




Pull-outrackinstallation procedure

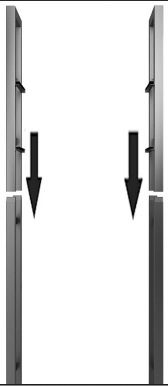

1. Install upper and lower load-bearing pipes

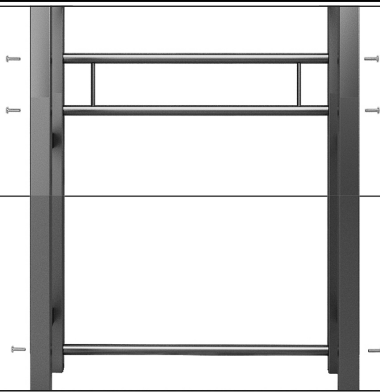


2. Install the connecting rod with screws

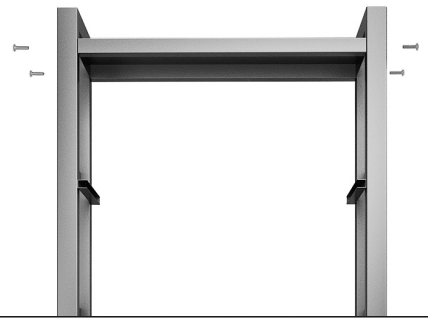

3. Install Upper Plate






4. Install bottom foot pad

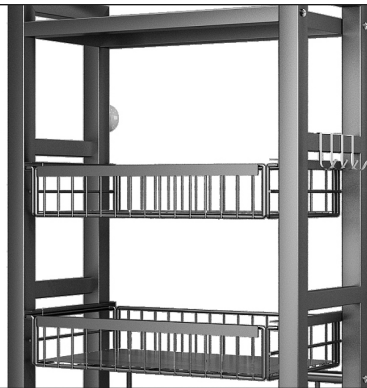


5. Install the hook



6. Mount Suction Cups on the back

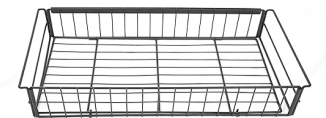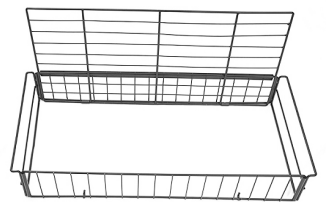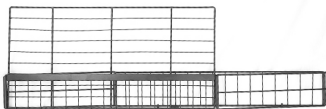

7. Unroll the basket

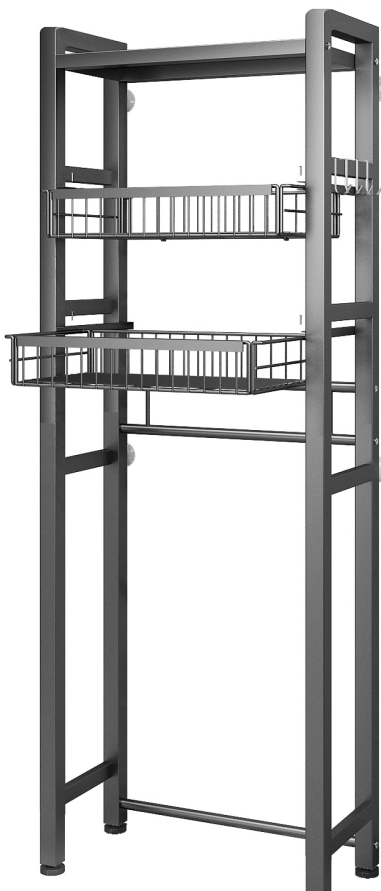

8. Push the basket into the slide and insert the bolt

Assemble the parts



Upper load-bearing pipe




Under the load-bearing pipe




One-piece double connecting rod




Single connecting rod



Upper Plate



Pull the basket x2



Take off the PP pad x2



Pull the latch x4



Foot pads x4



Screws x4



Hexagonal handle x4



Suction Cup x4



Hook X4