



80094 Product Installation Instructions




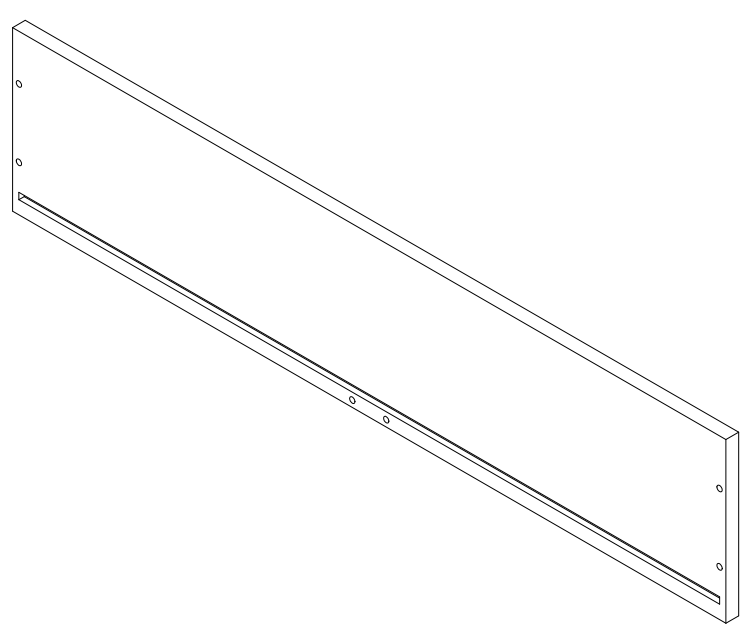


Ax1

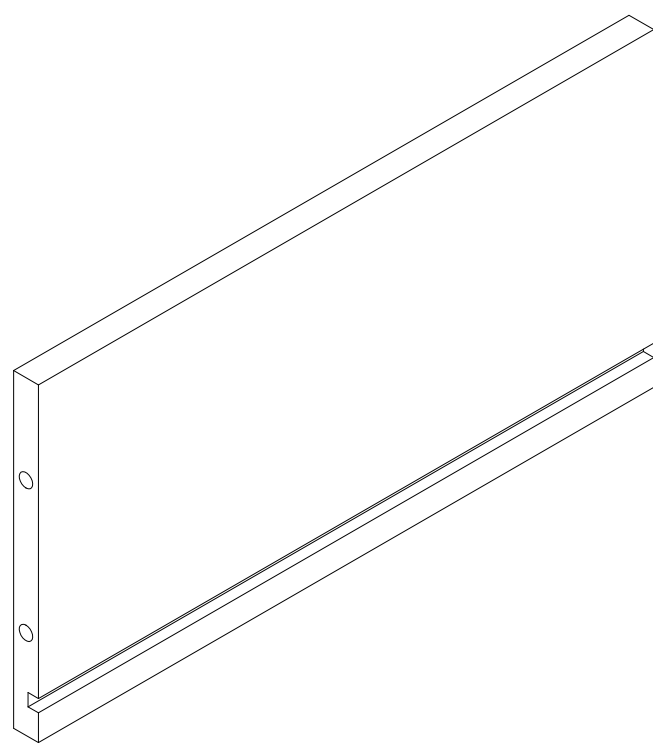


Bx2

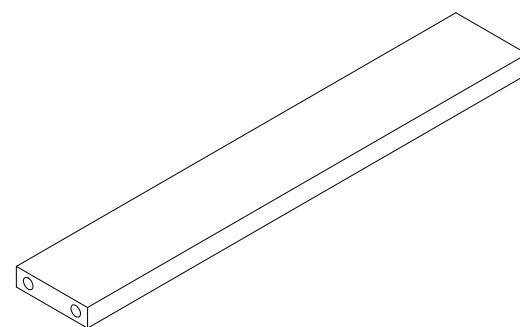


Cx1

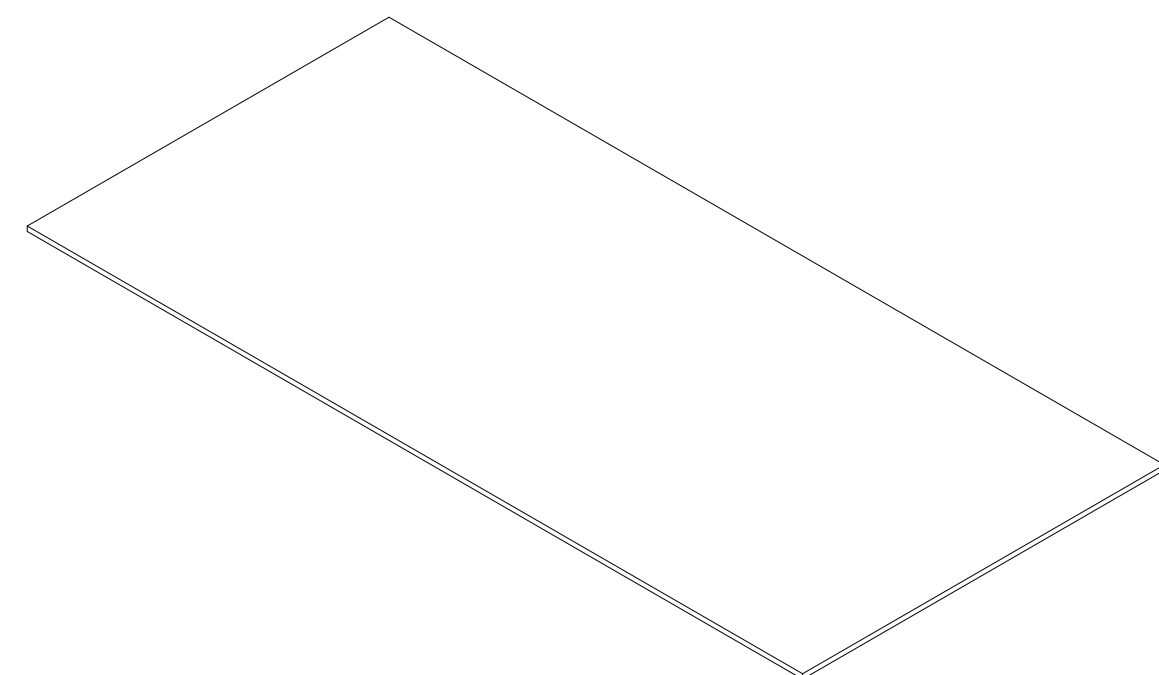


Dx1

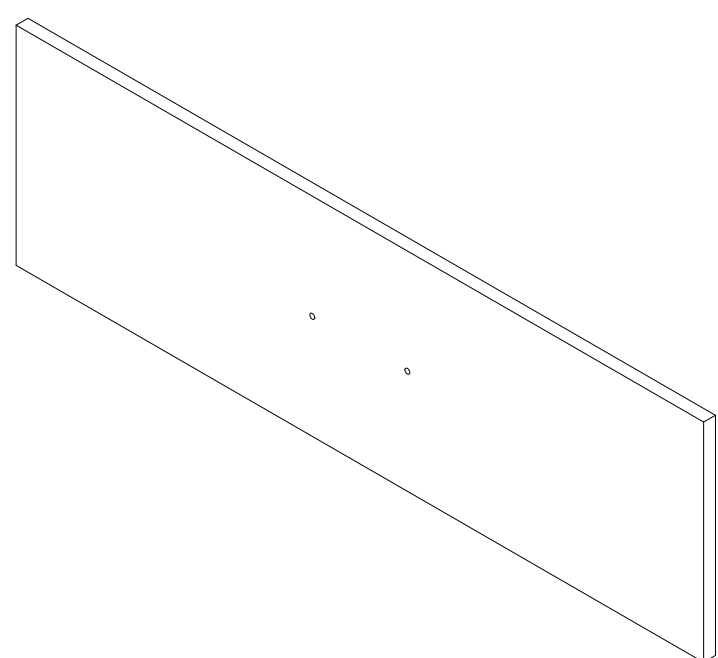


Ex1

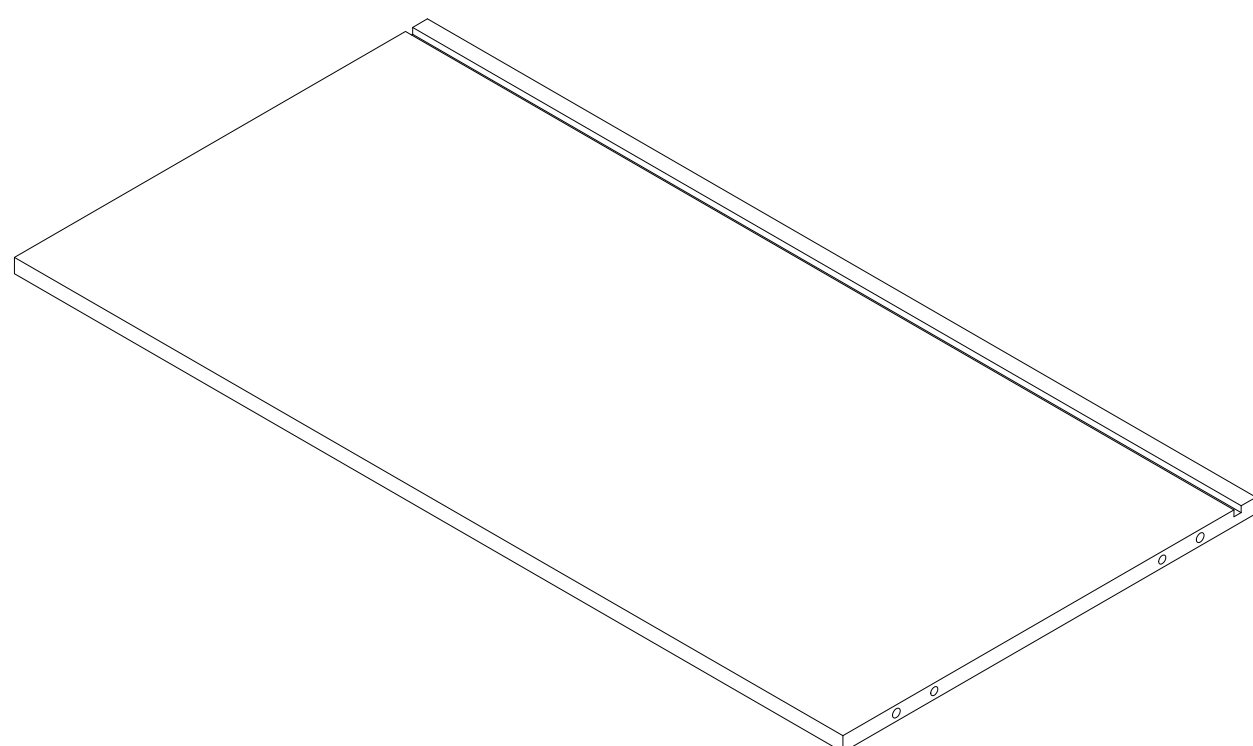


Fx1

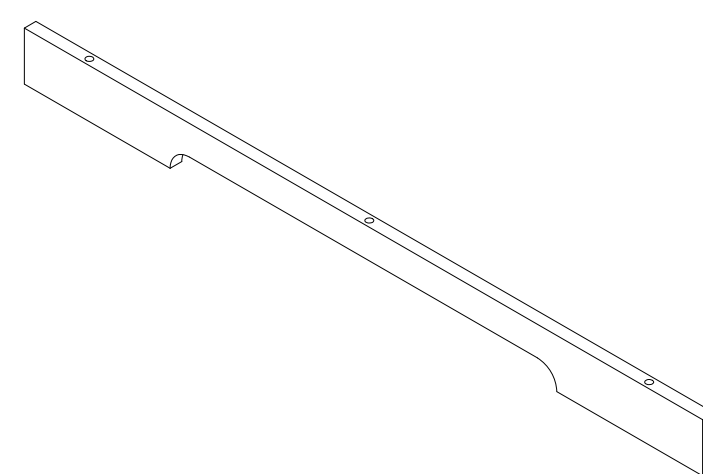


Gx1

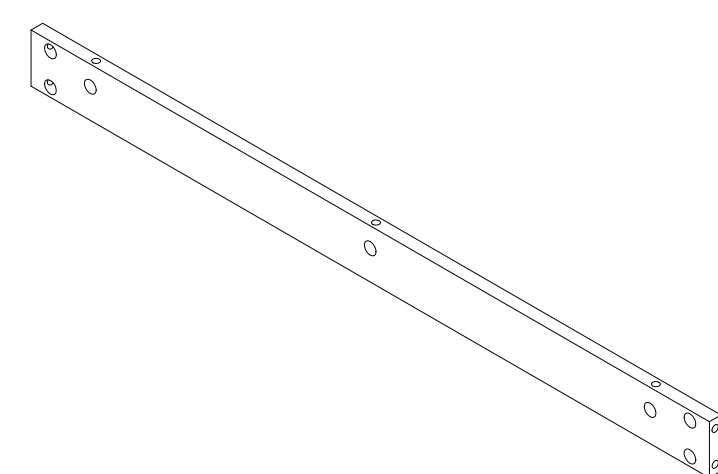


Hx1

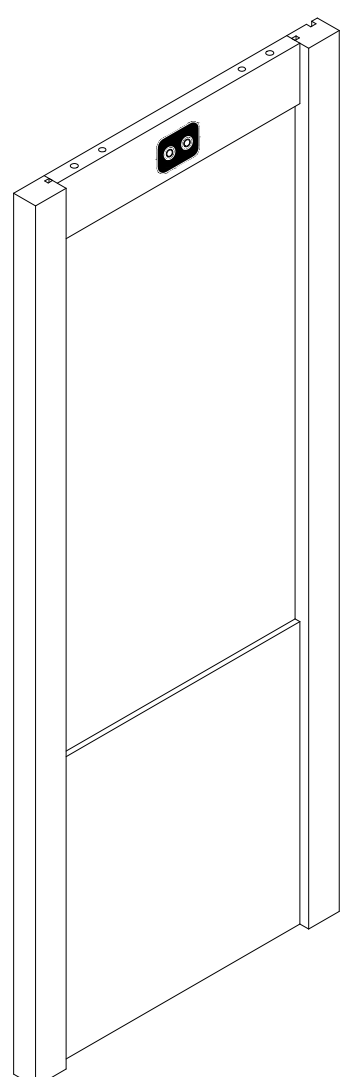


Ix1

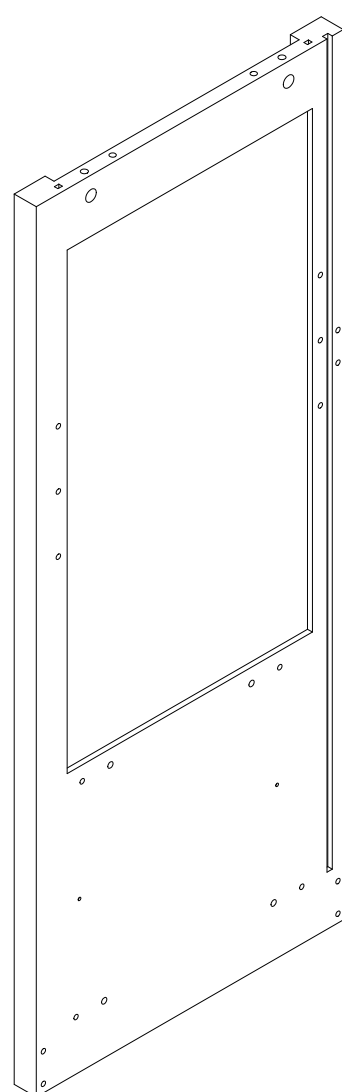


Jx1

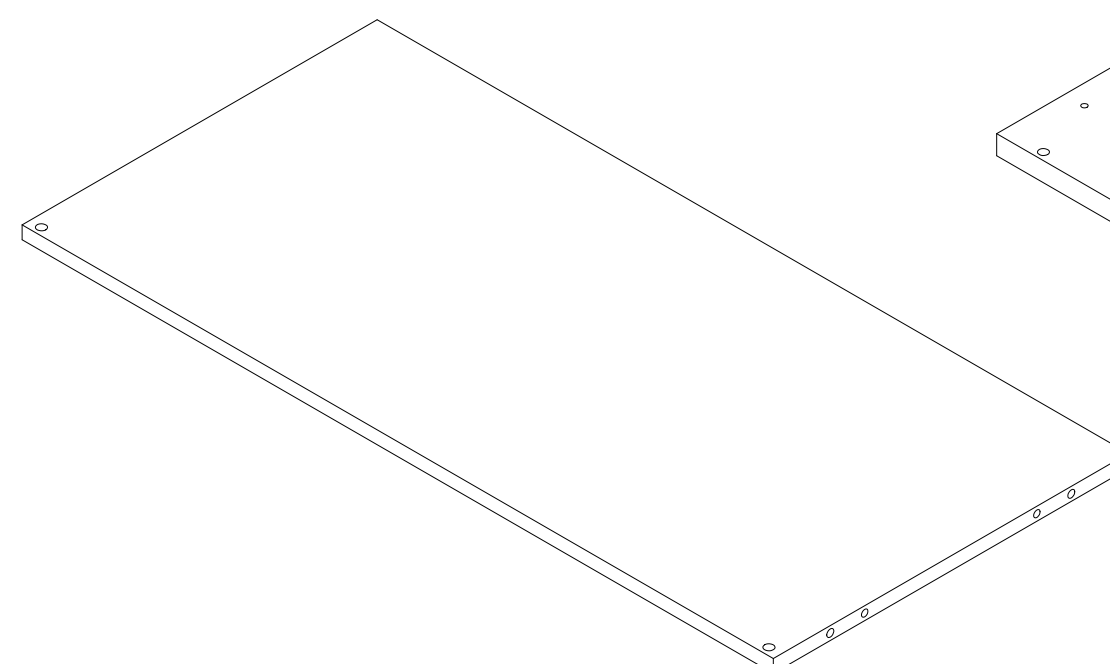


Kx1

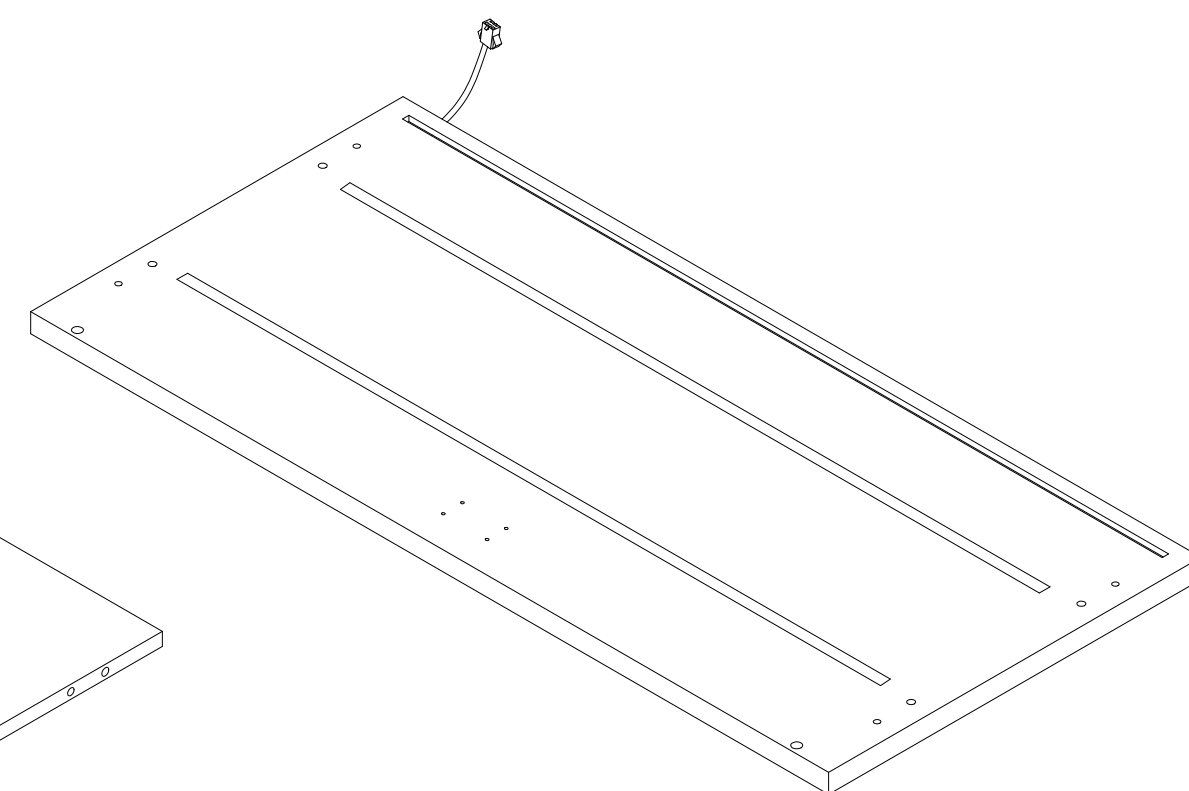


Lx1

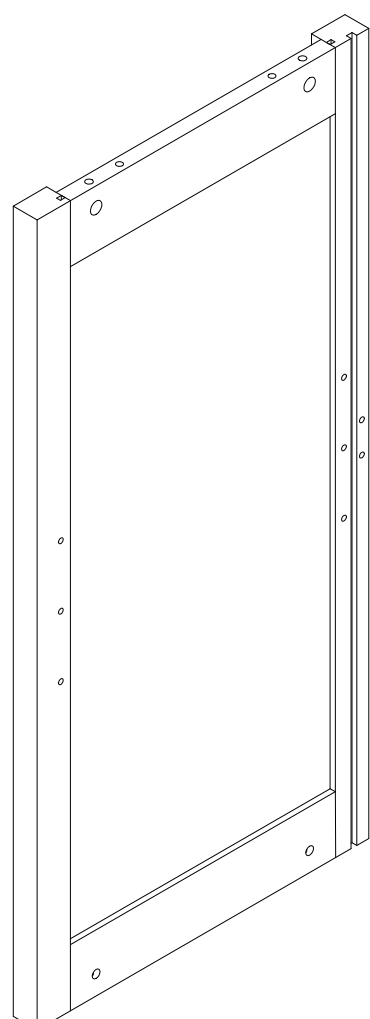


Mx2

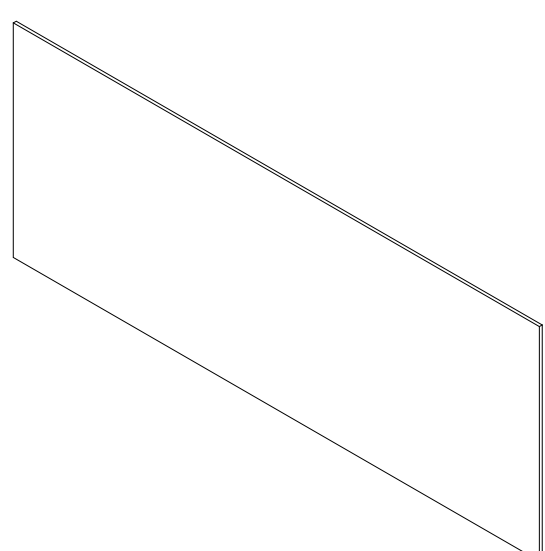


Nx3

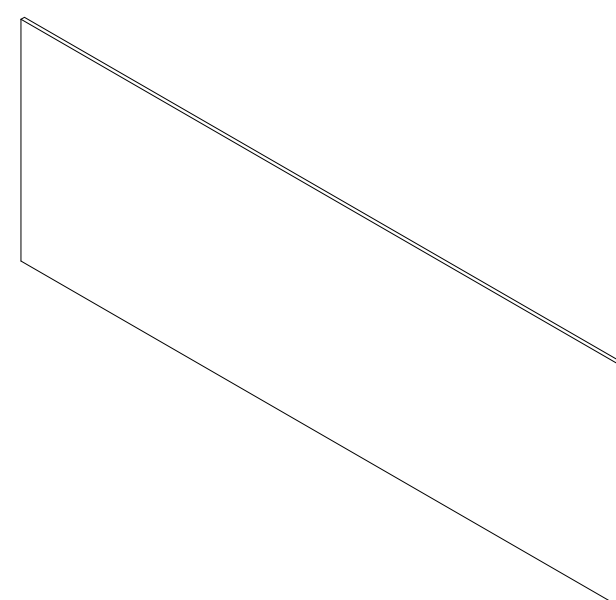


Ox3

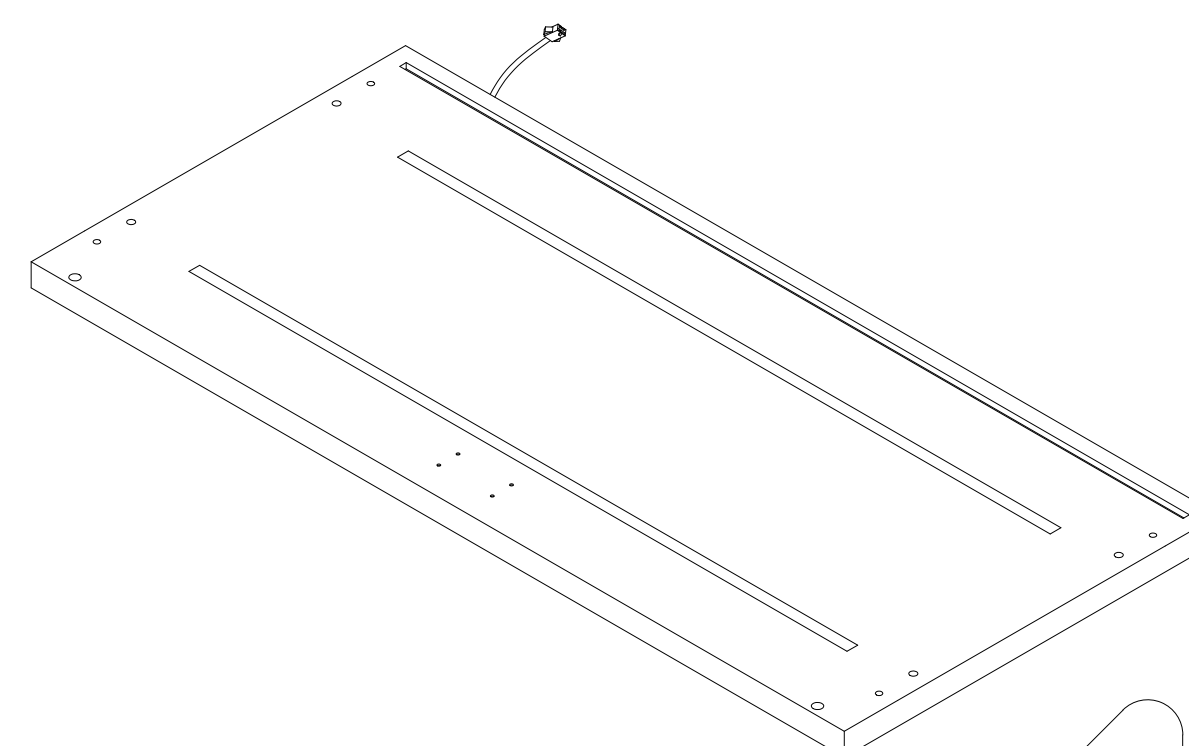


Px1

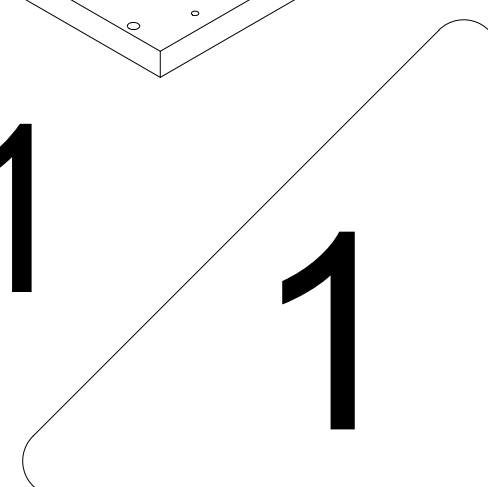


1

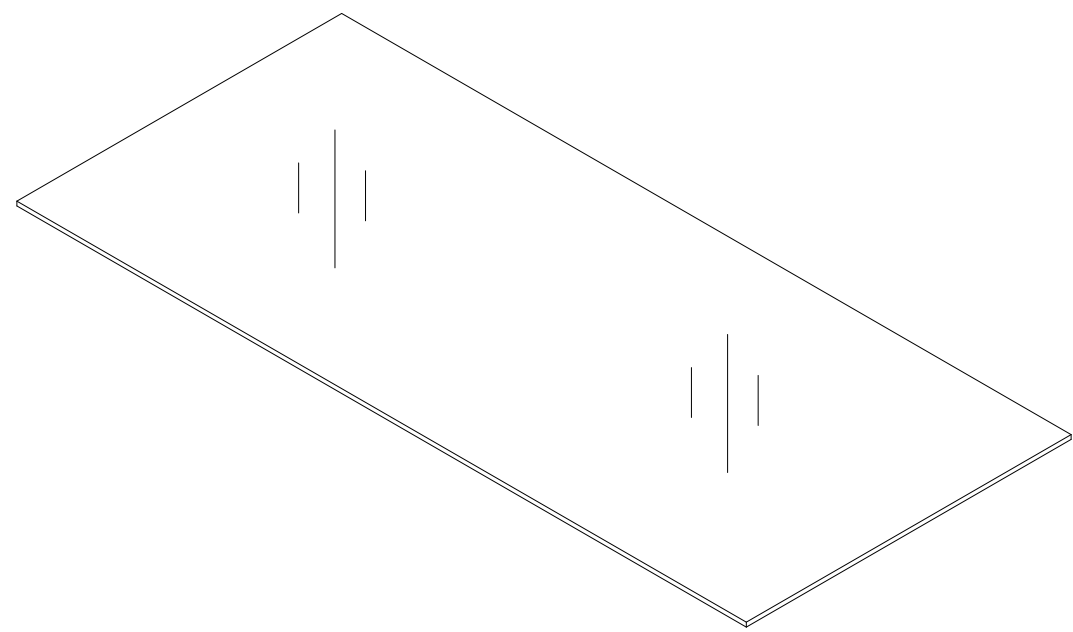


Qx2

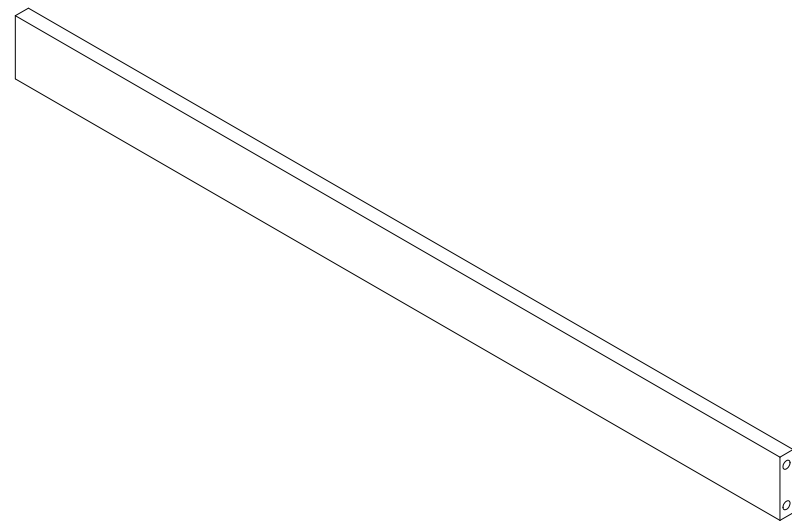






















Rx2

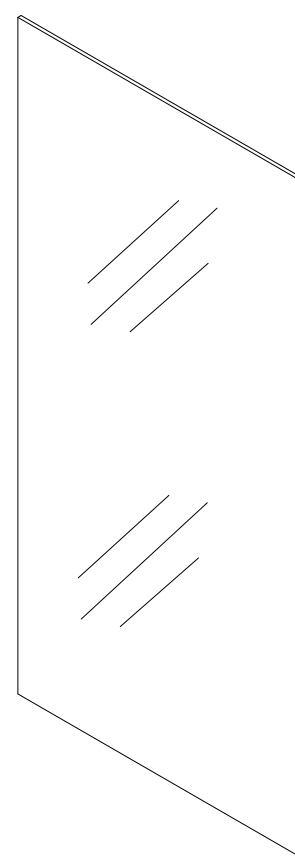


Sx2






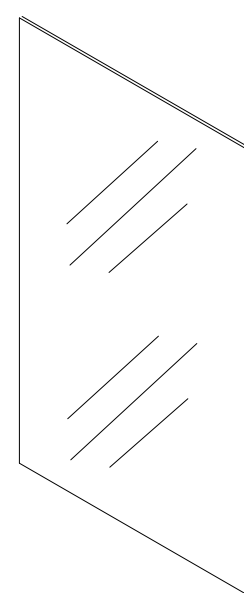



Tx2

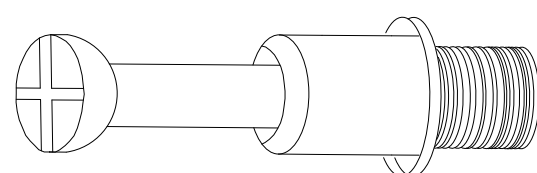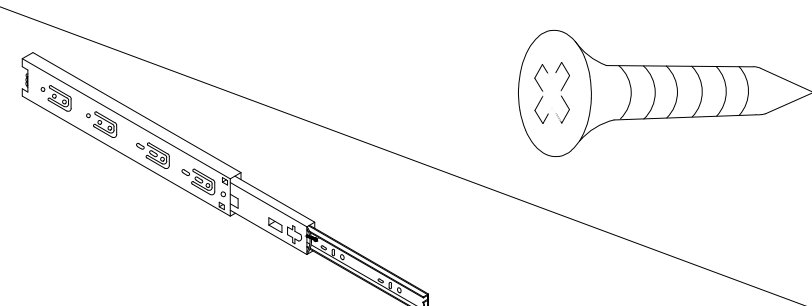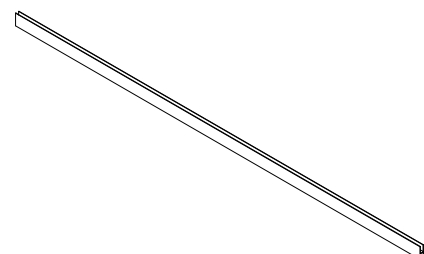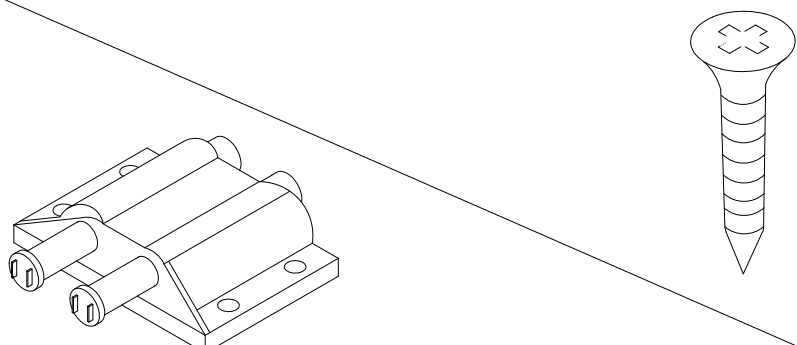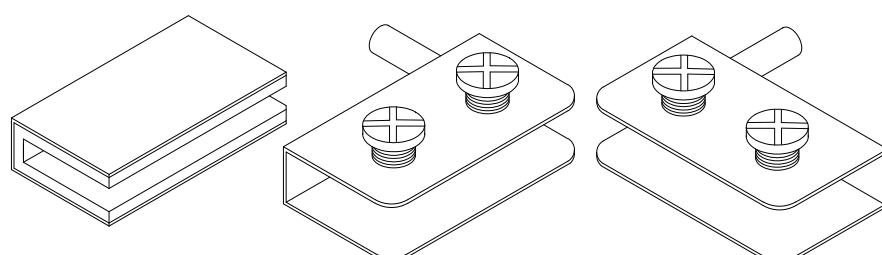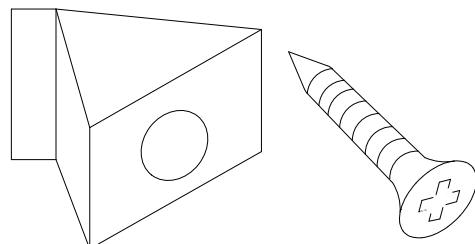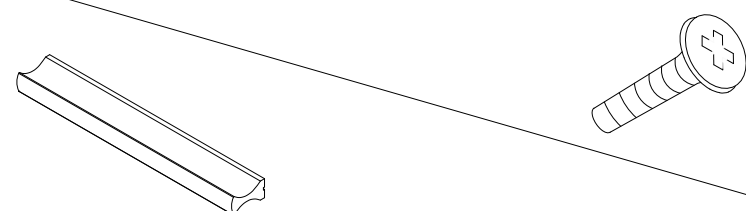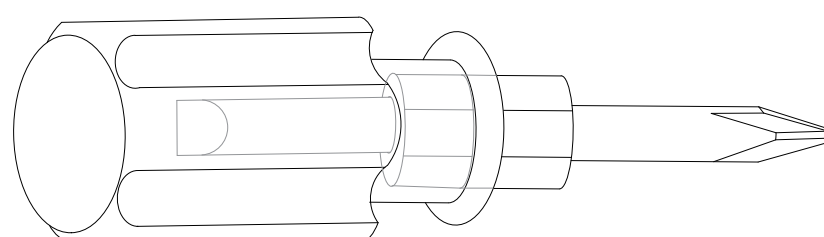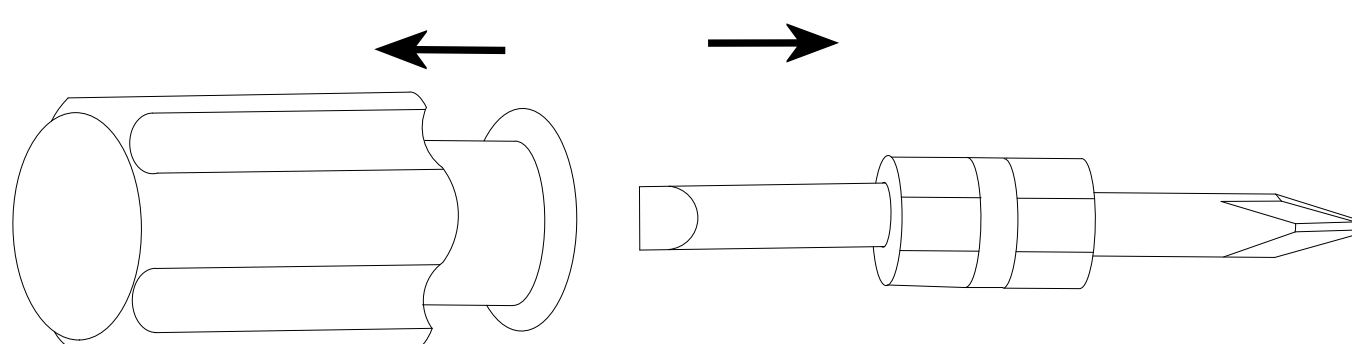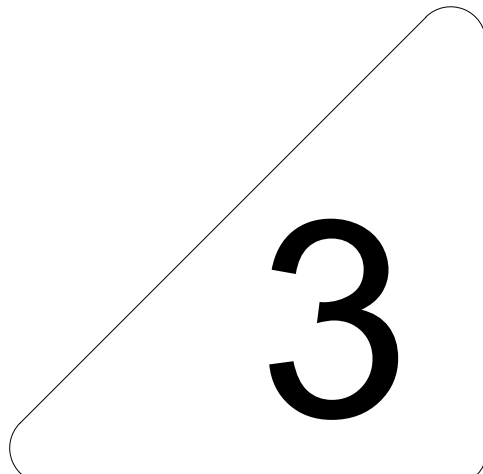Accessories list			
1		Two in one screw (6x28mm)	54pcs +5pcs
2		Two in one nut (10x12mm)	54pcs +5pcs
3		Wood chipping (6x30mm)	20pcs +2pcs
4		Guide & Screw(29cm) (3x12mm)	12pcs 2pcs +3pcs
5		Backboard card strip(698mm)	4pcs
6		Rebound device & Screw (3x16mm)	8pcs 2pcs +1pcs
		Rubber ring	8pcs
		Iron sheet & Hinge	4pcs
7		Laminate support nail	8pcs +1pcs
8		Fixing clip & screw (3x16mm)	16pcs +2pcs
9		Wire clamp	1pcs
10		Handle & screw (4x16mm)	1pcs 2pcs
11	Anti Fall Hardware	 x2  x2  x2 (3. 5x14mm)  x2 (4x45mm)  x4	
12		Non-slip pads (50x10)	6pcs
	AC/DC Adapter (12V 3. 0A)		1pcs
Double-head screwdriver, use as required			
 1pcs 			

Product structure decomposition

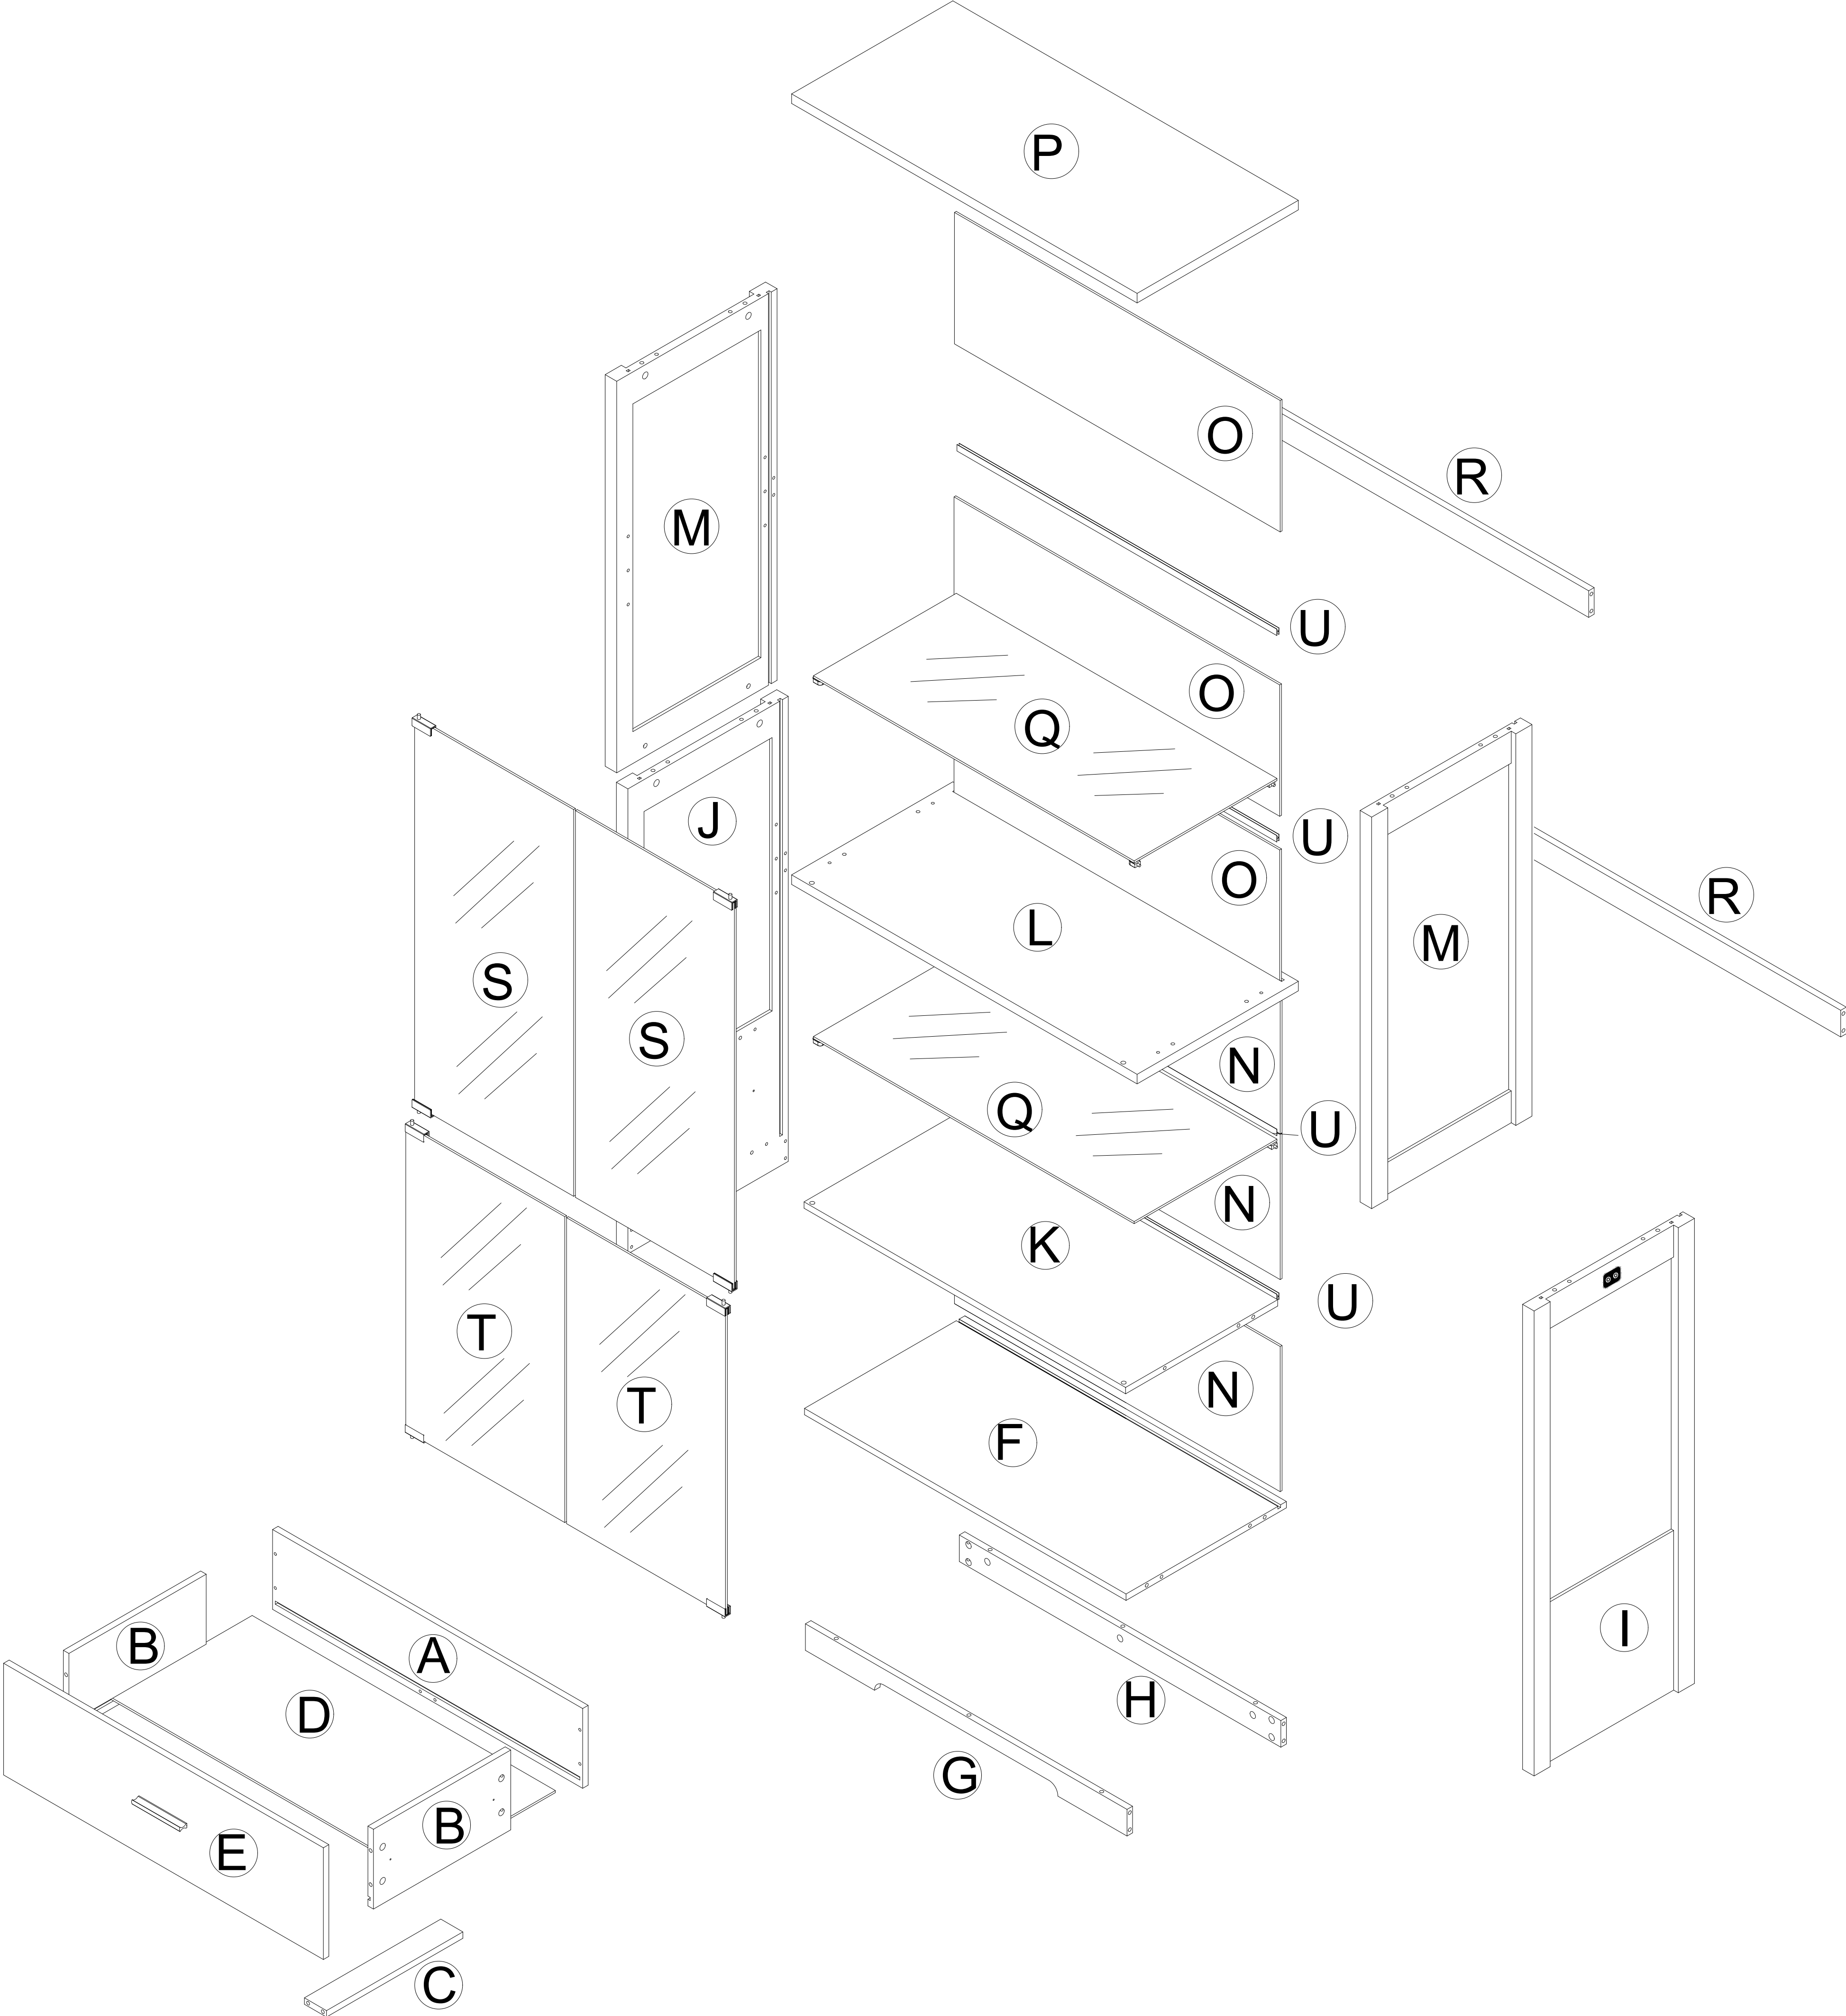


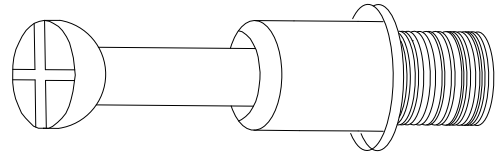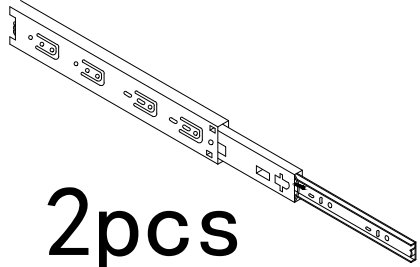1		12pcs	2		12pcs	4		2pcs		4pcs
10		1pcs		2pcs						

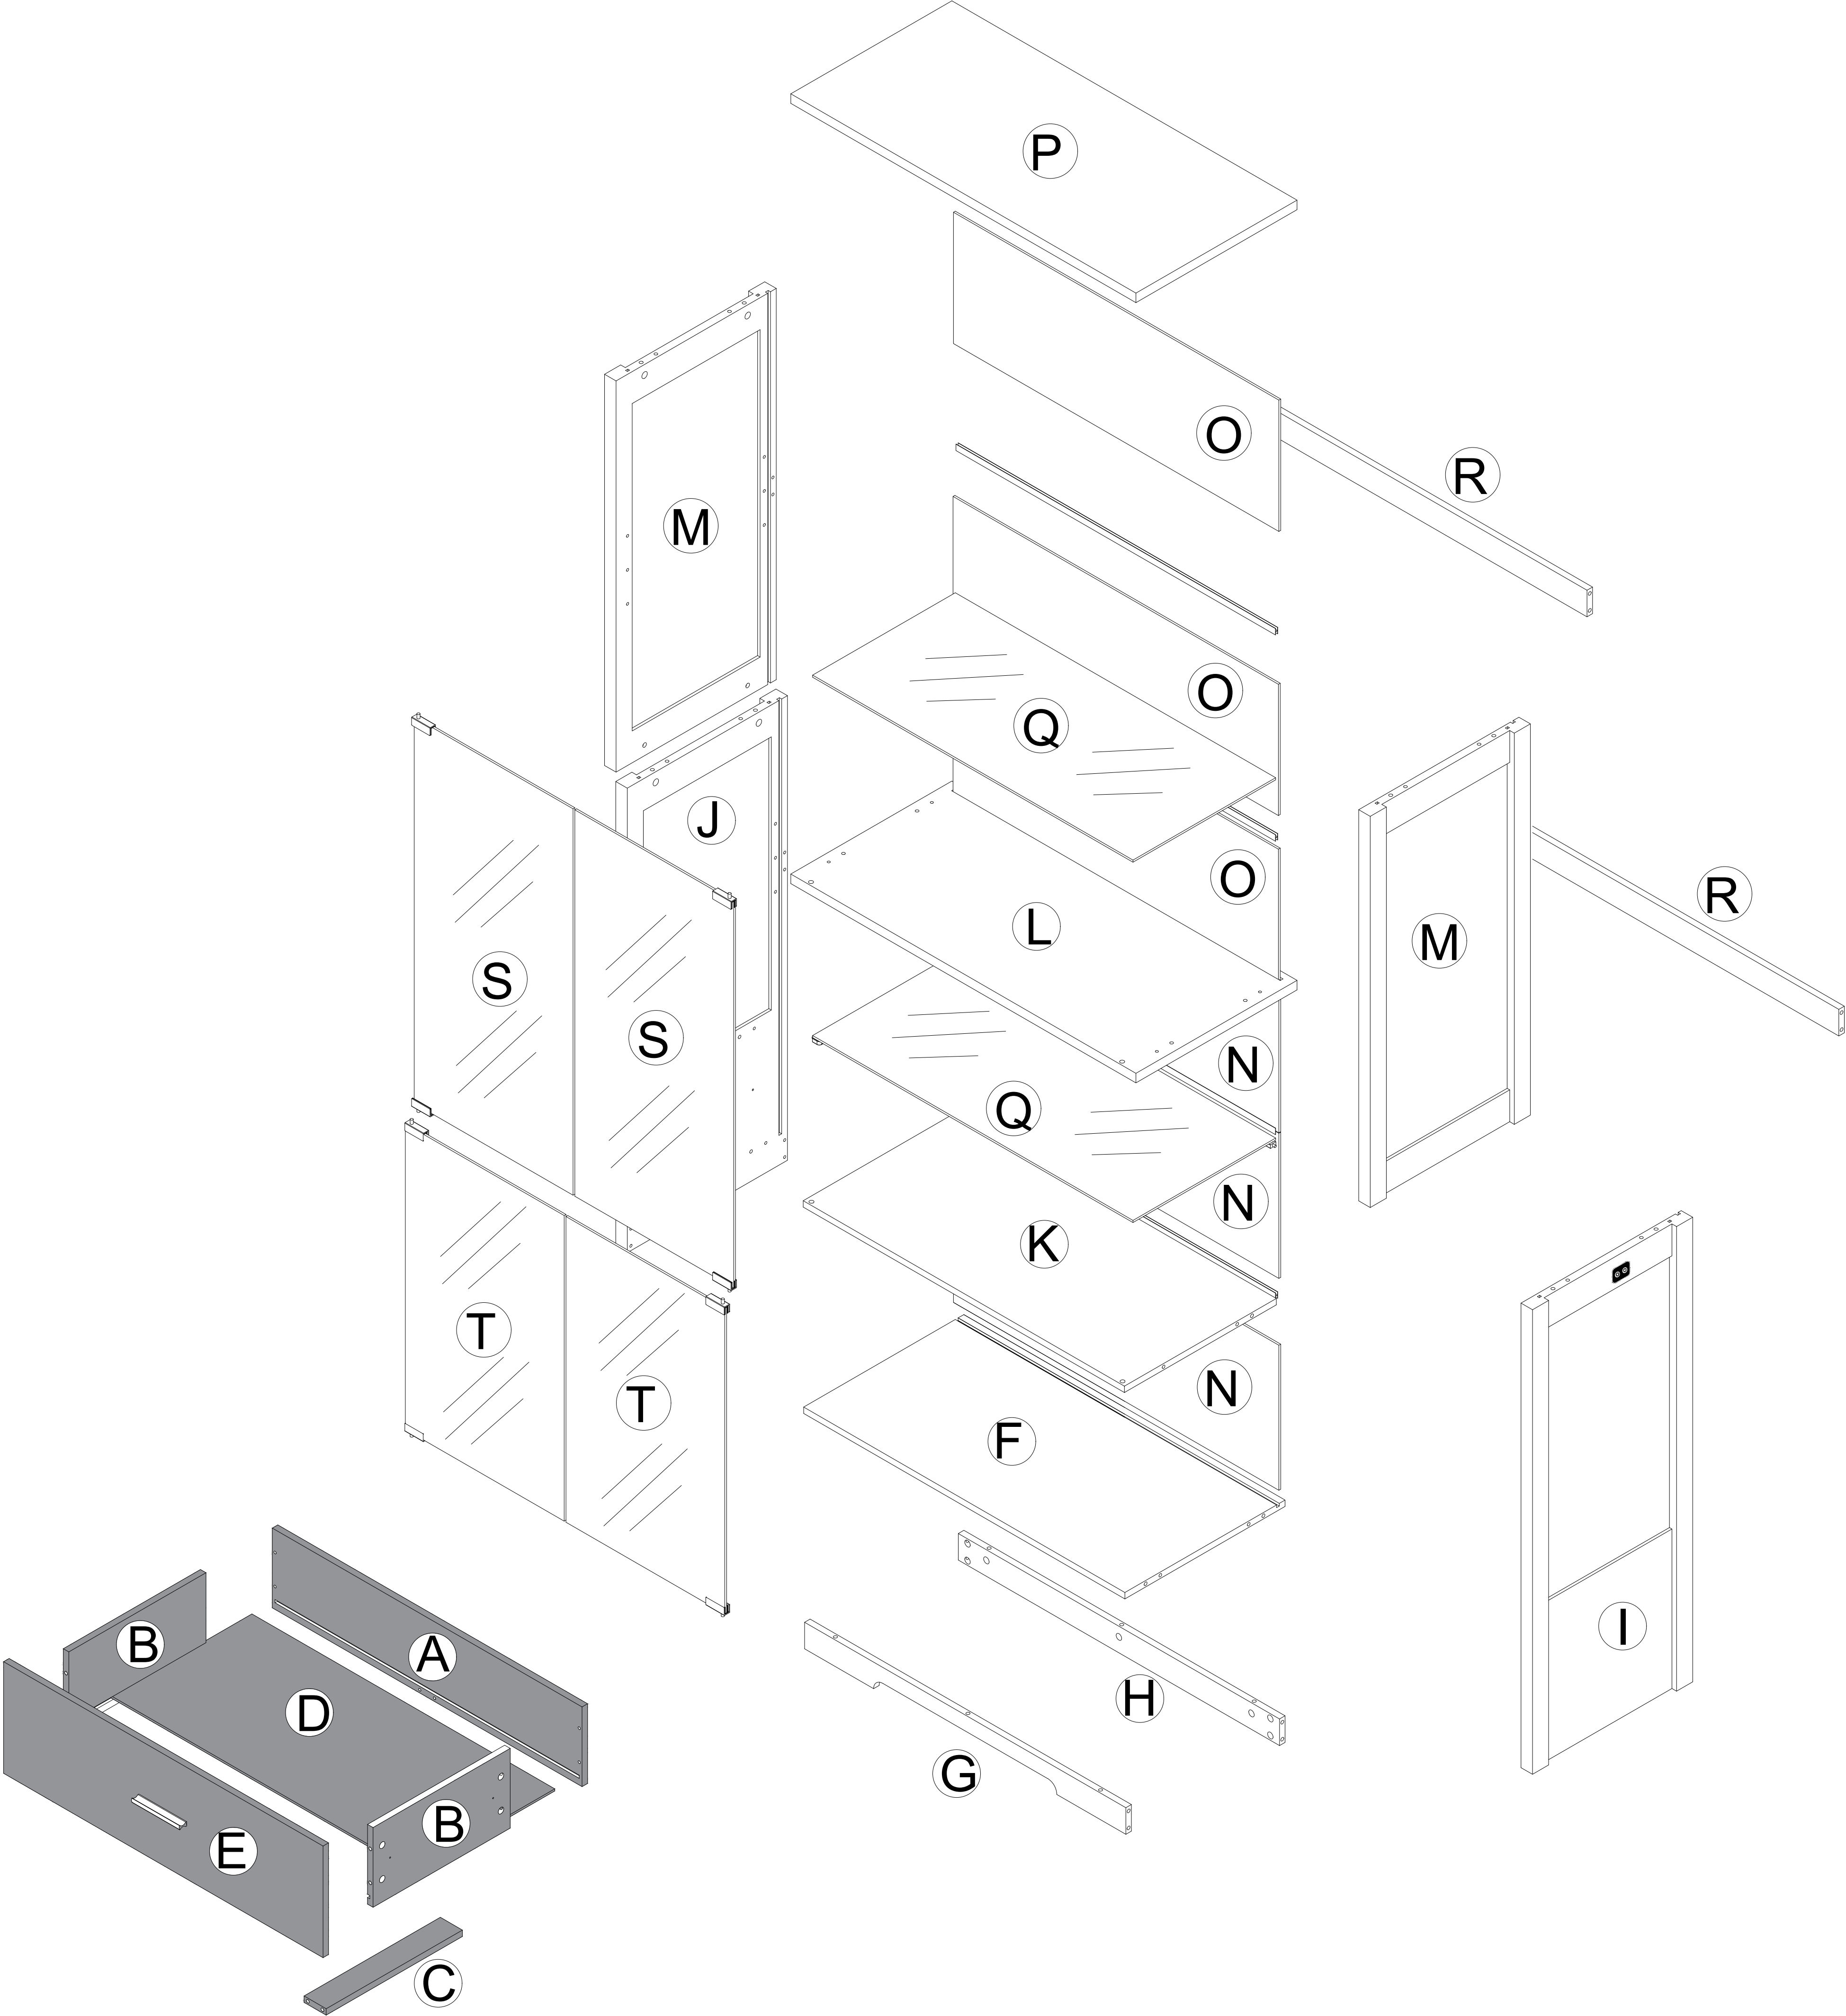


Use parts ① and ②



Step1

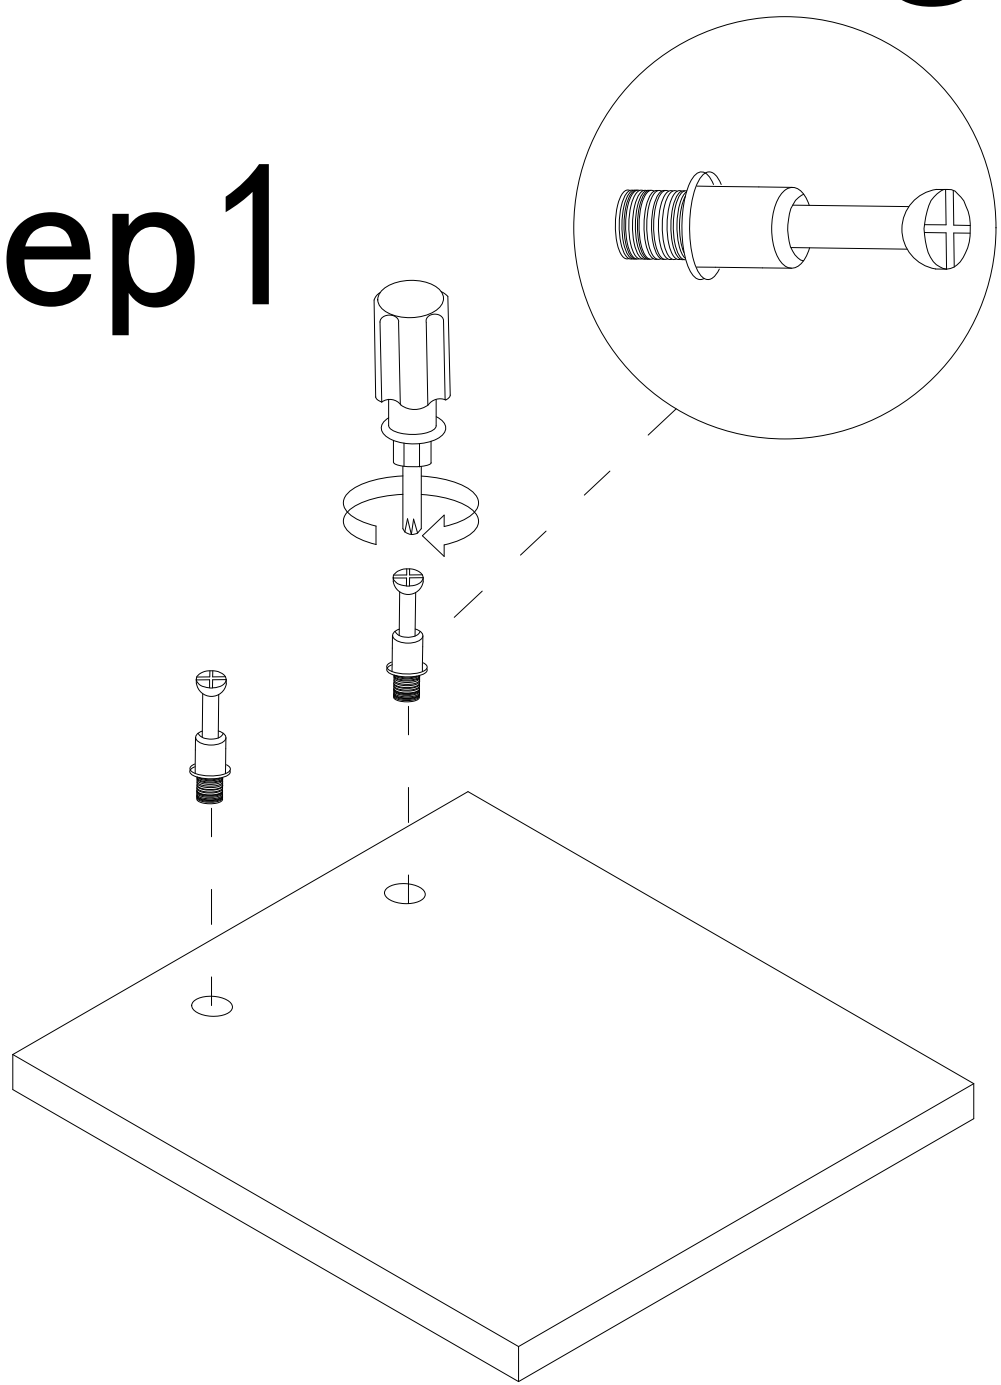


Step2

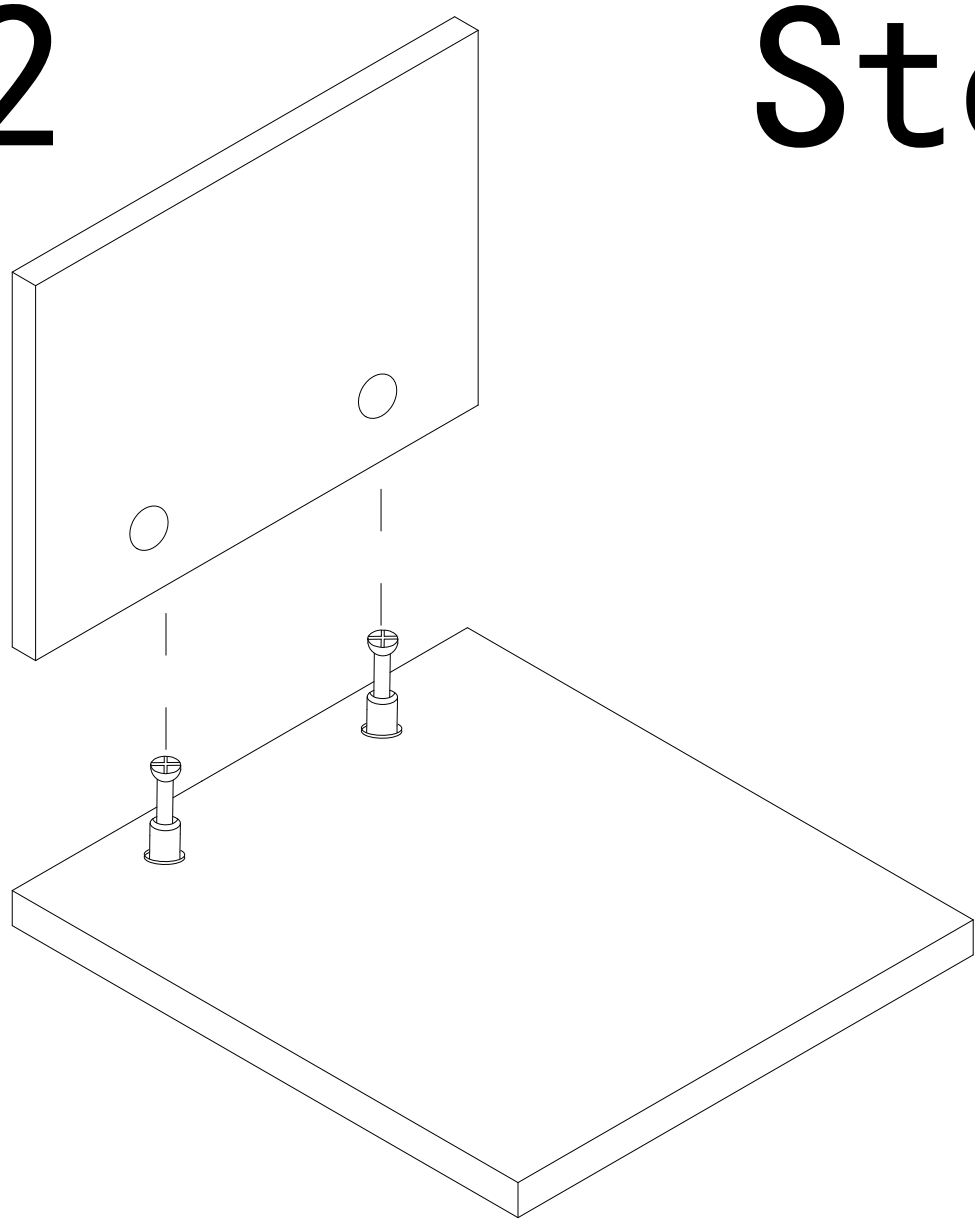

Step3

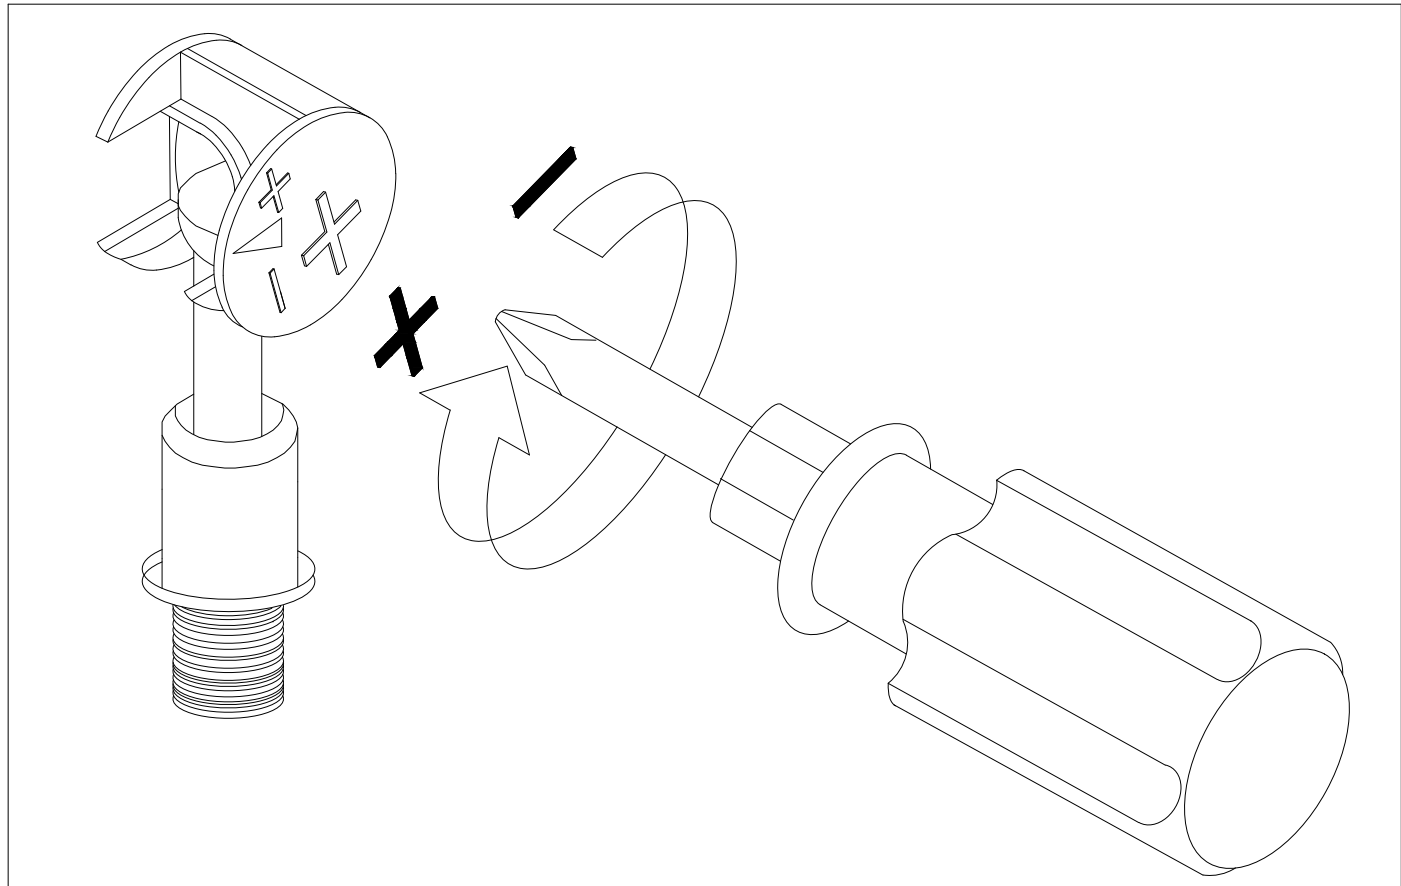
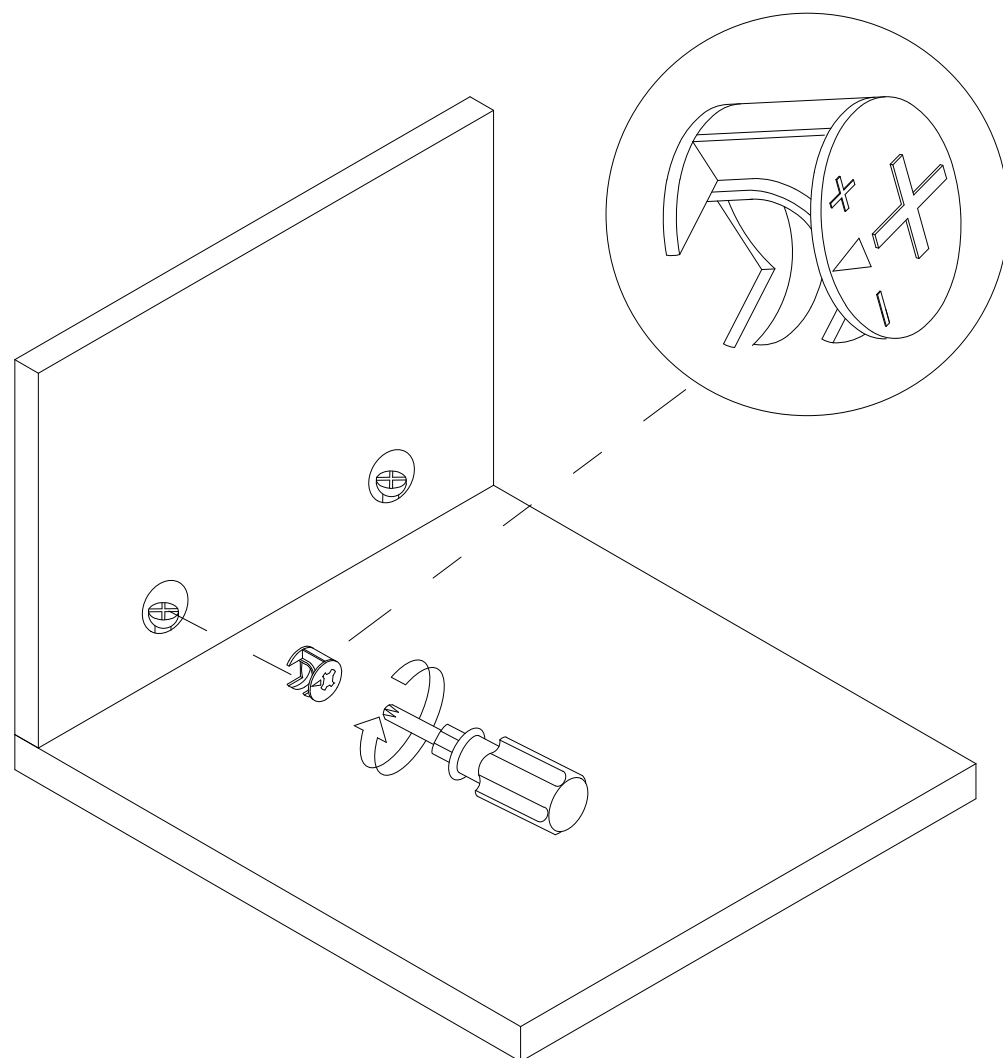


Use a screwdriver to lock in the direction of the "+" sign

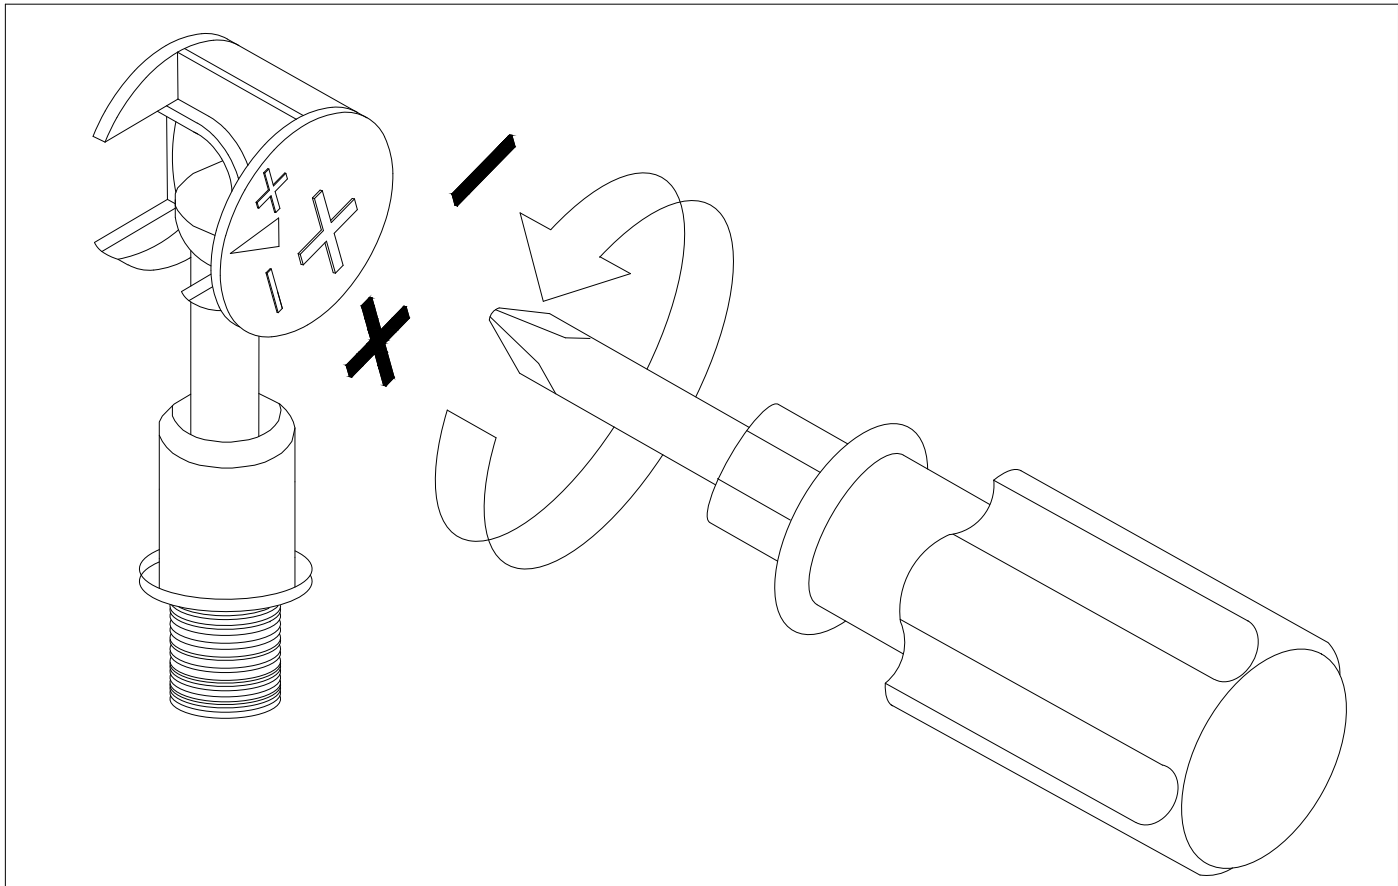



Disassemble along the direction of "-" sign

Step 1

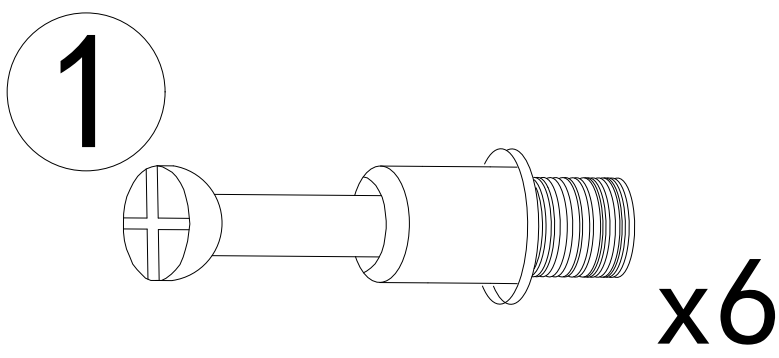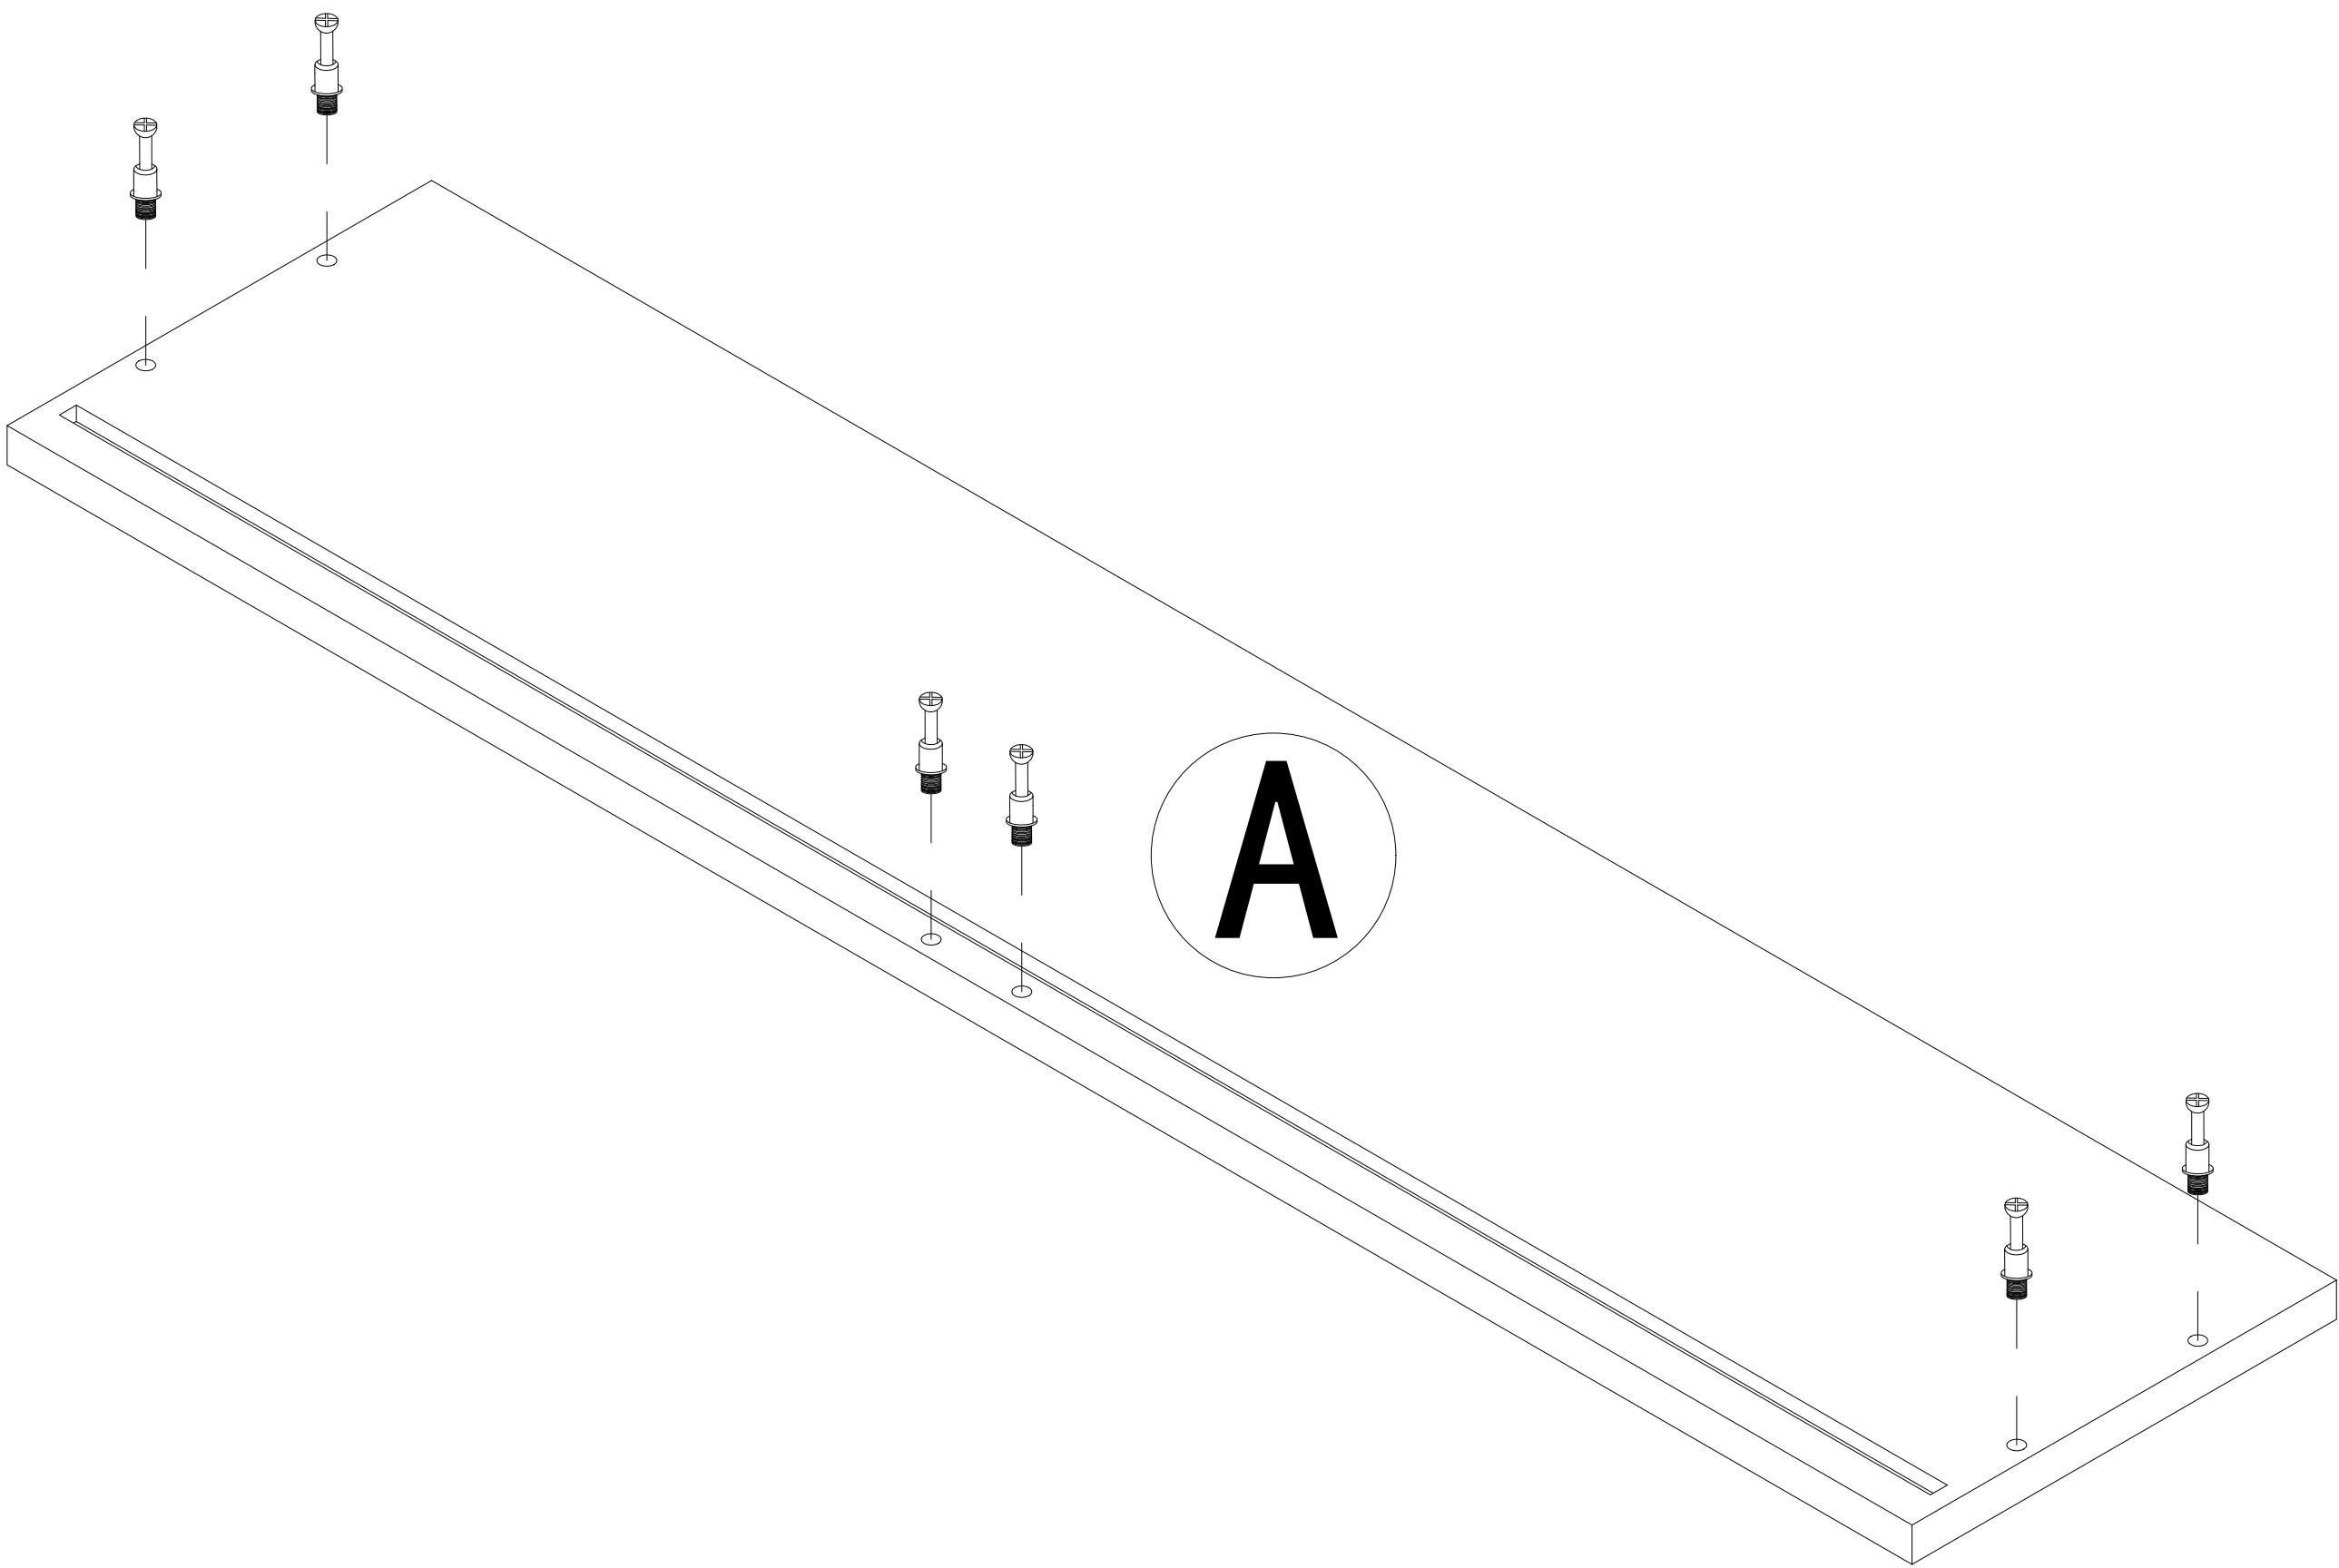


Step 2

2  x6

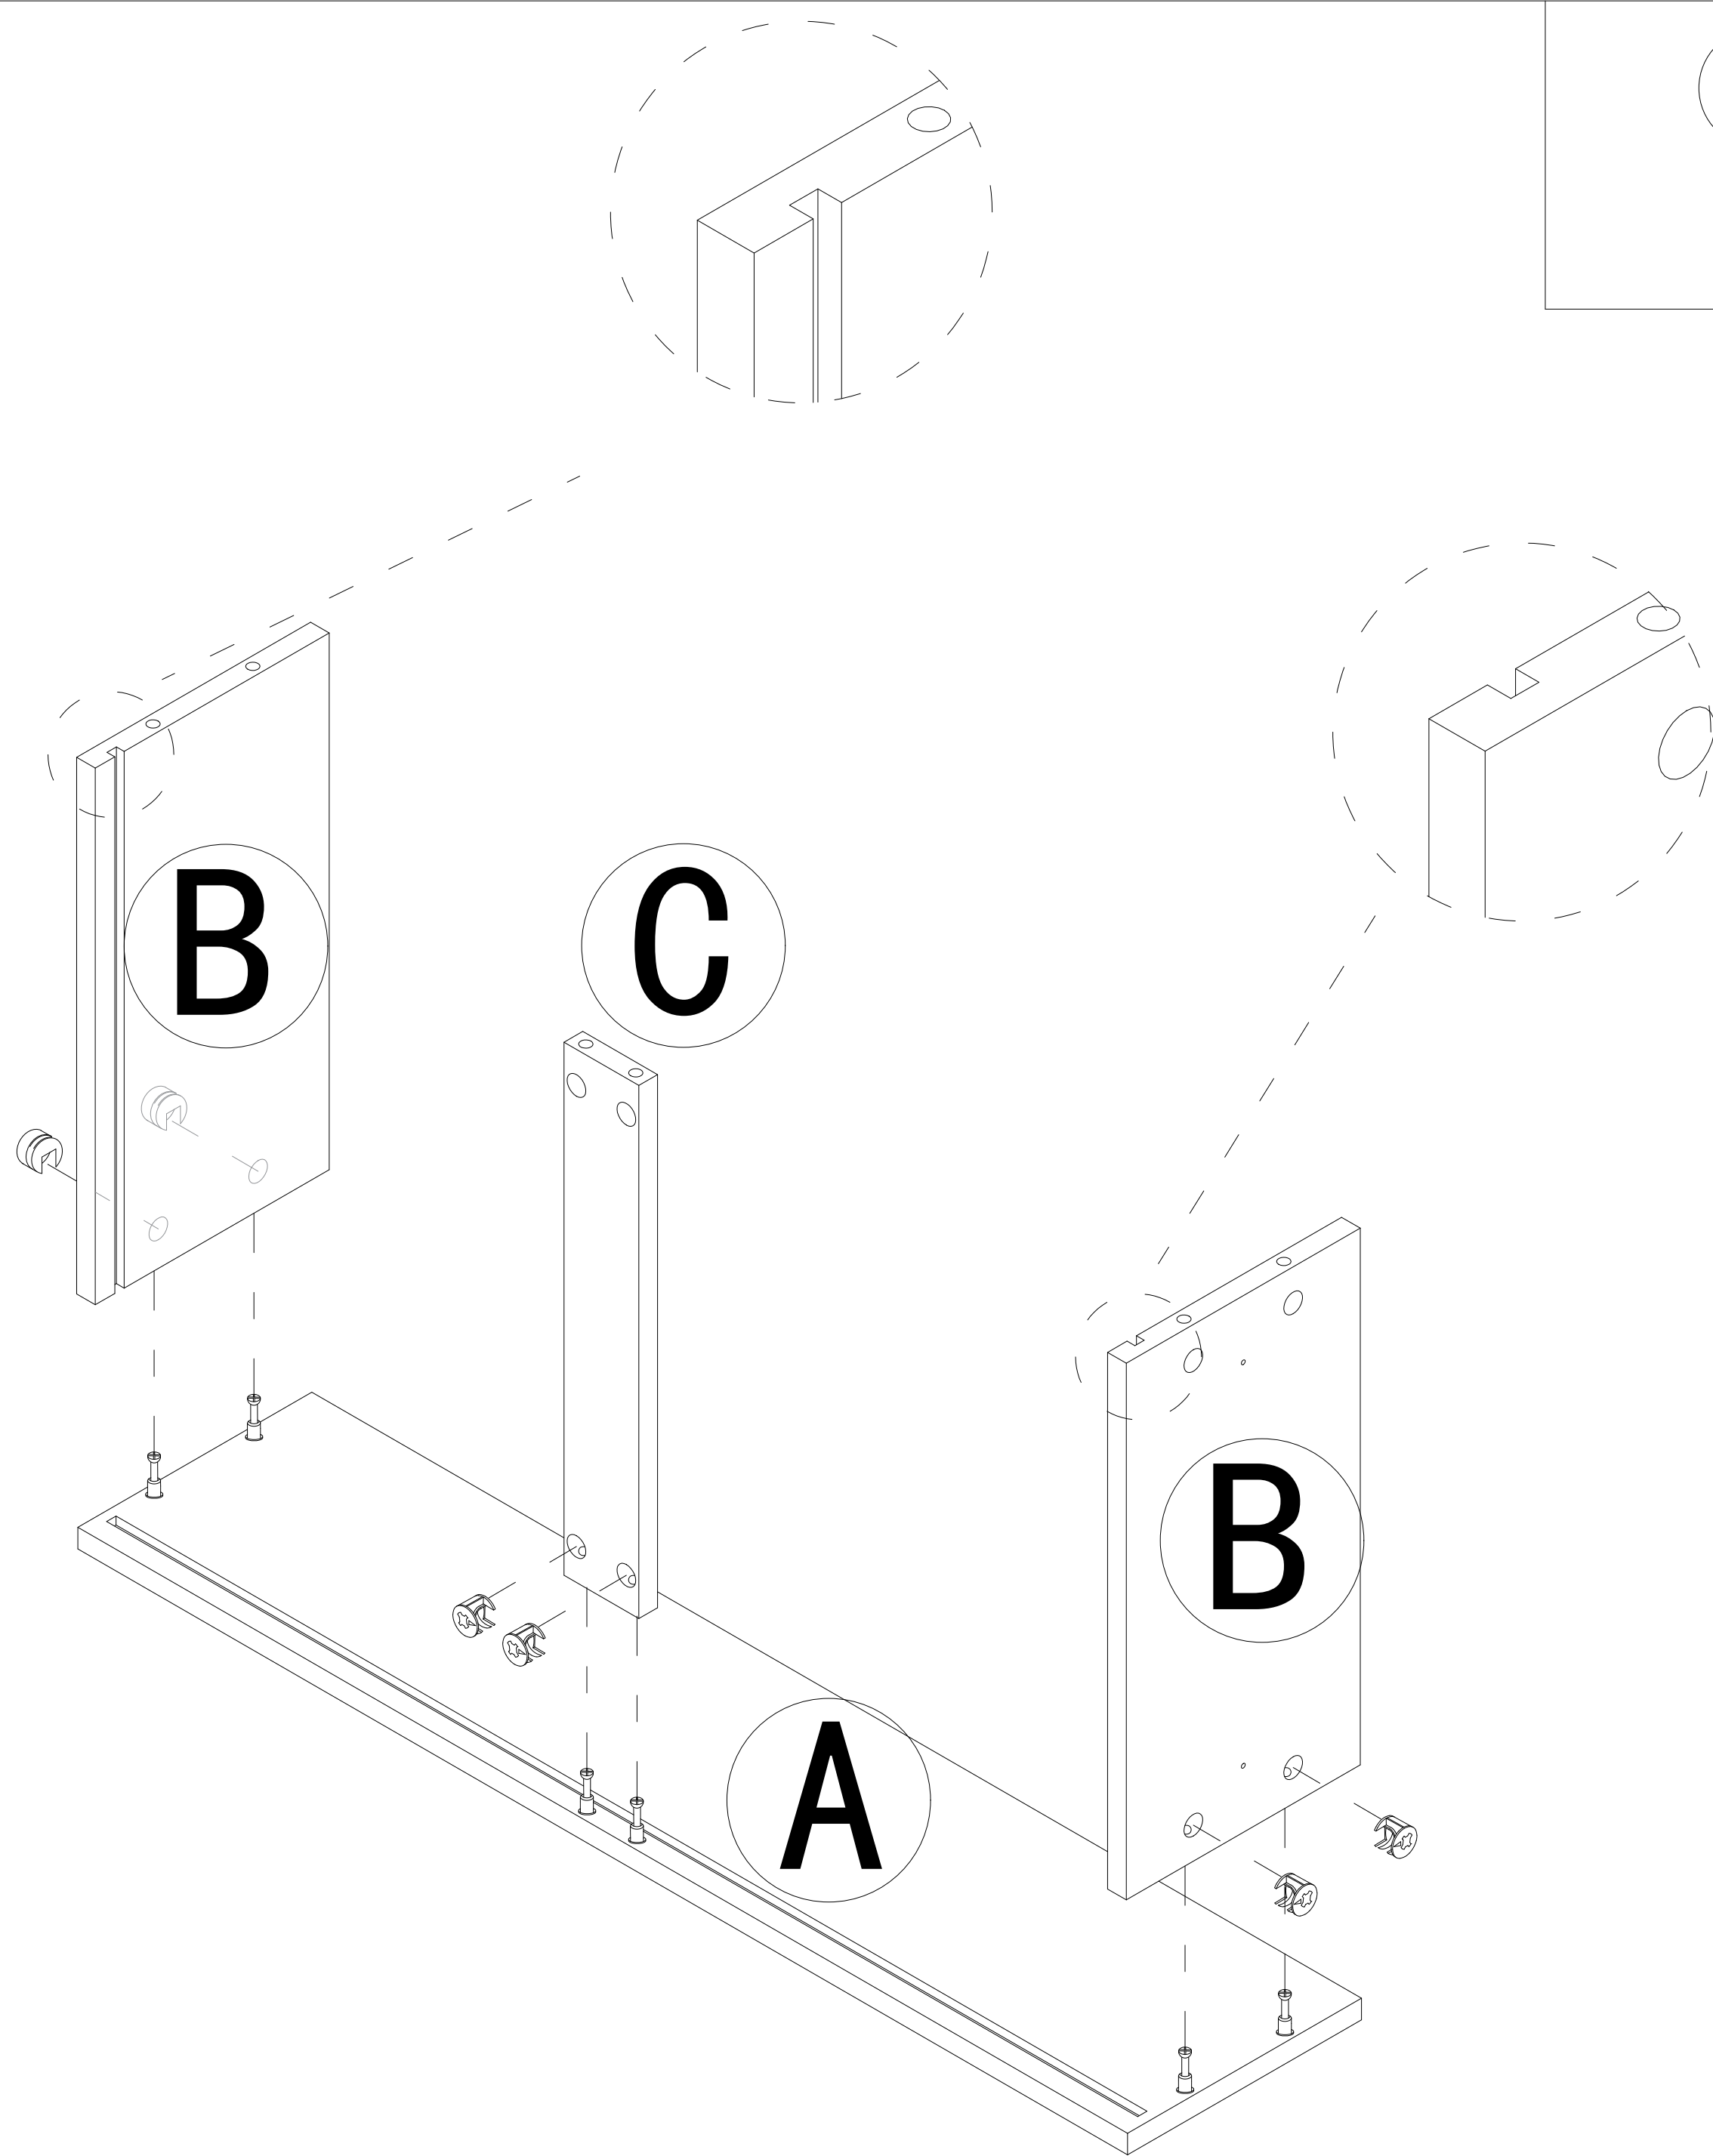


Step 3

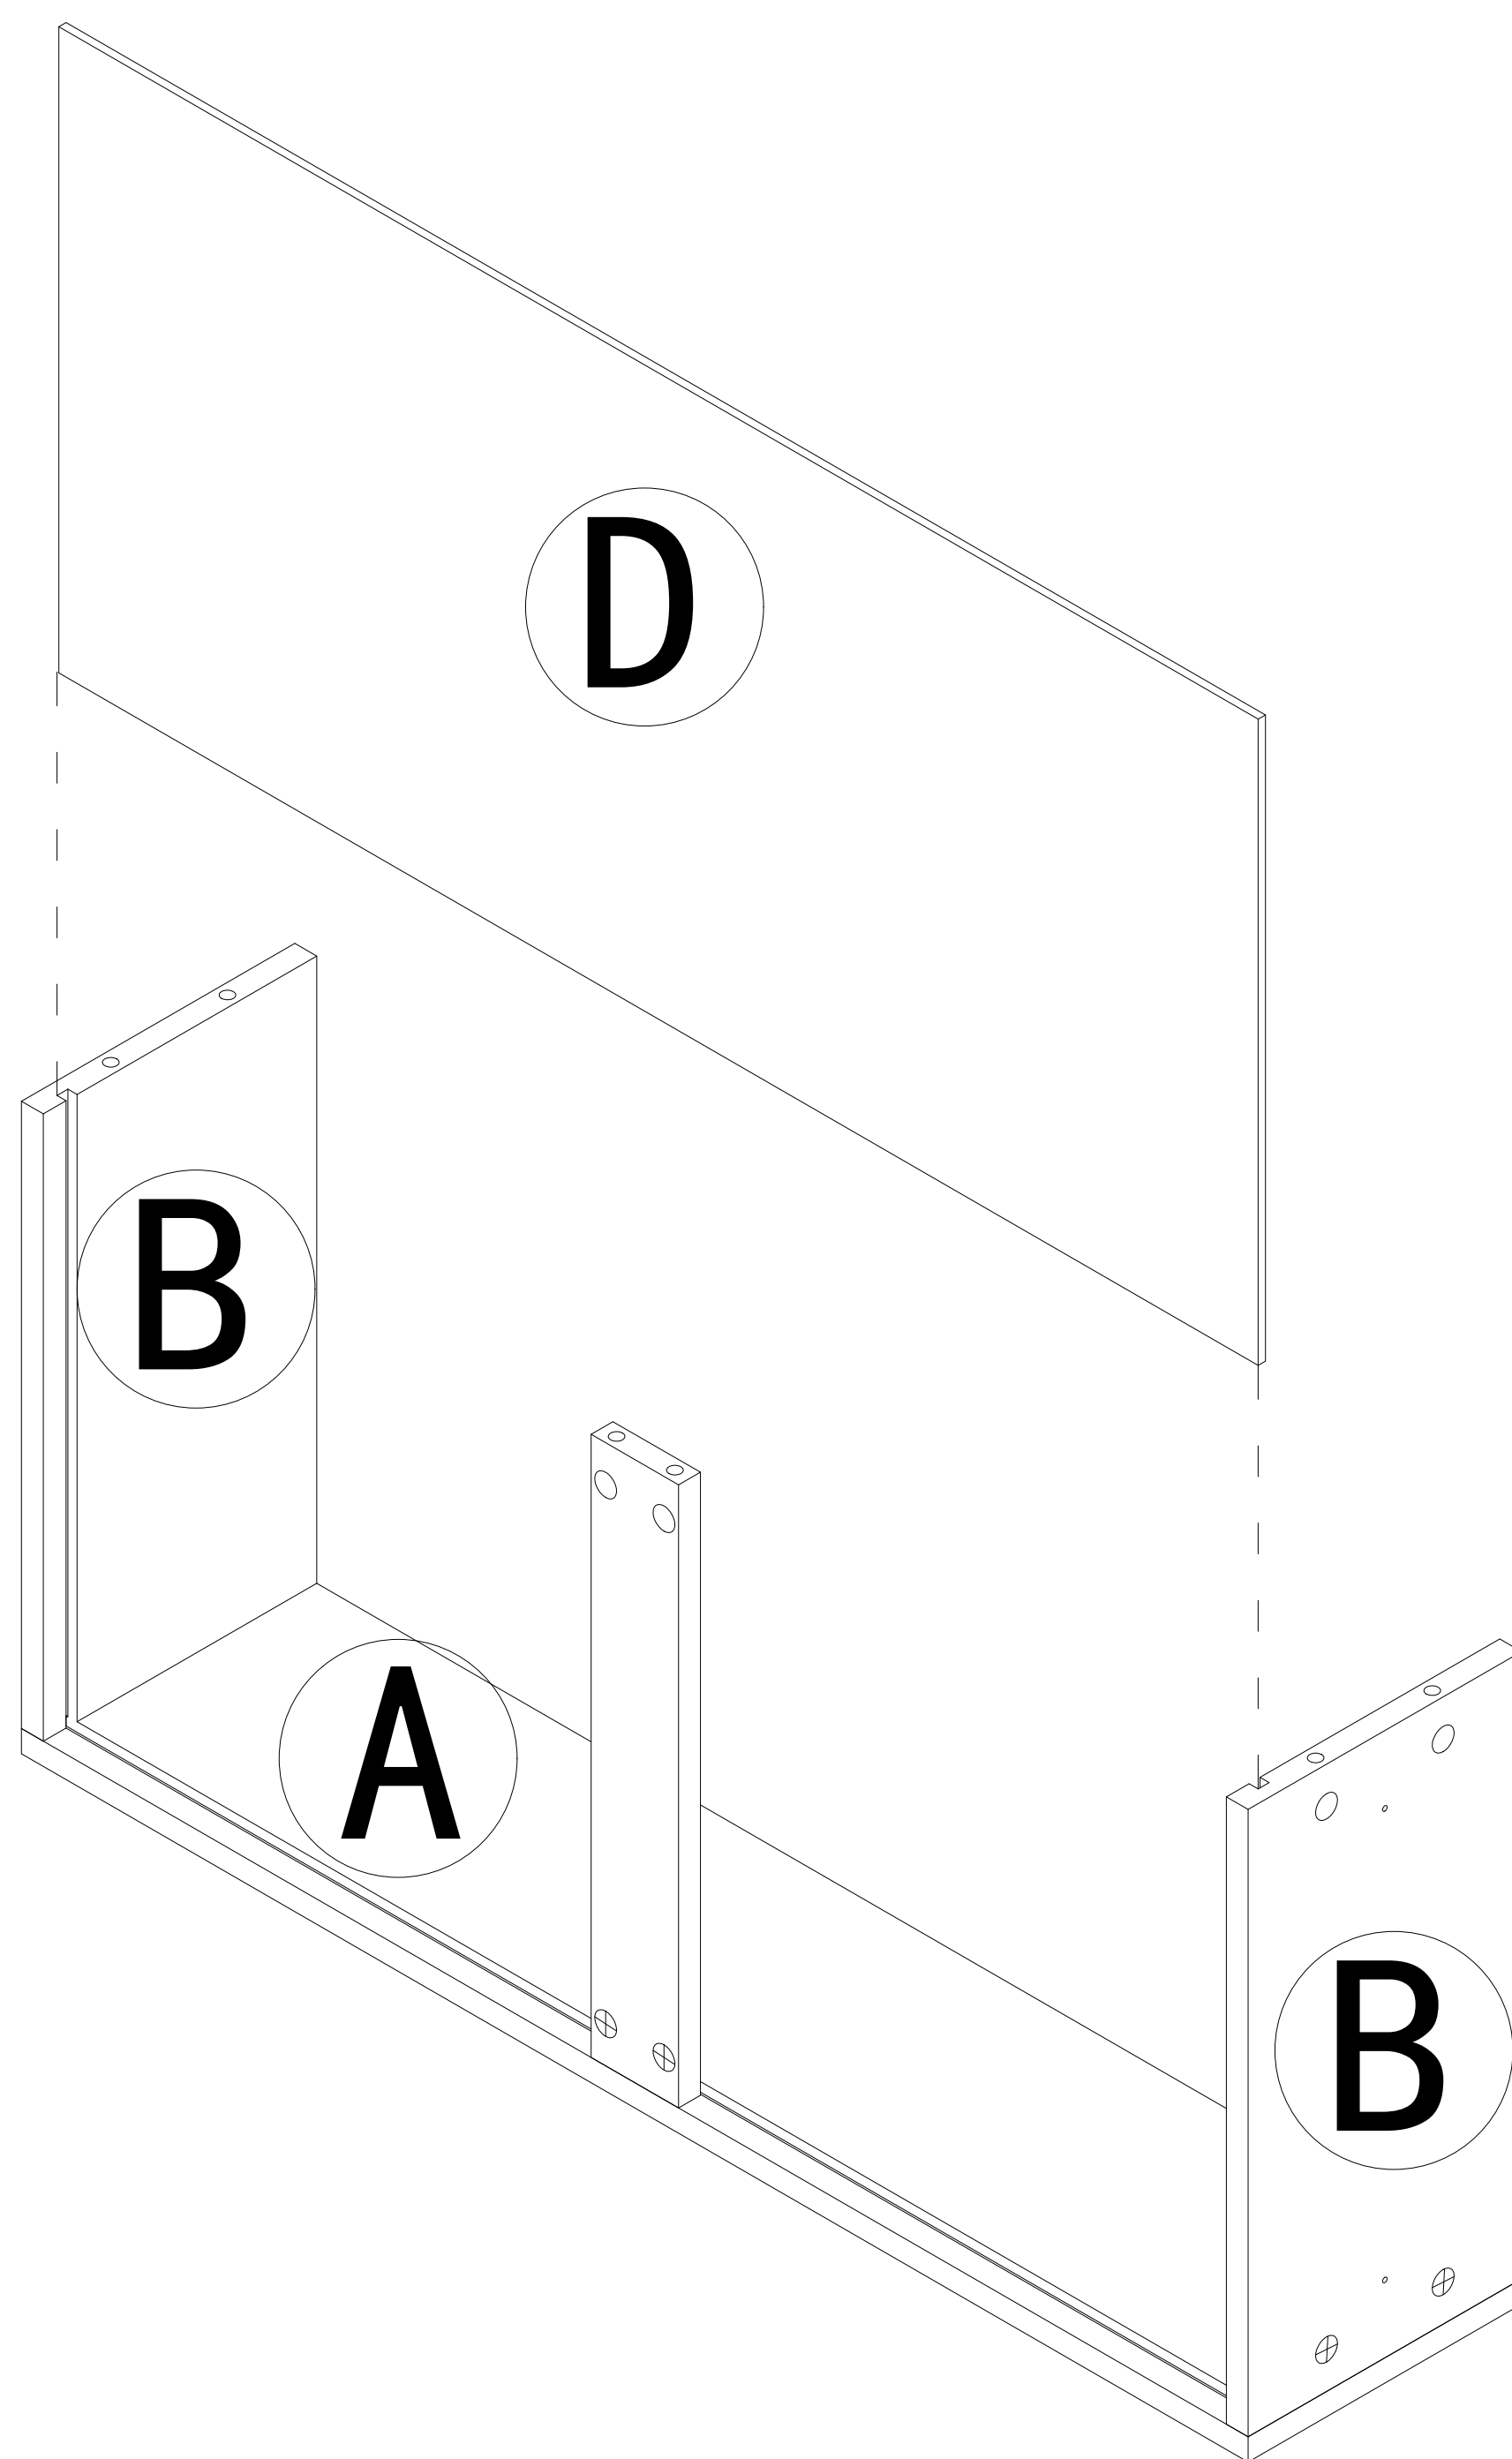



Step 4

- 1

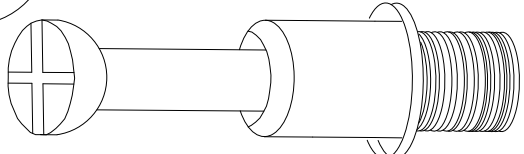


x6
- 10




1pcs
- 

2pcs

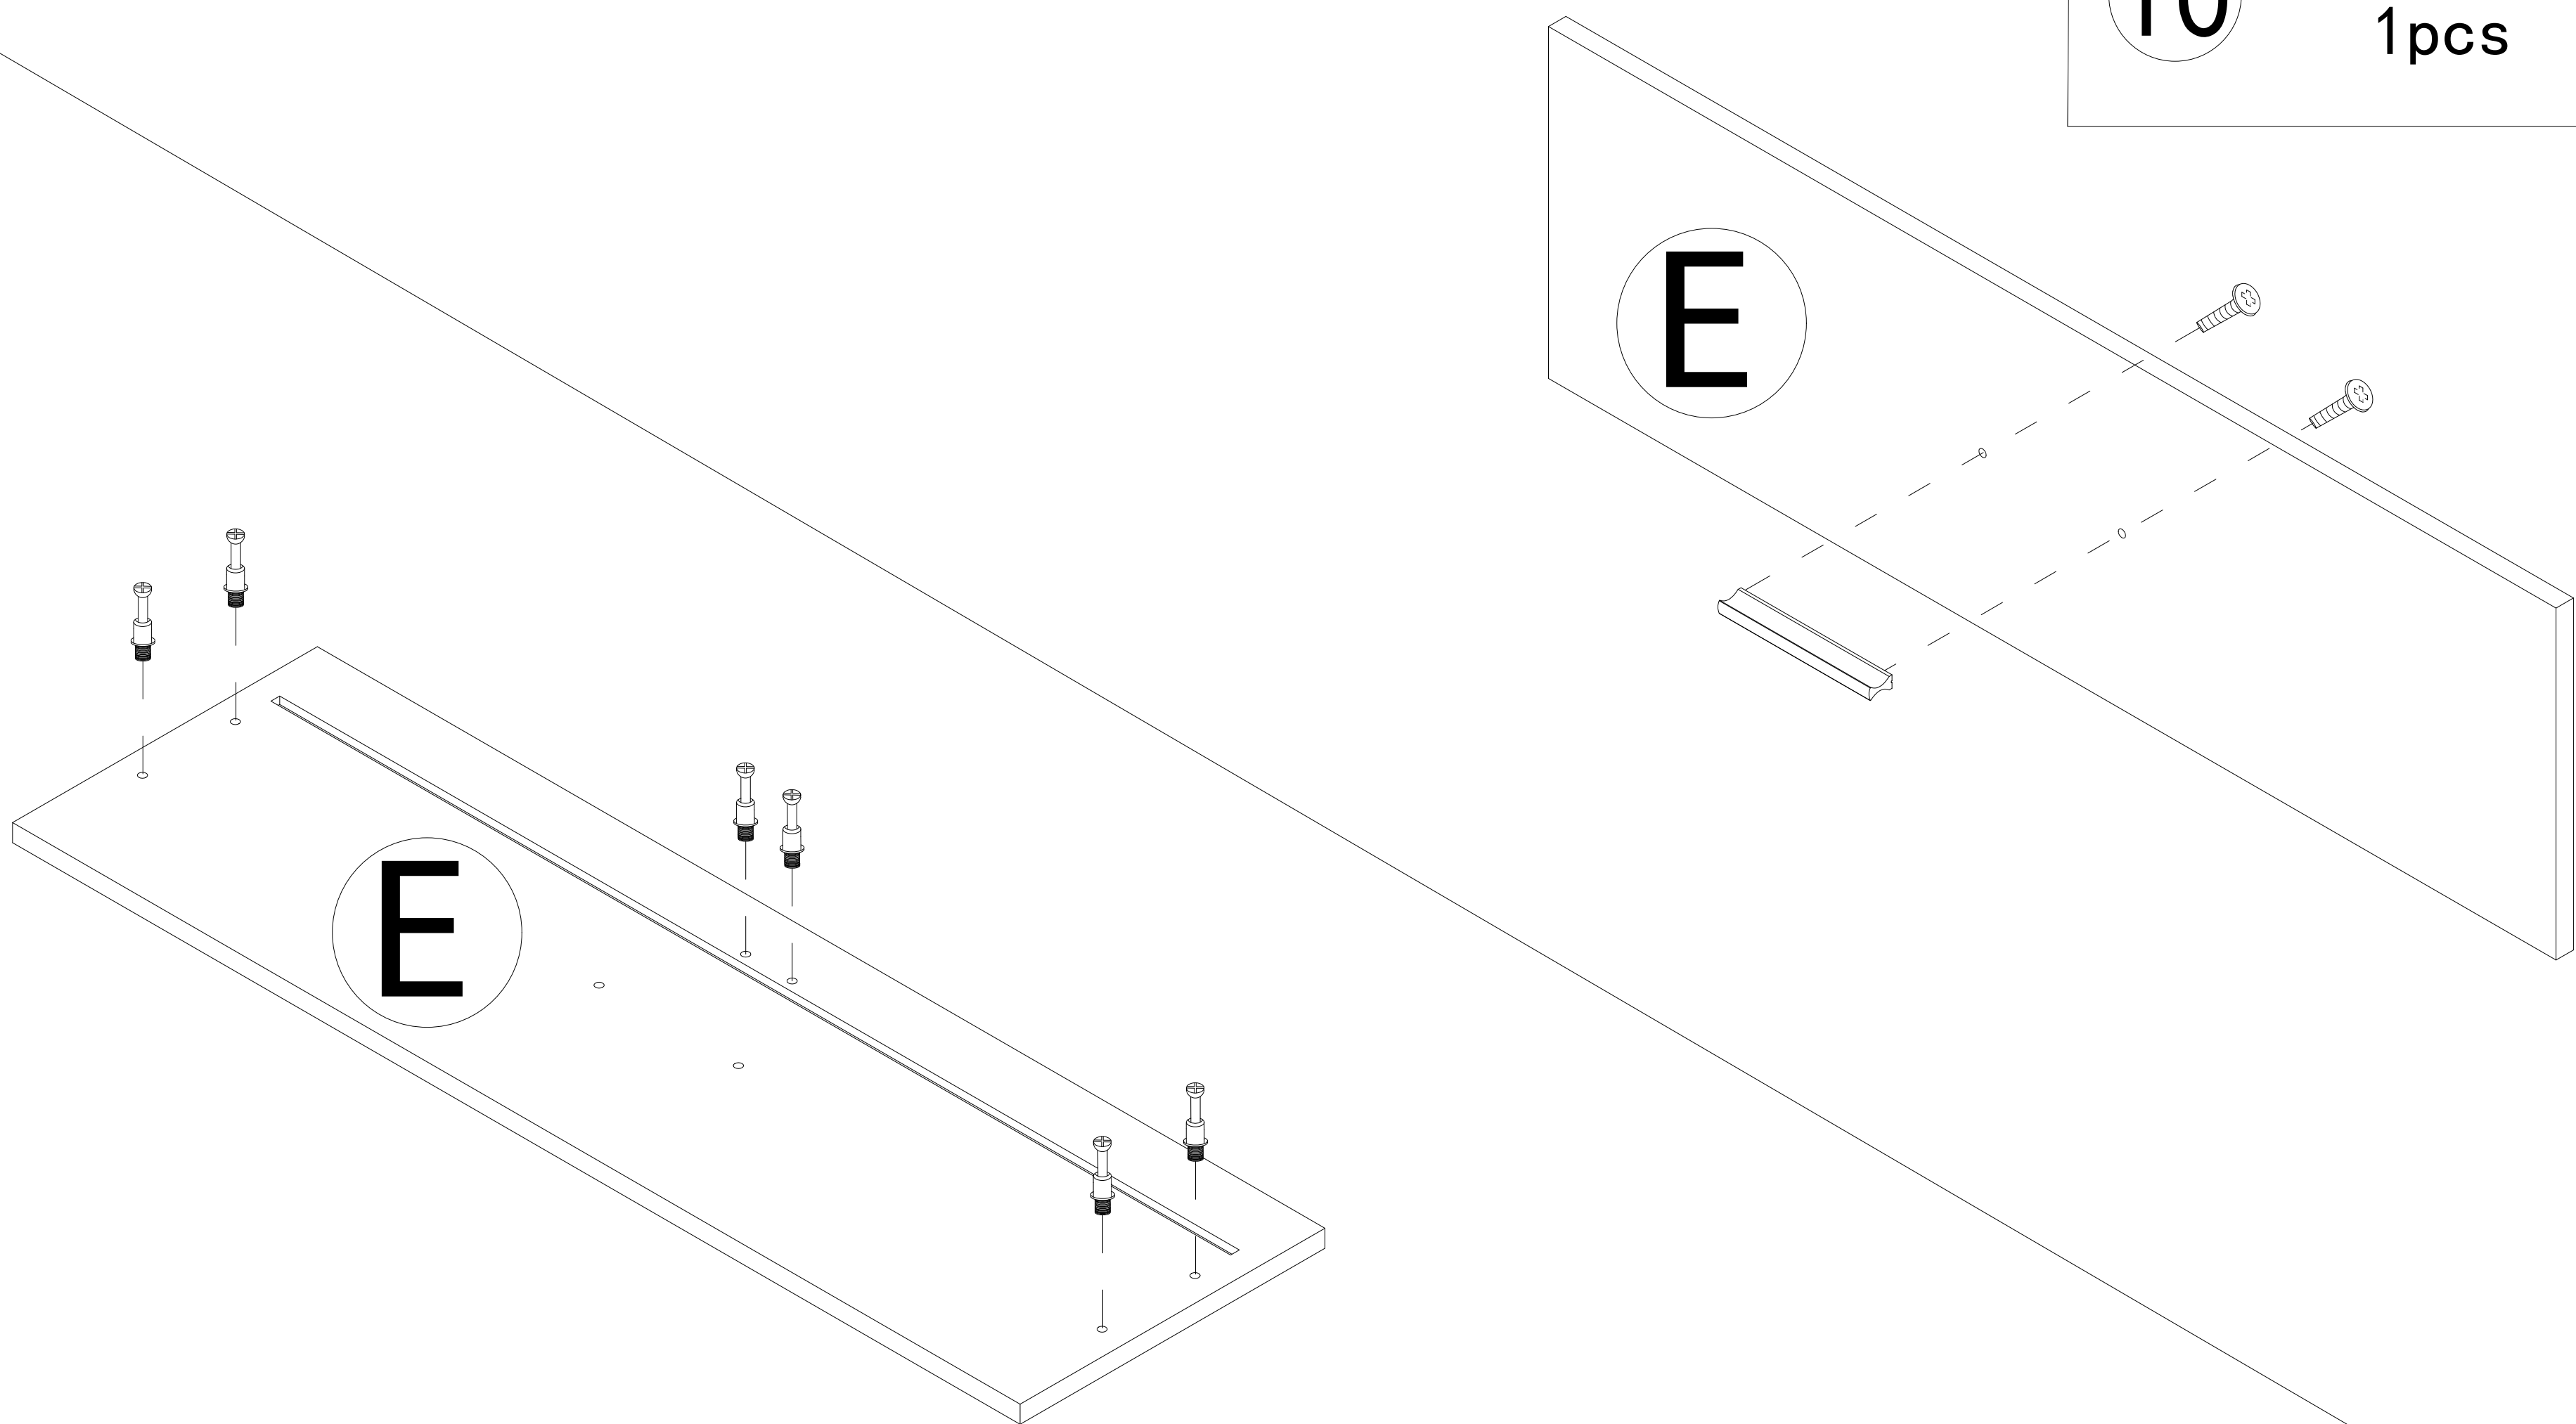


Step 5

- 2




x6

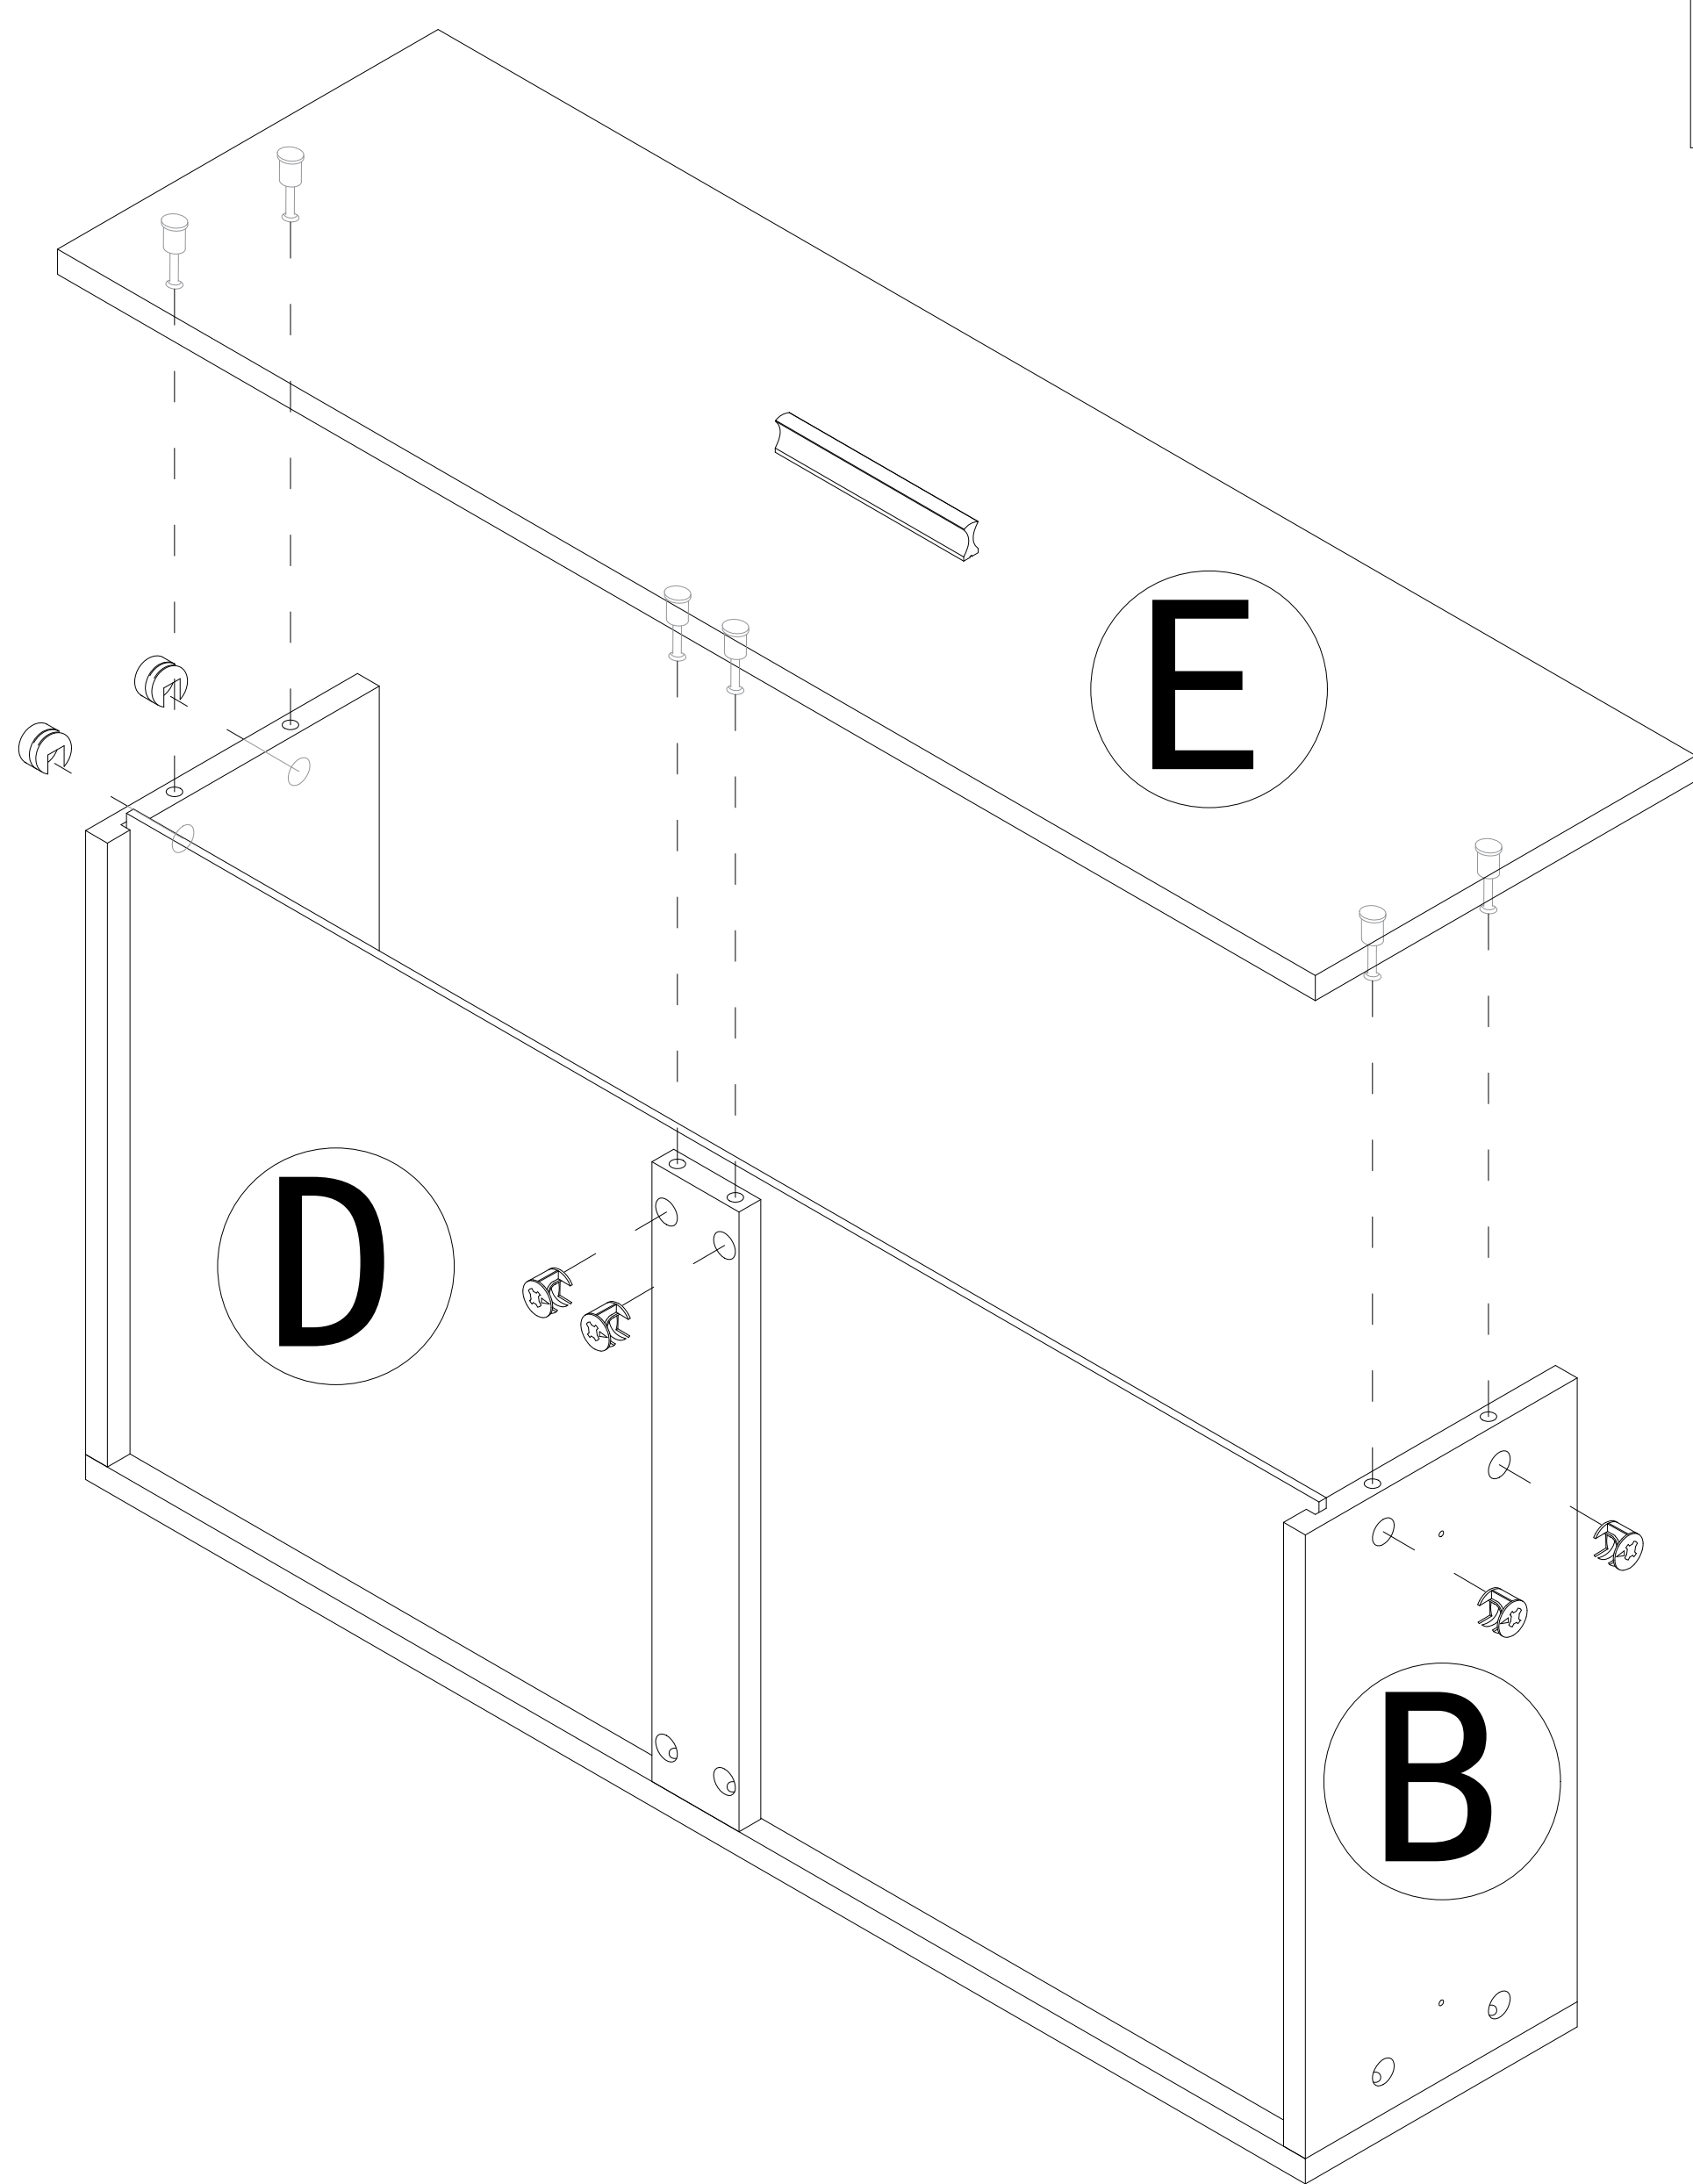


Use parts ④

Drawer rail breakdown diagram

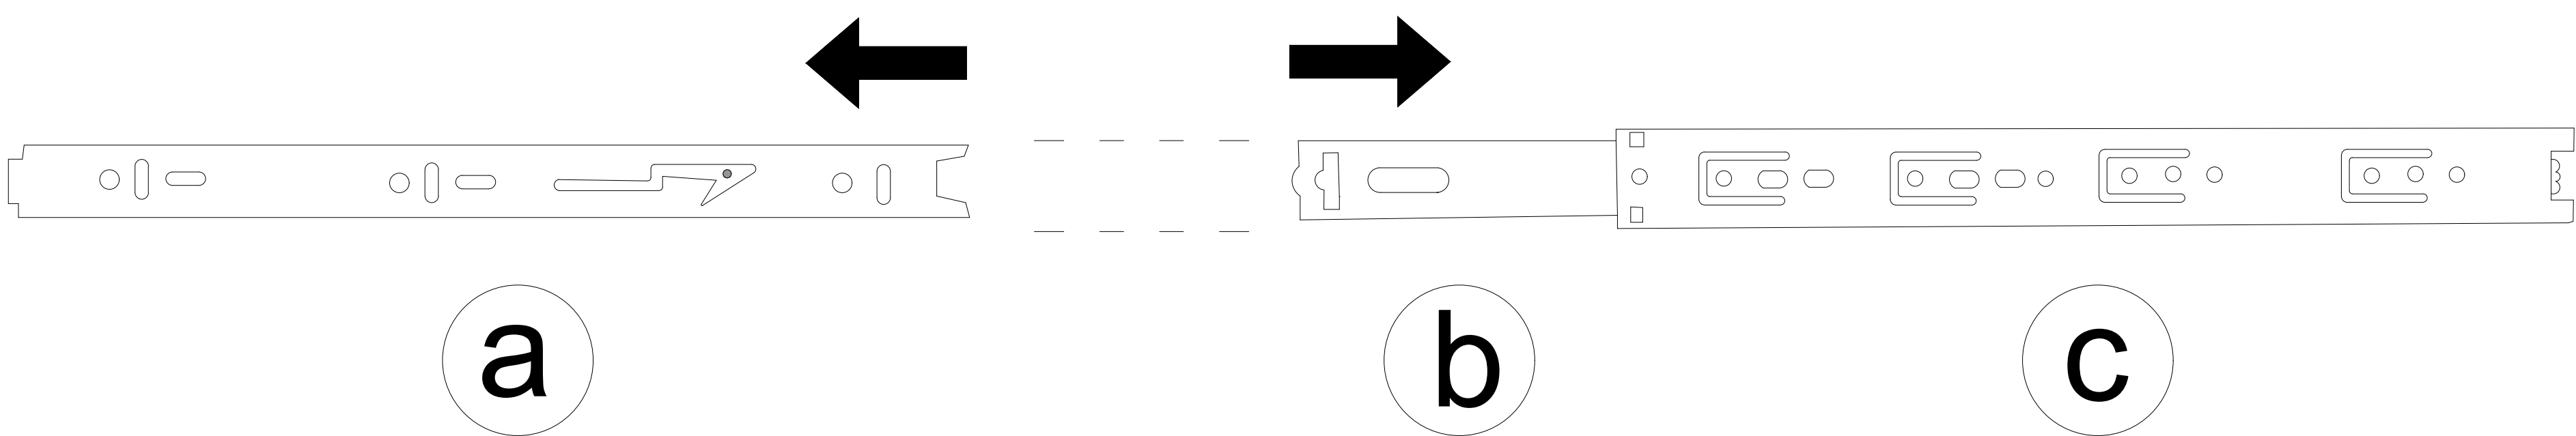


① Dismantle the schematic diagram

Step 1 : Pull the rails apart

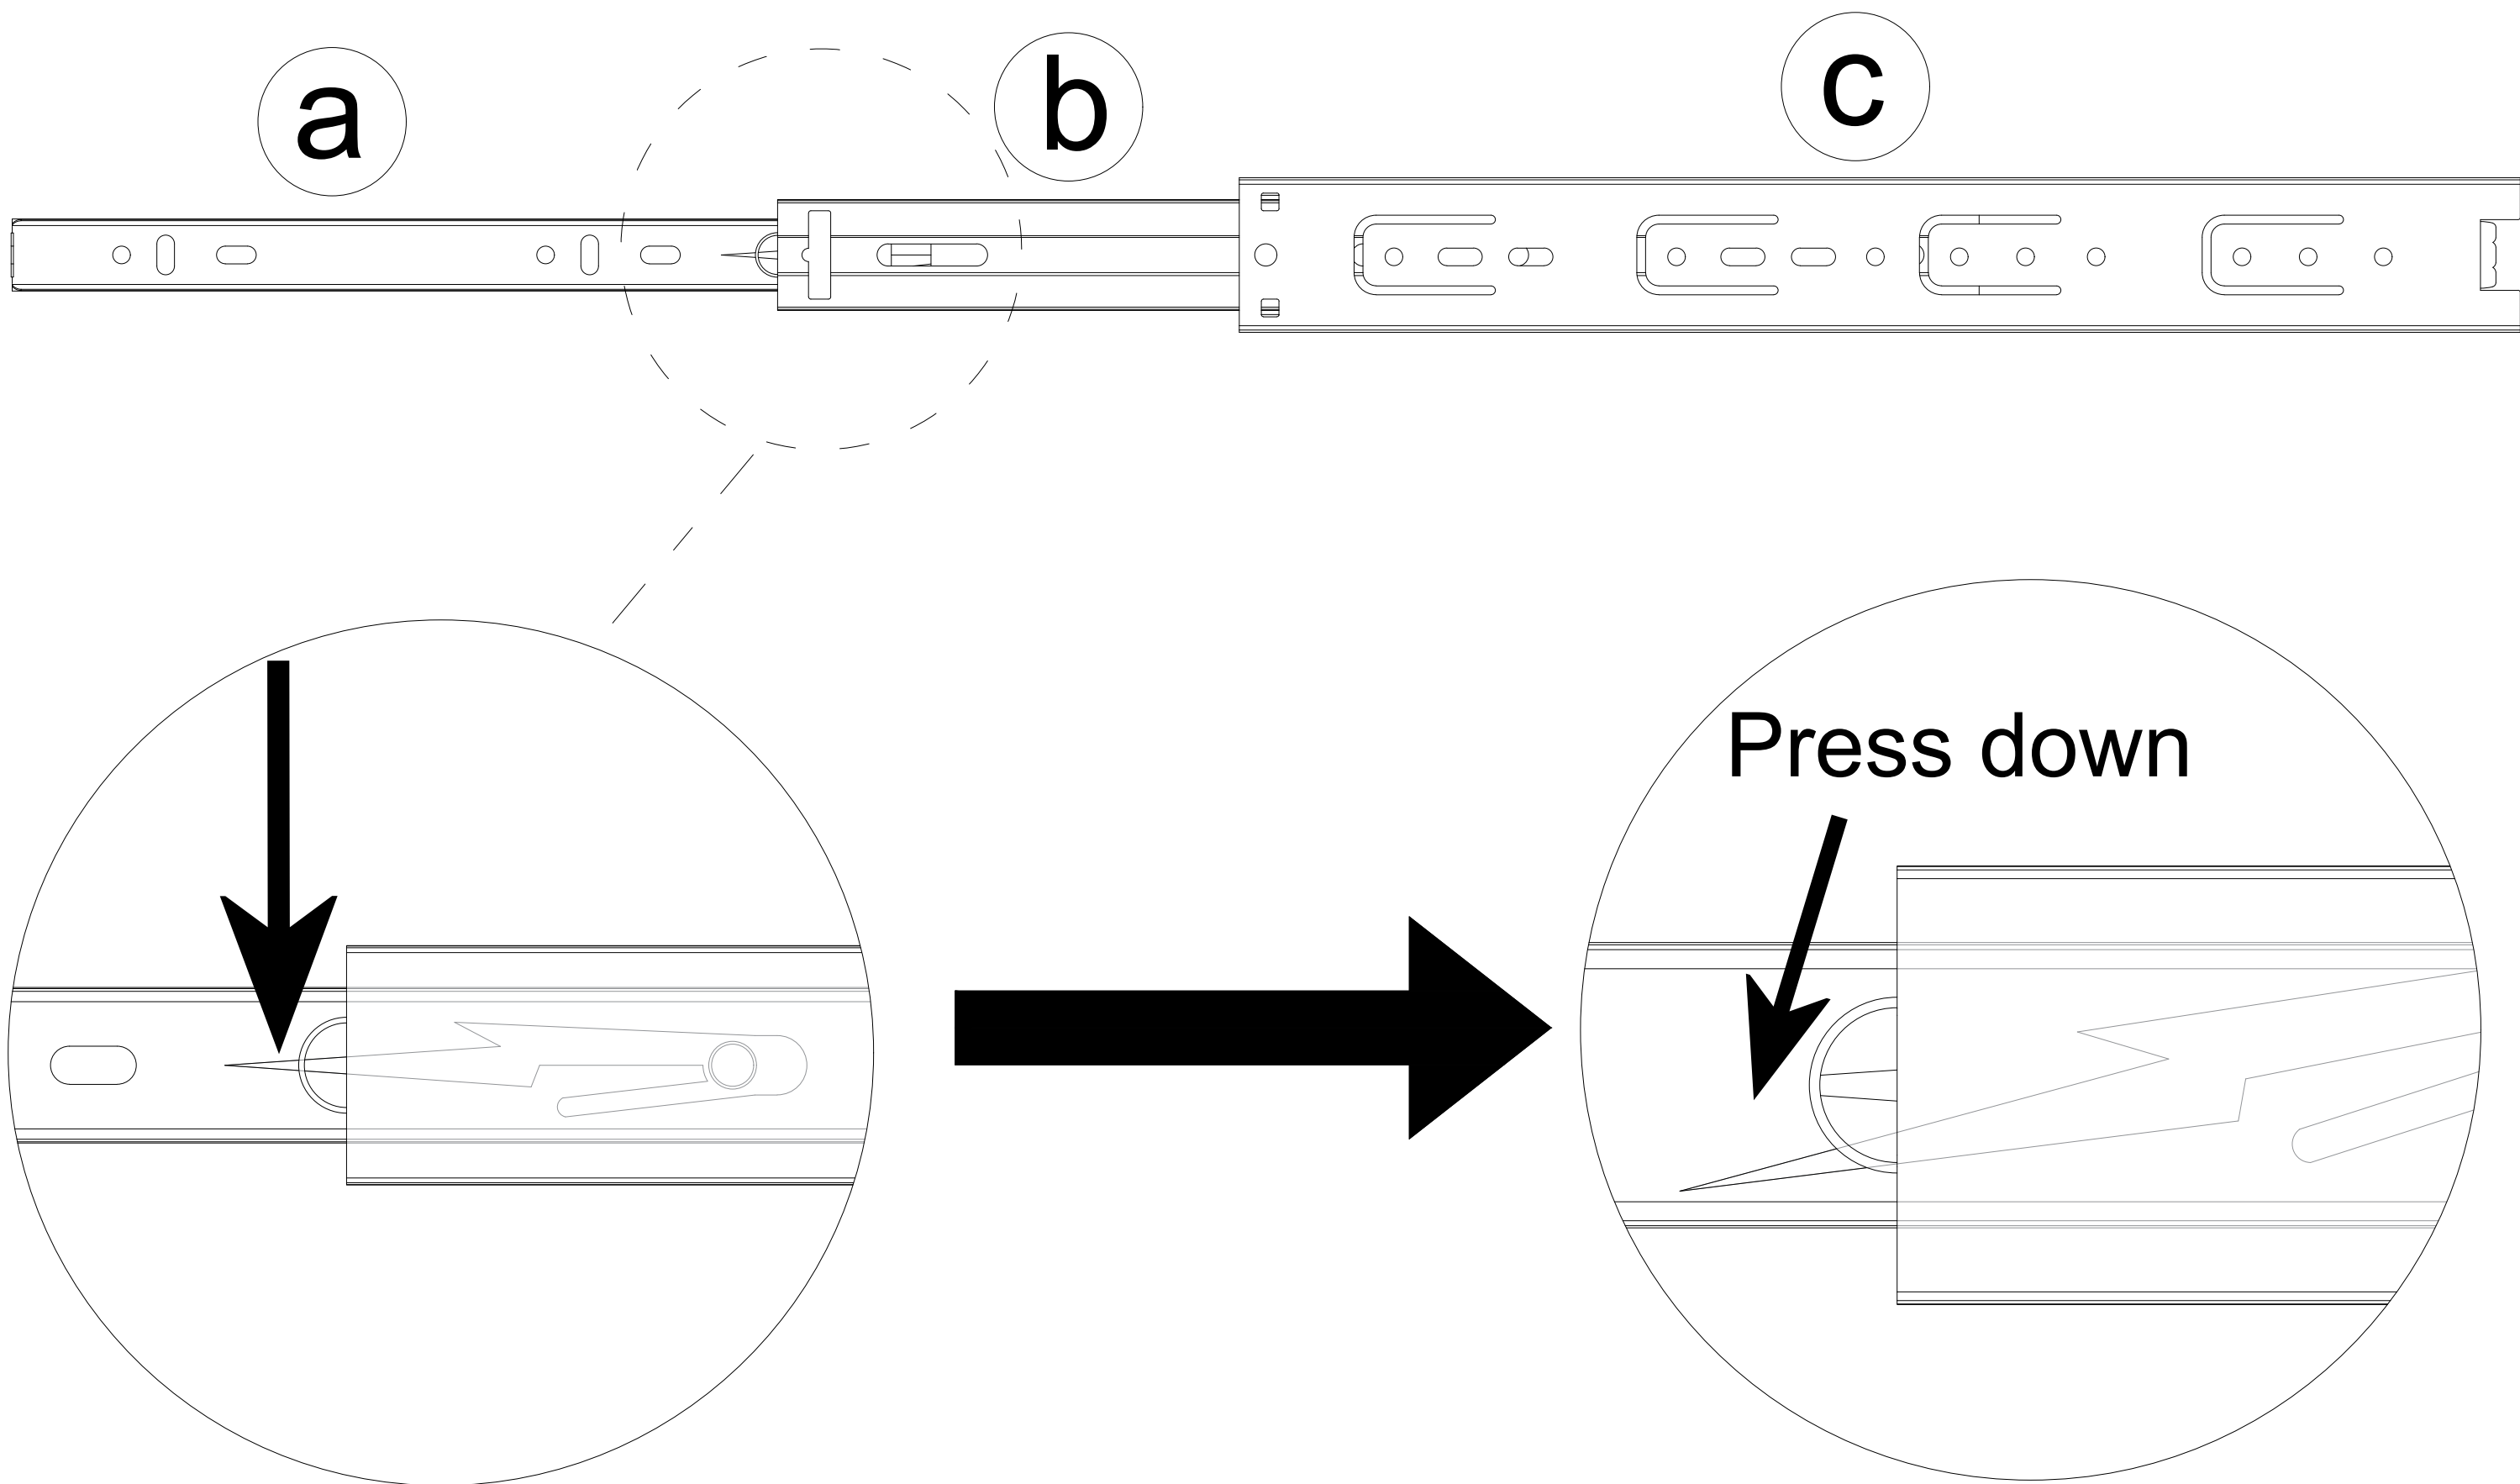


Step 2 : Press the nylon button and pull out (a).


Drawer rail decomposition completed schematic diagram














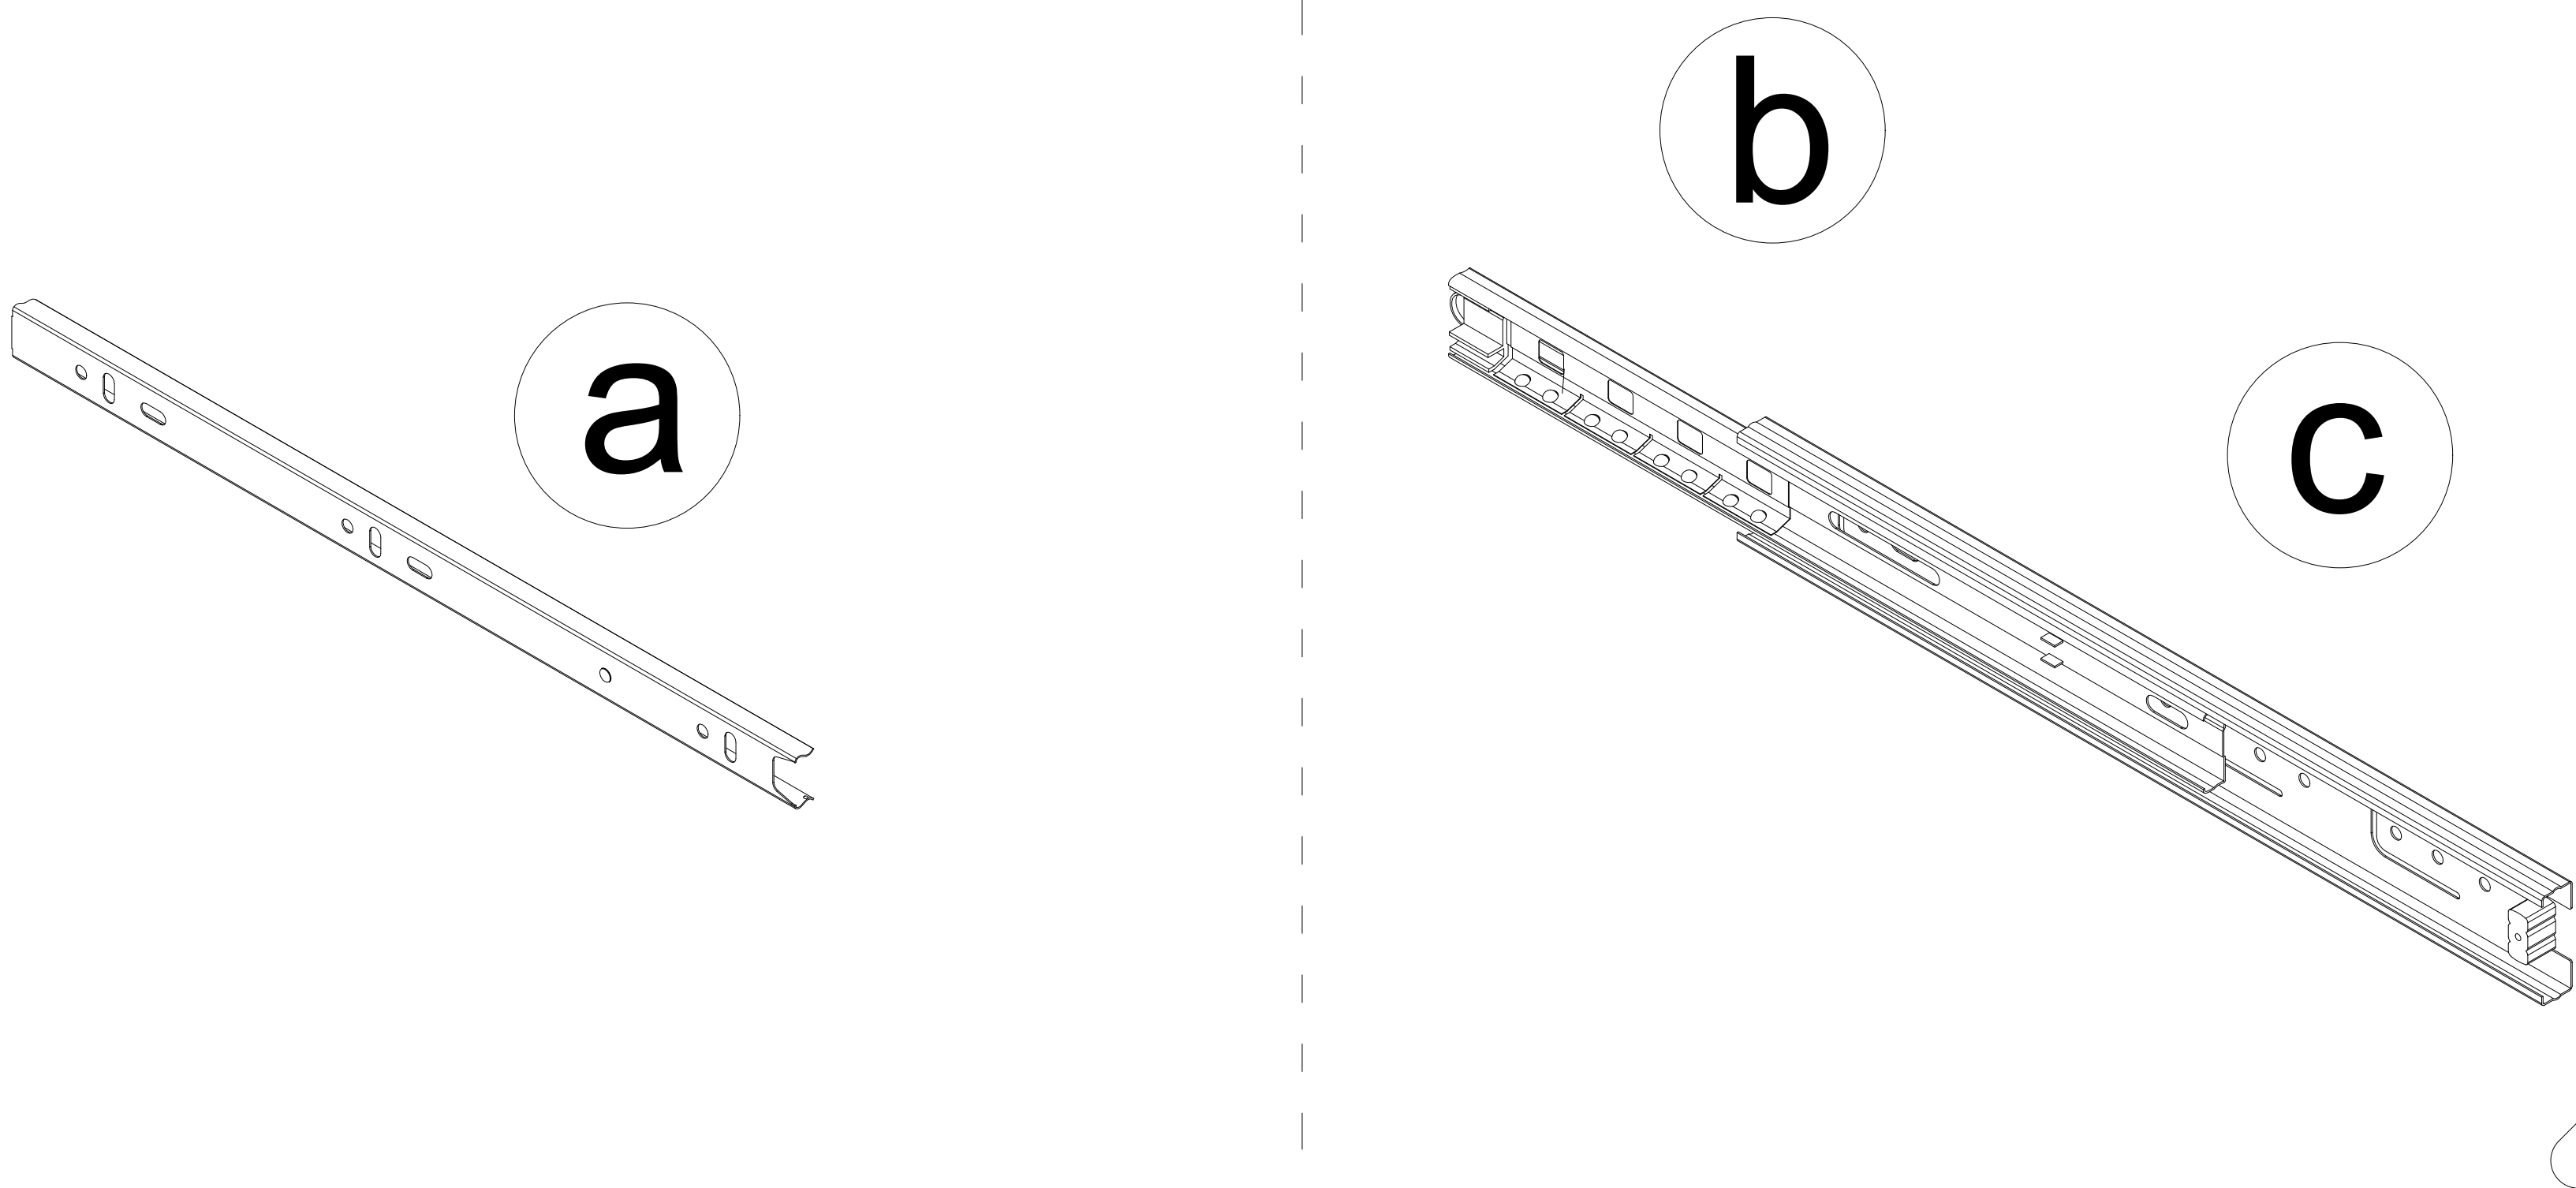



Step 6

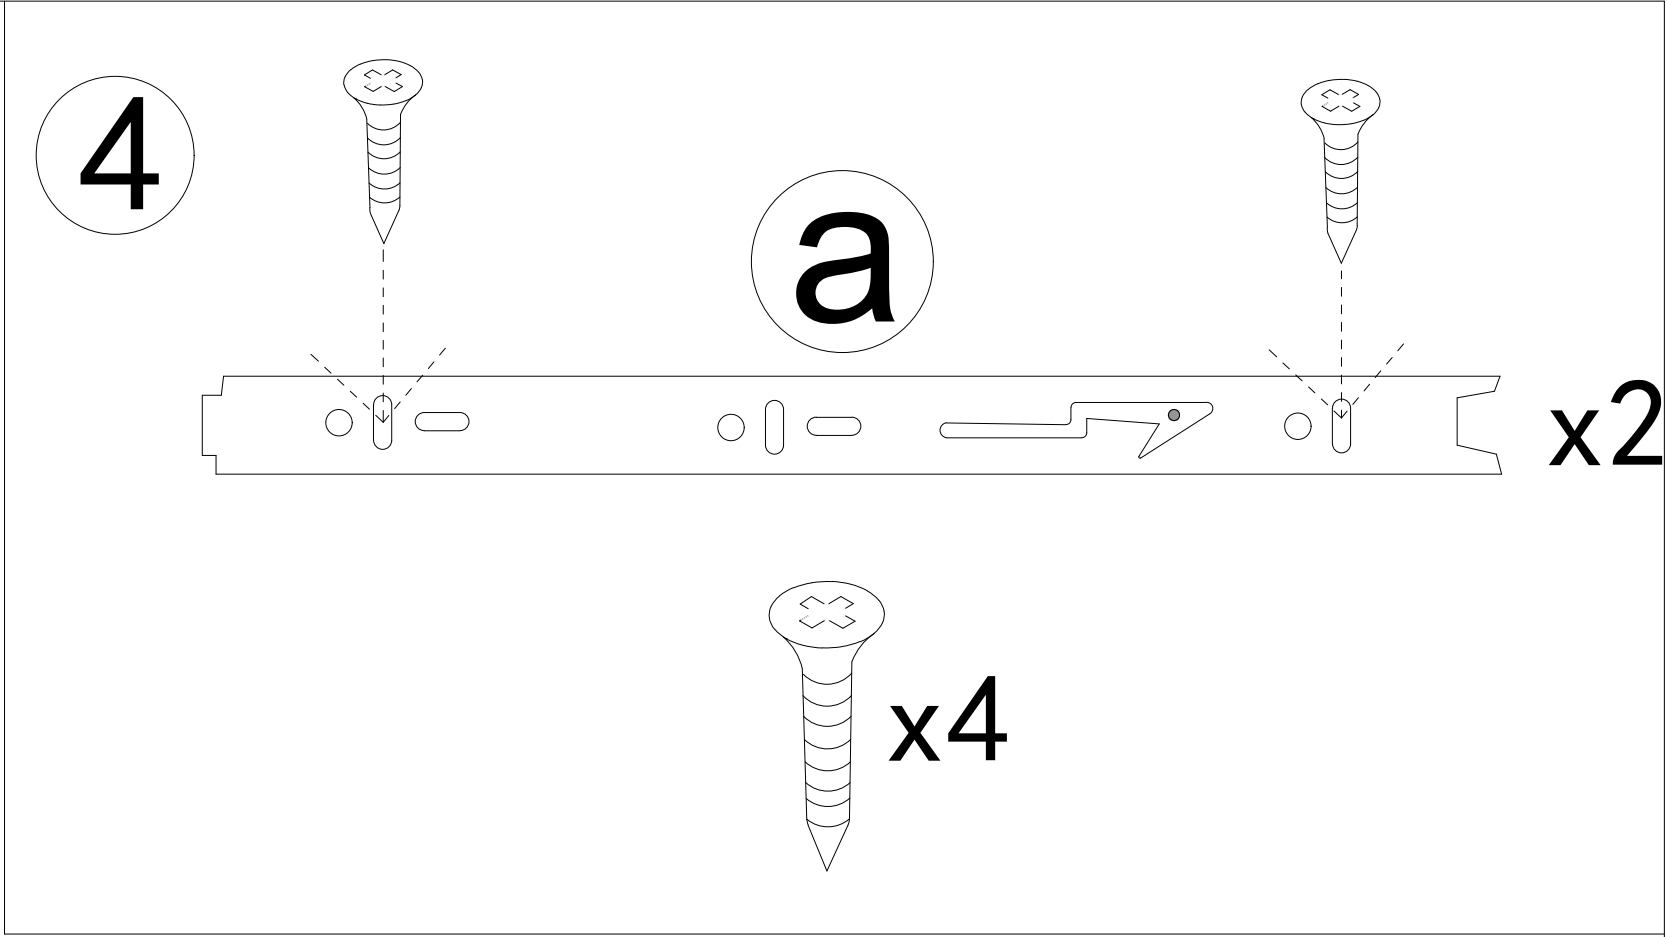



Step 7

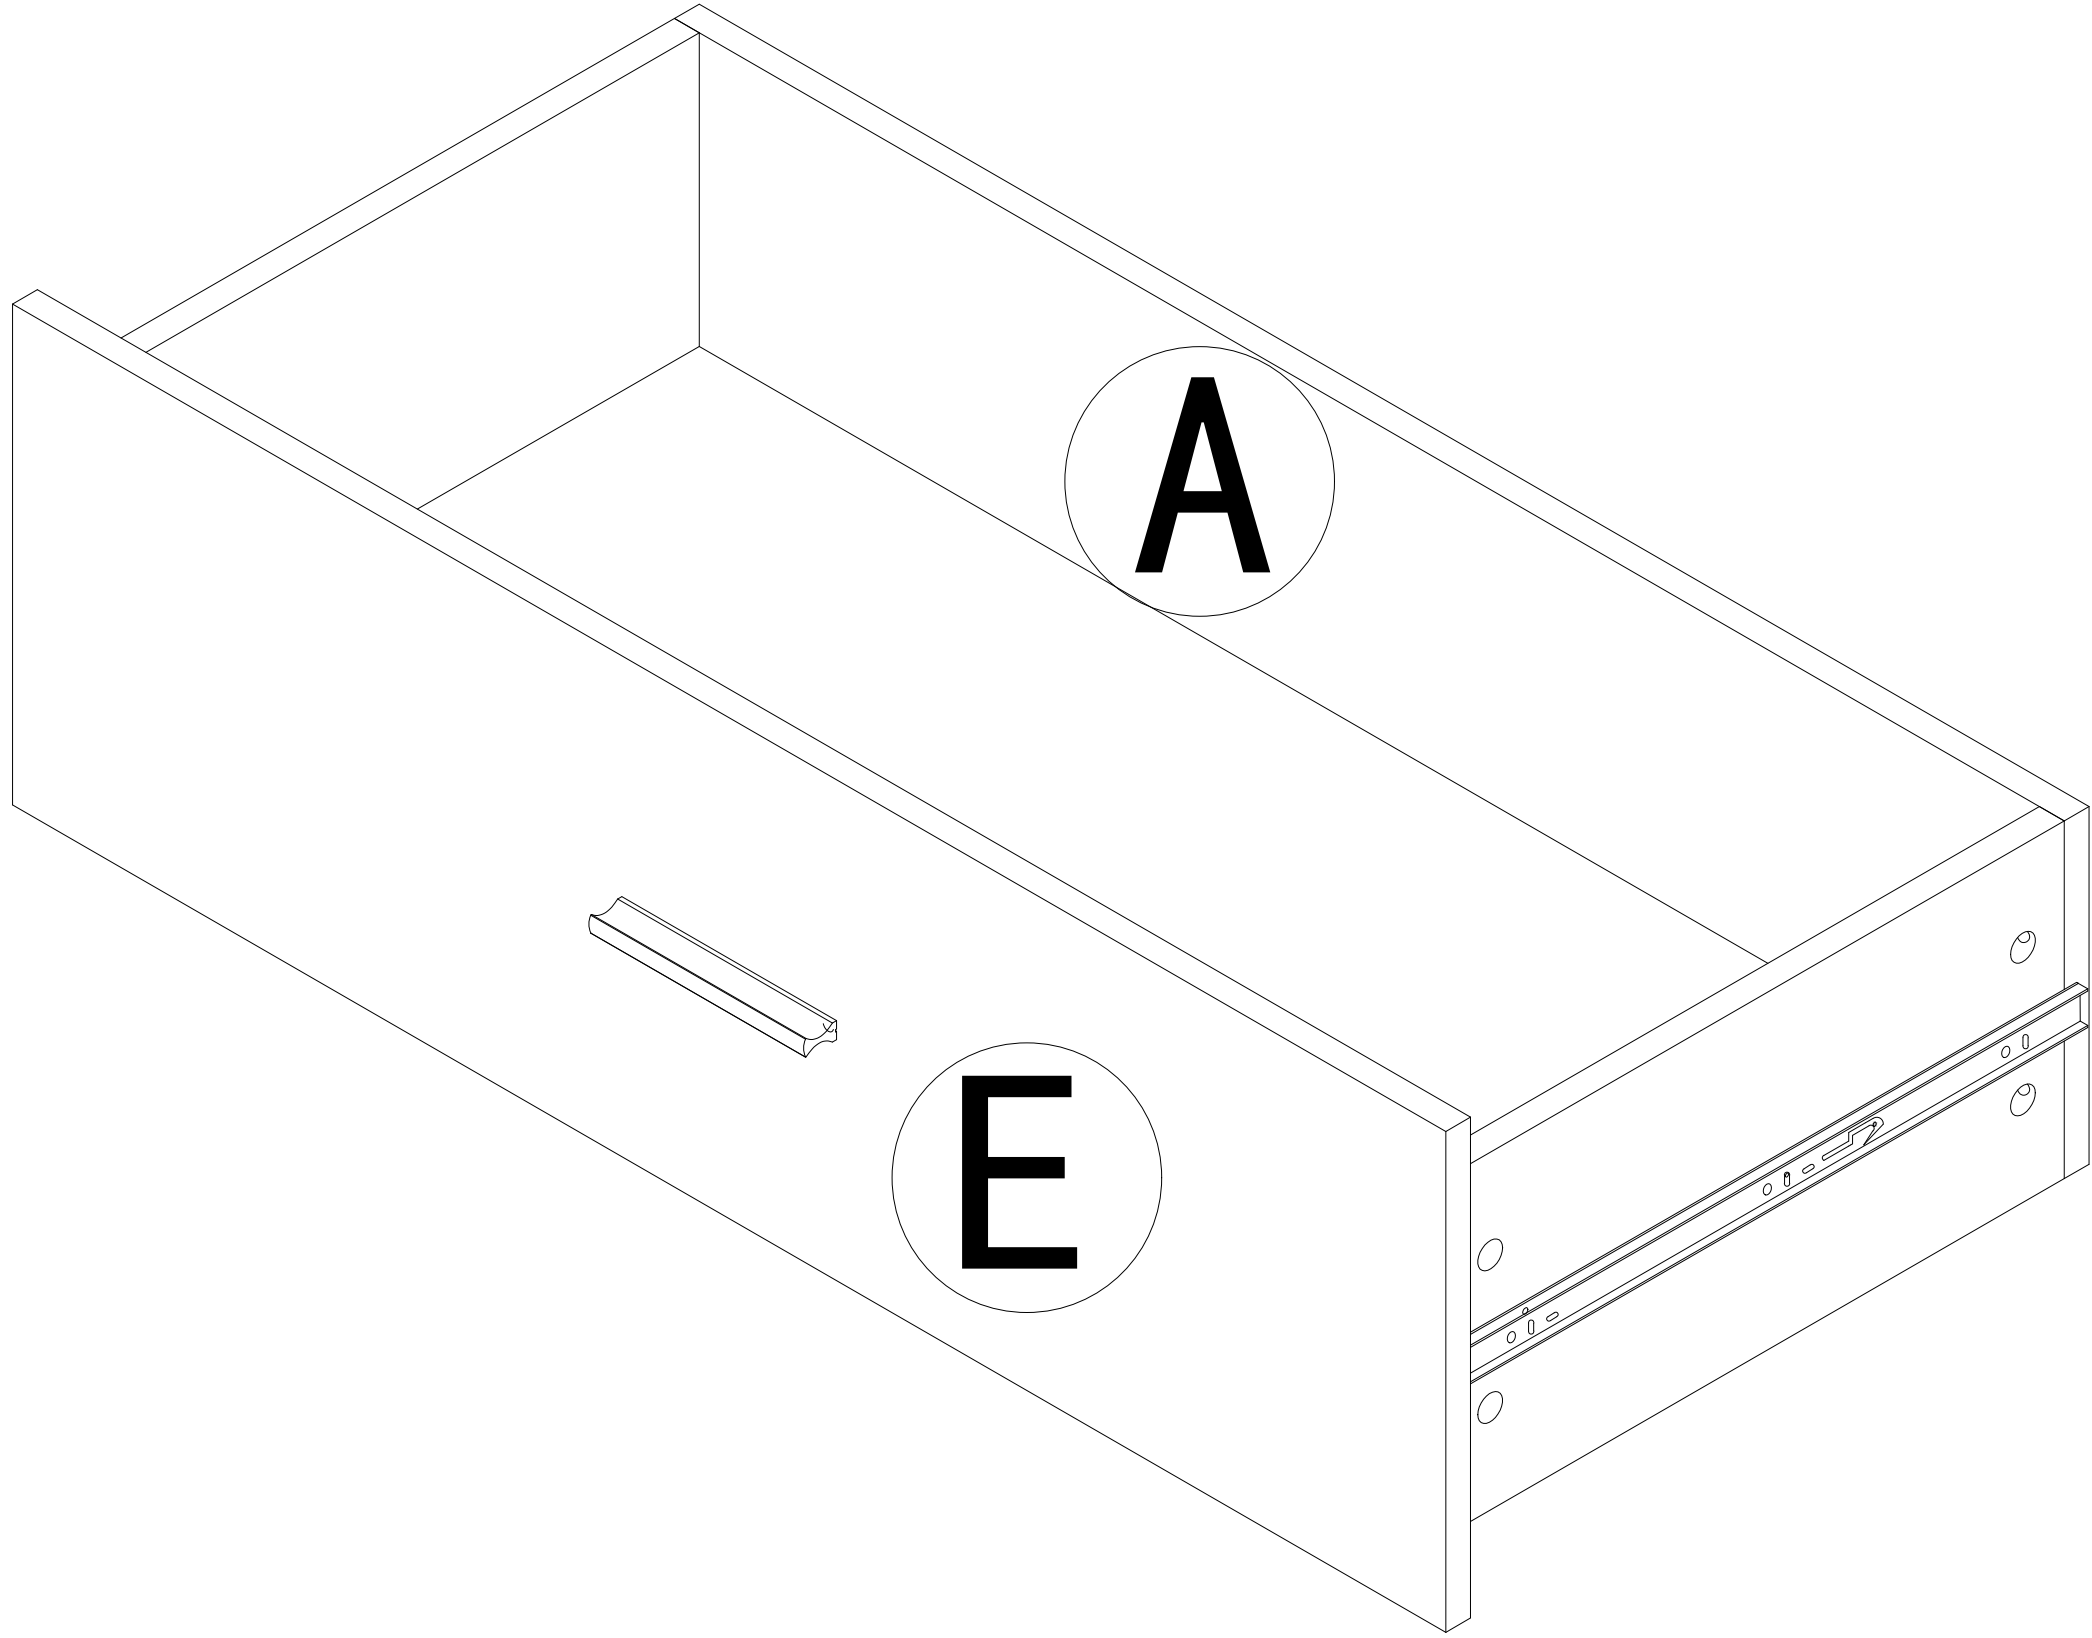

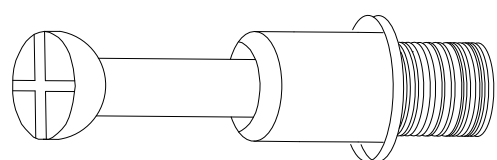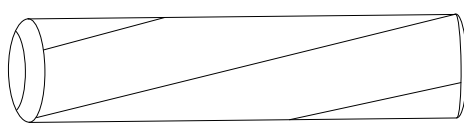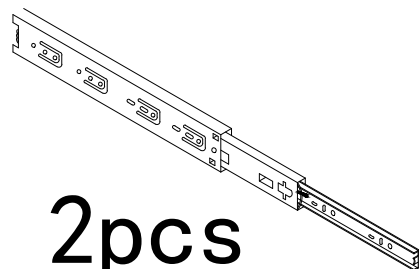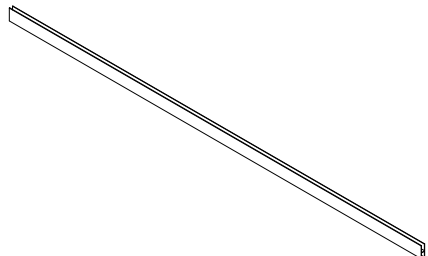

1		42pcs	2		42pcs	3	 x4
4	 2pcs	 6pcs	5		4pcs	6	 x2  x8
7	 x8		8	 x16			 x4  x4  x4
9	 x1						

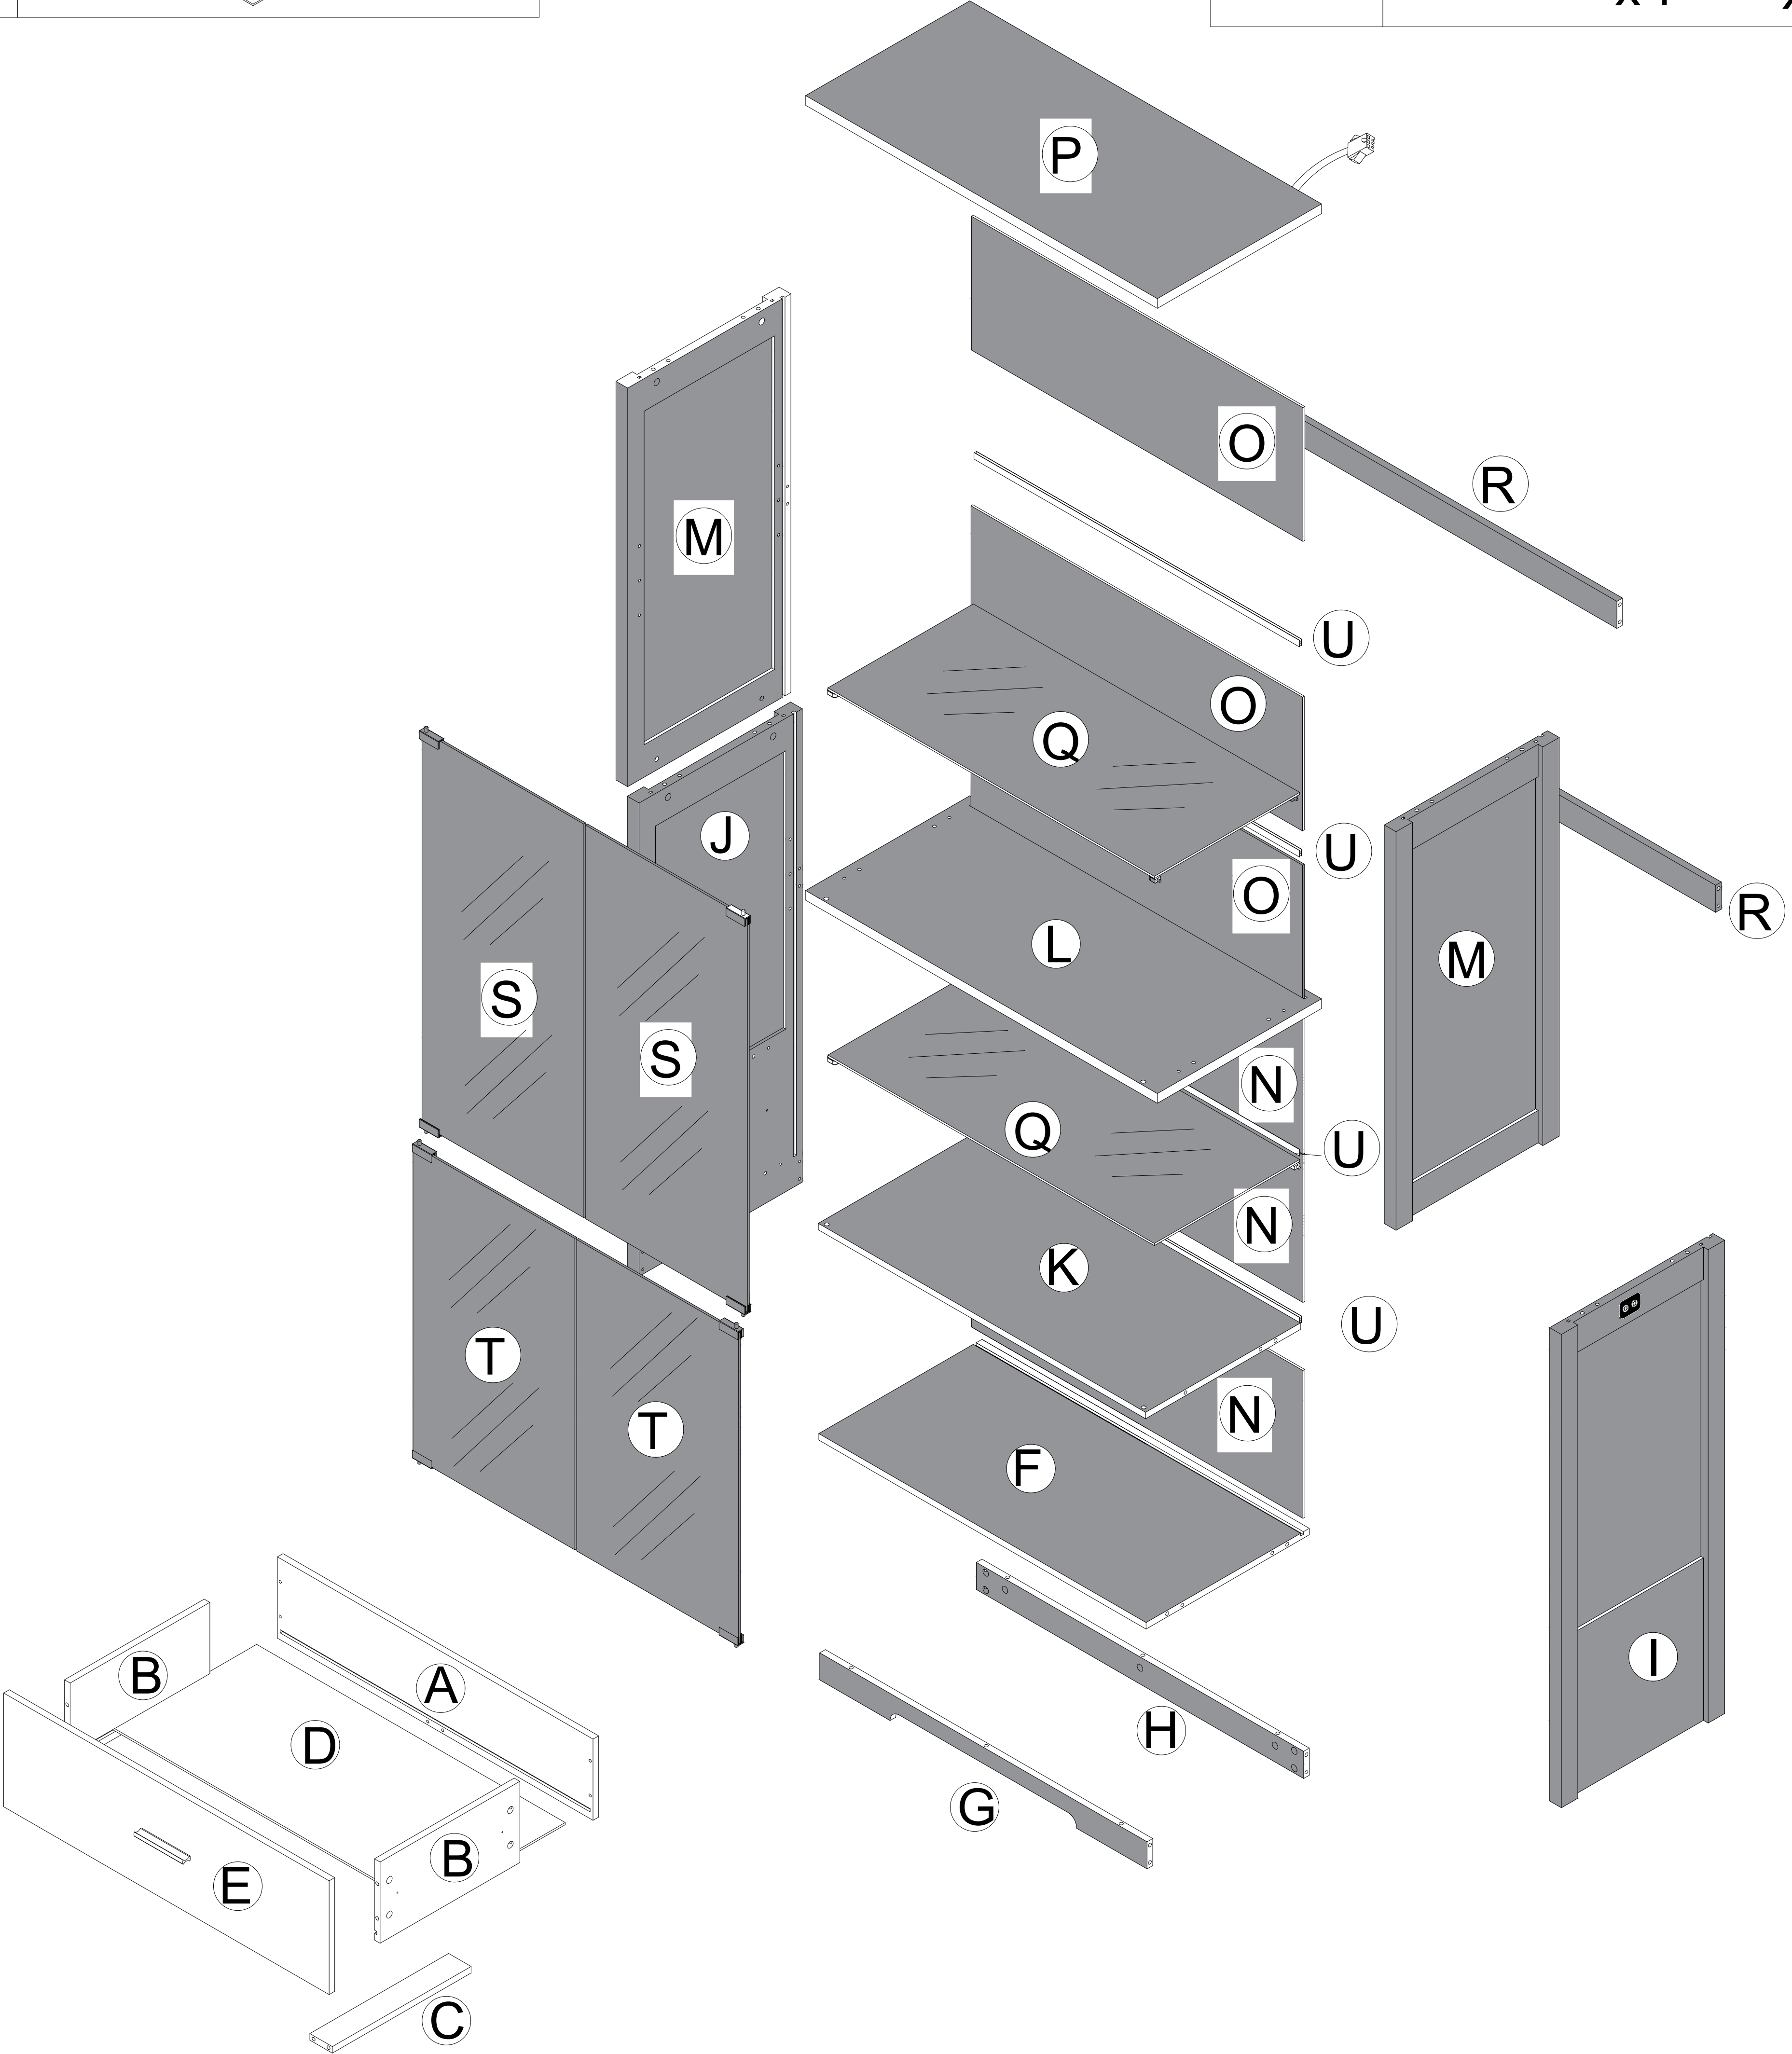

Step 8

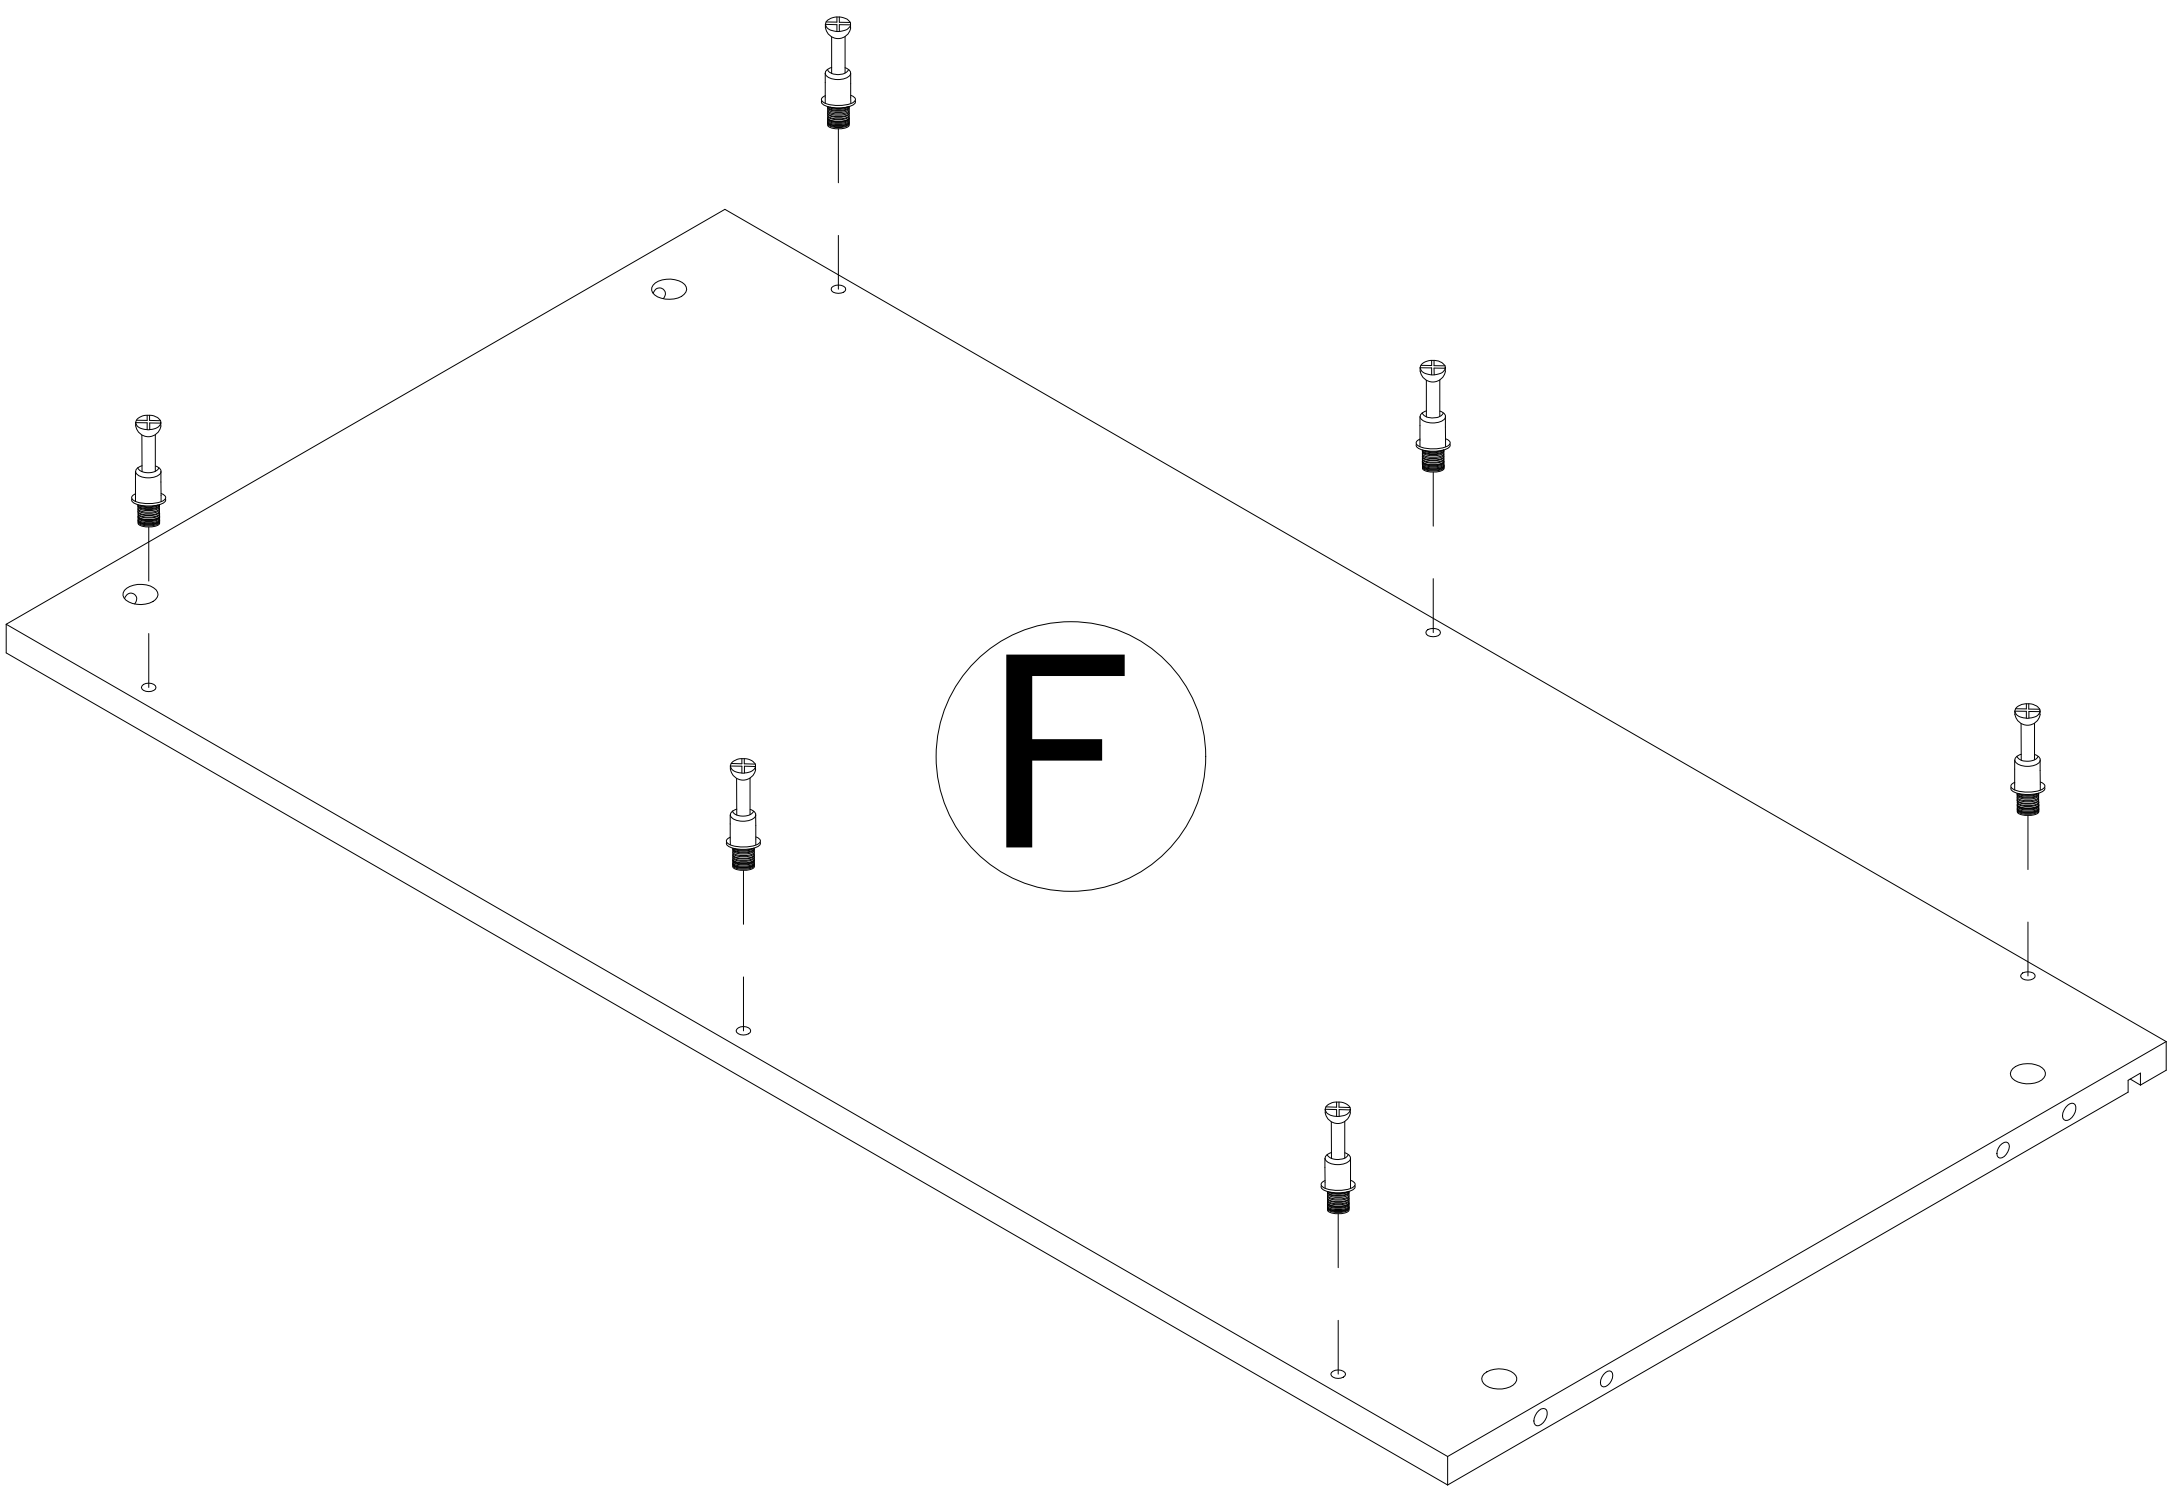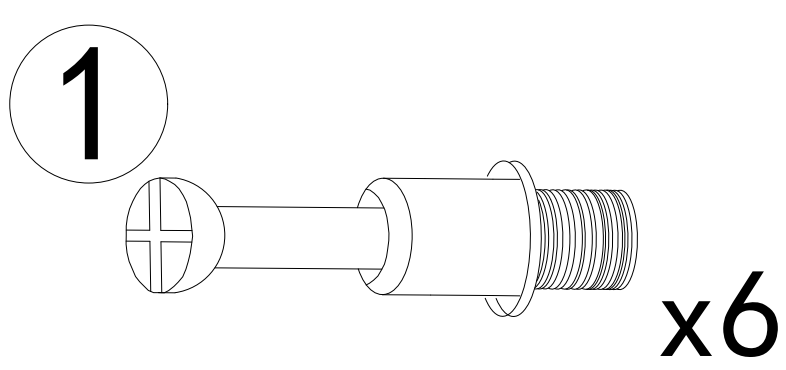



Step 9

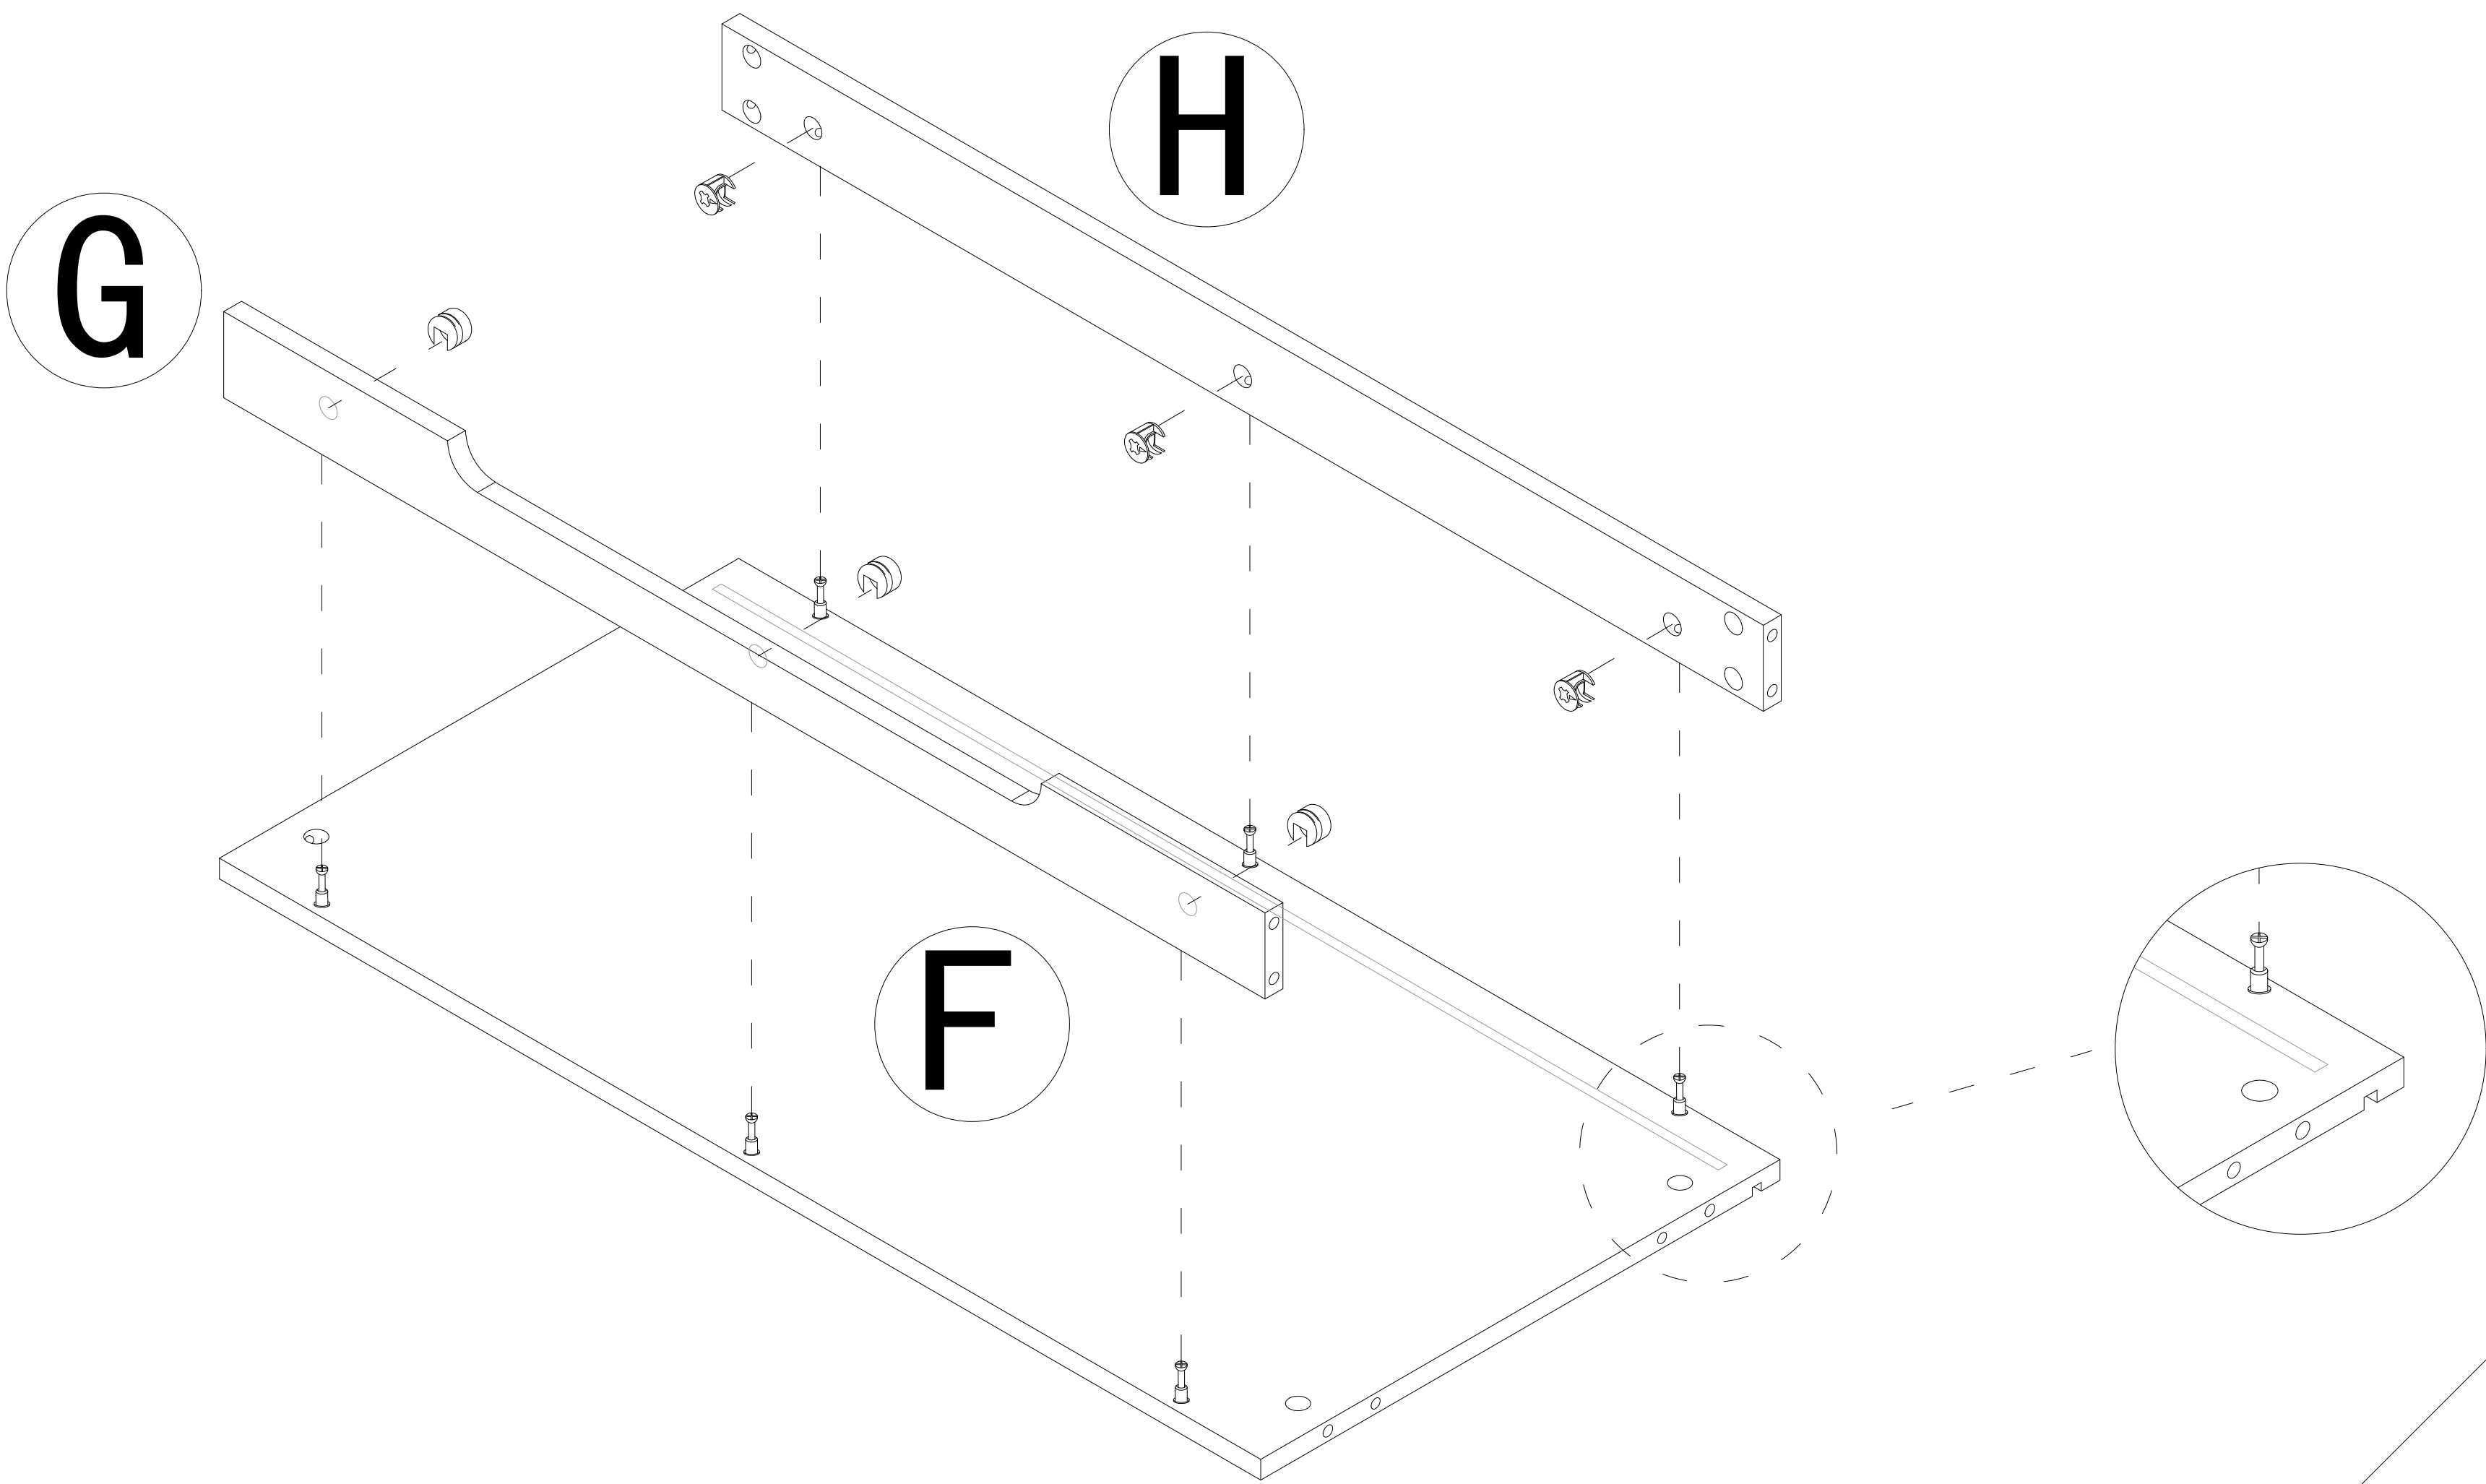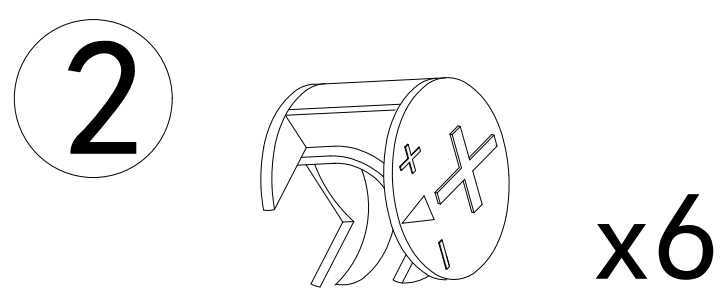

Pay attention to the position of the back slot.



Step 10

This hole is for strengthening fixed hole customers can choose to install according to their needs.

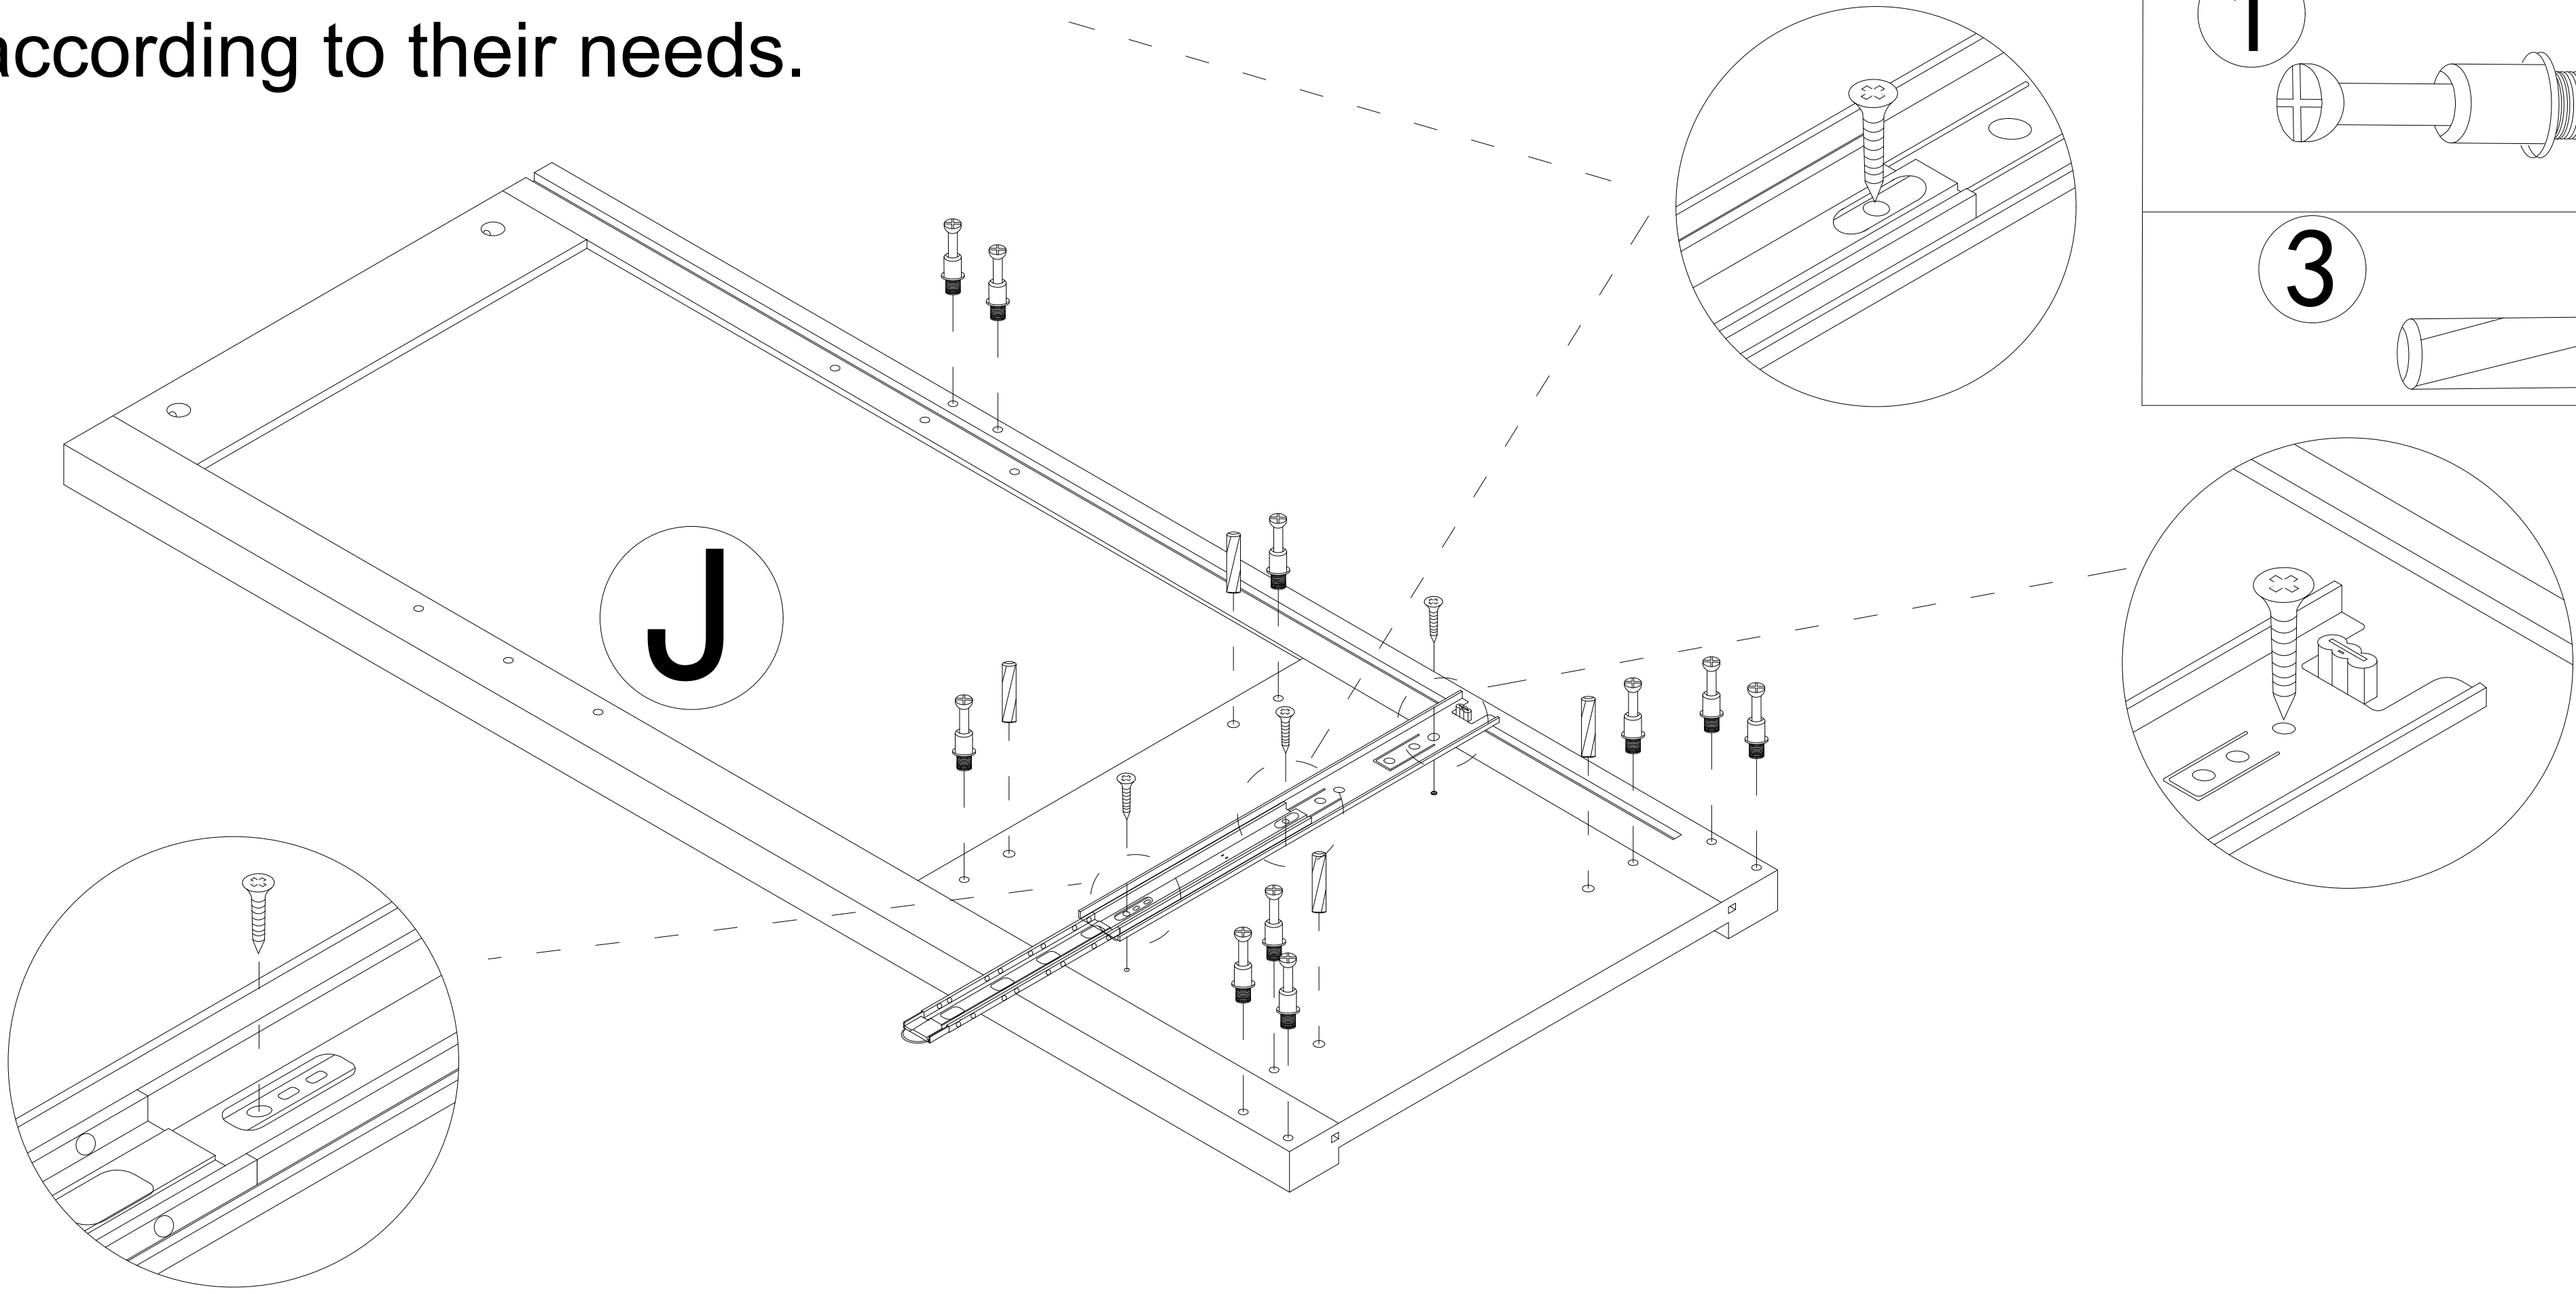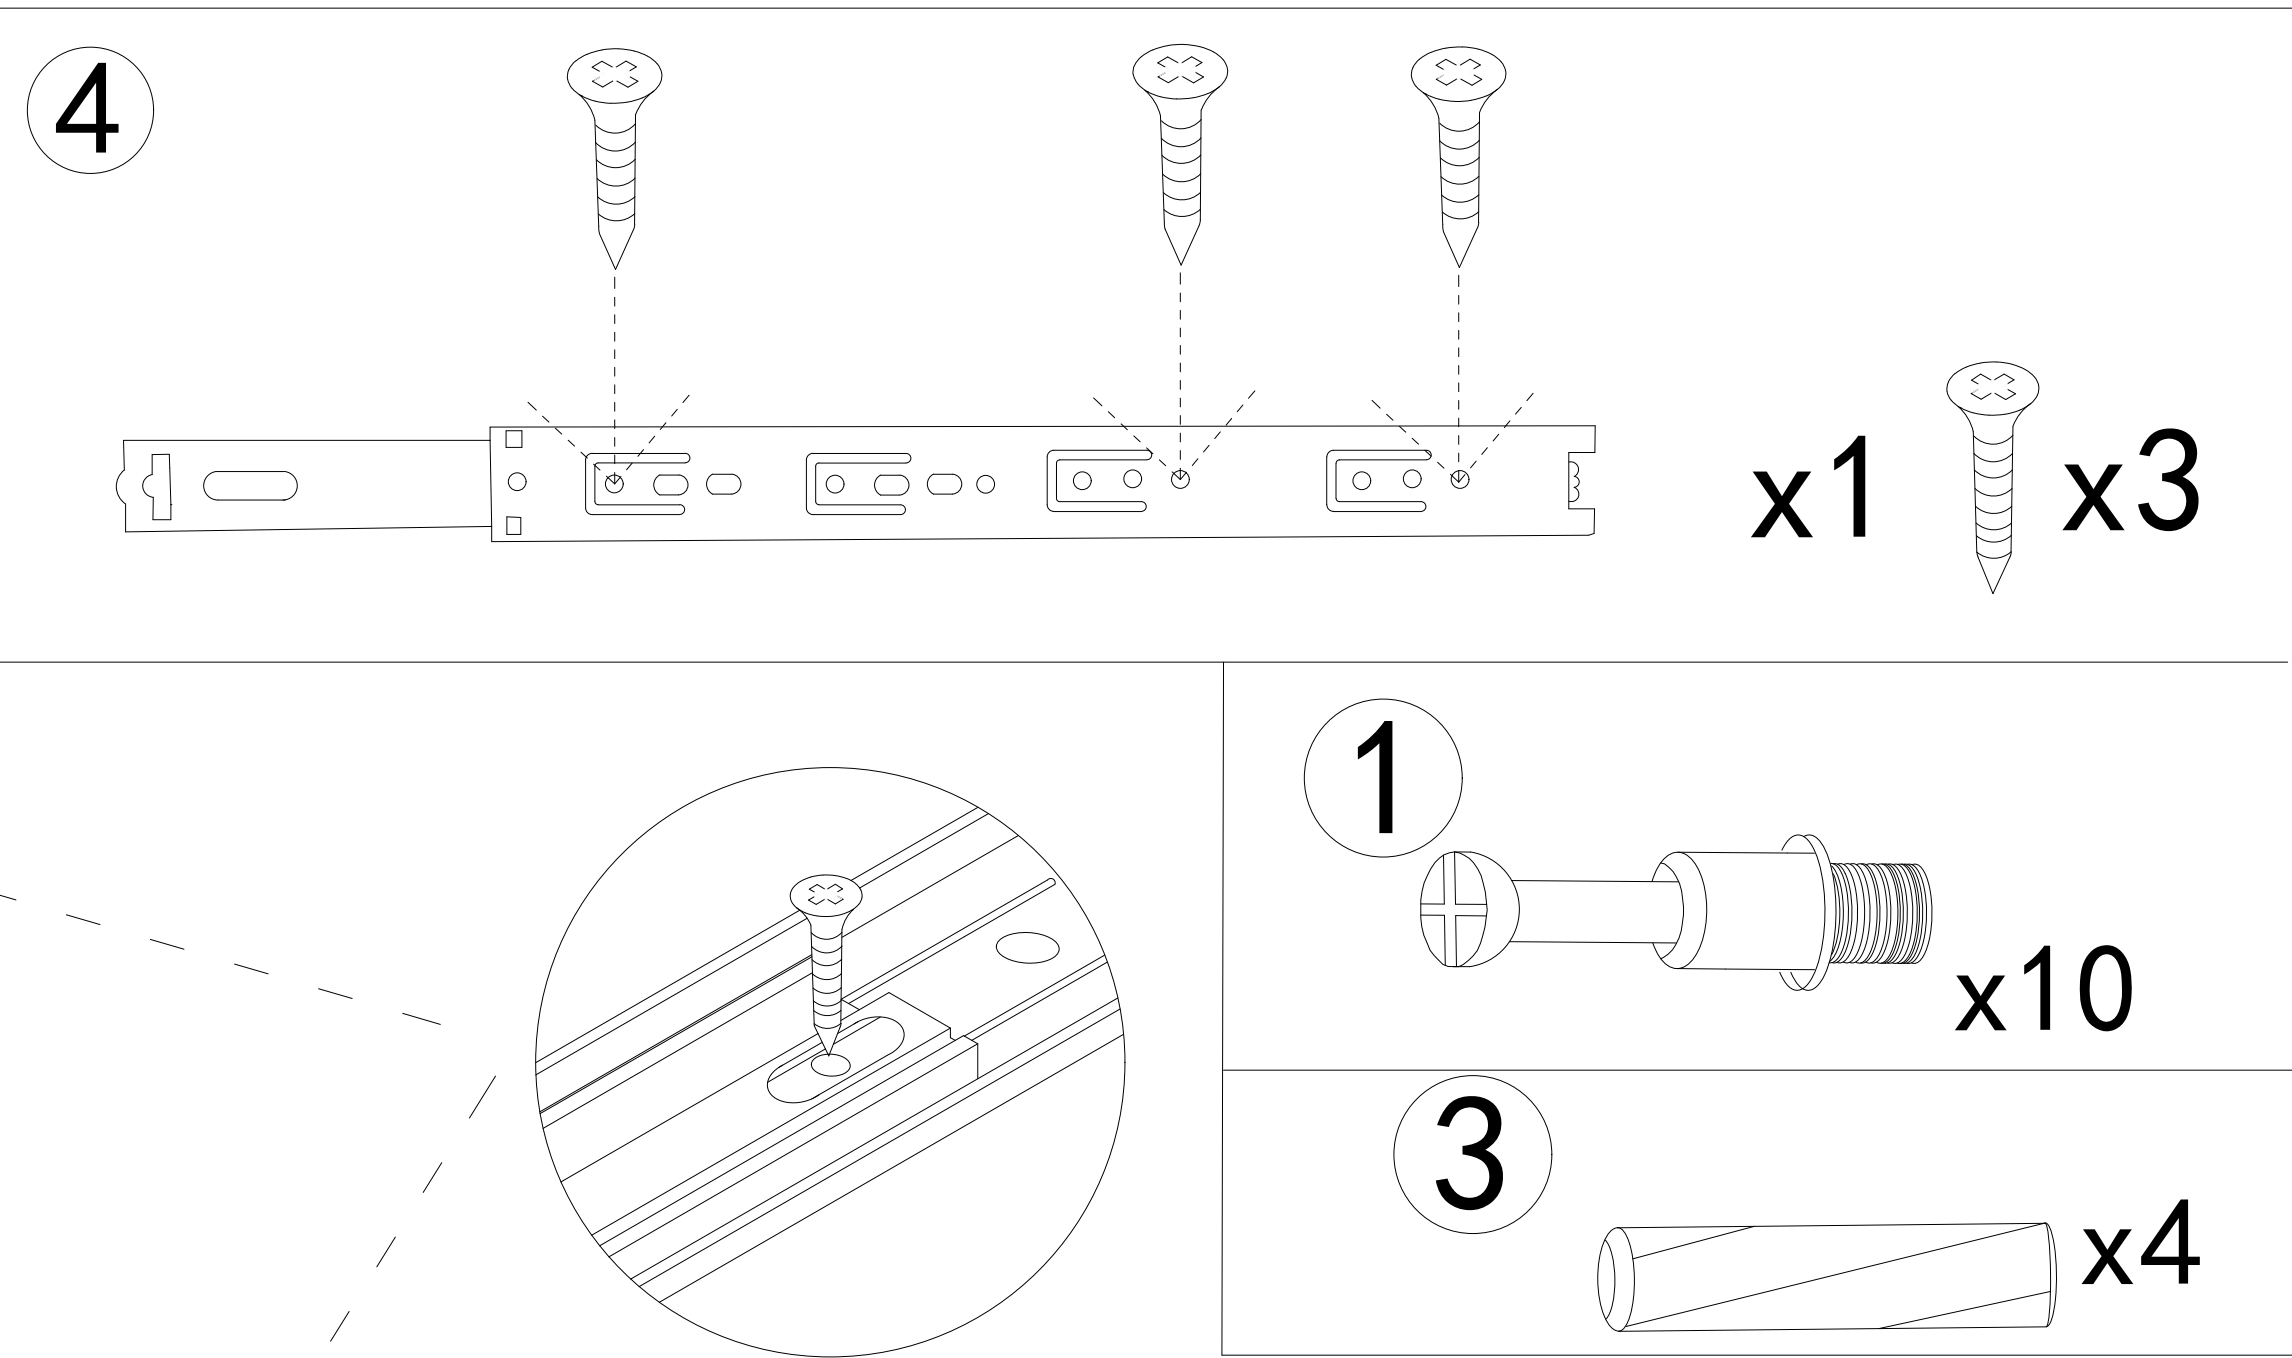



Step 11


This hole is for strengthening fixed hole customers can choose to install according to their needs.

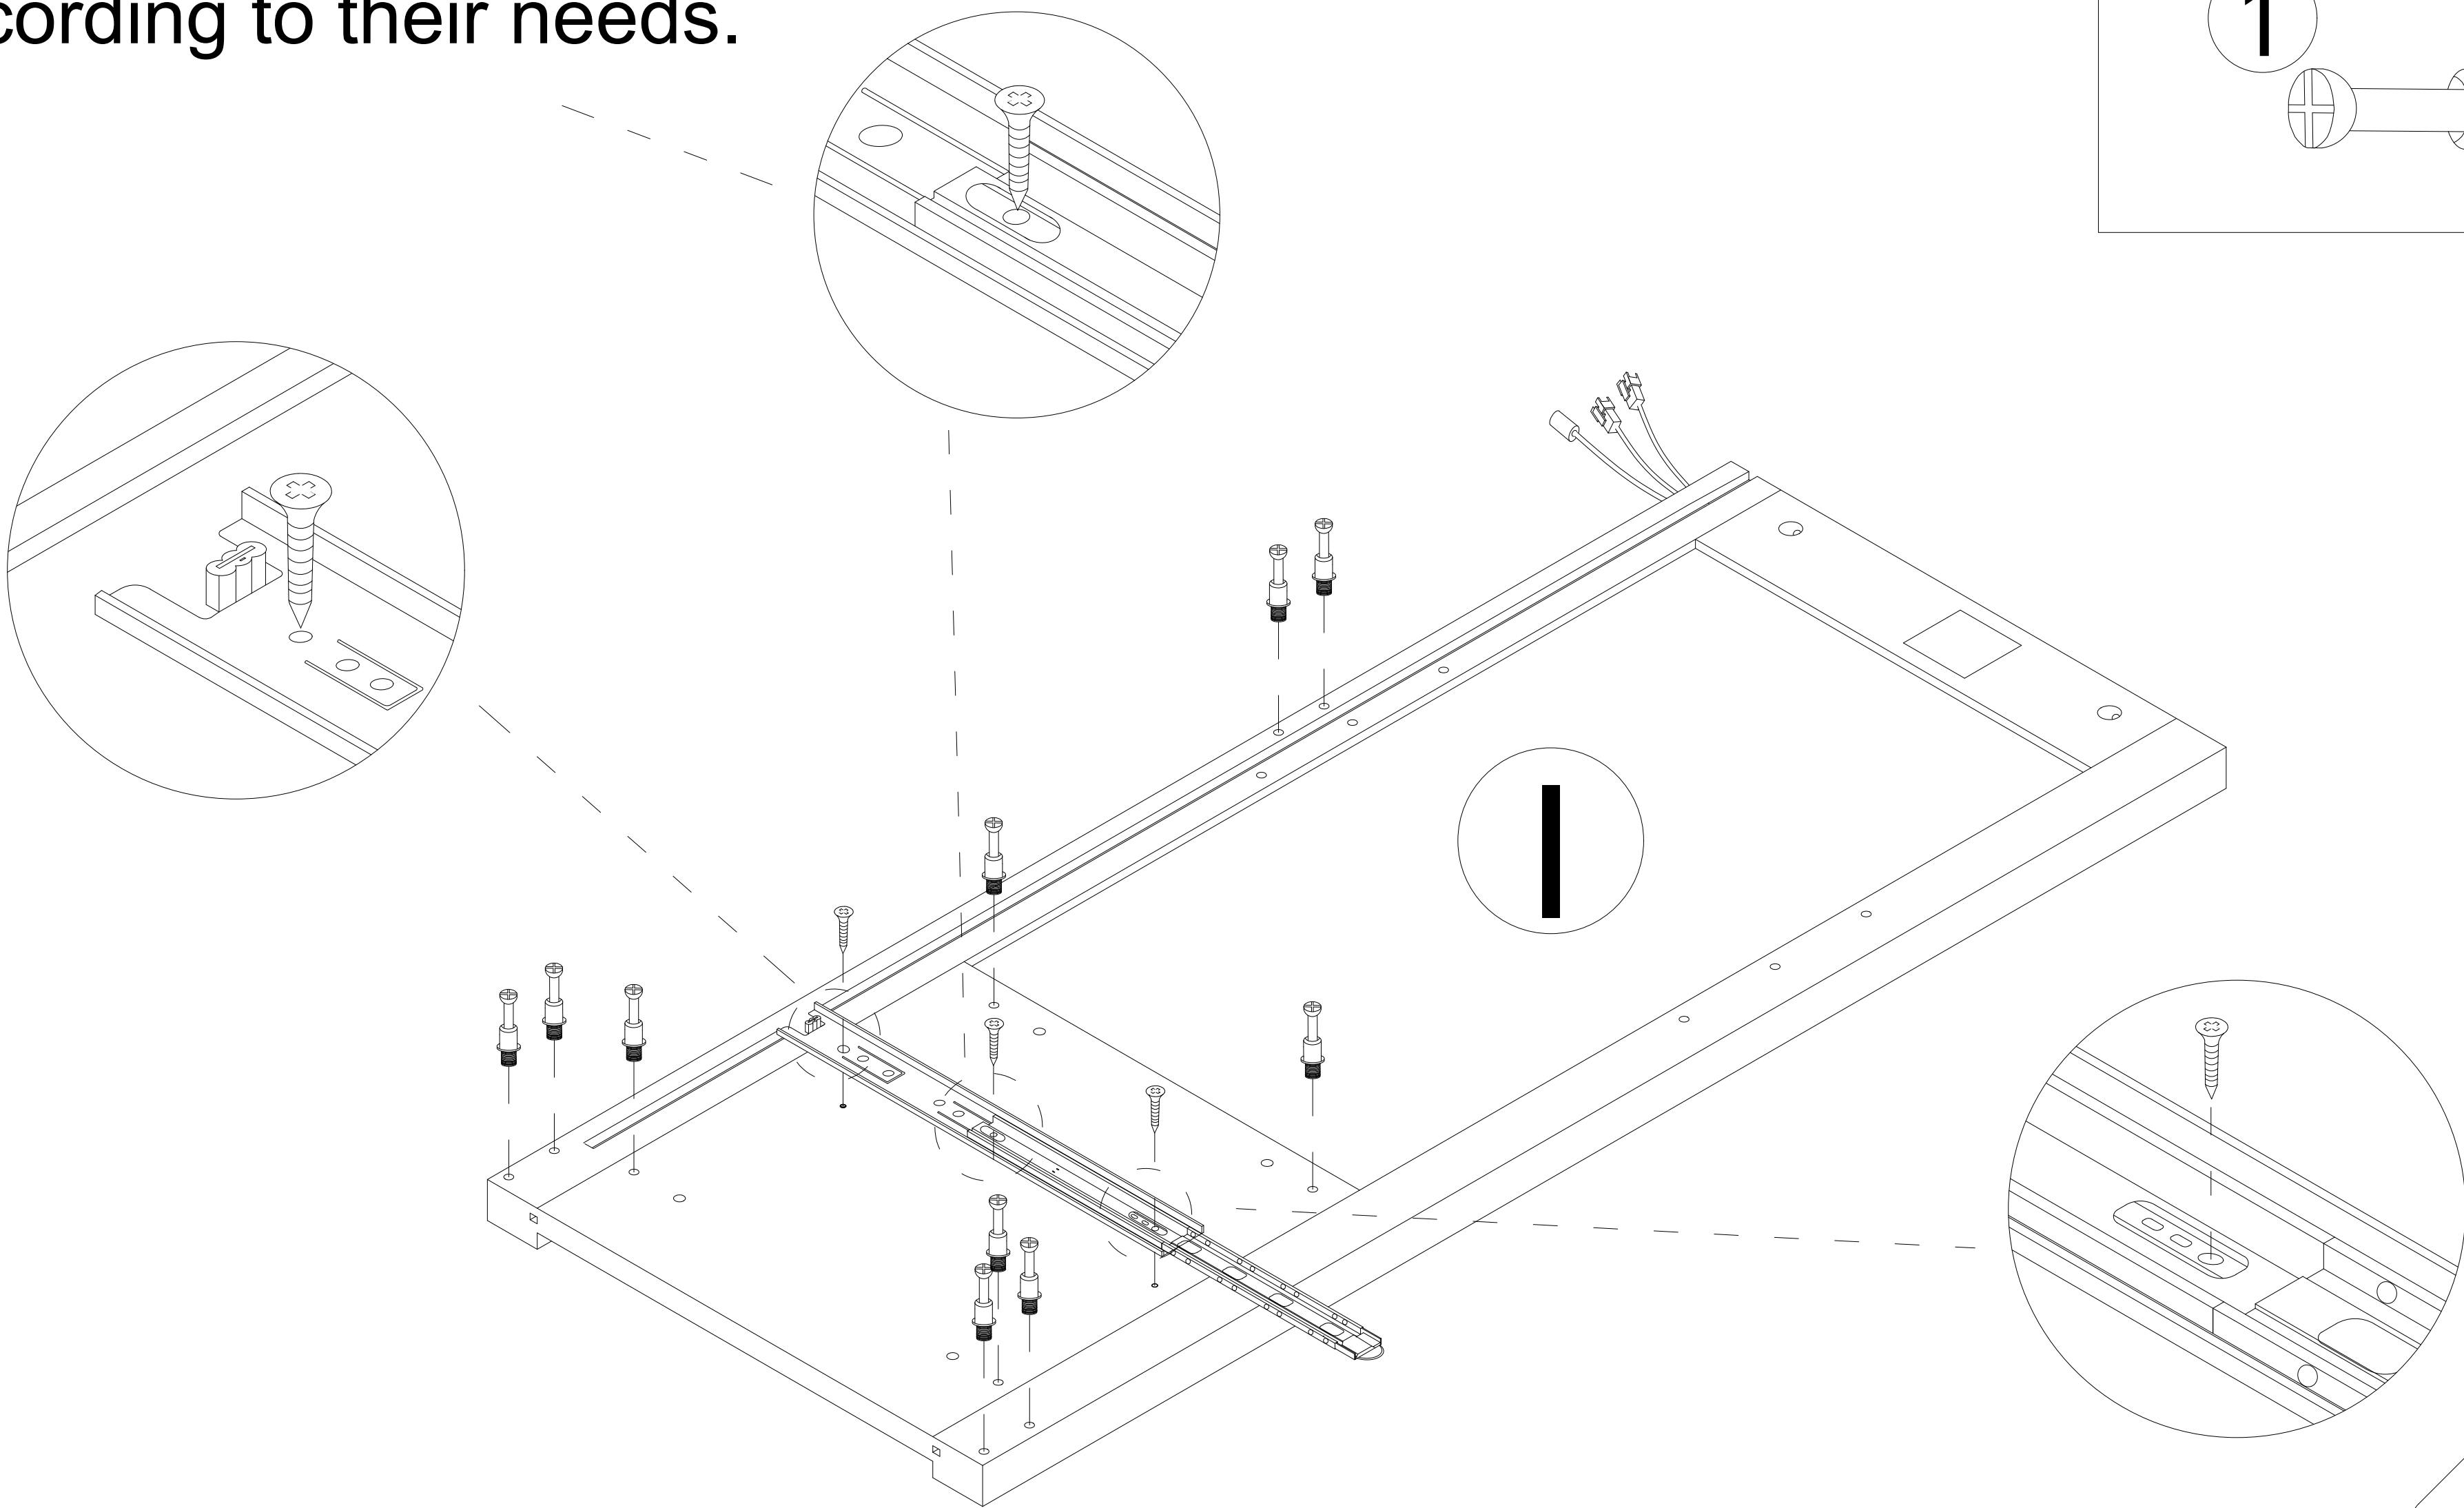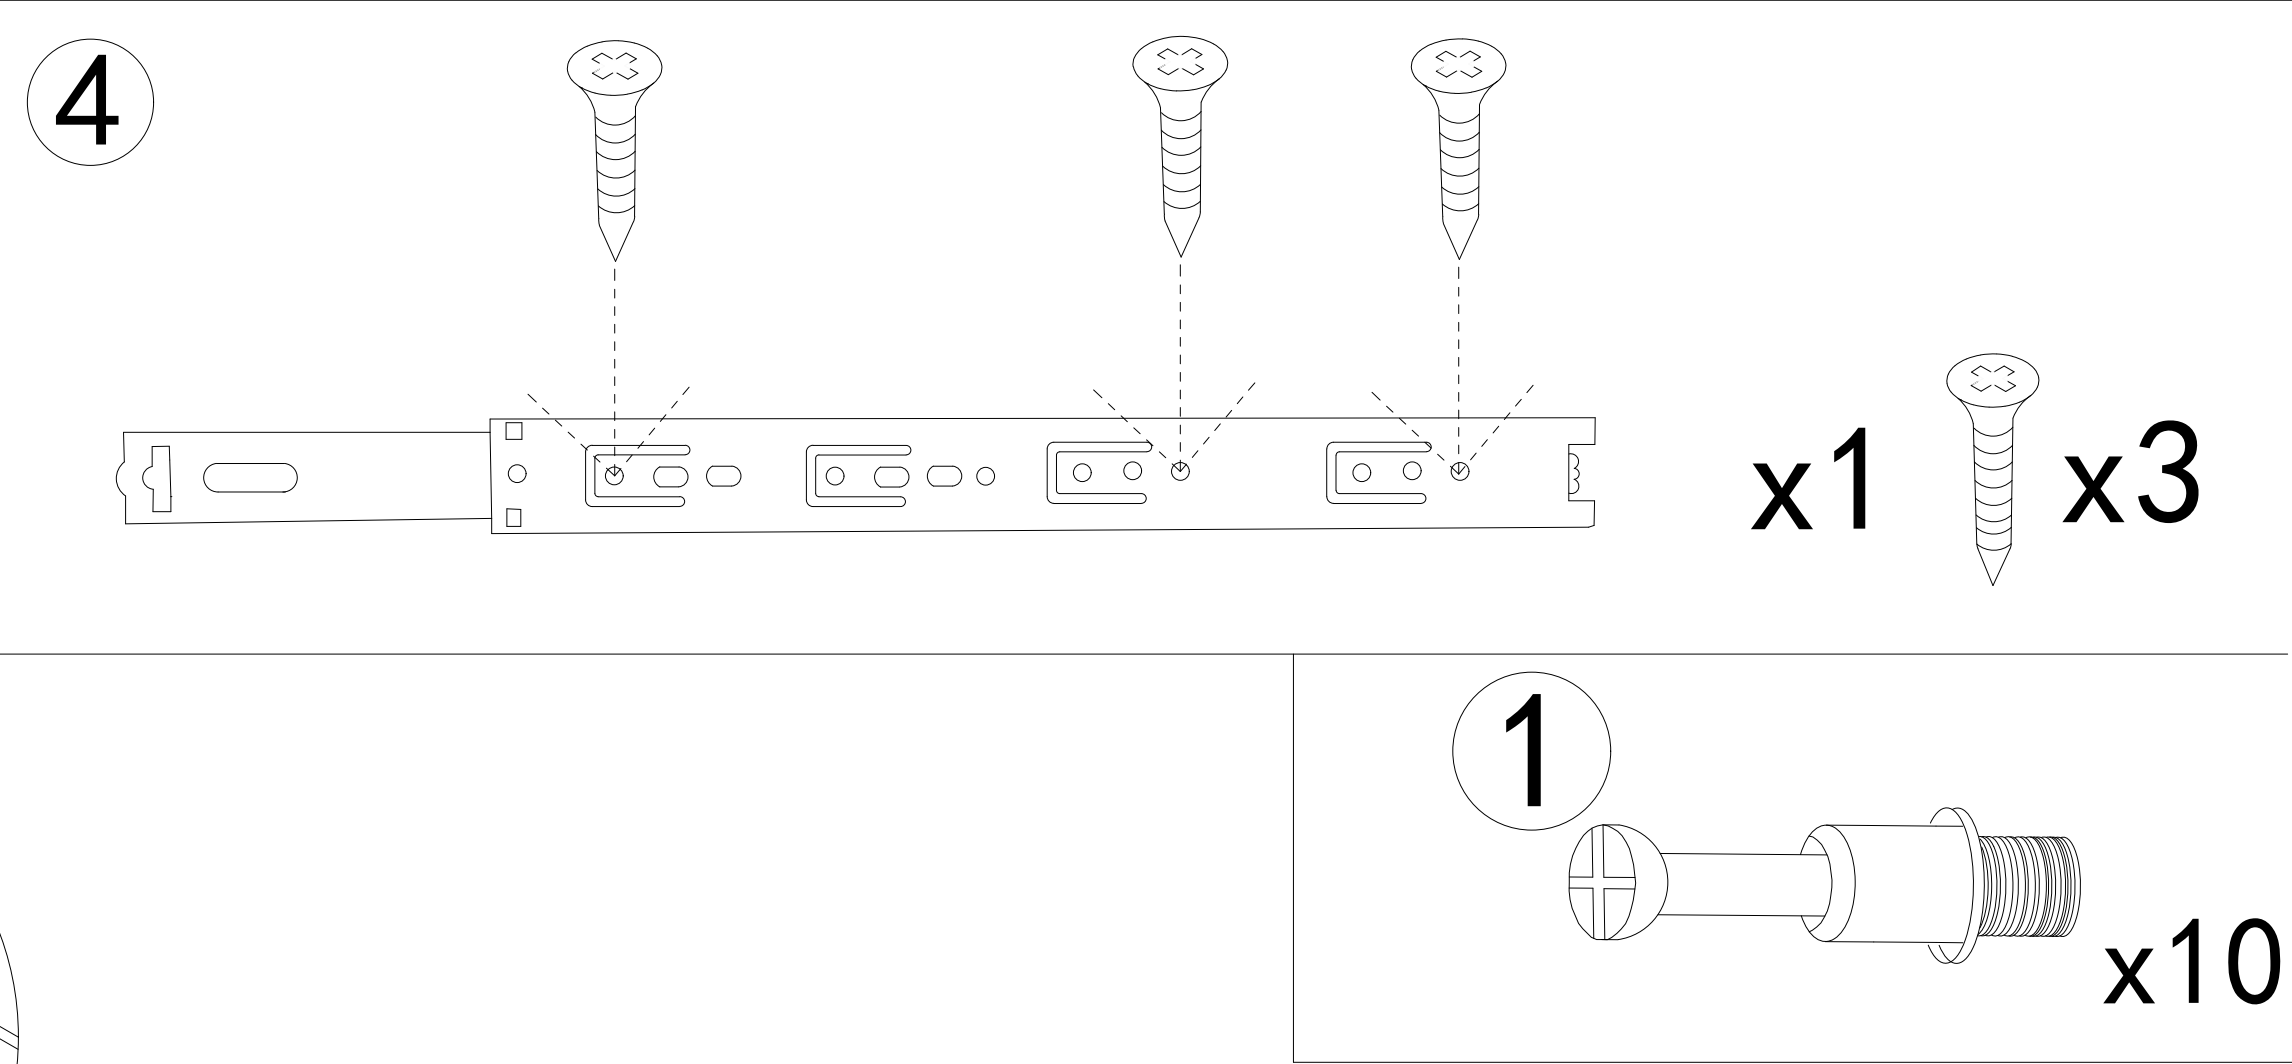

Step 12

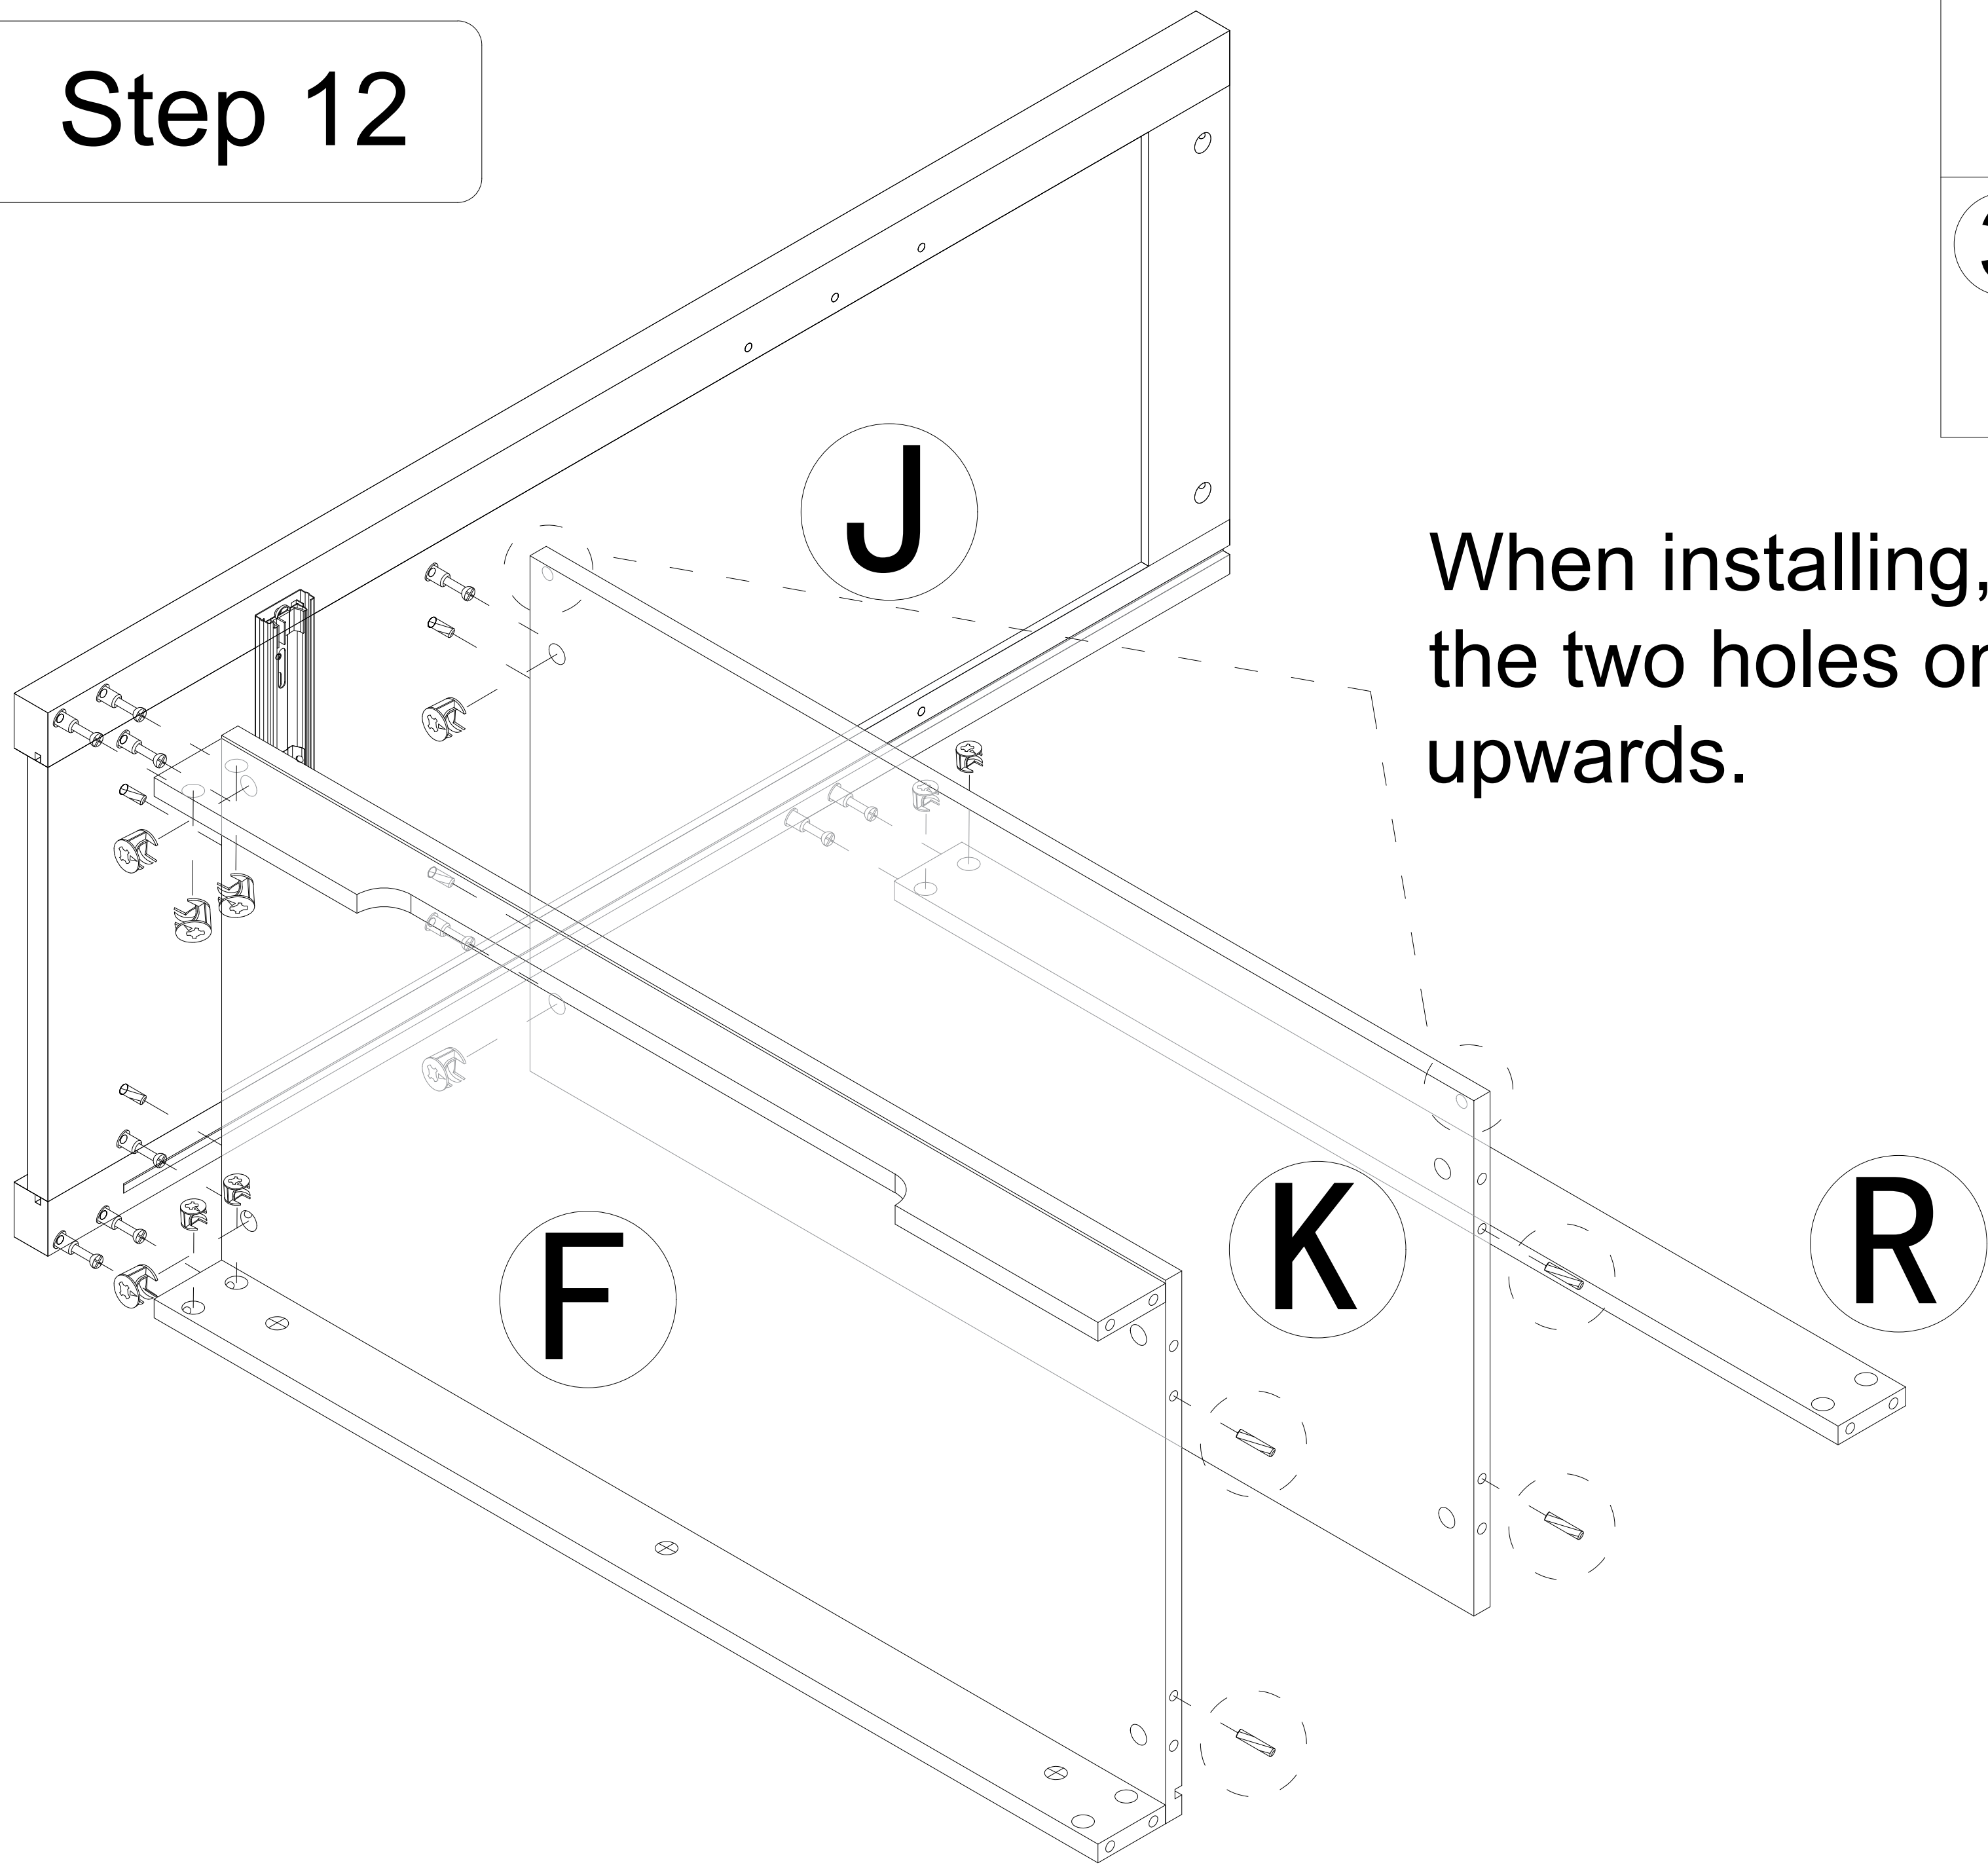



2  x10

3  x4

When installing, make sure that the two holes on the K plate face upwards.


Step 13

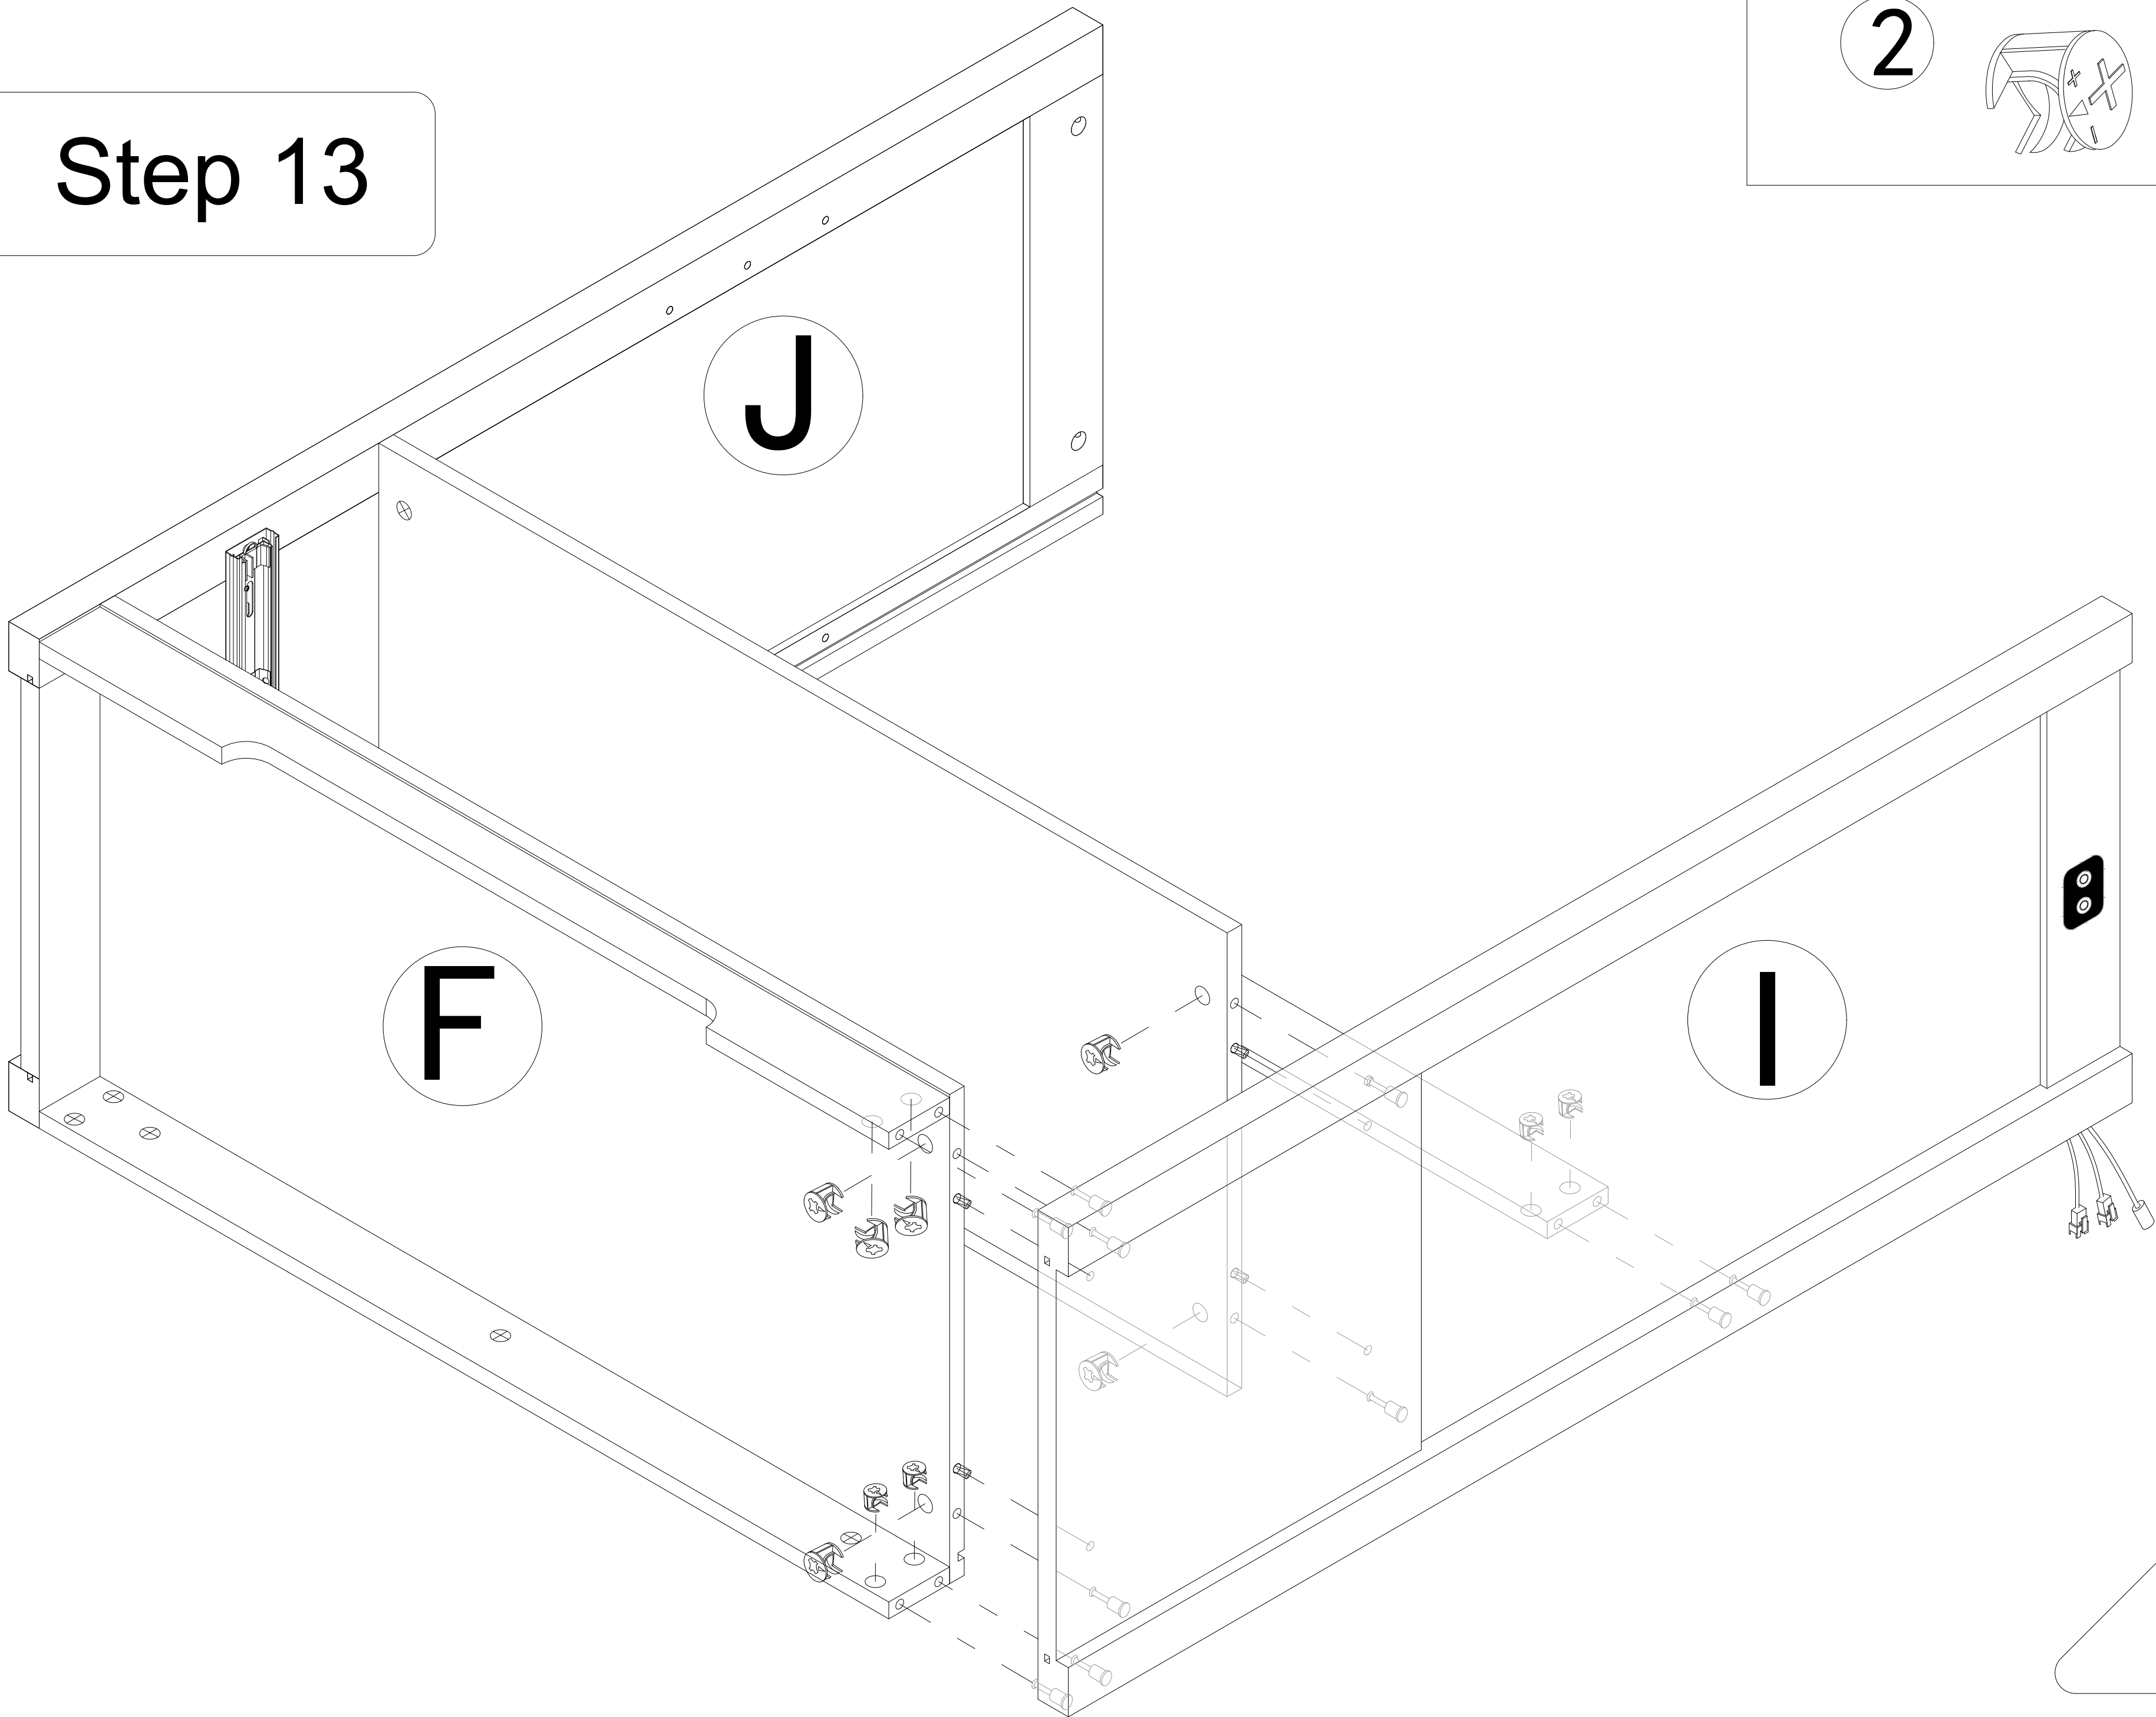

2  x10


Step 14

6

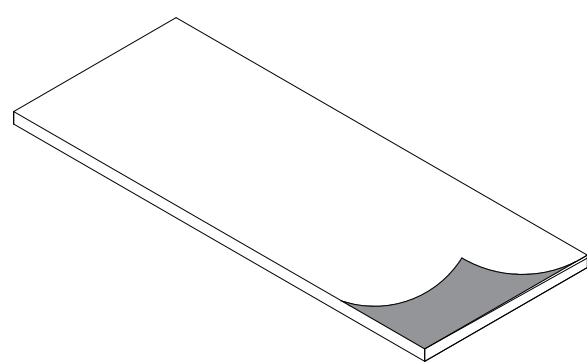




x6

Tear off release paper and stick the black foot pad on the board

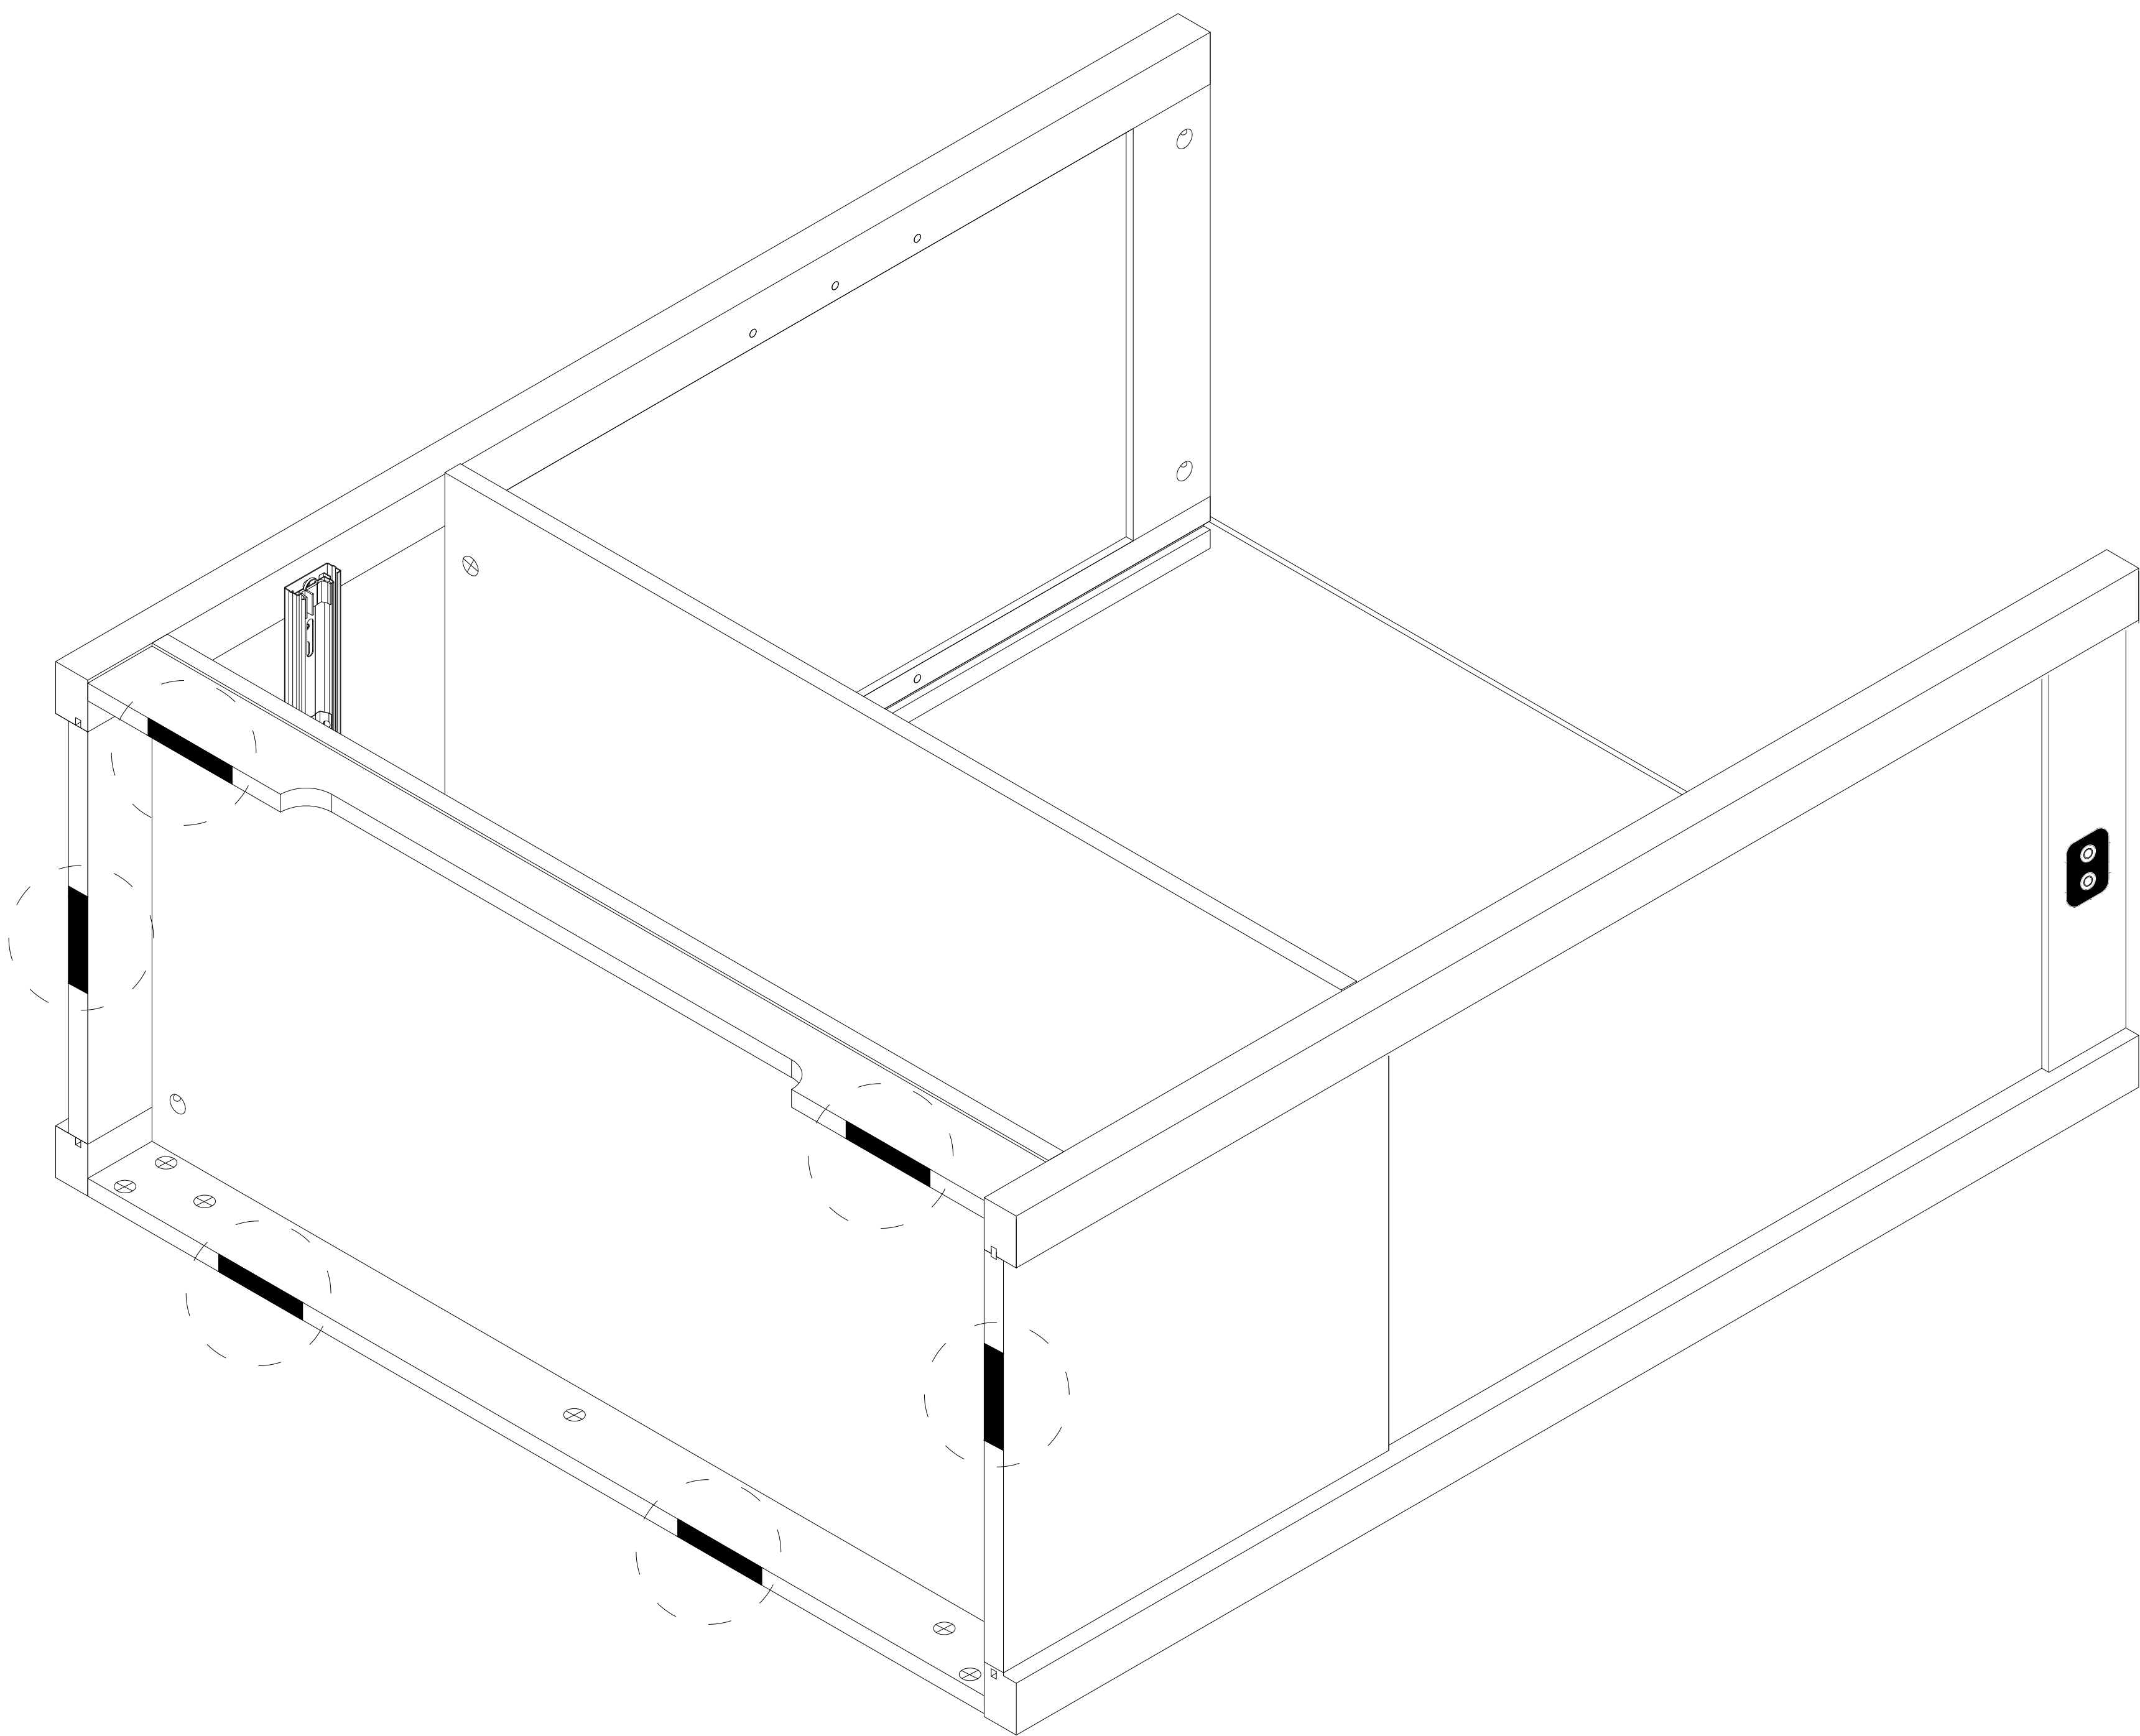


Step 15

5 x2

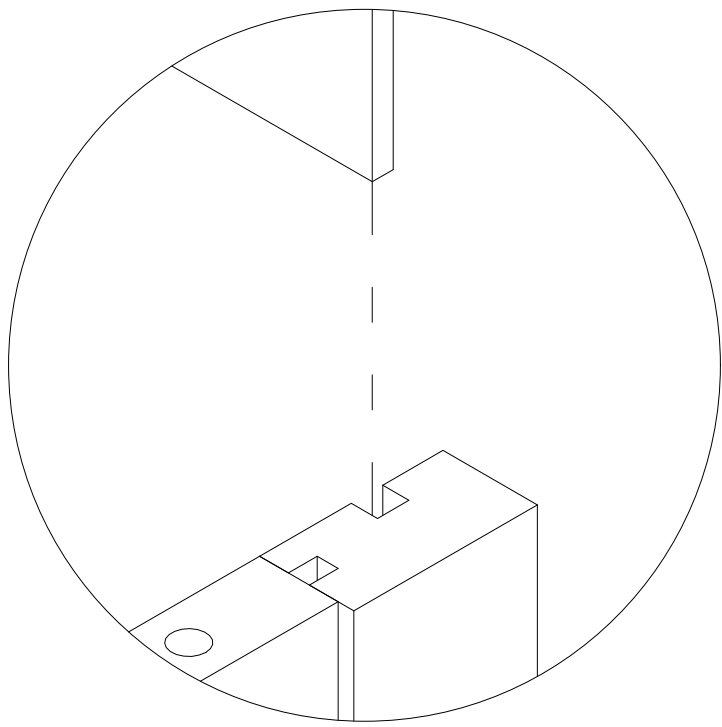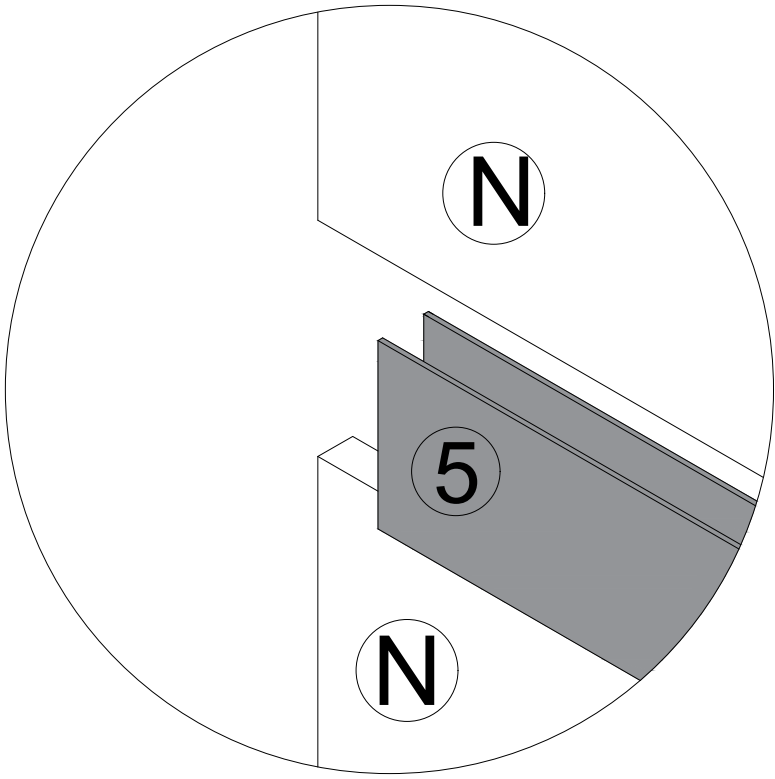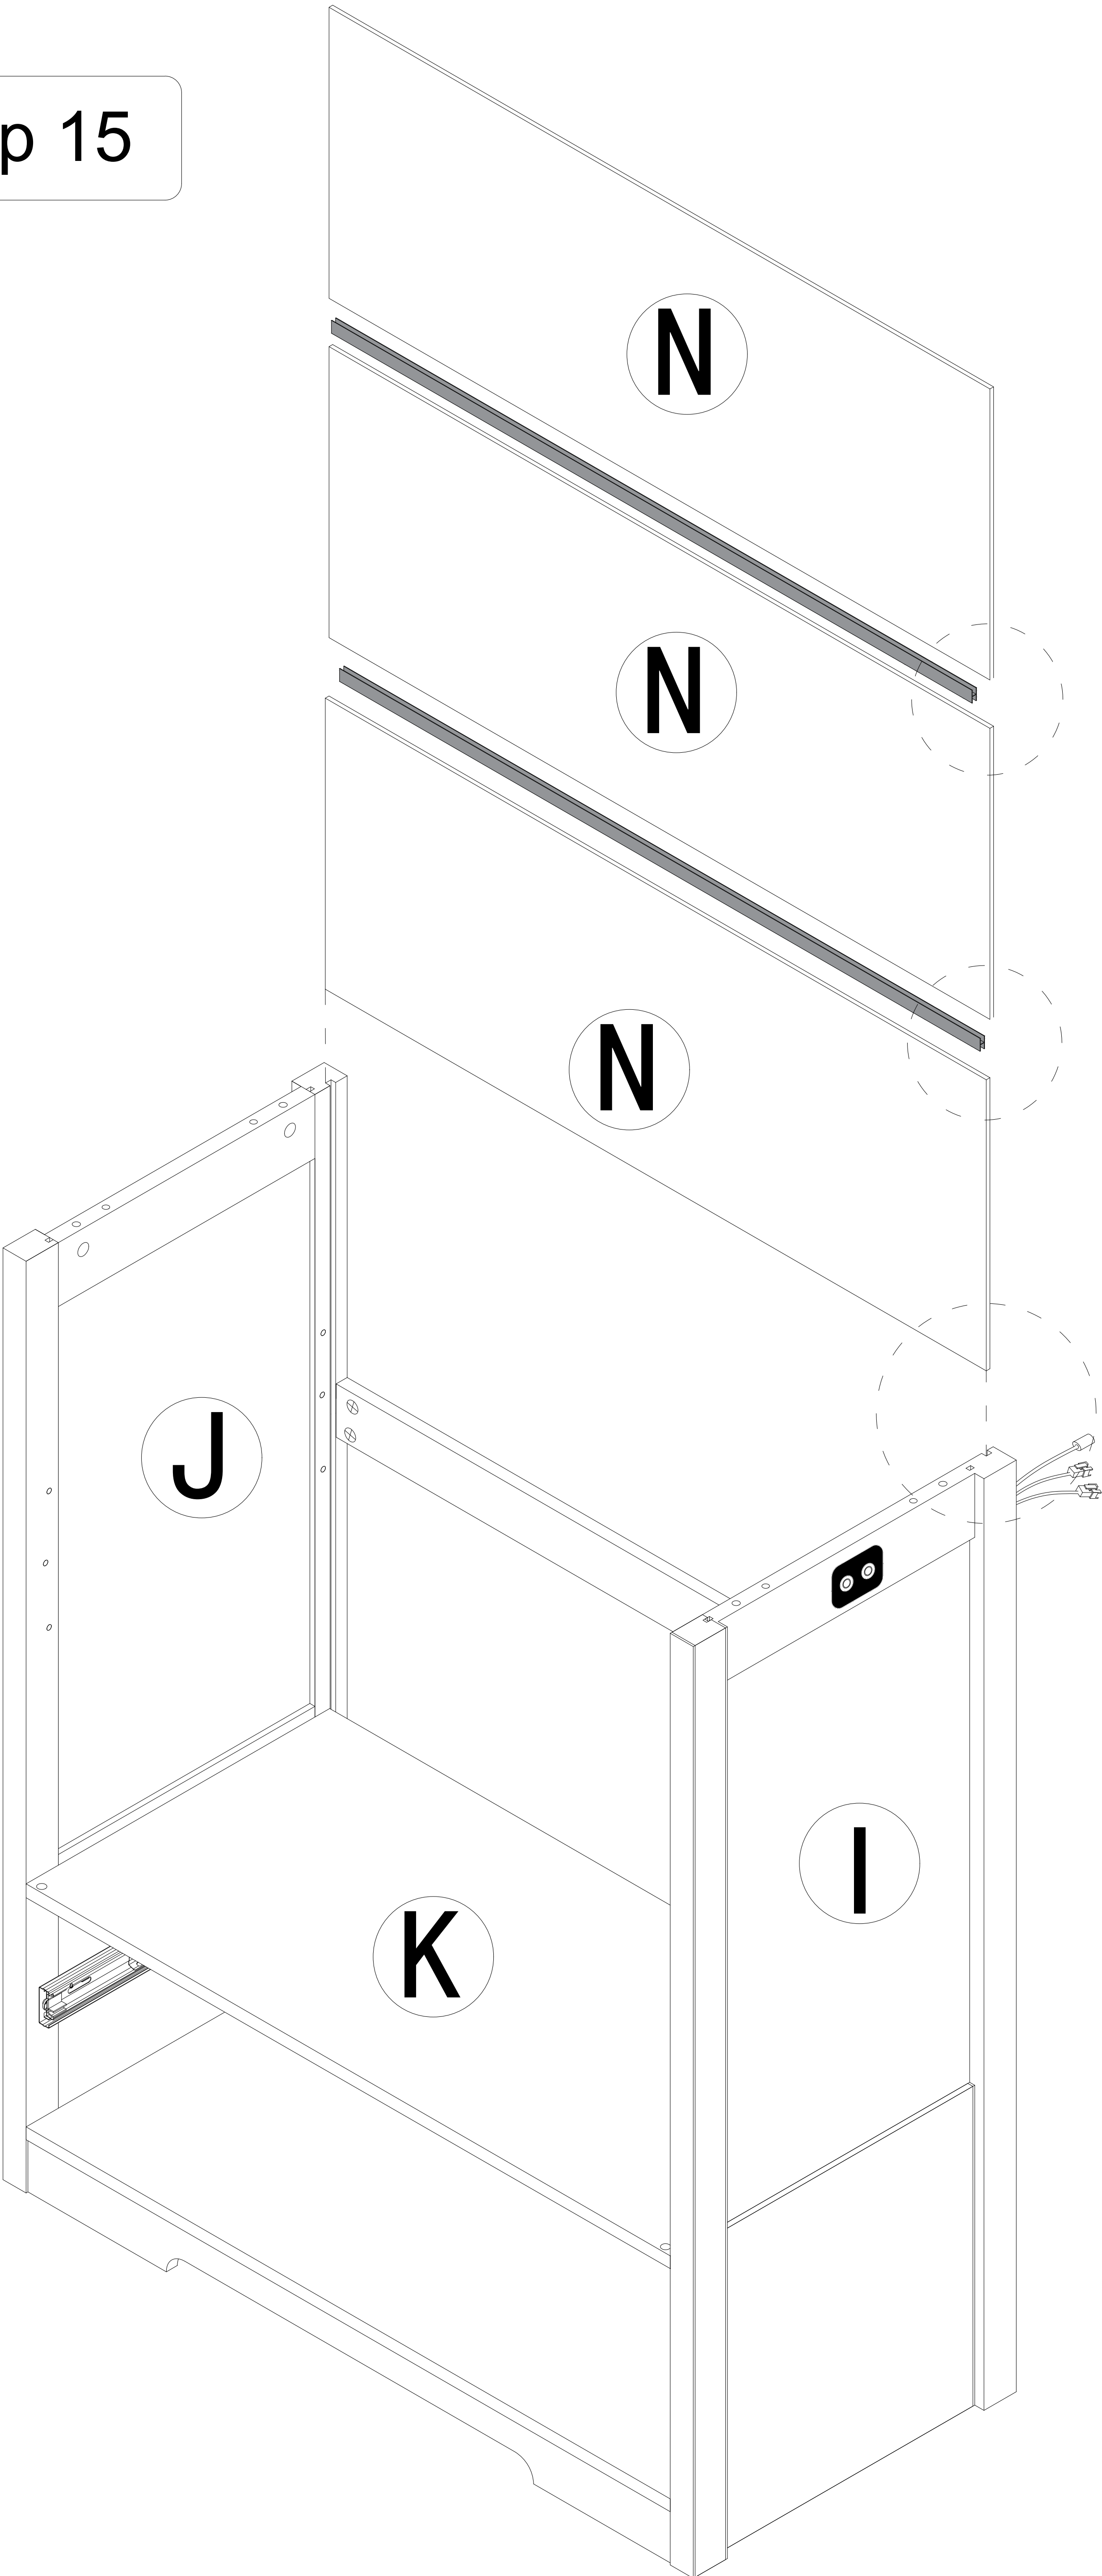



Step 16

- 1

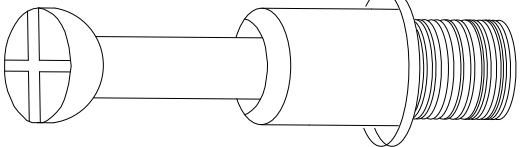


x4
- 6




x1
- 

x4

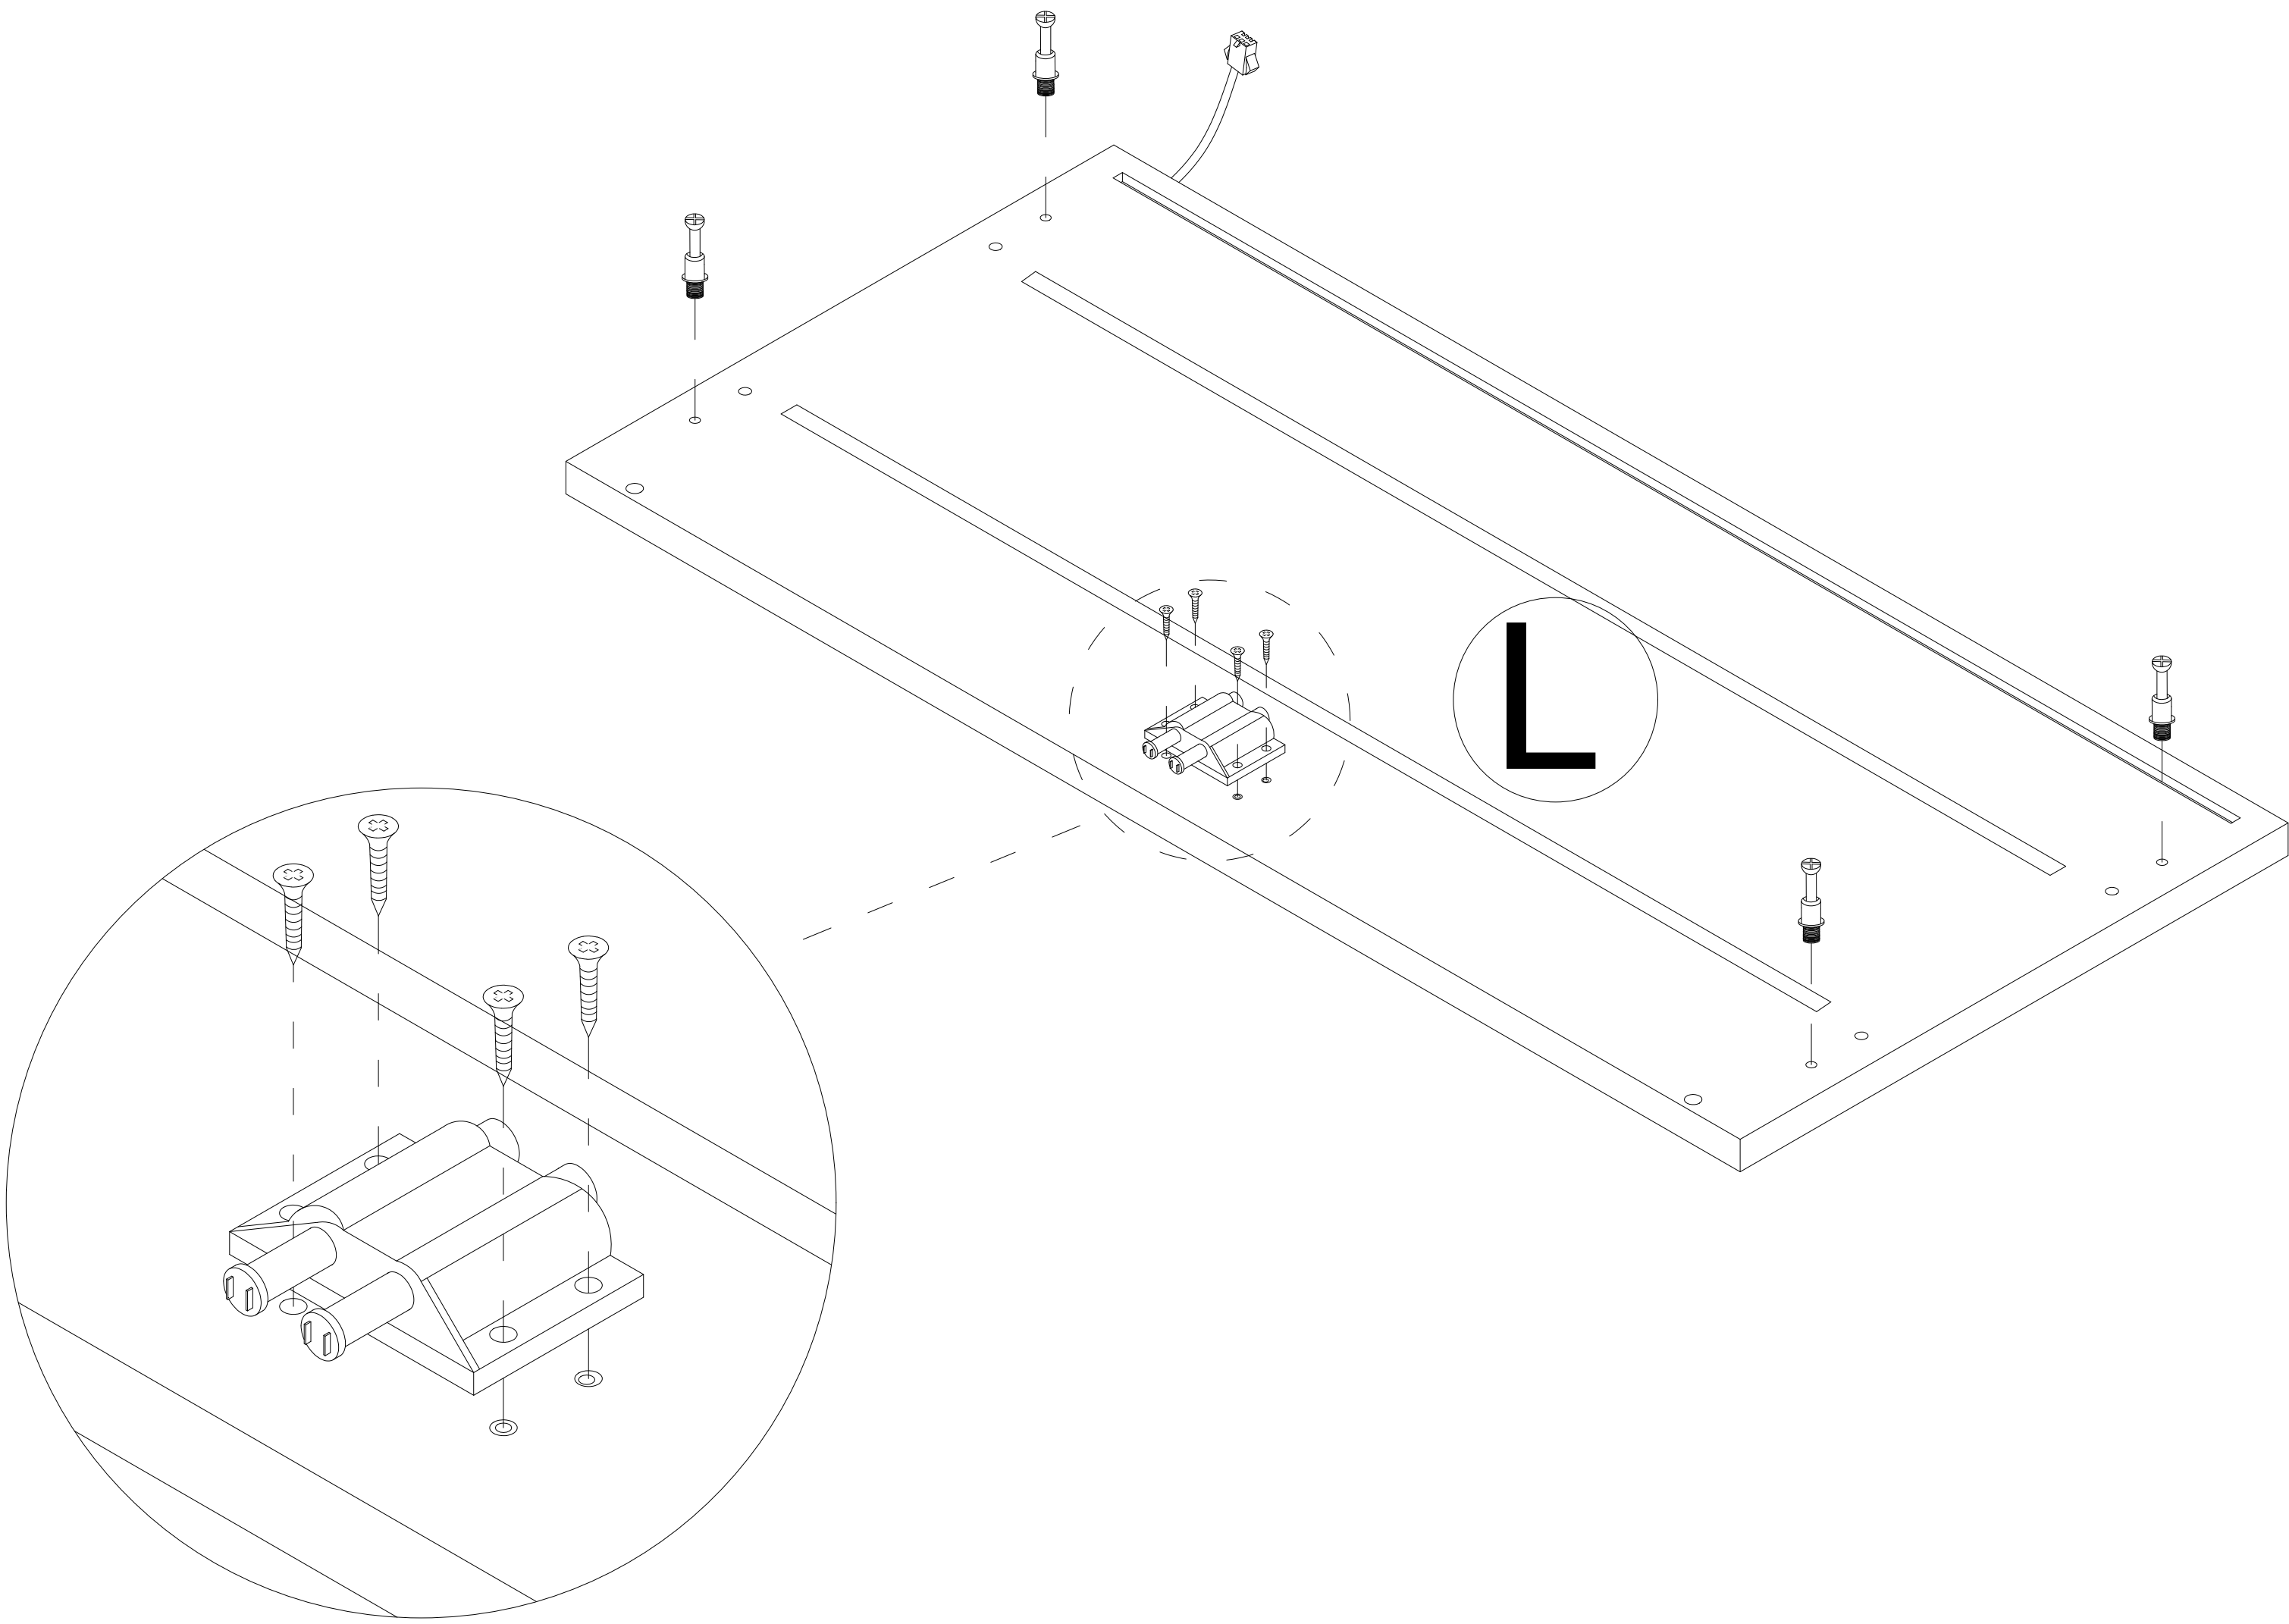


Step 17

- 3




x4

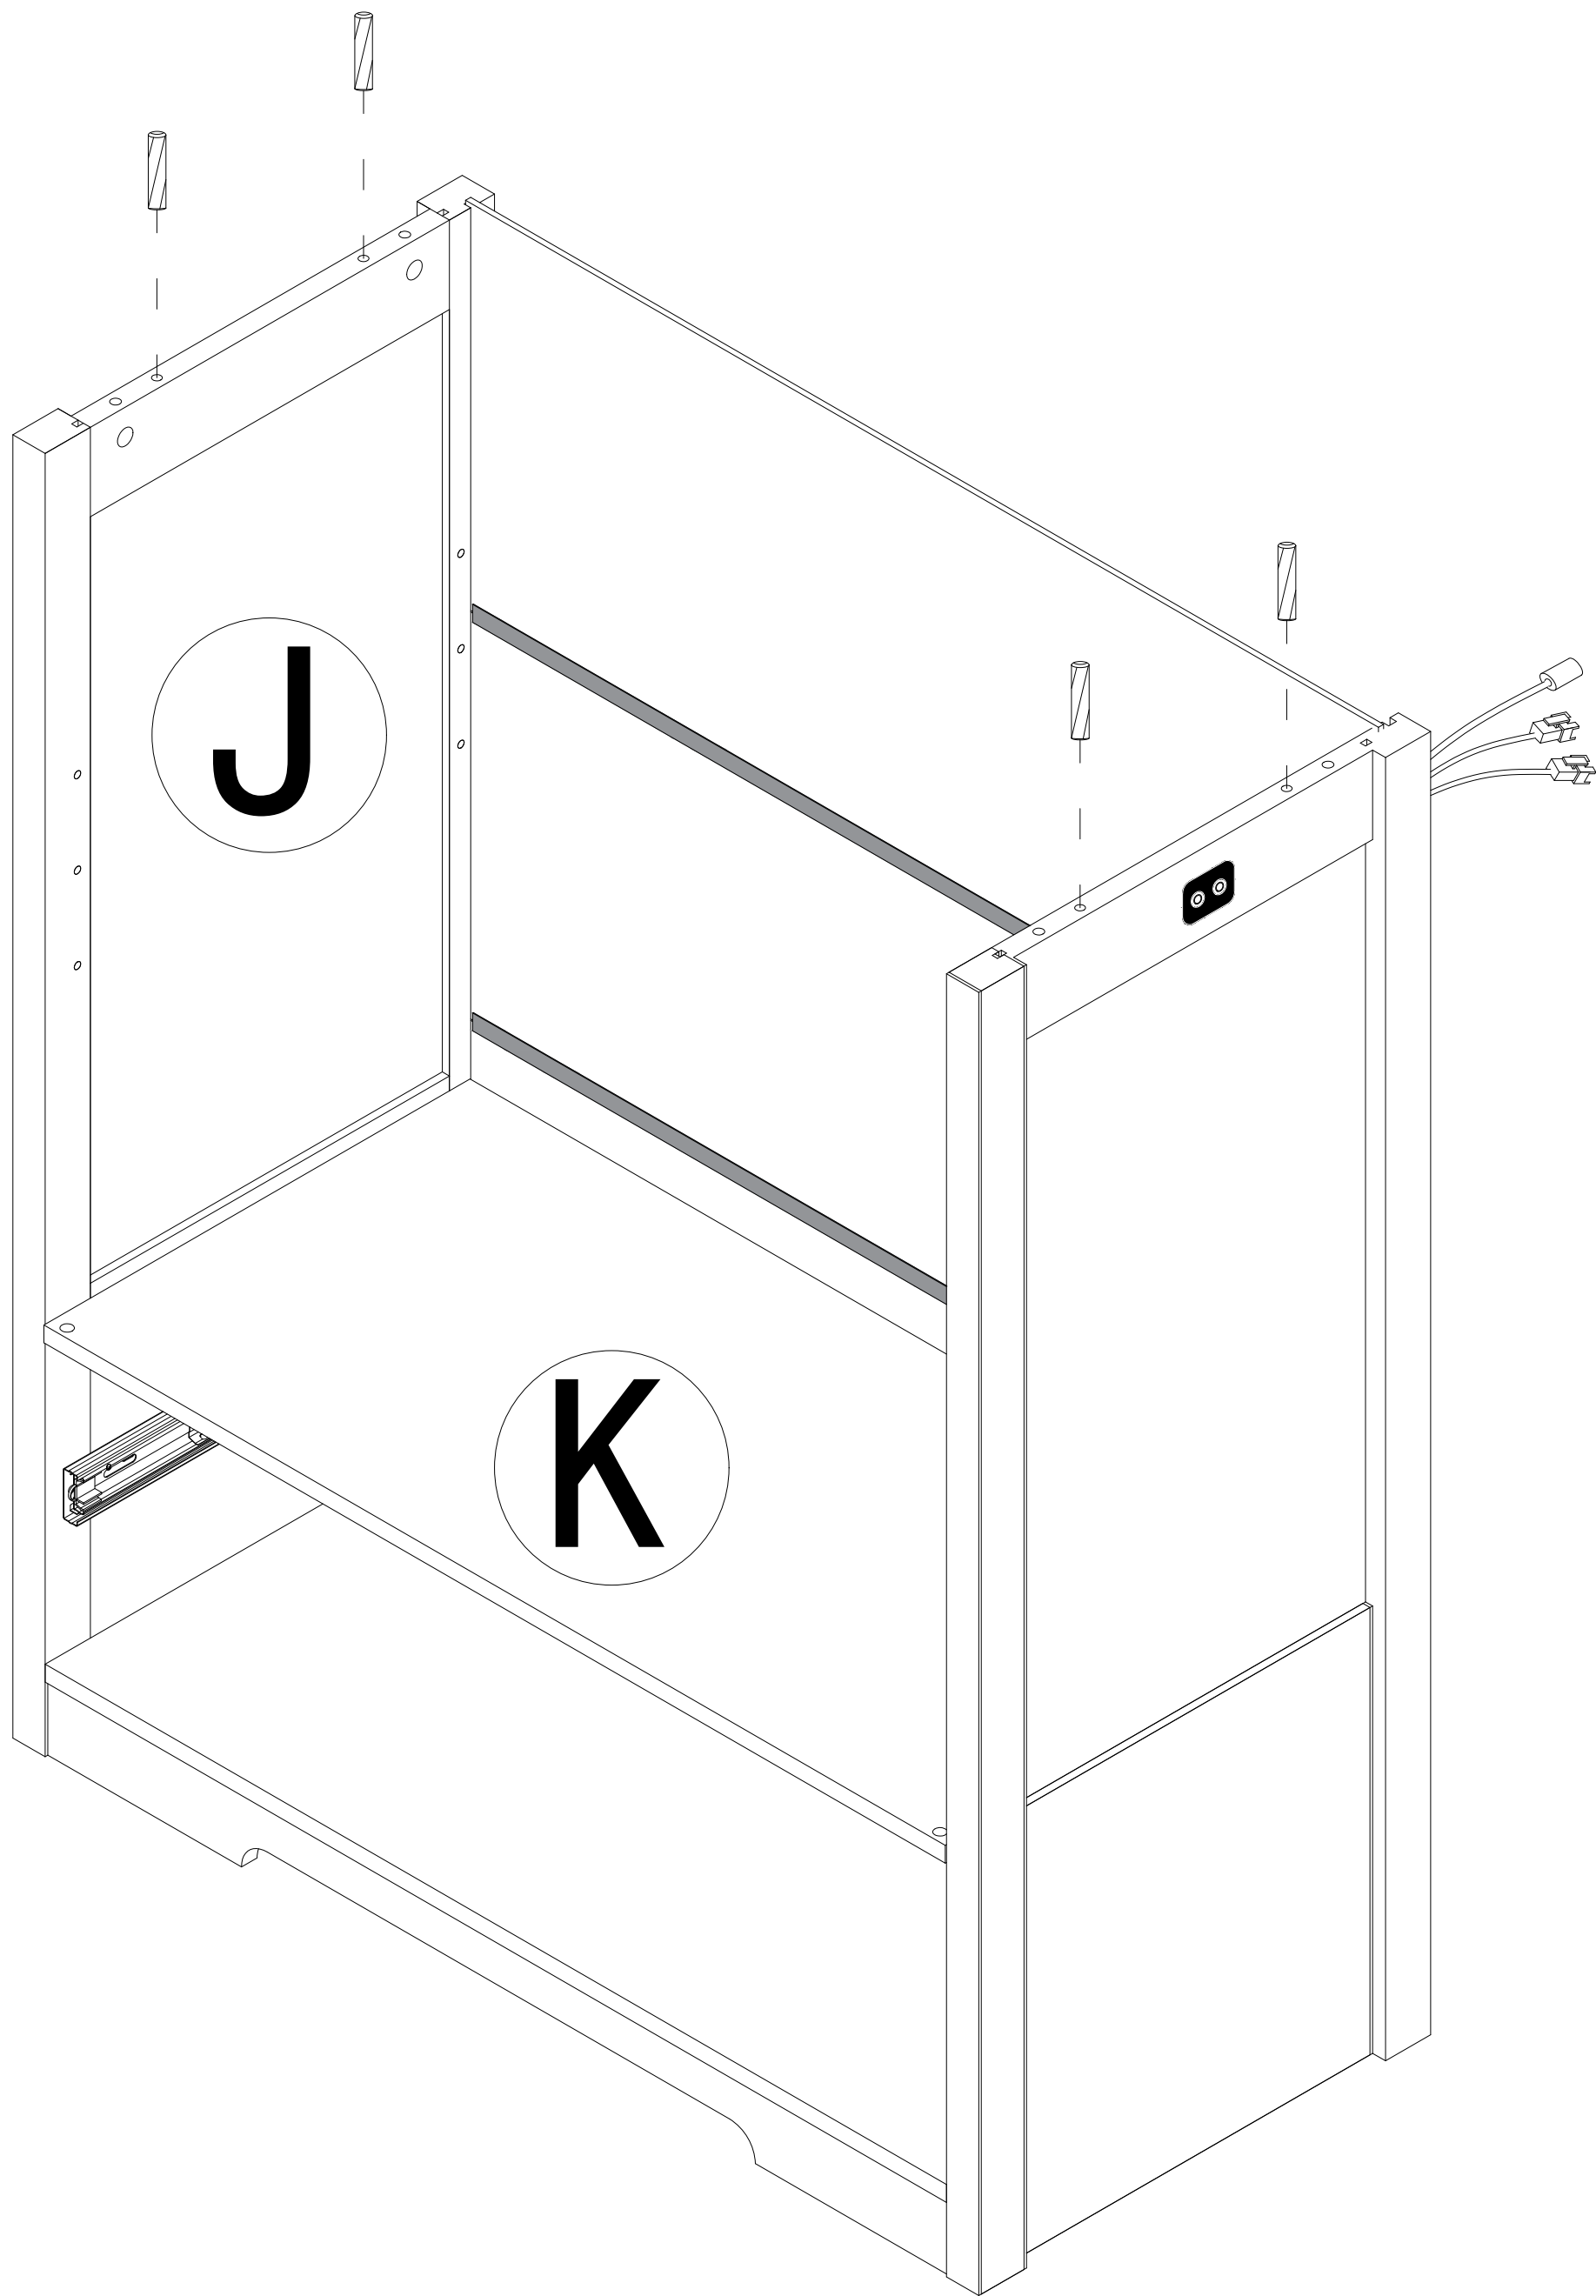


Step 18


2




x4

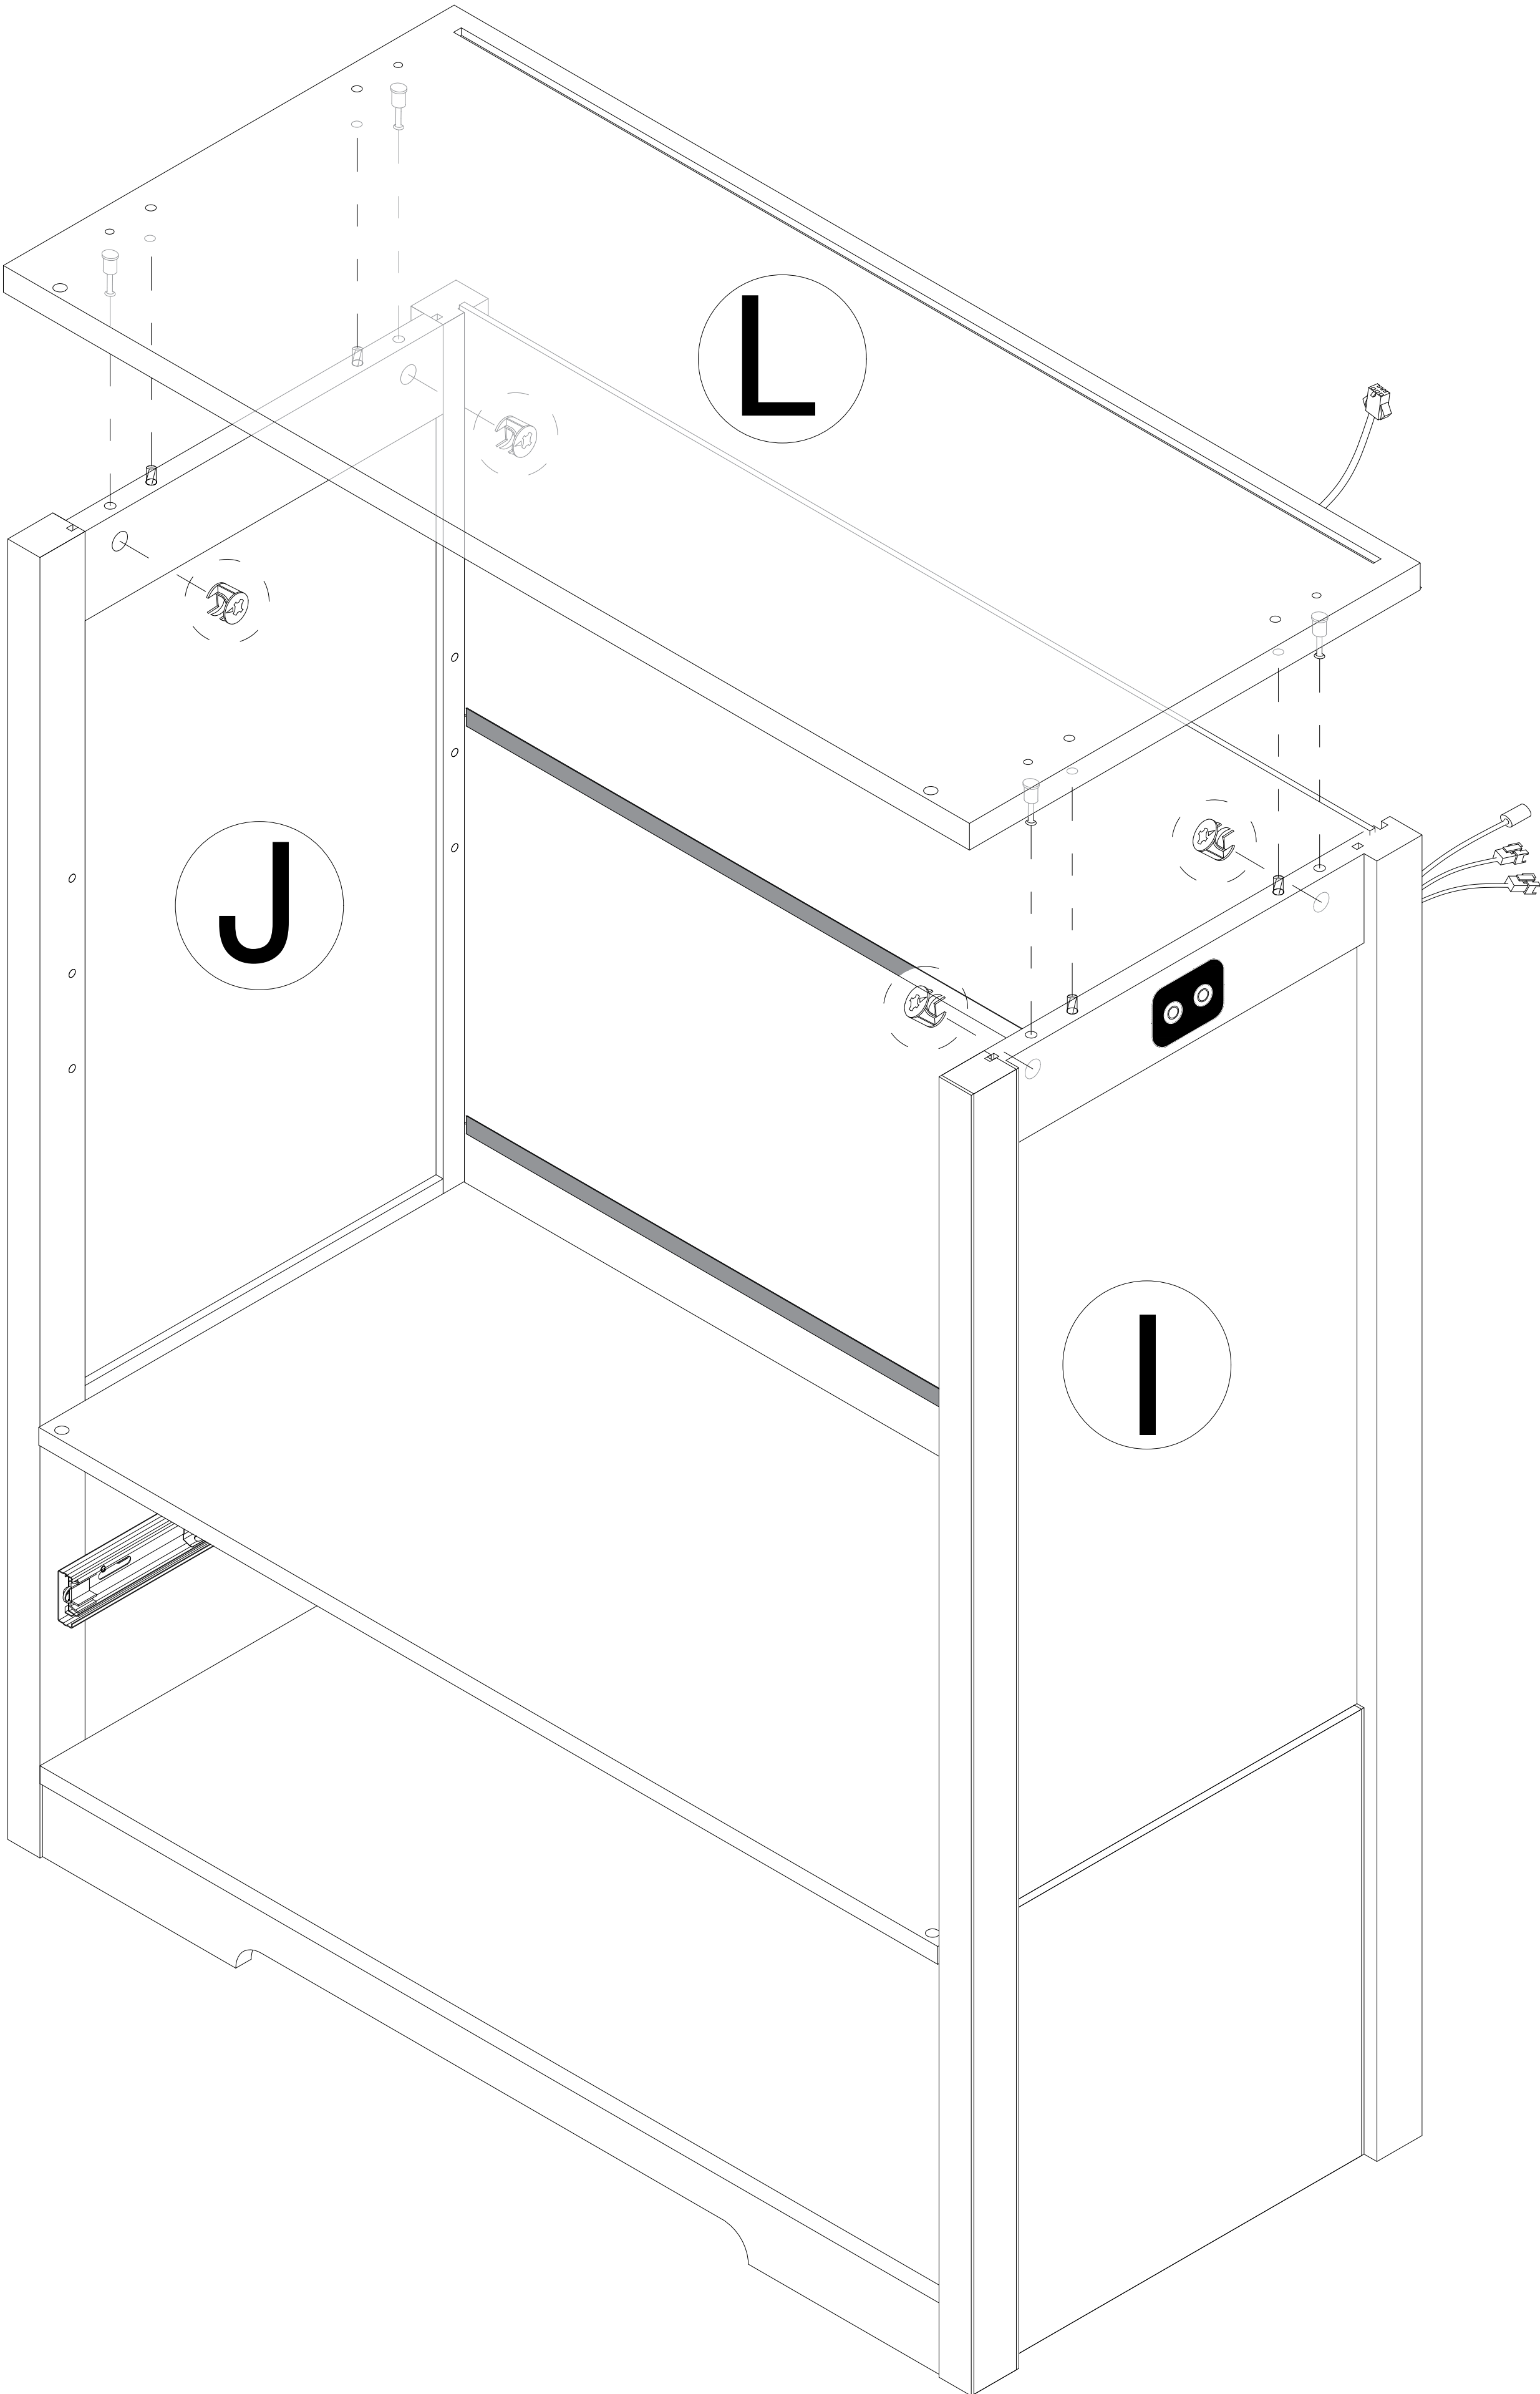


Step 19

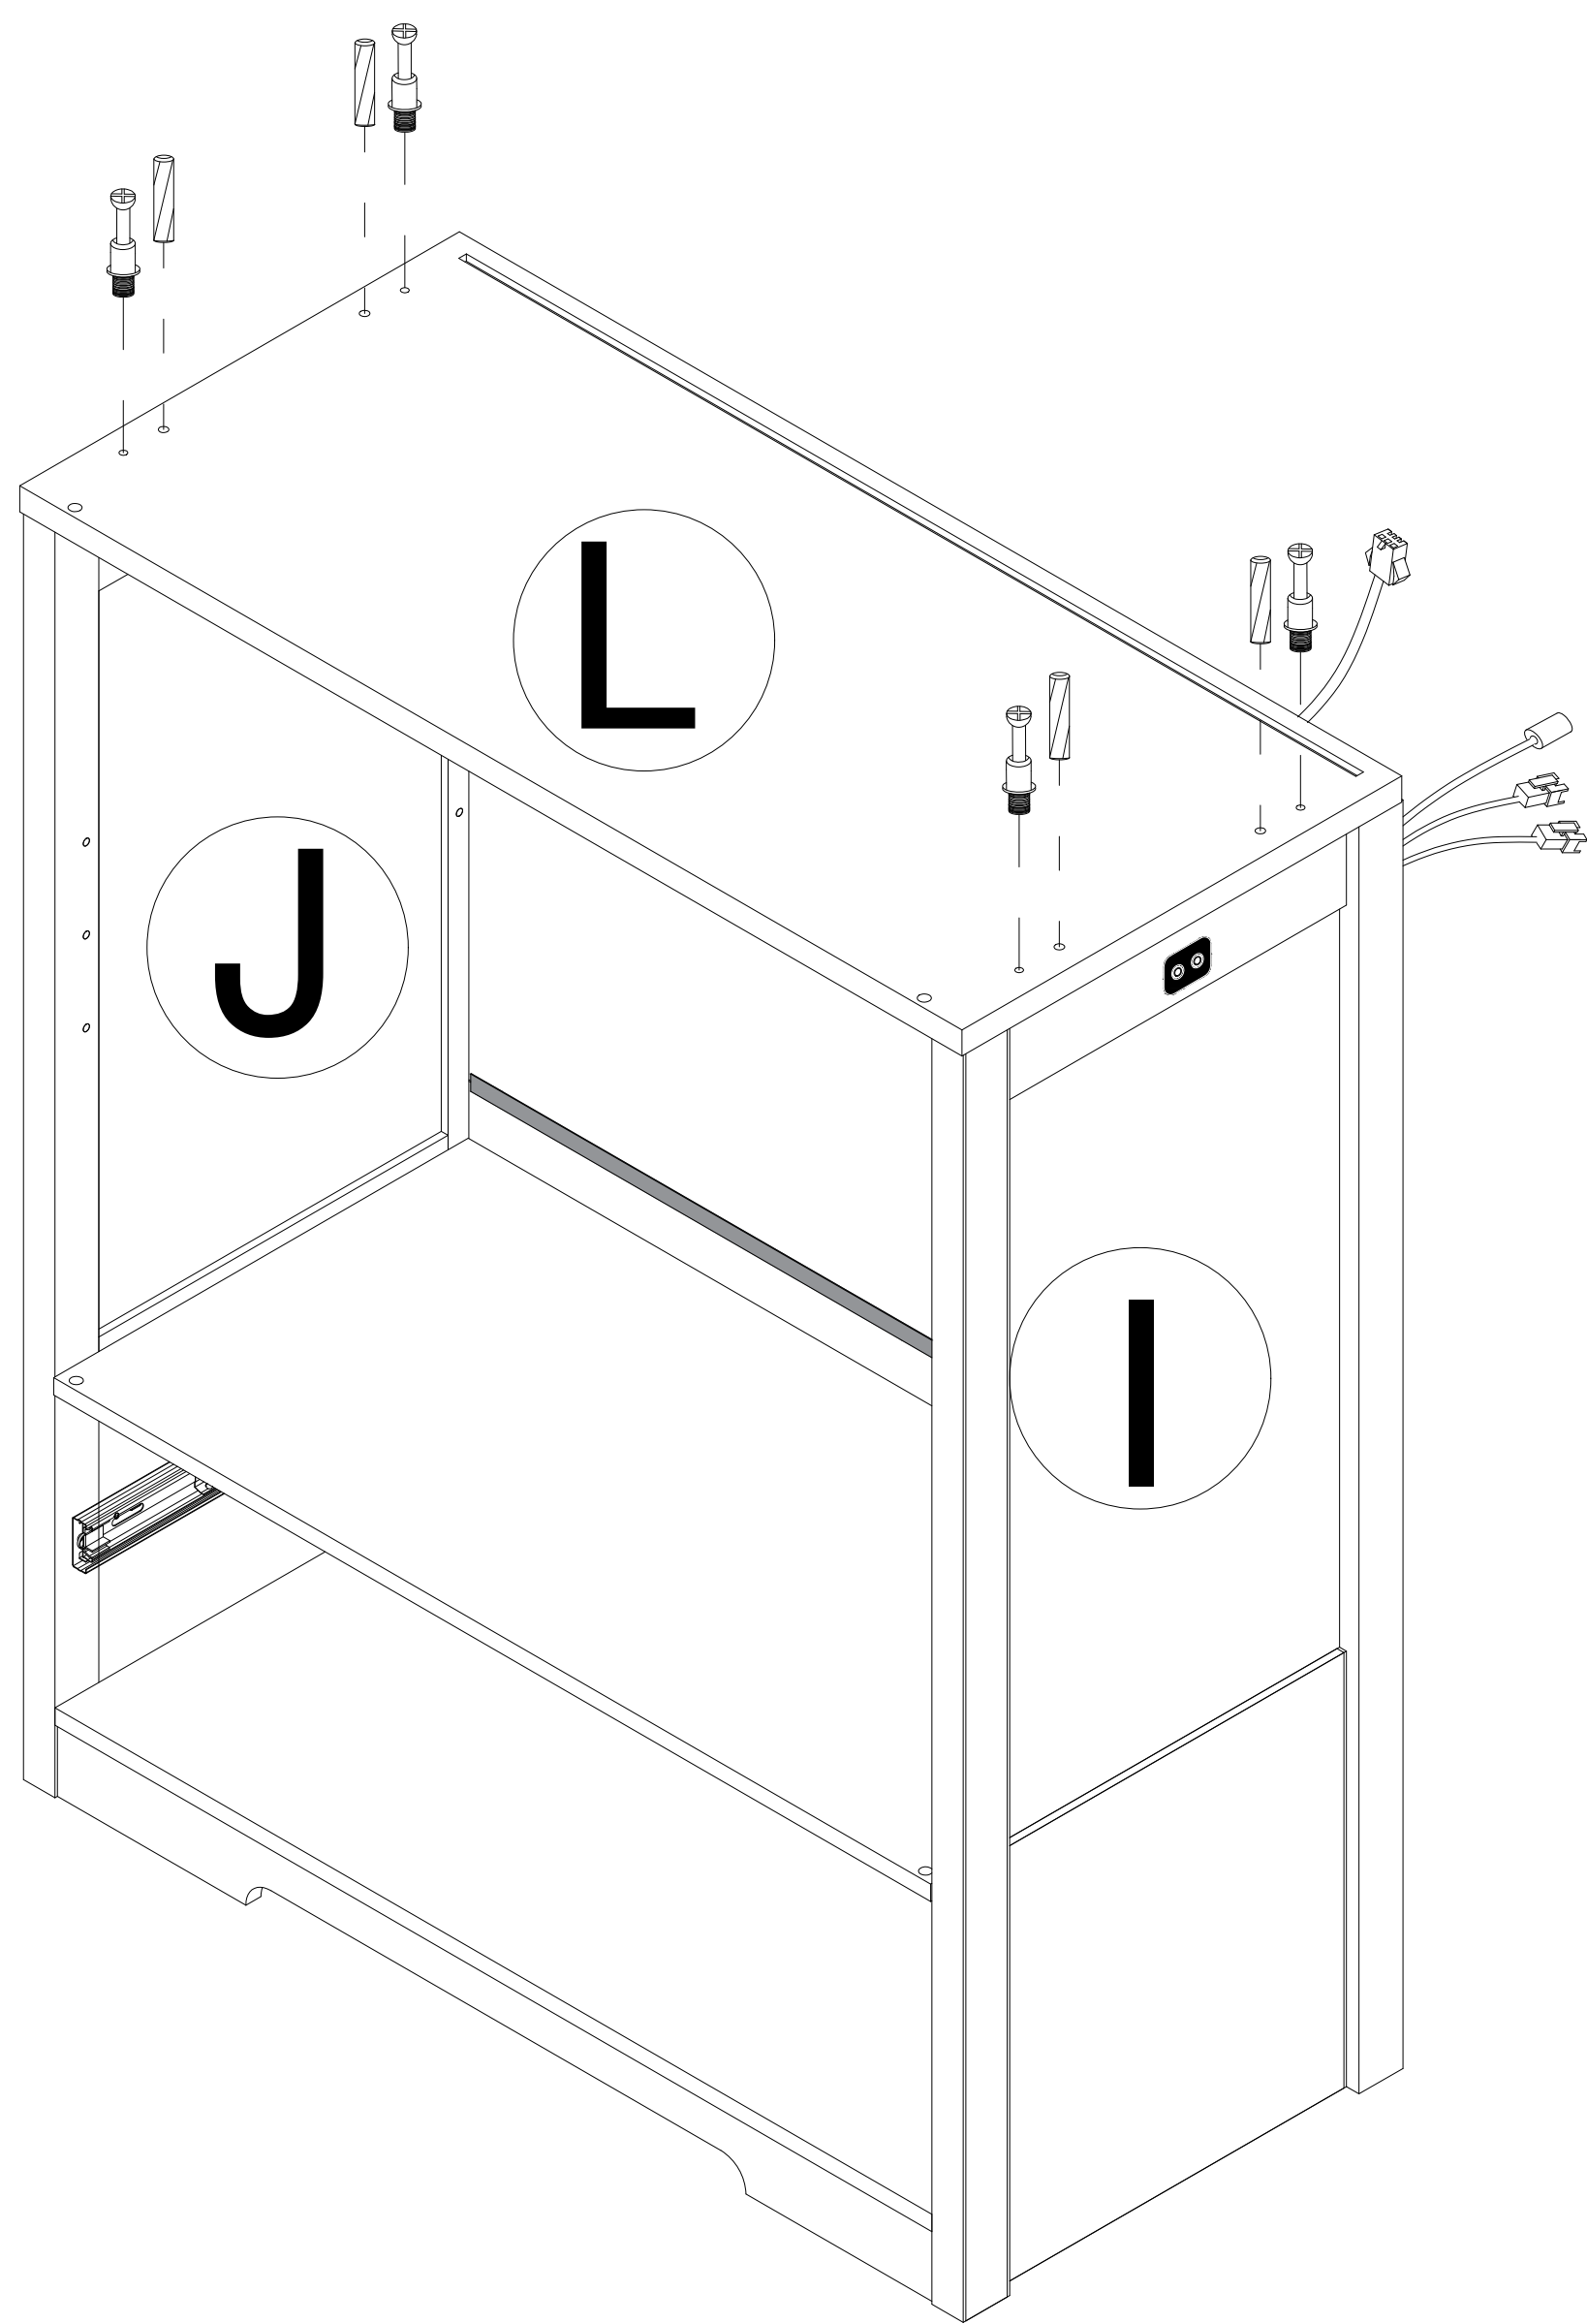


- 1

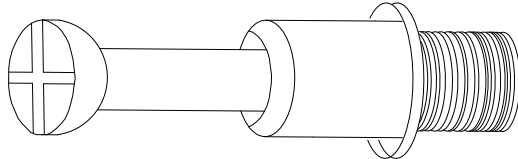
x4
- 3

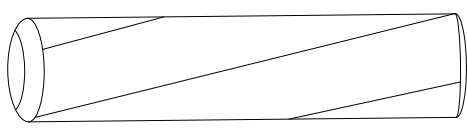x4

Step 20

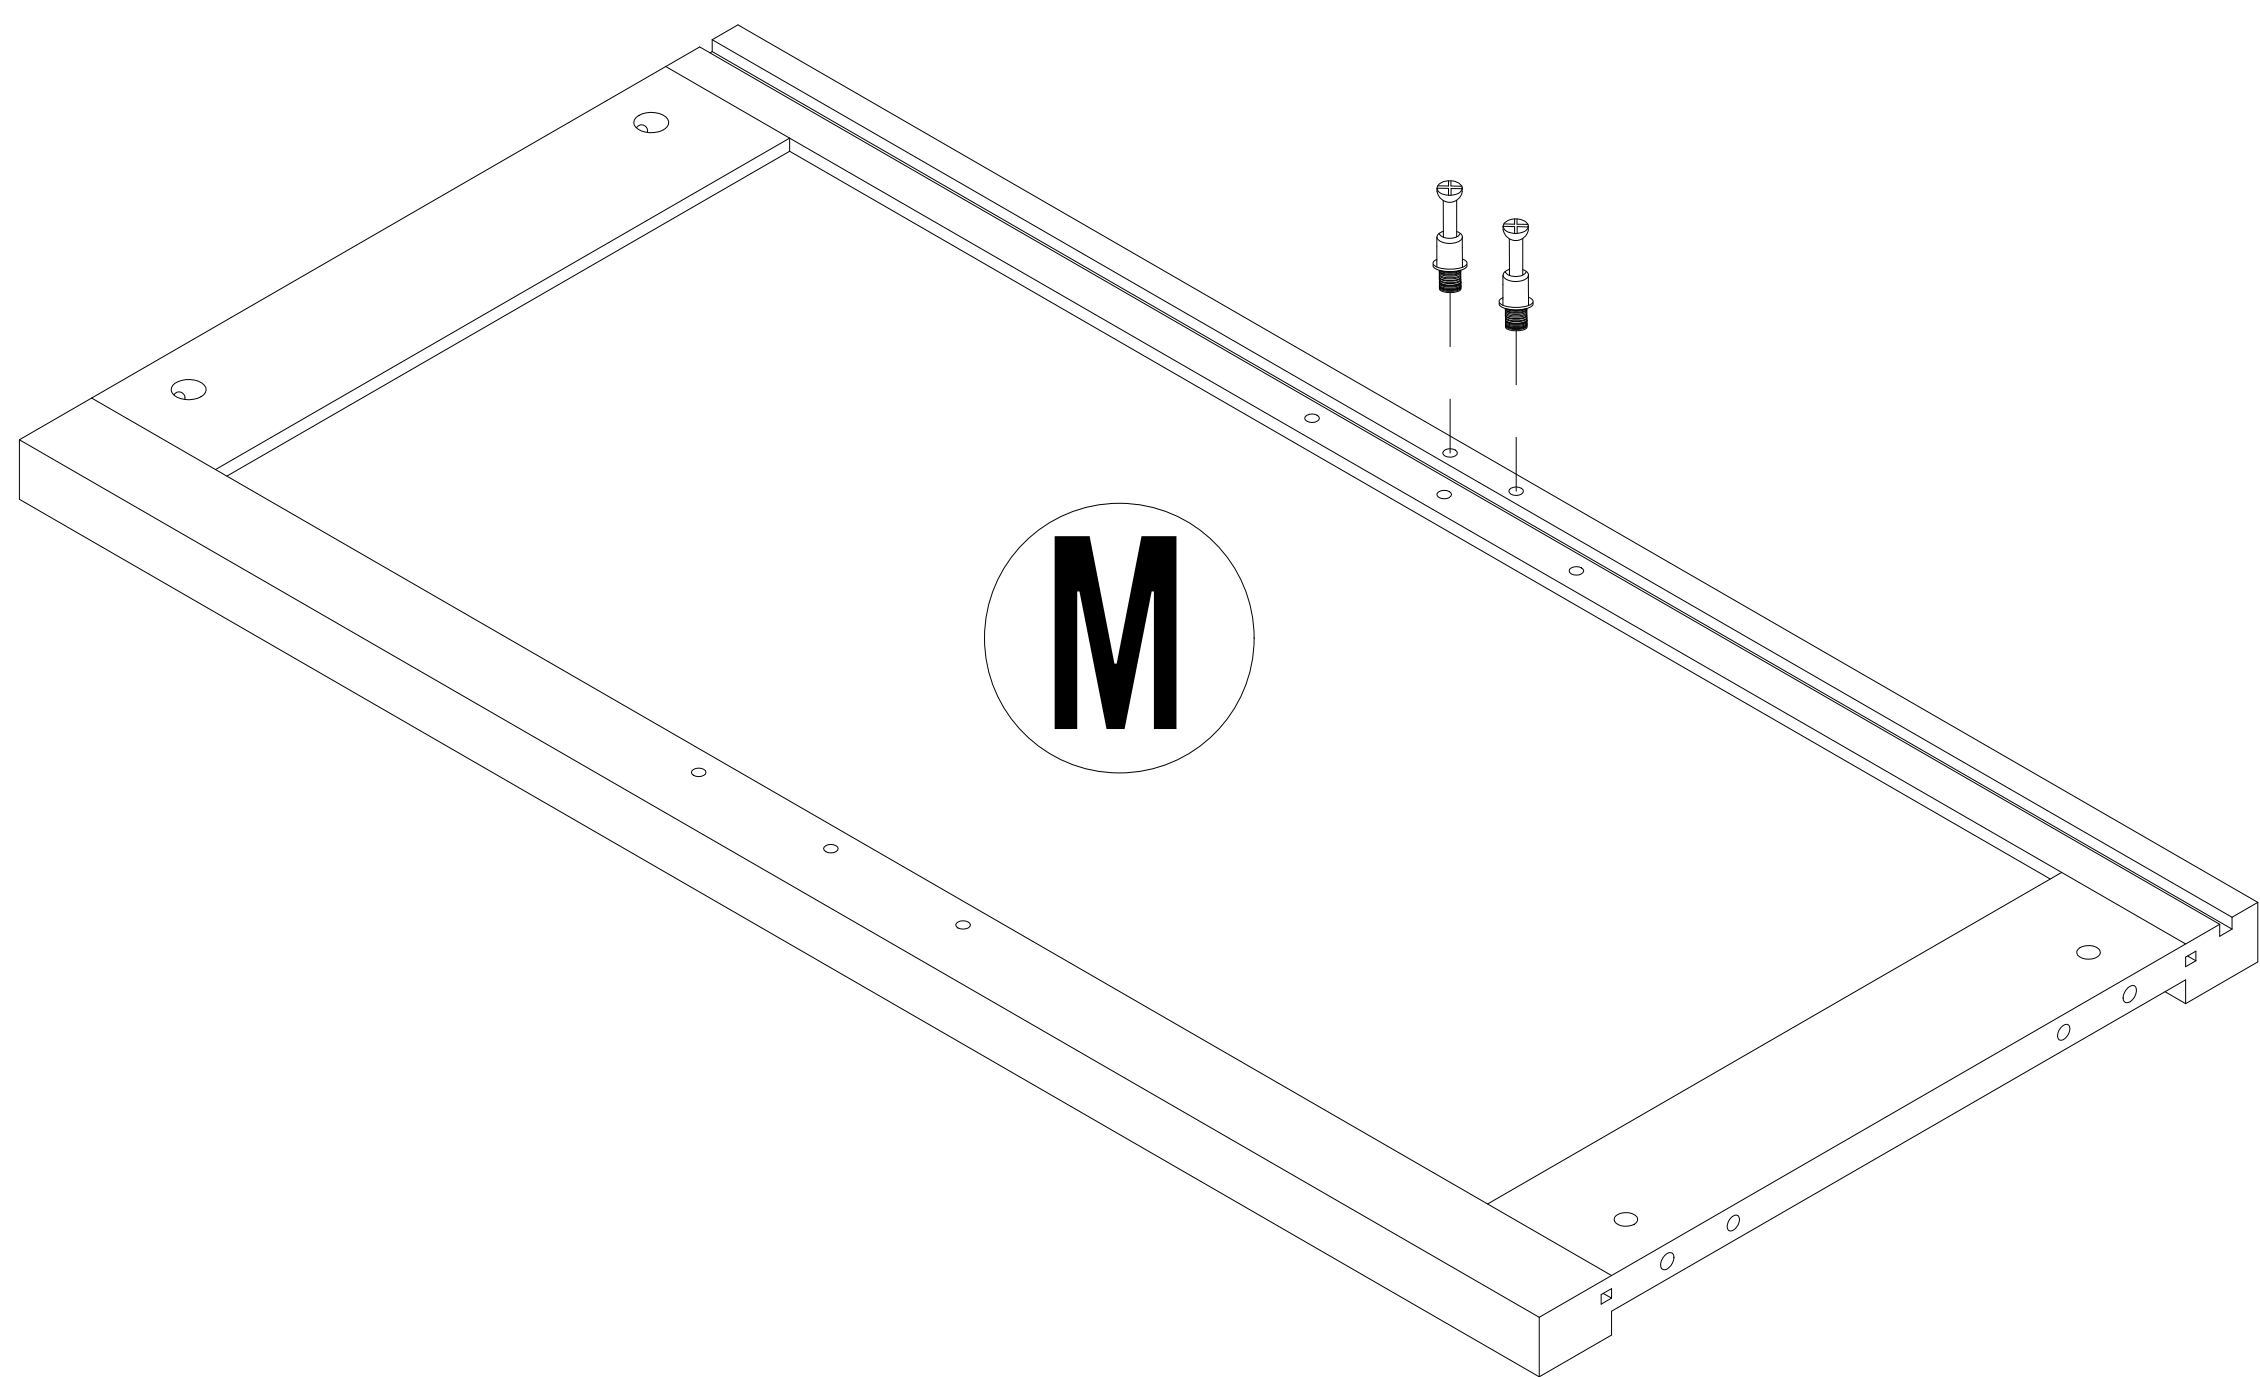


- 1

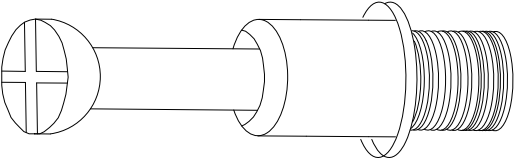
x4

Step 21

2




x2

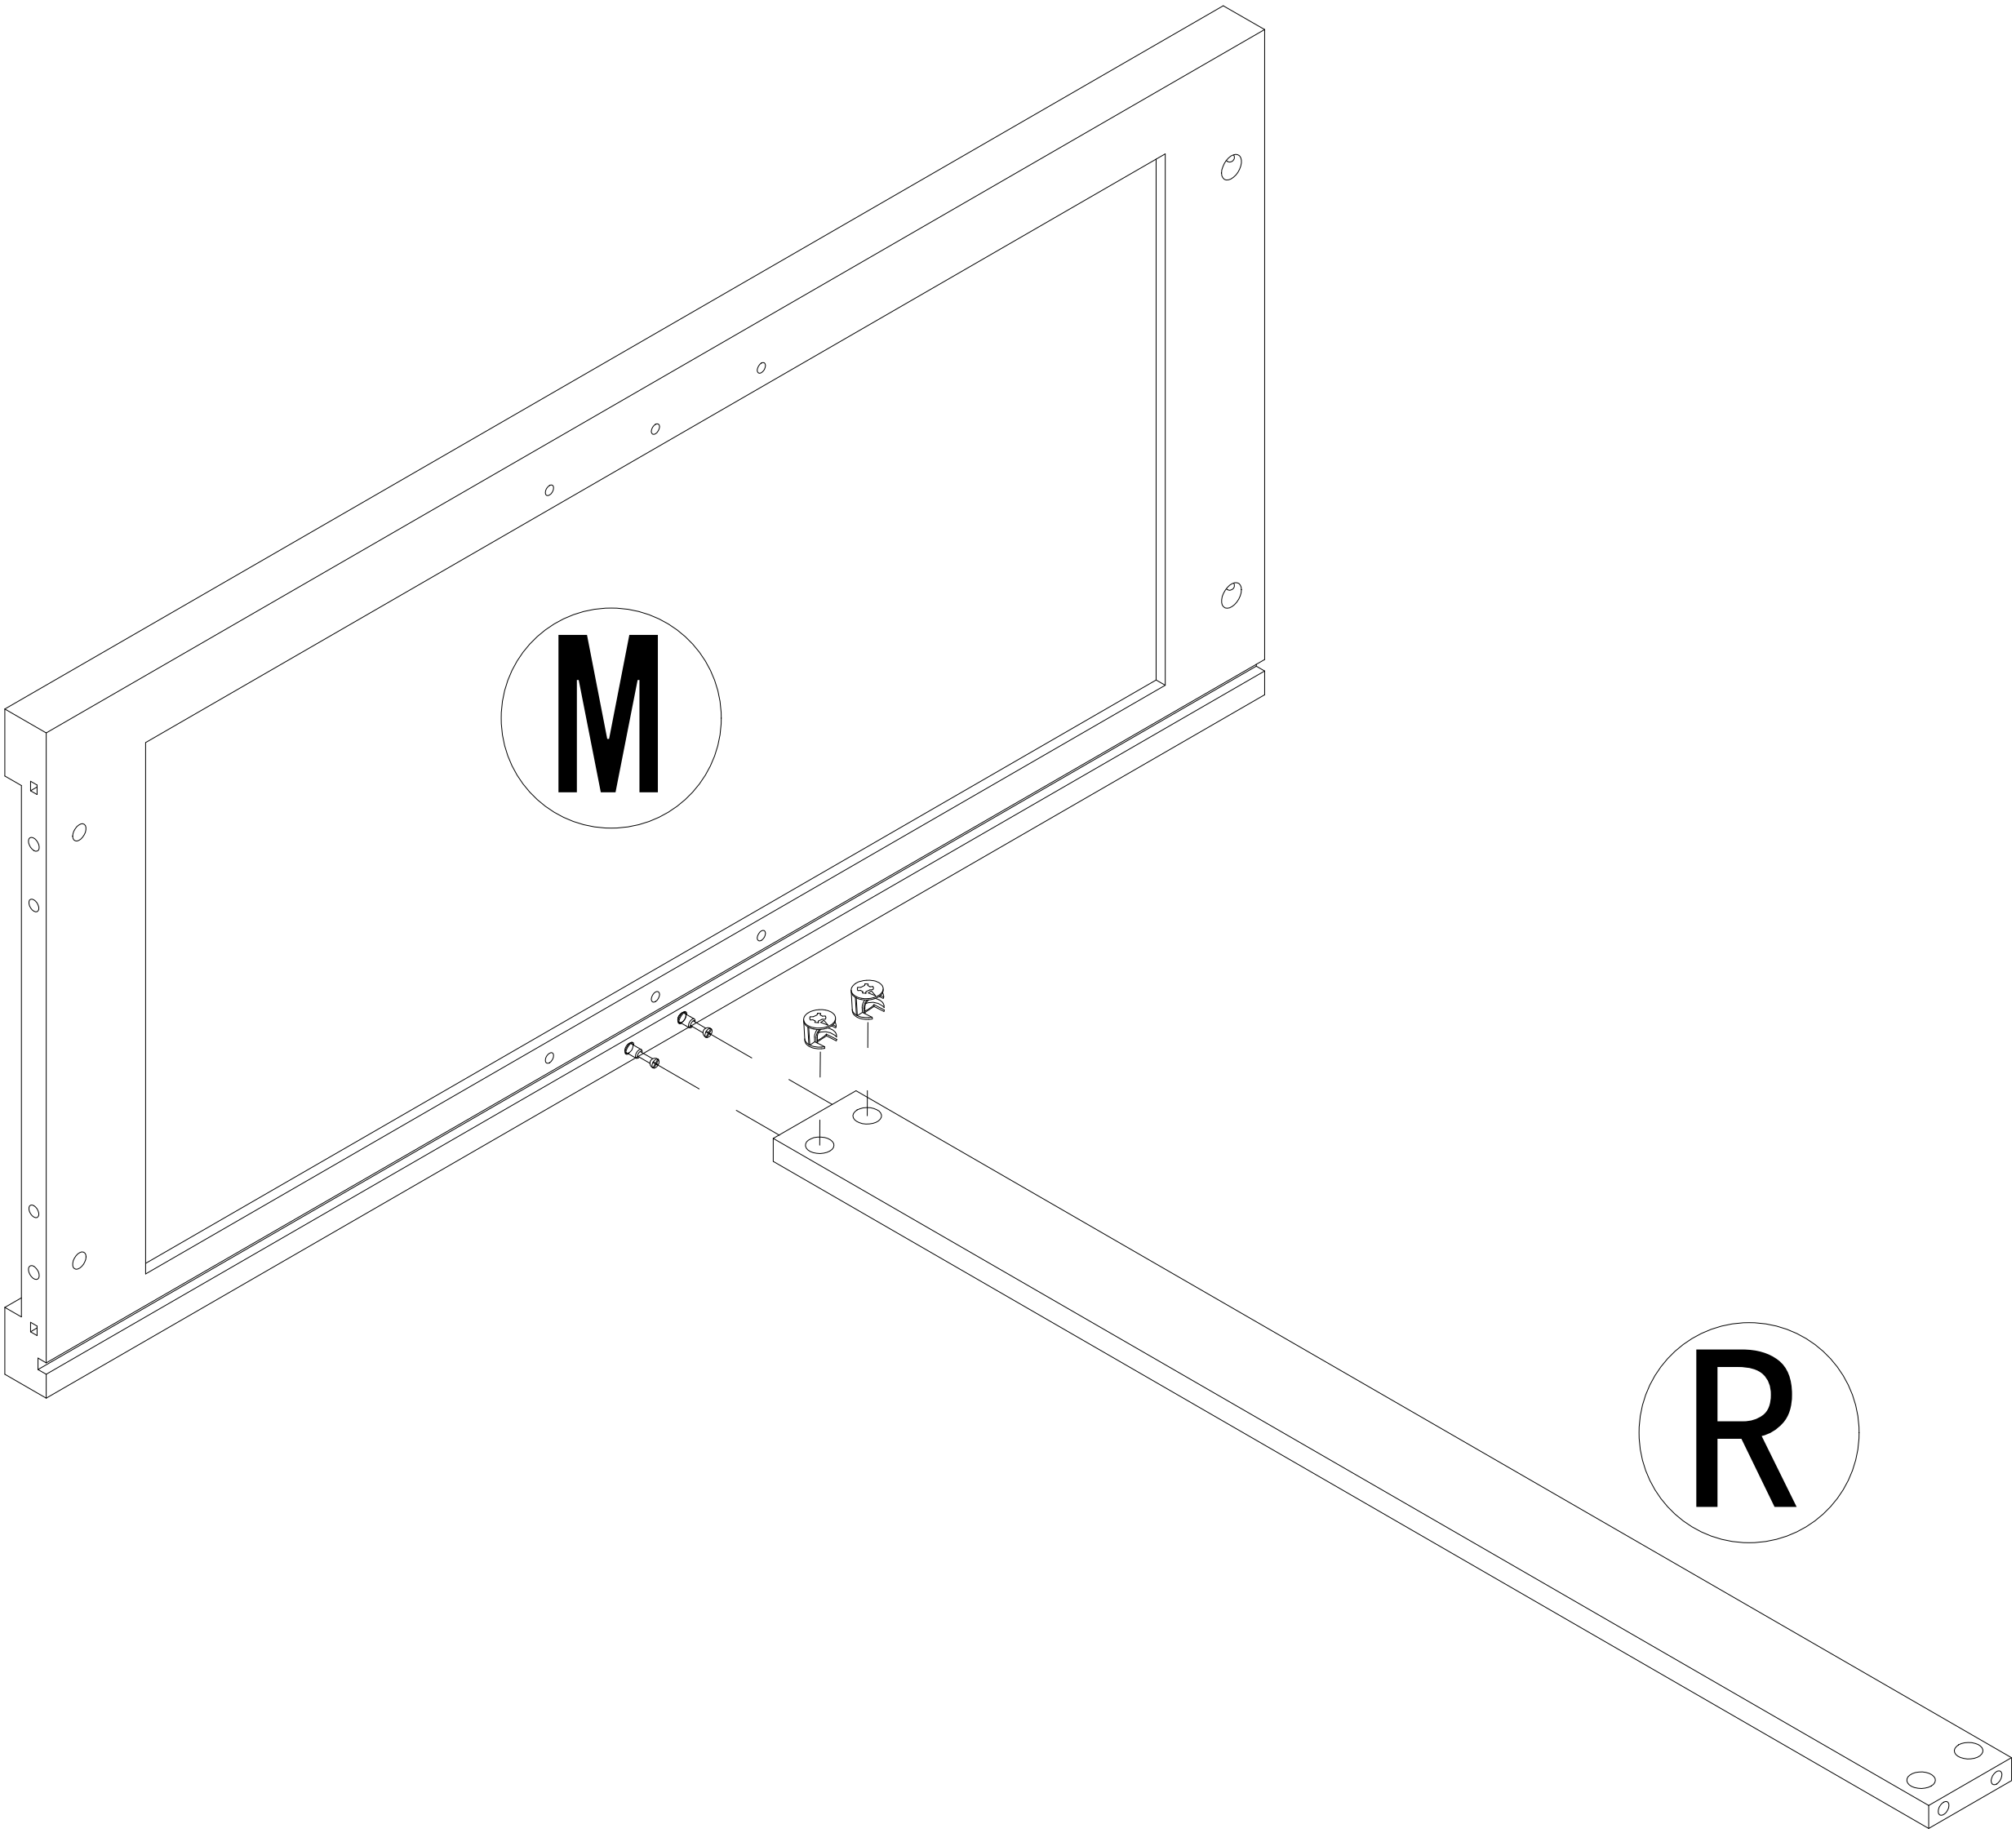


Step 22

2




x2

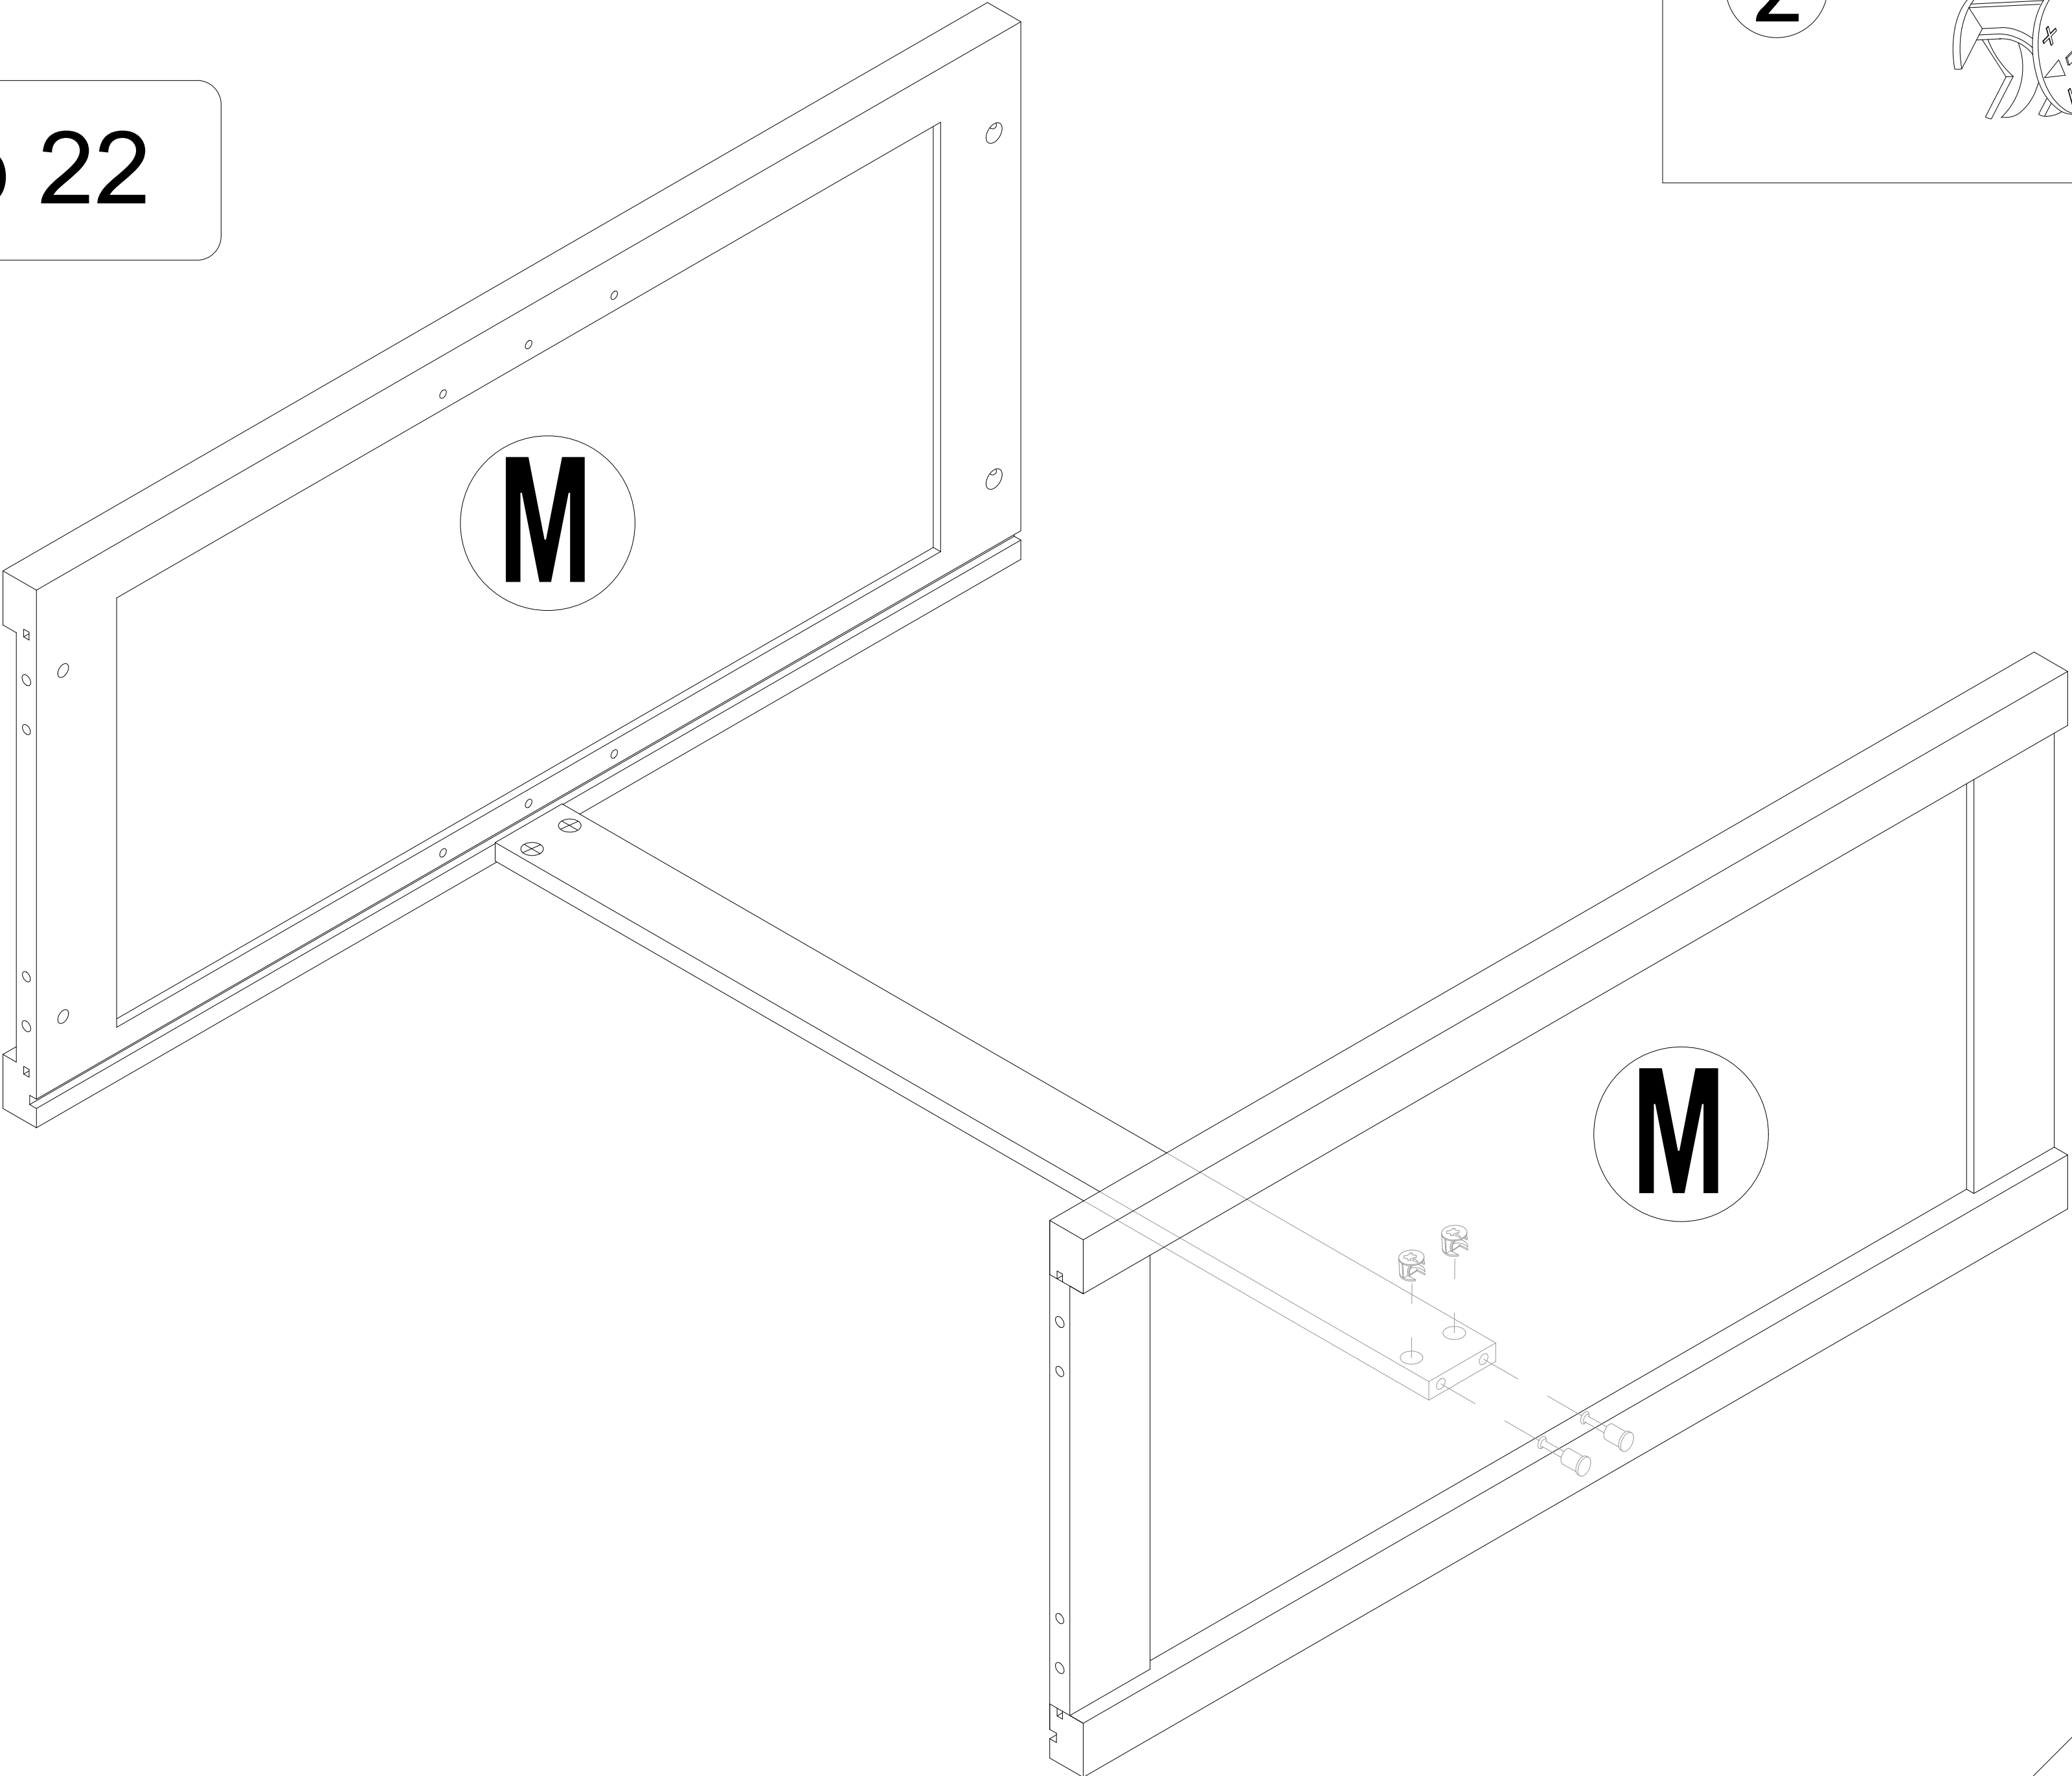


Step 23

2








x4

It is recommended to have two people assist with the installation.

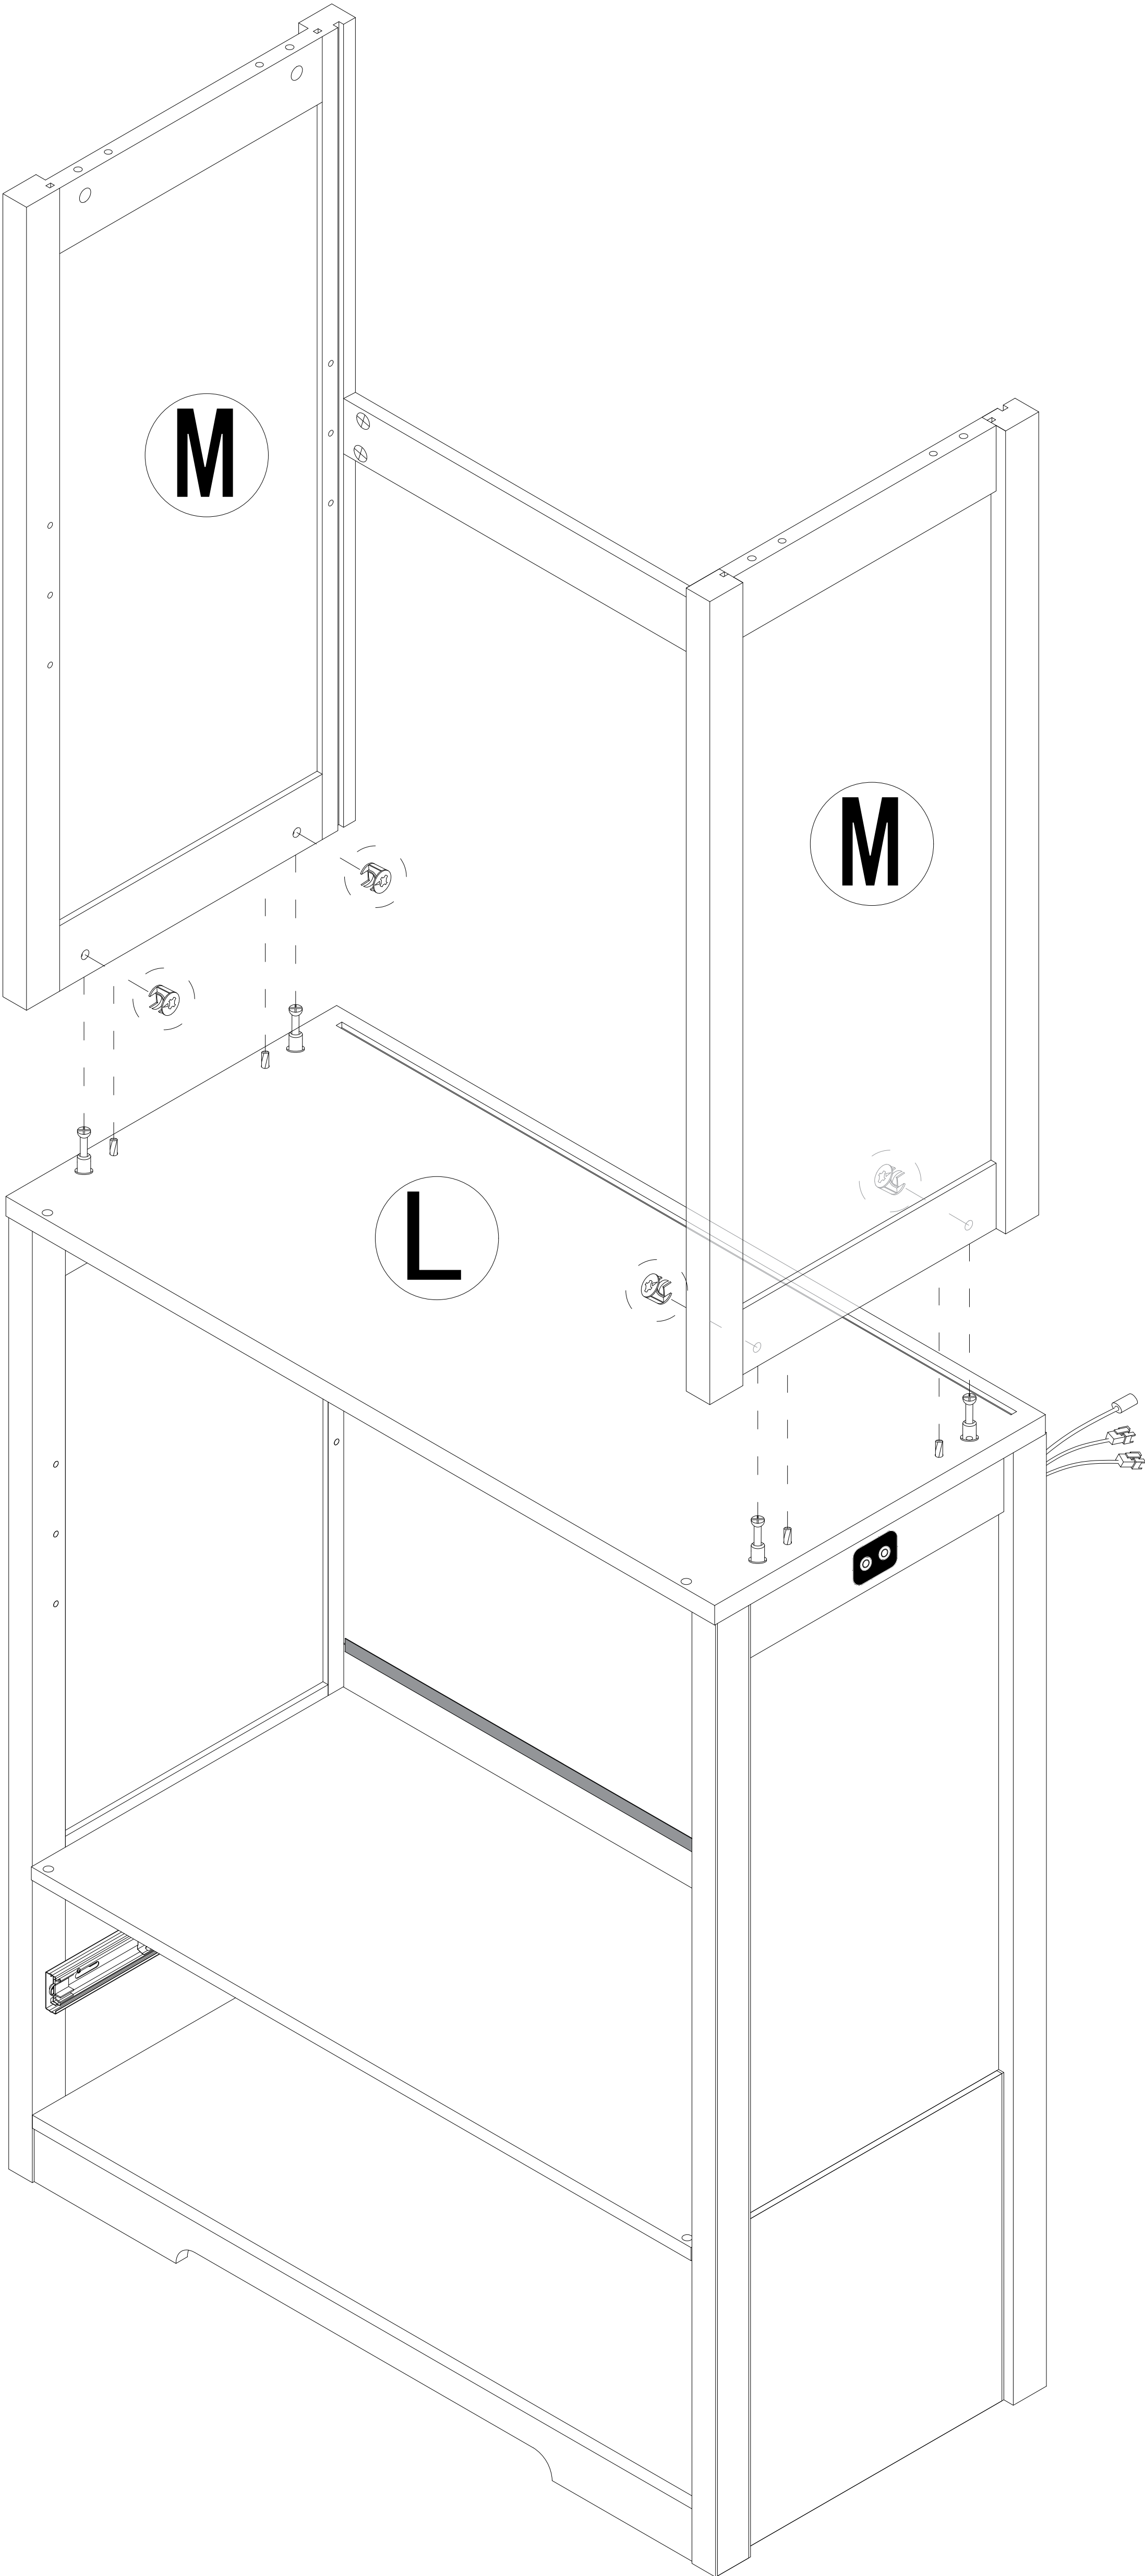


Step 24

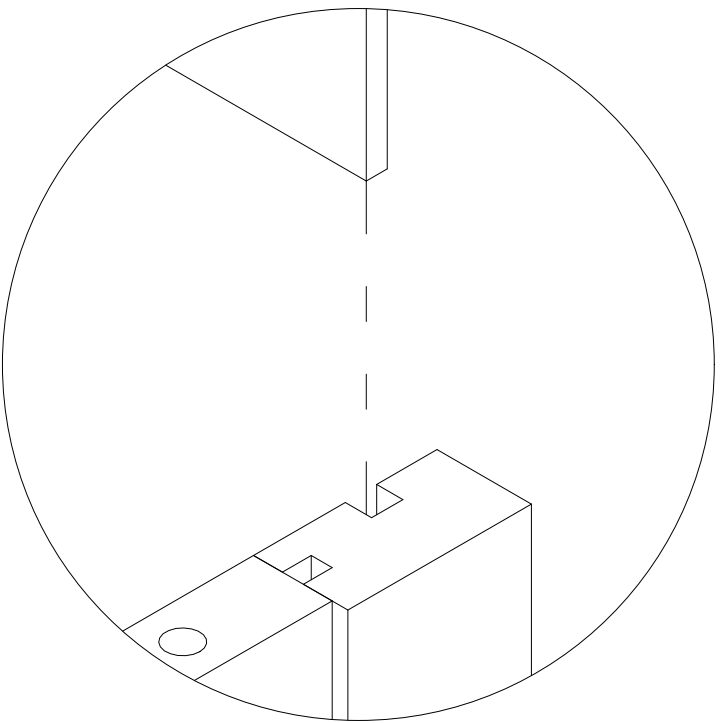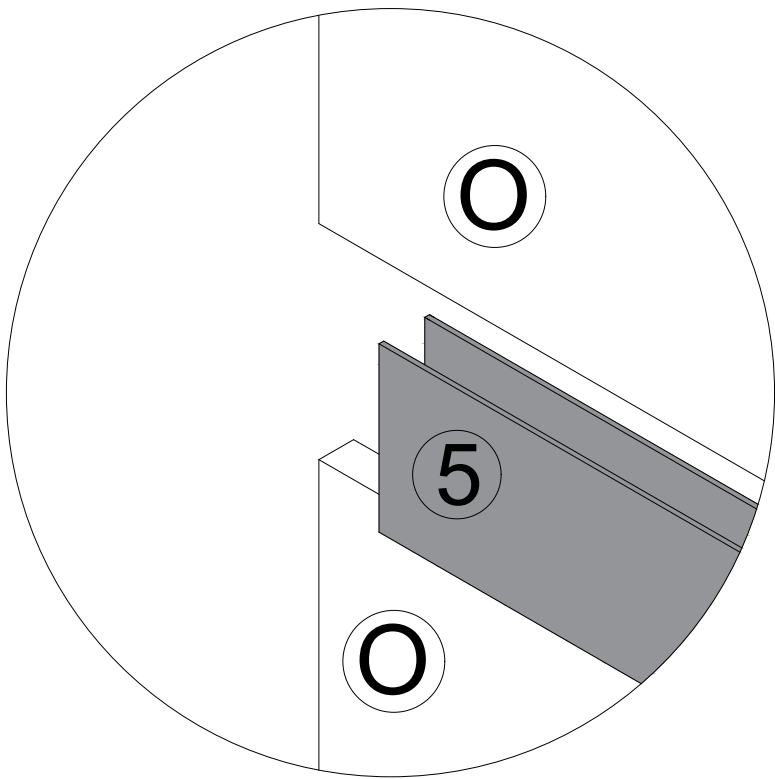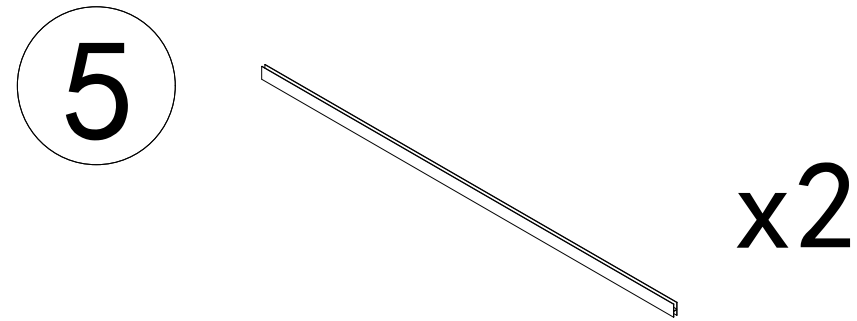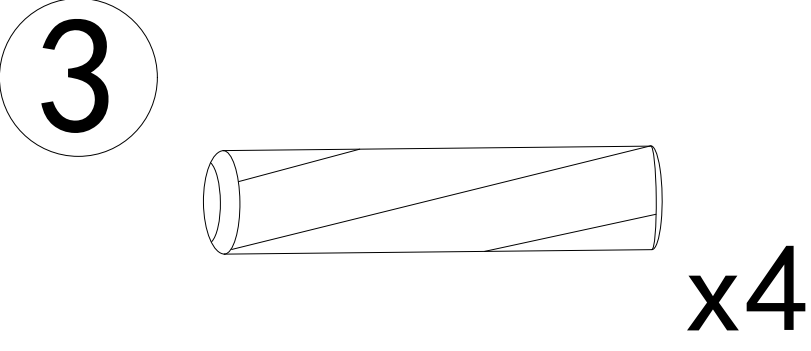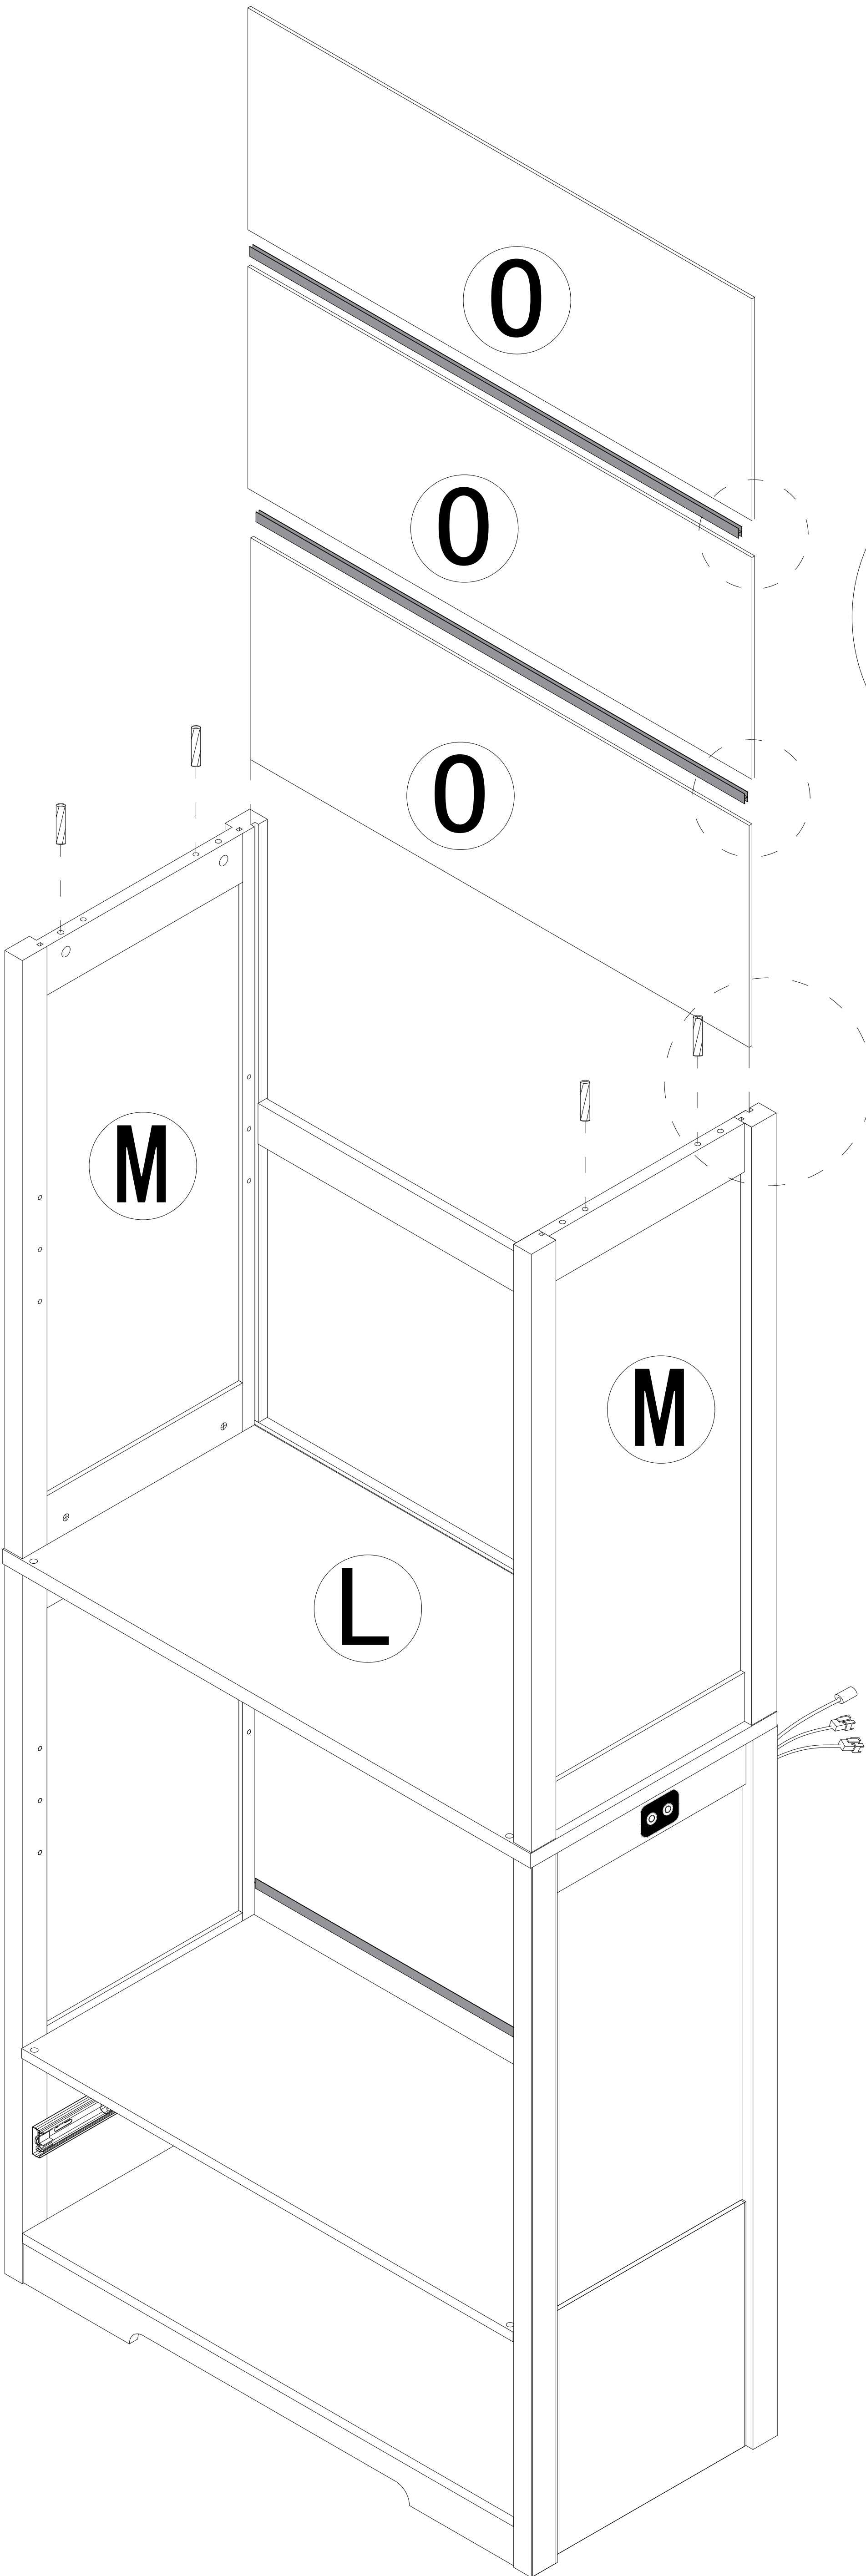



Step 25

- 1

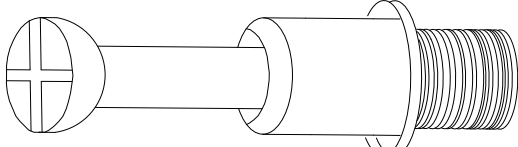


x4
- 7




x1
- 

x4

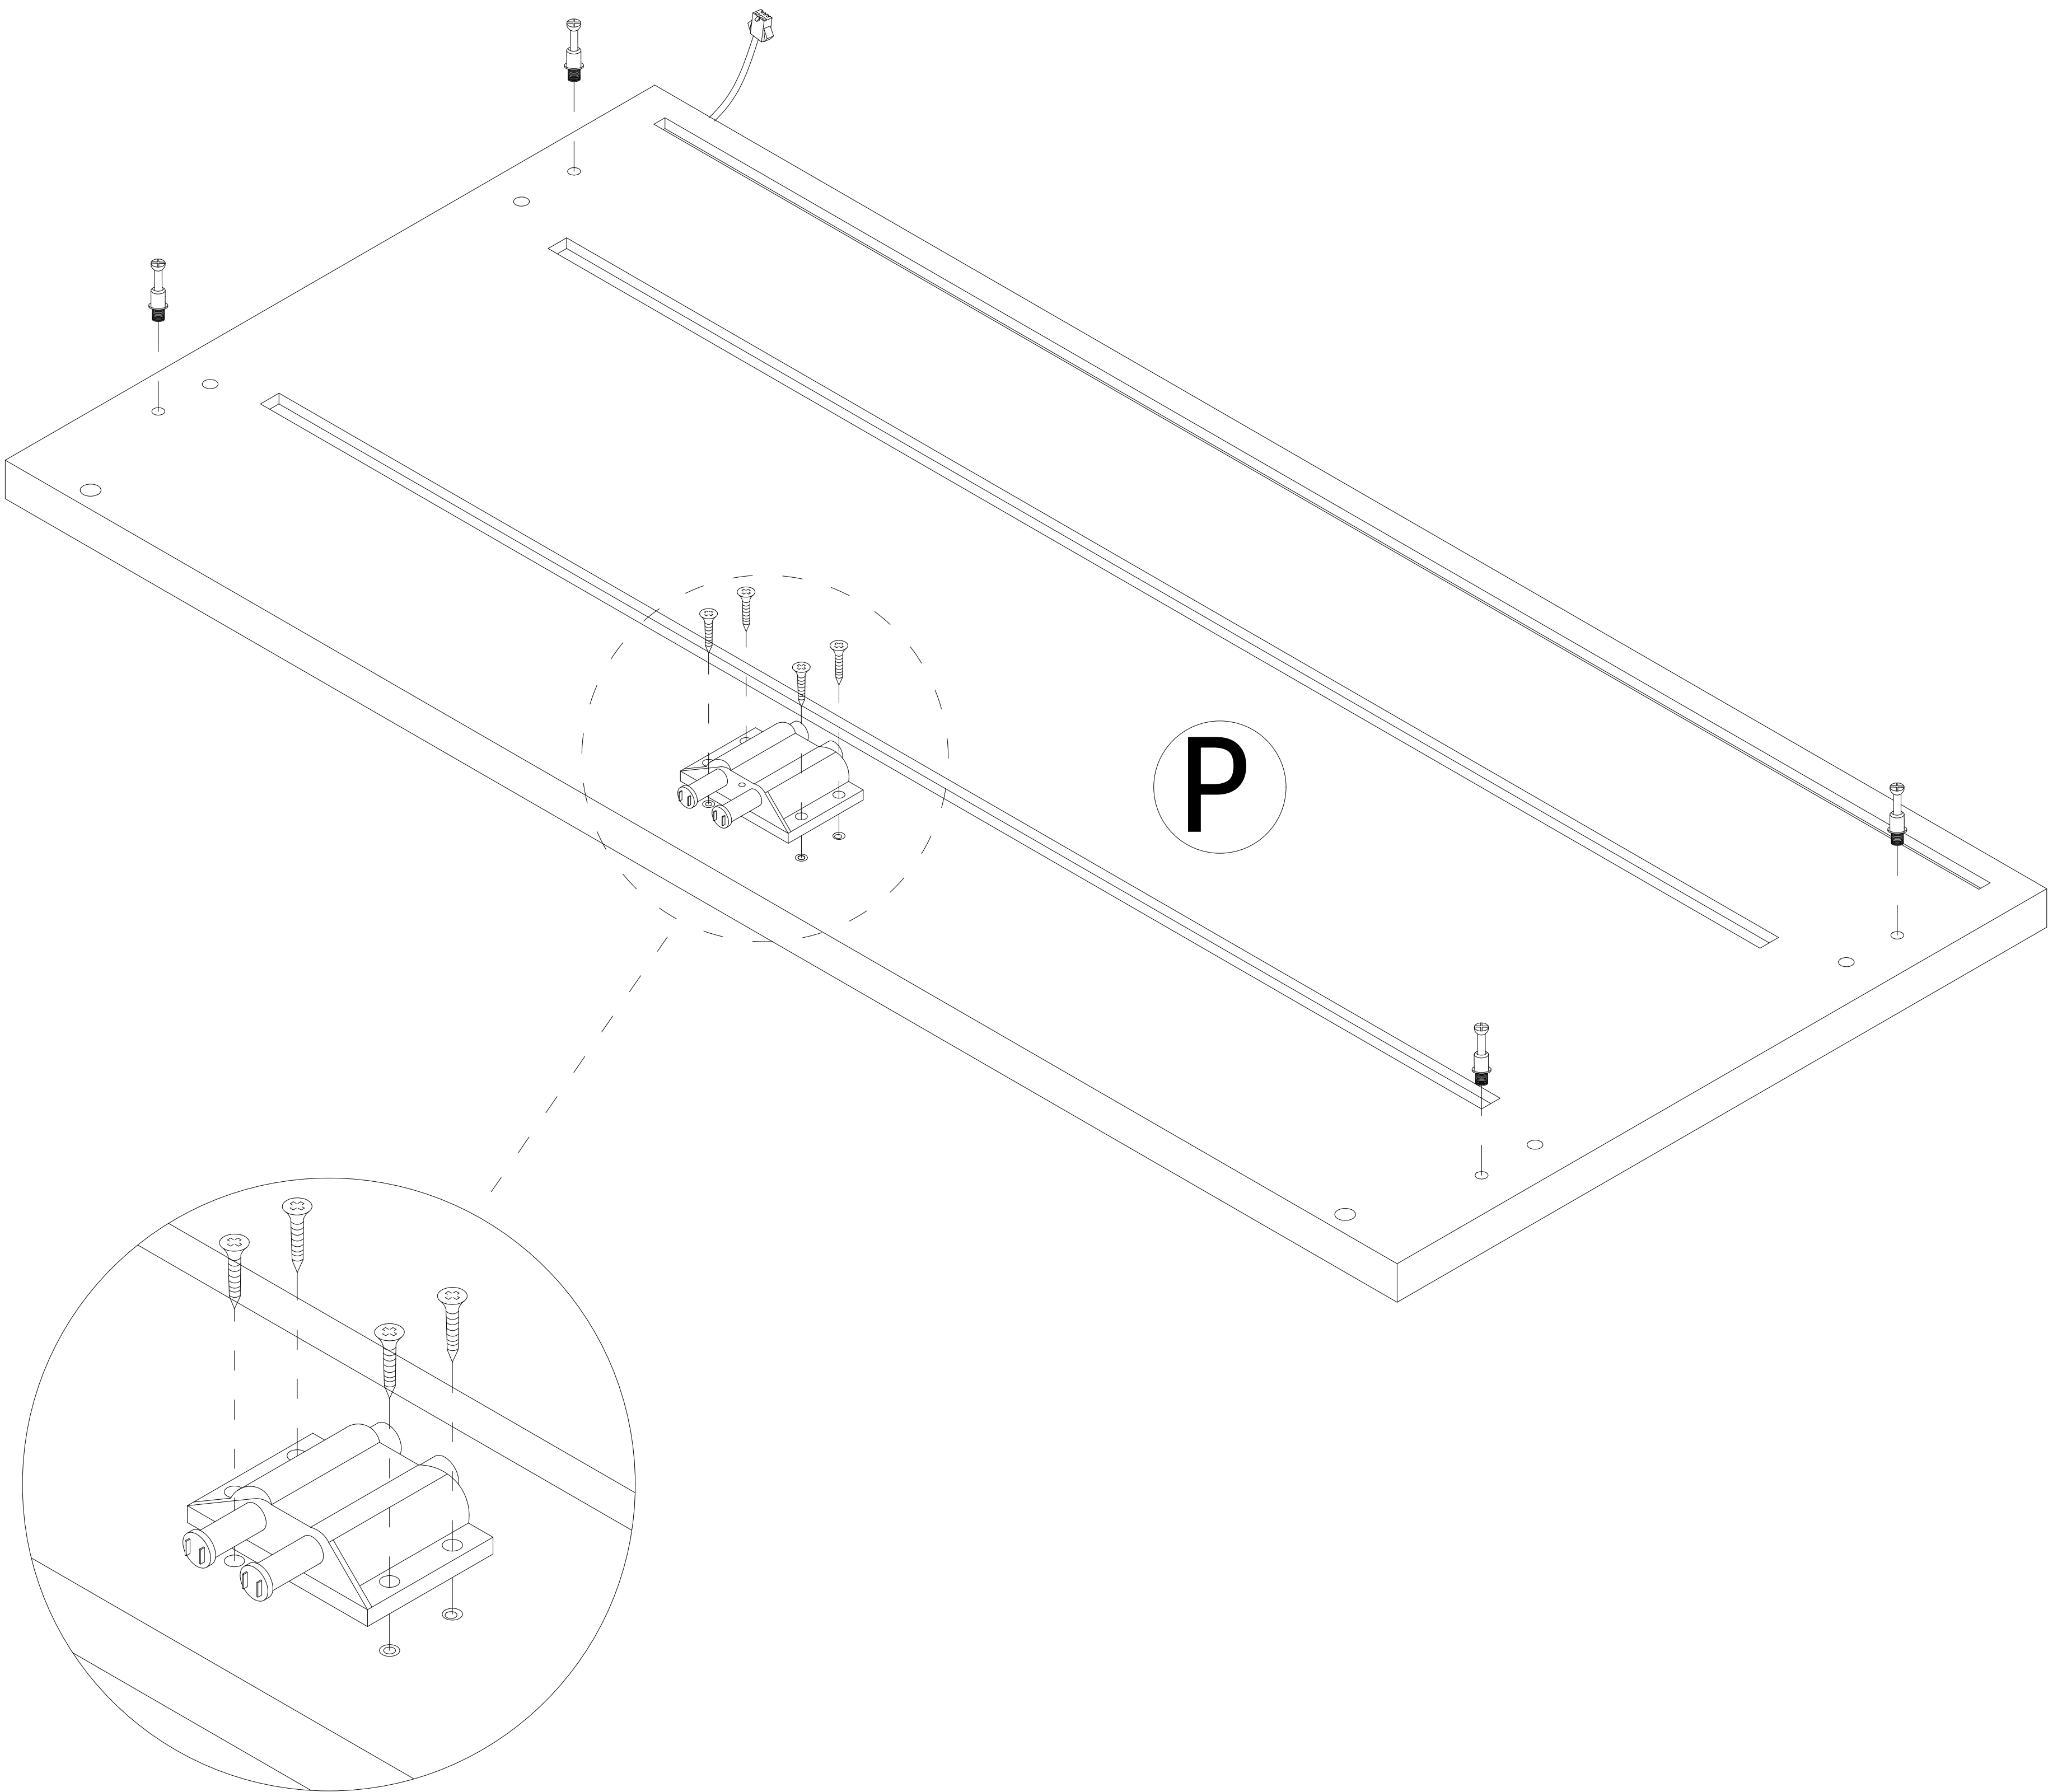


Step 26



2



x4

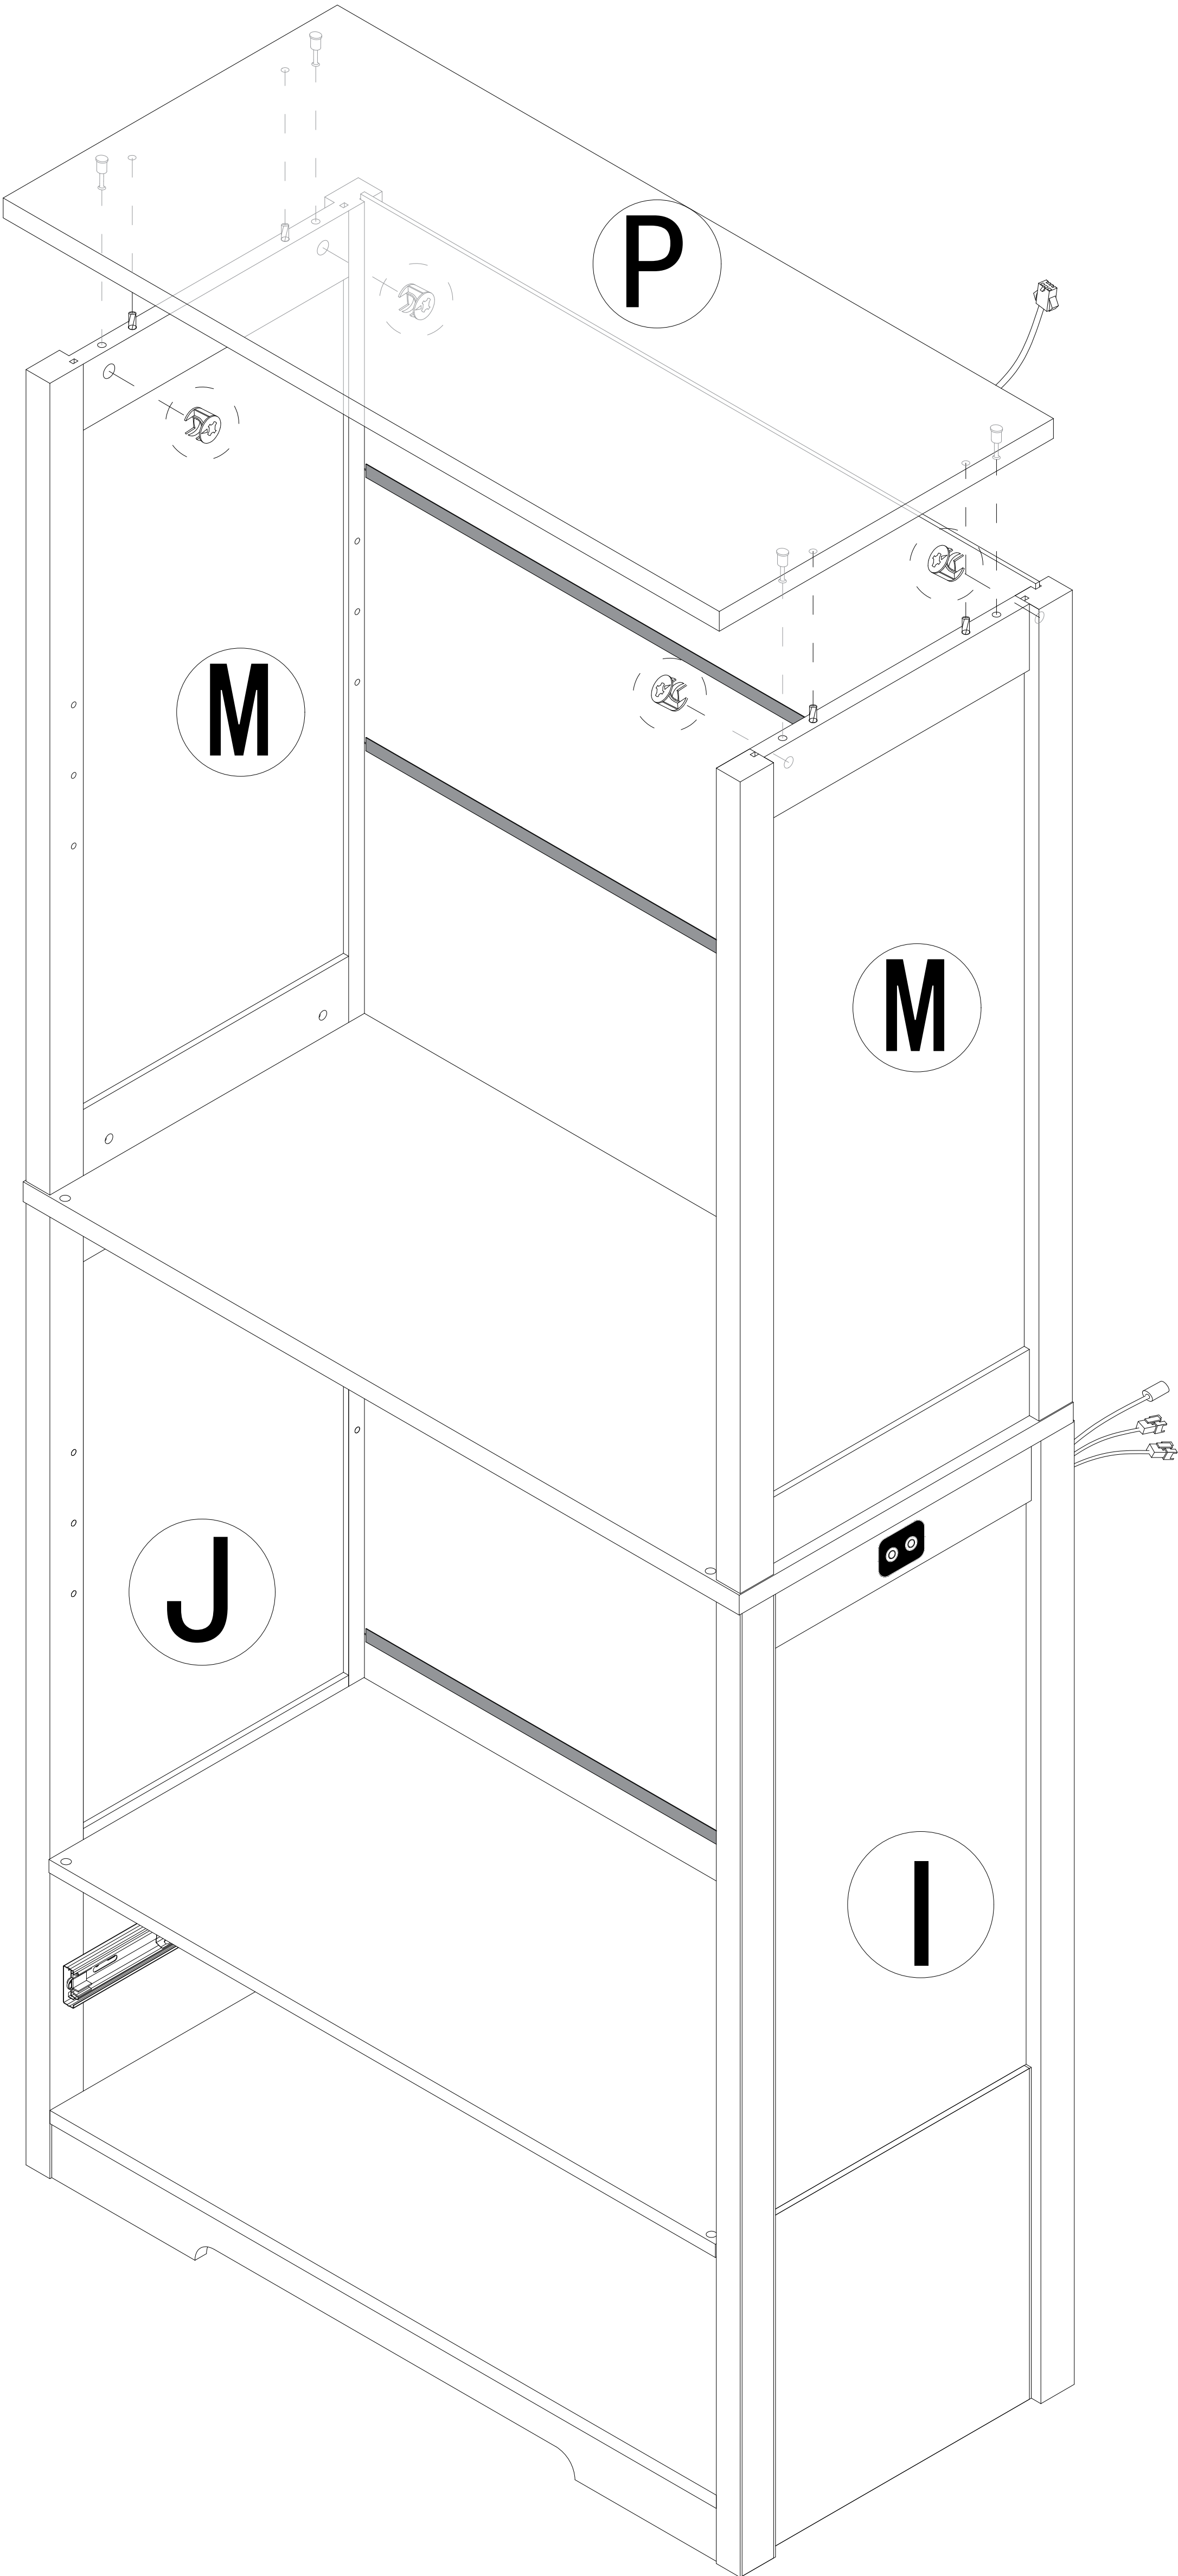


Step 27

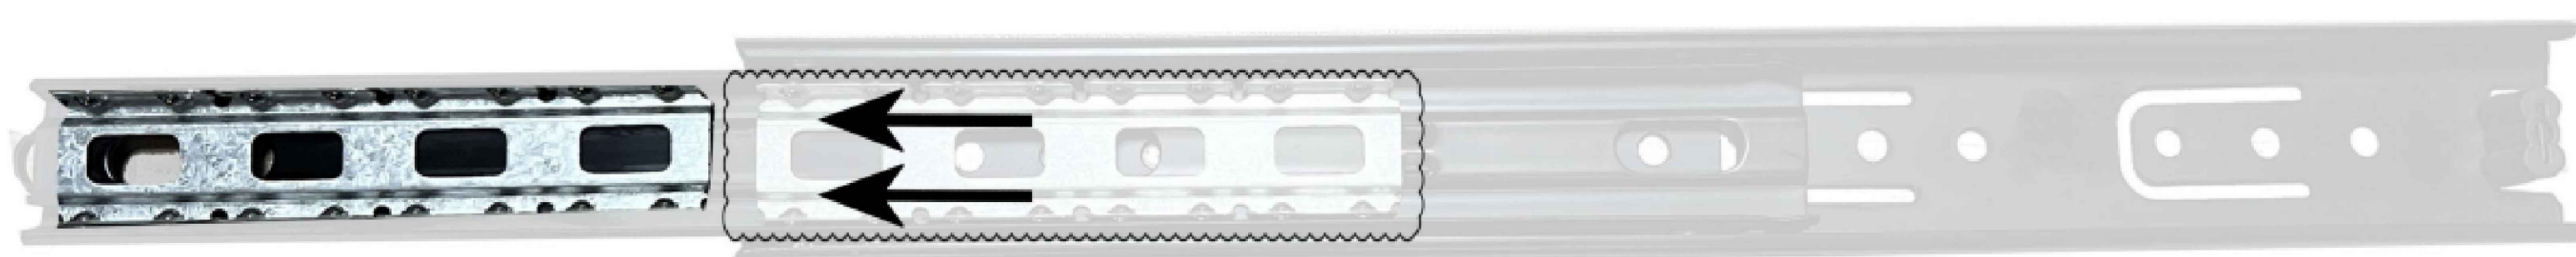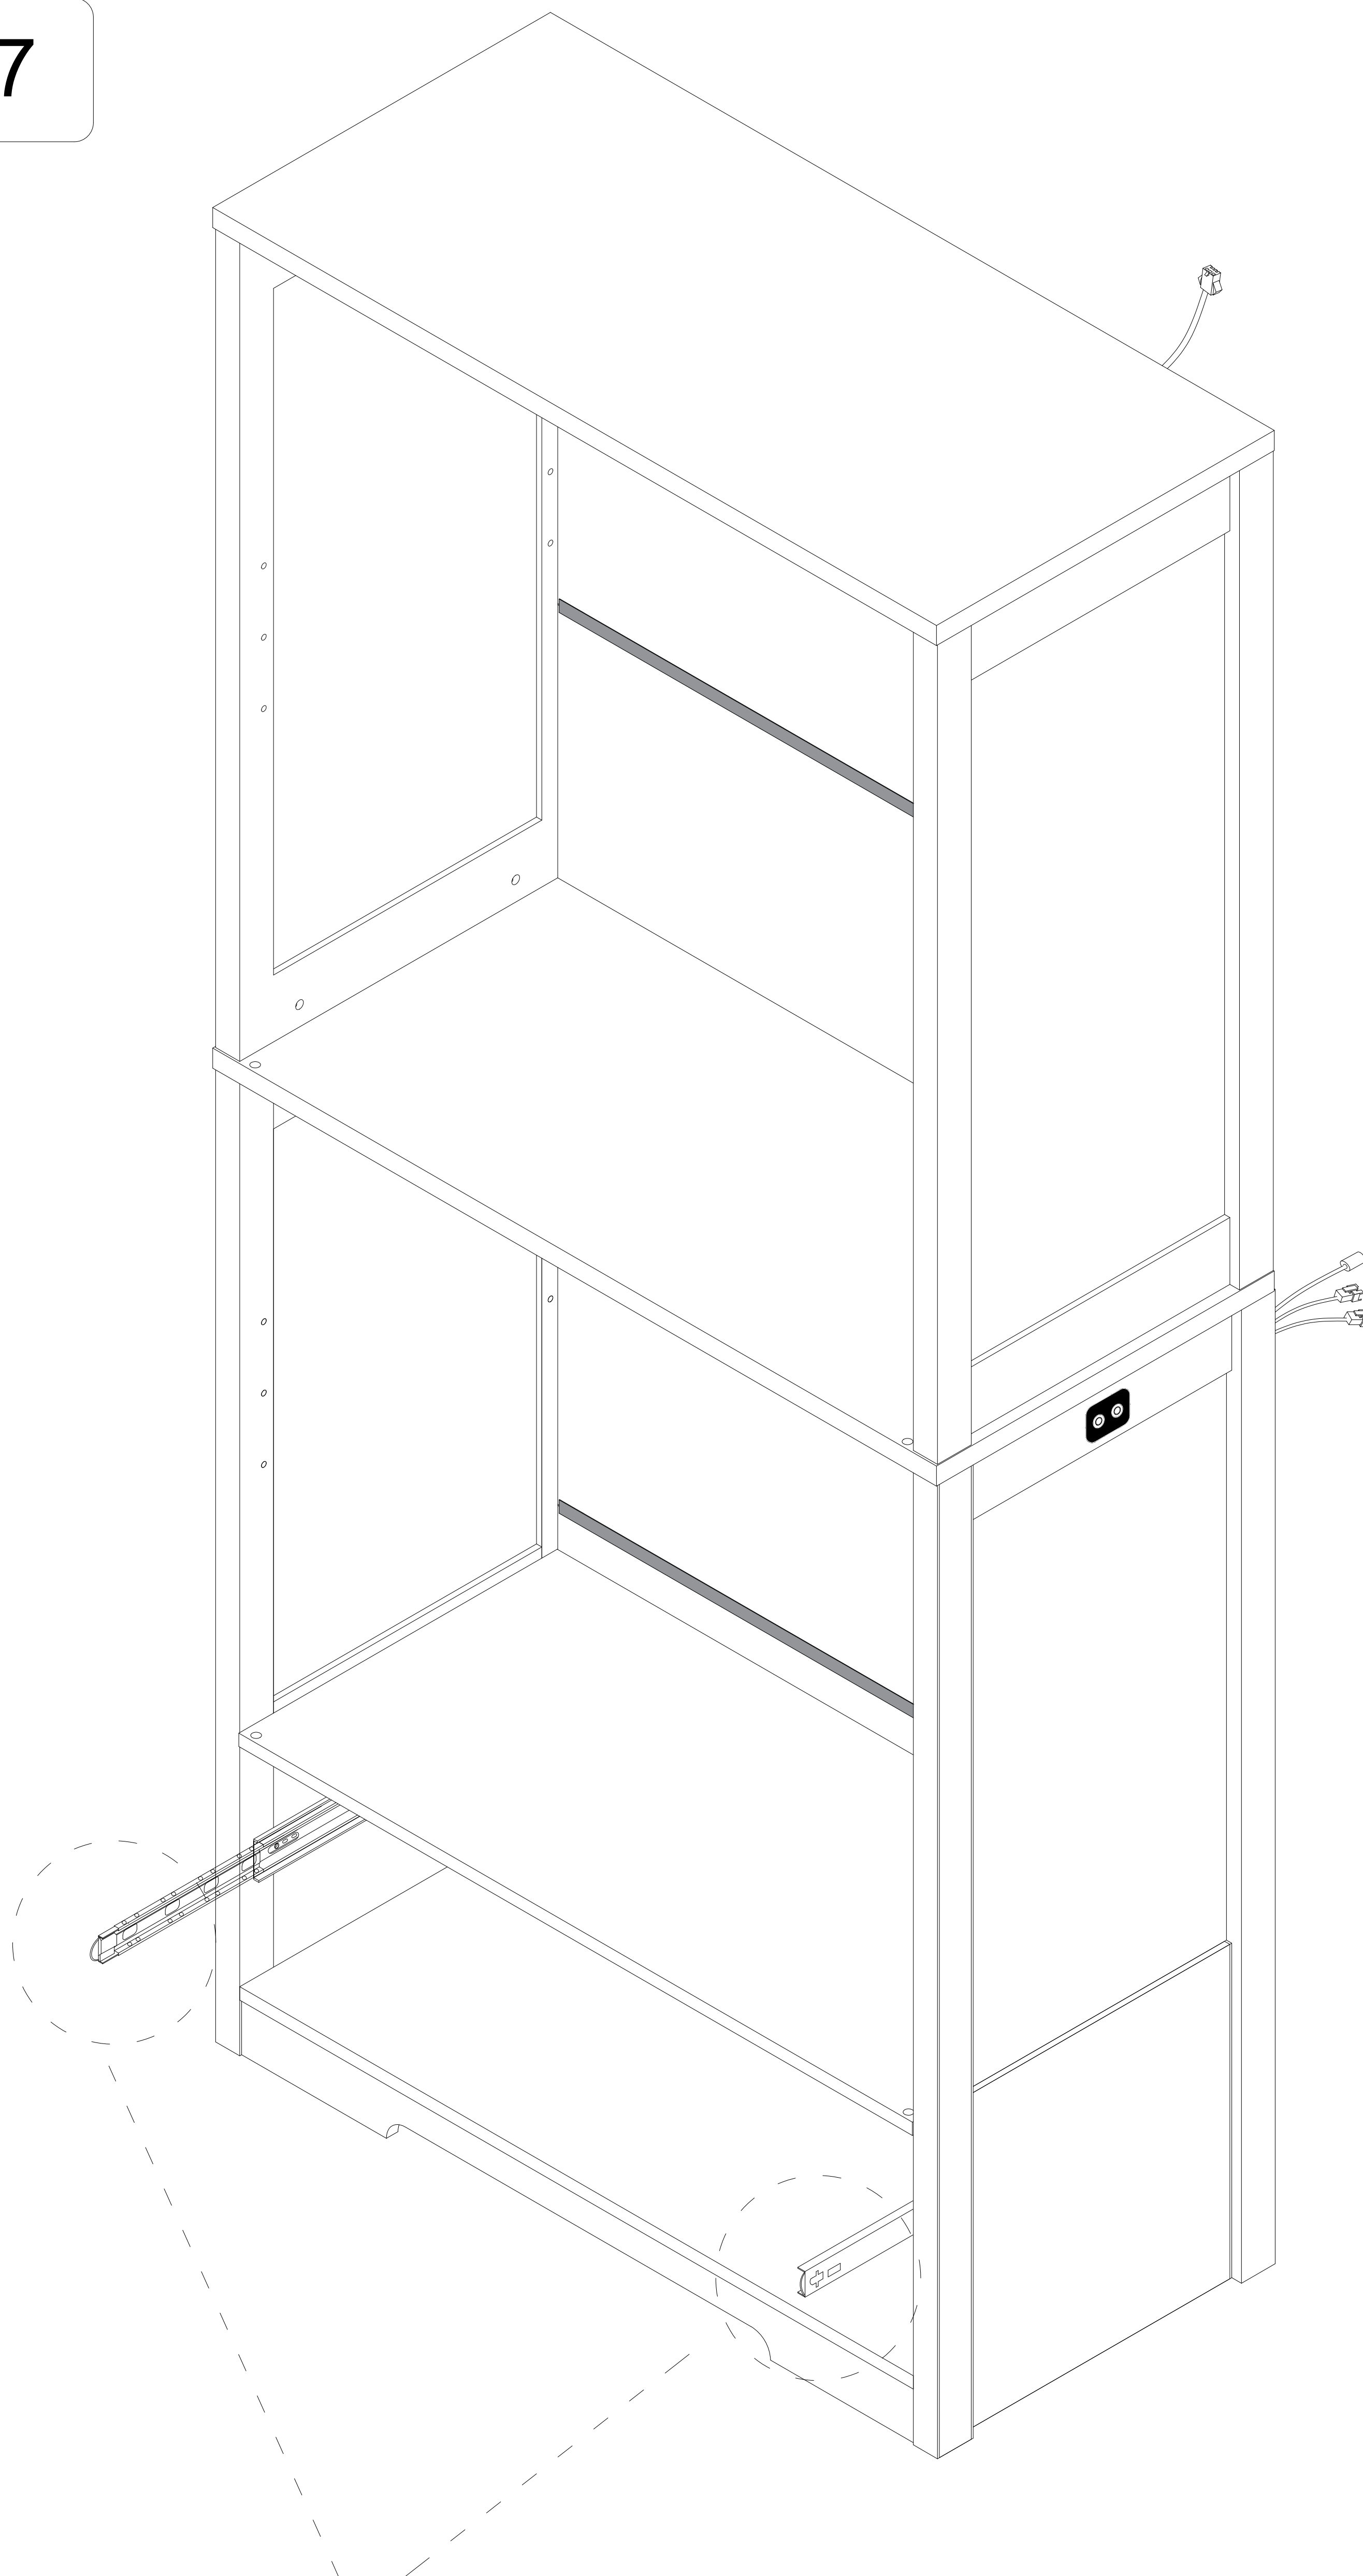

As shown, When installing the drawer,
pull the guide rail out first, Slide beads are also pulled out.


Step 28

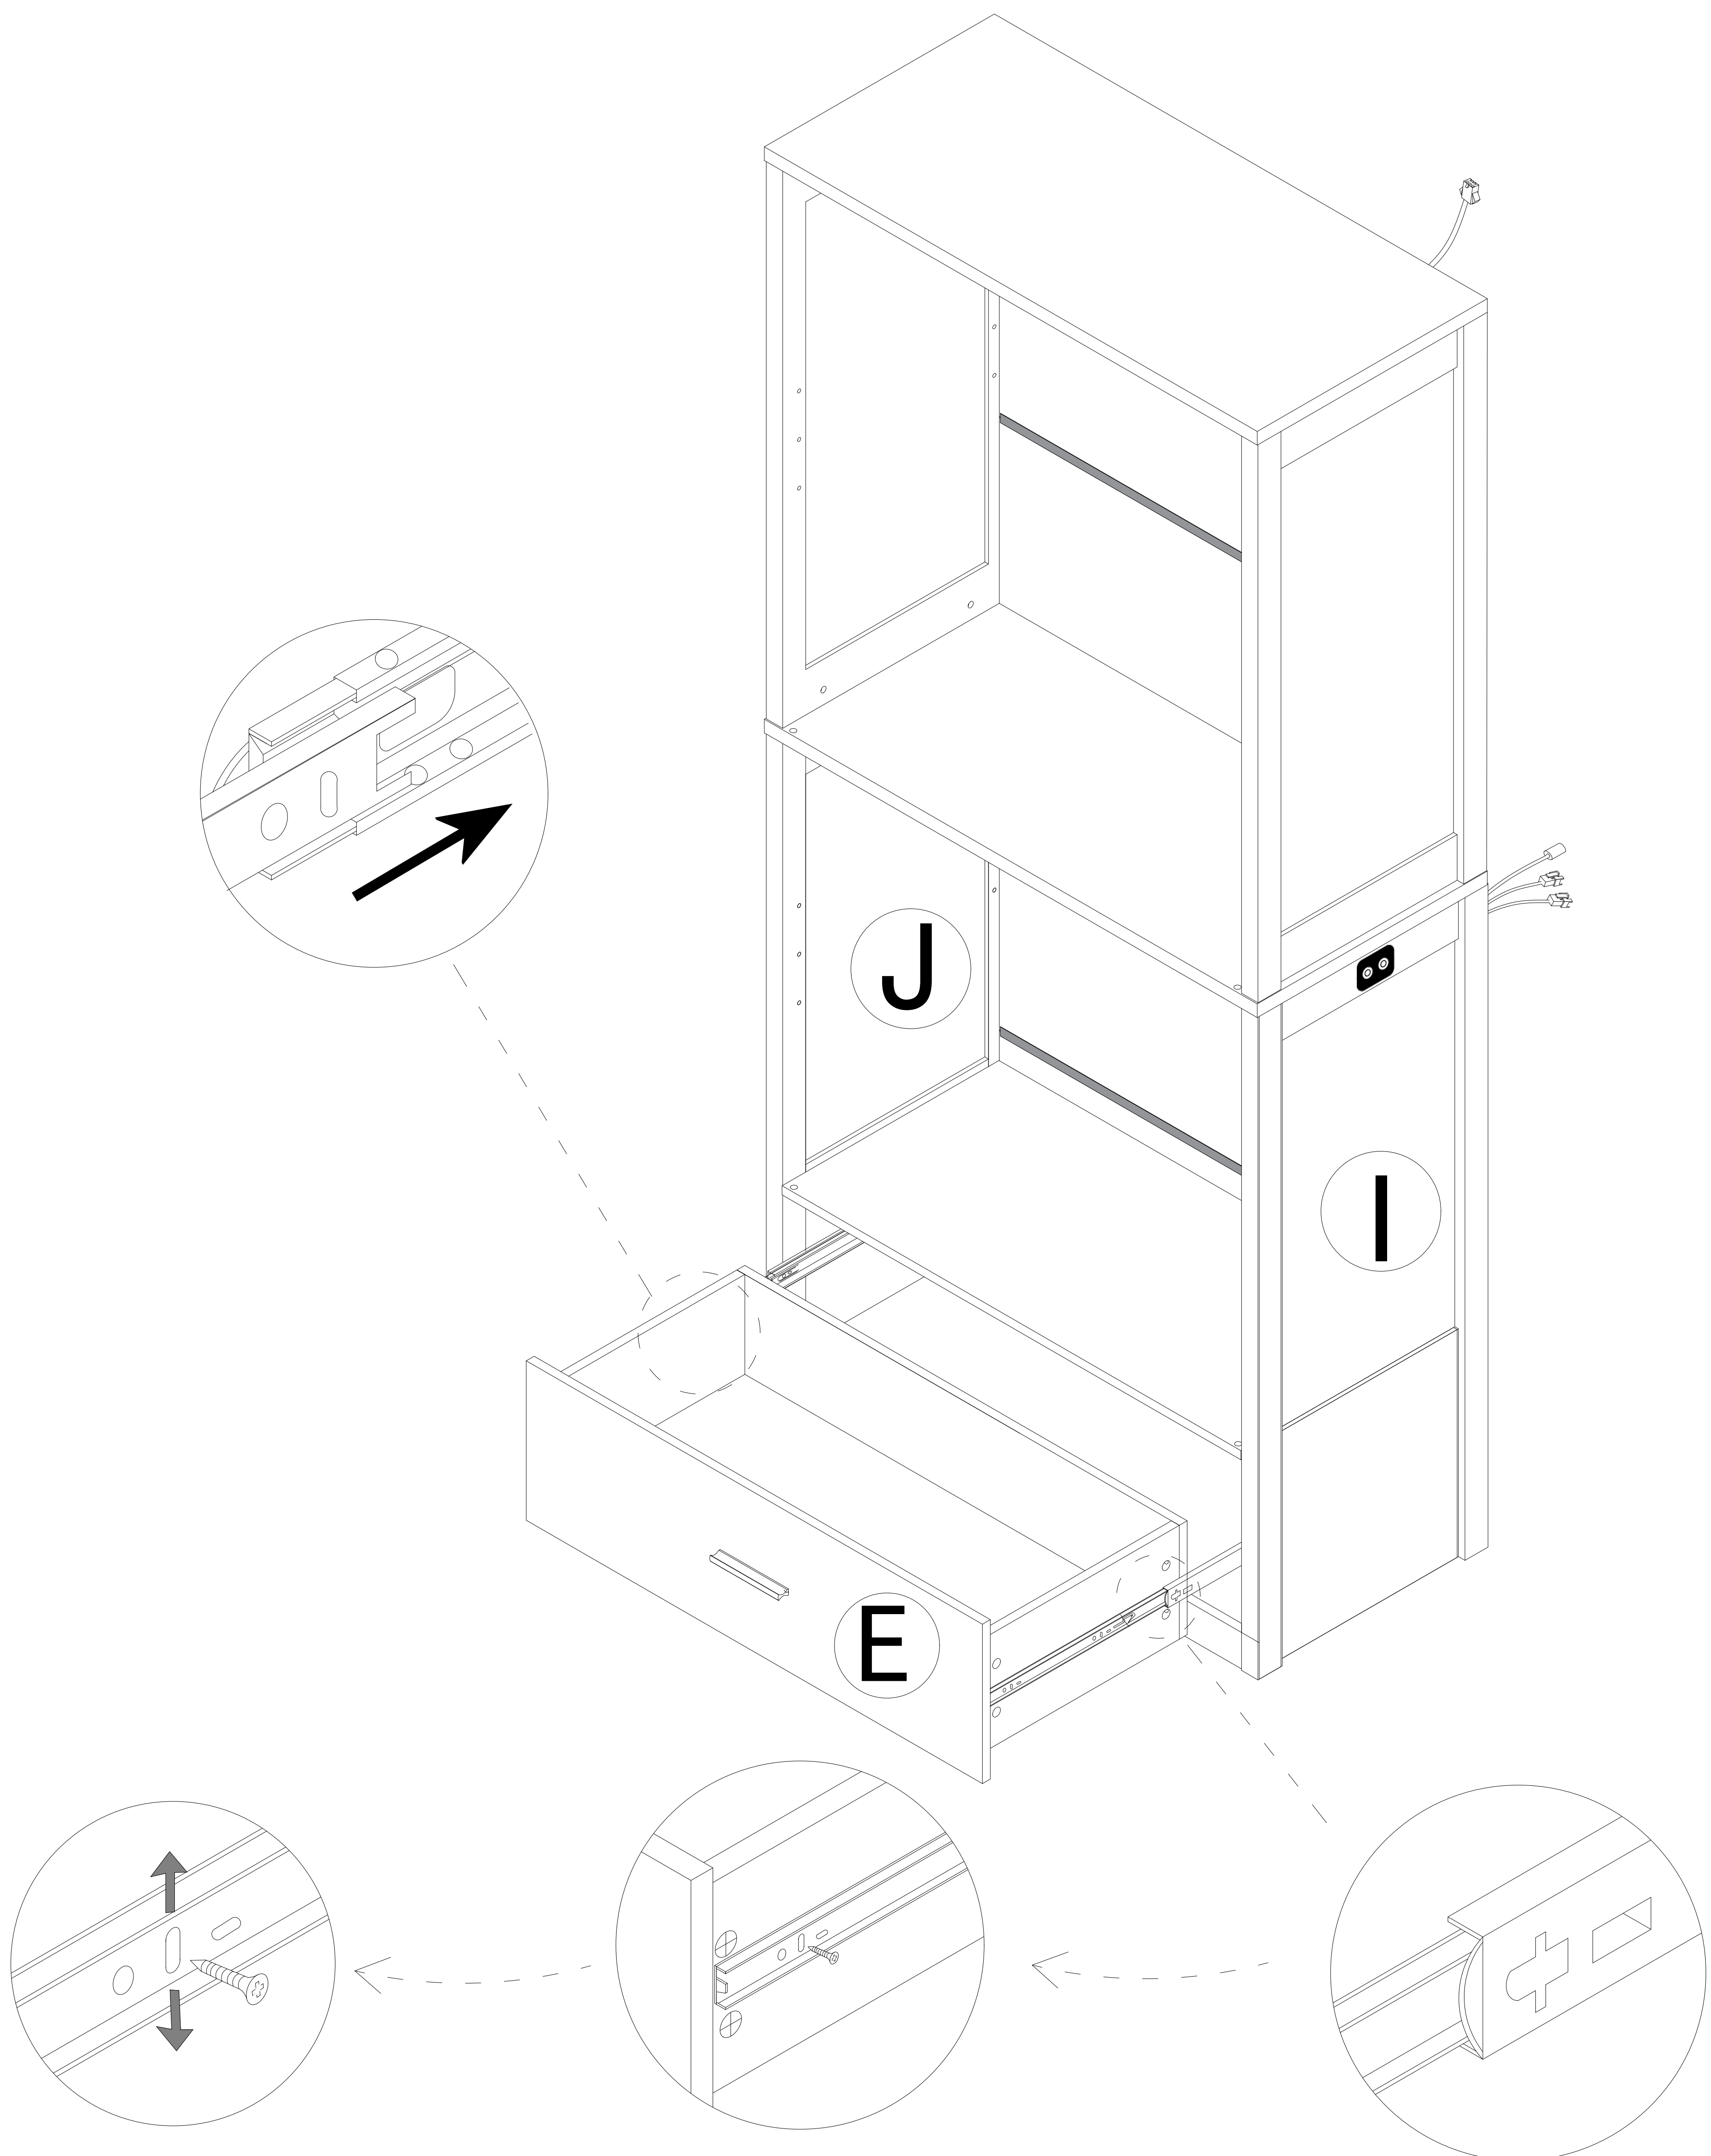


If a large gap is found after installing the drawer the slide rail can be moved up and down to adjust the gap

Step 29


7



x8

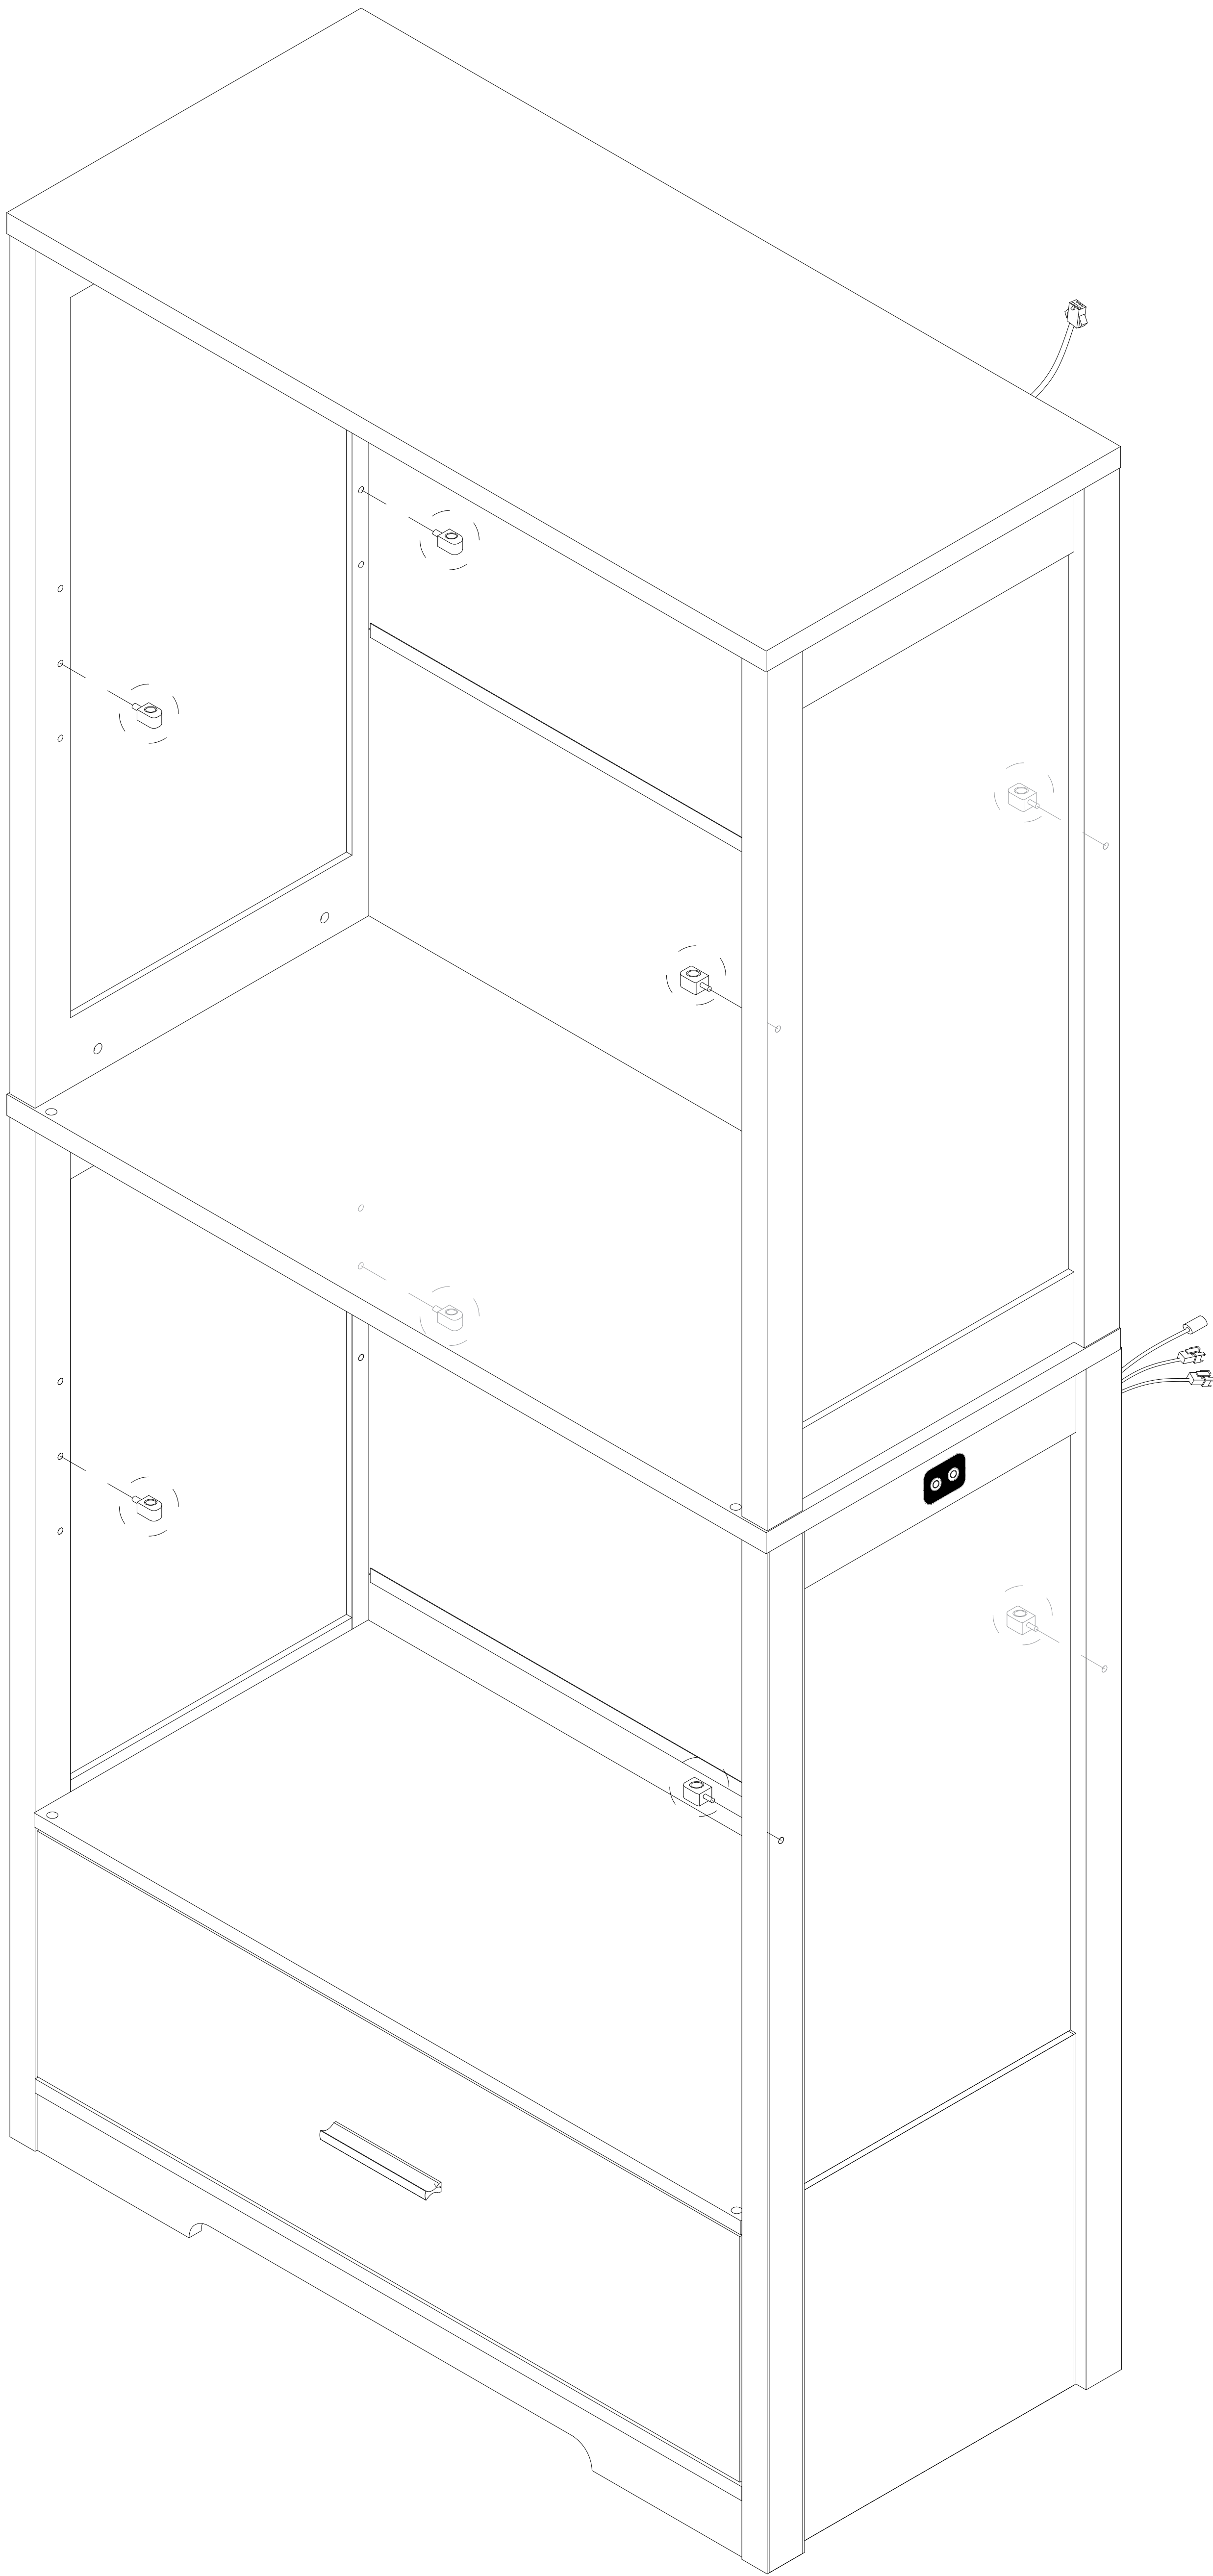


Step 30

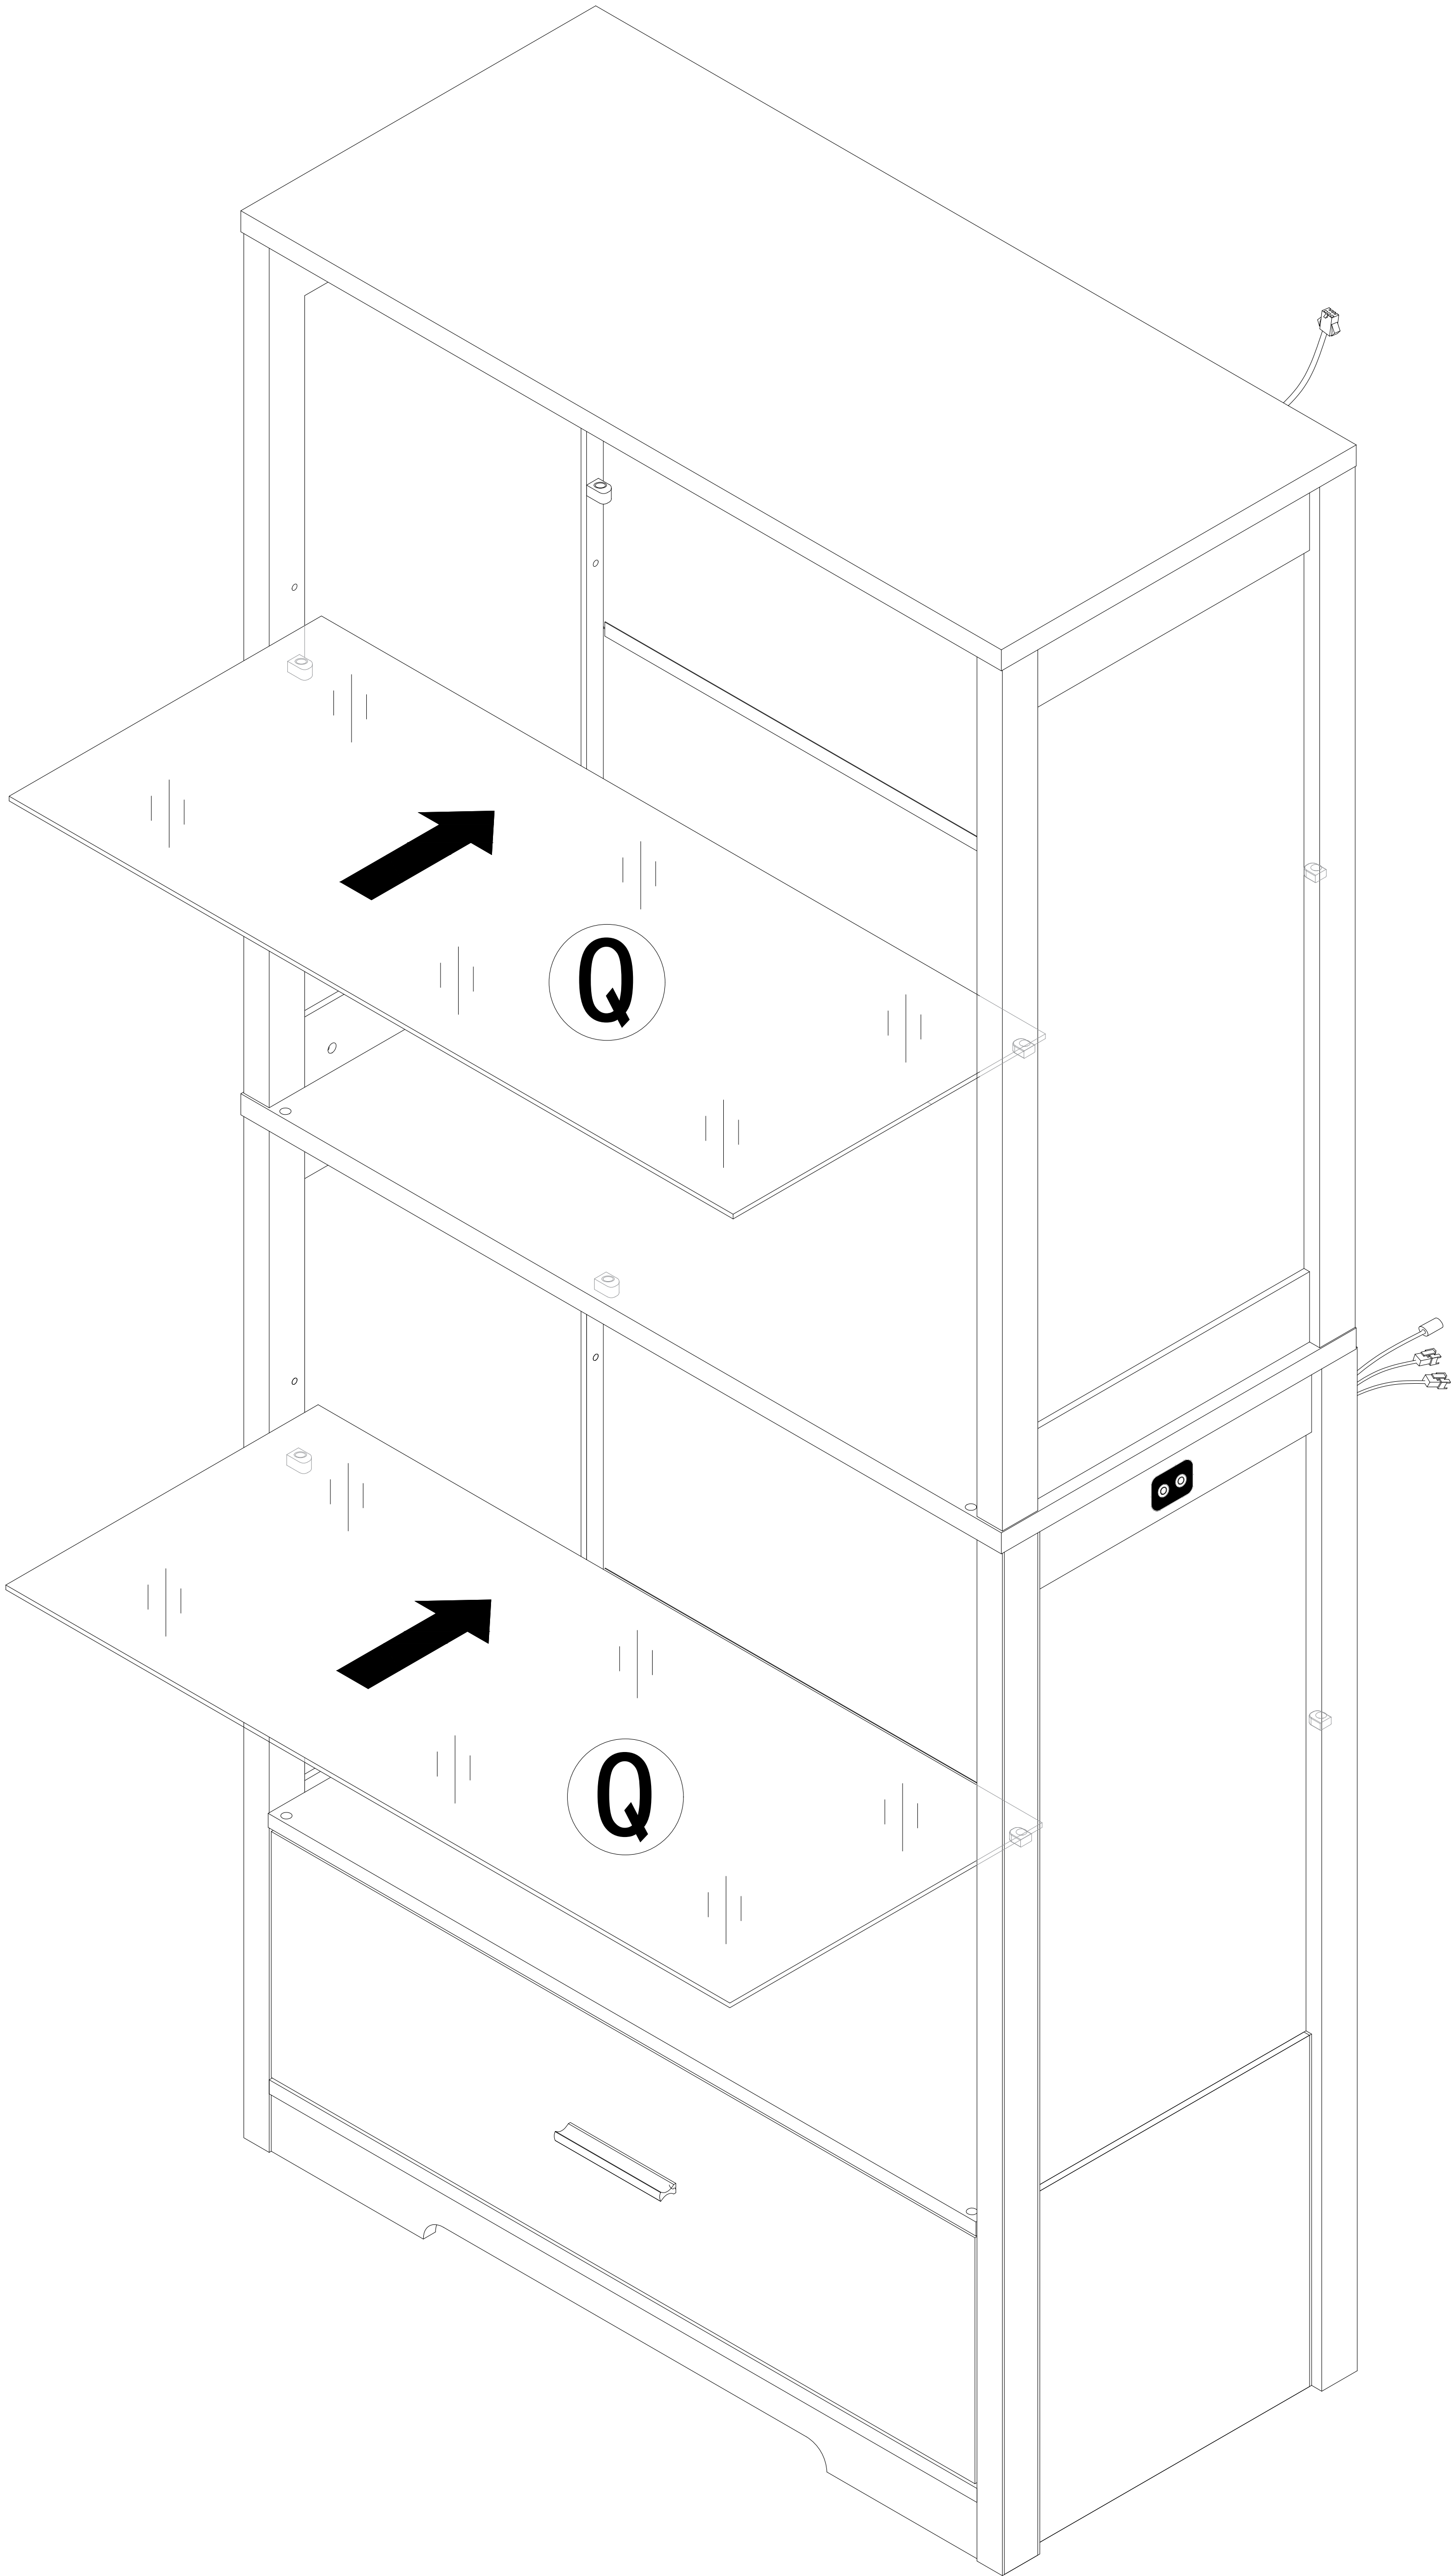


Step 31



First, completely unscrew the screws on the parts

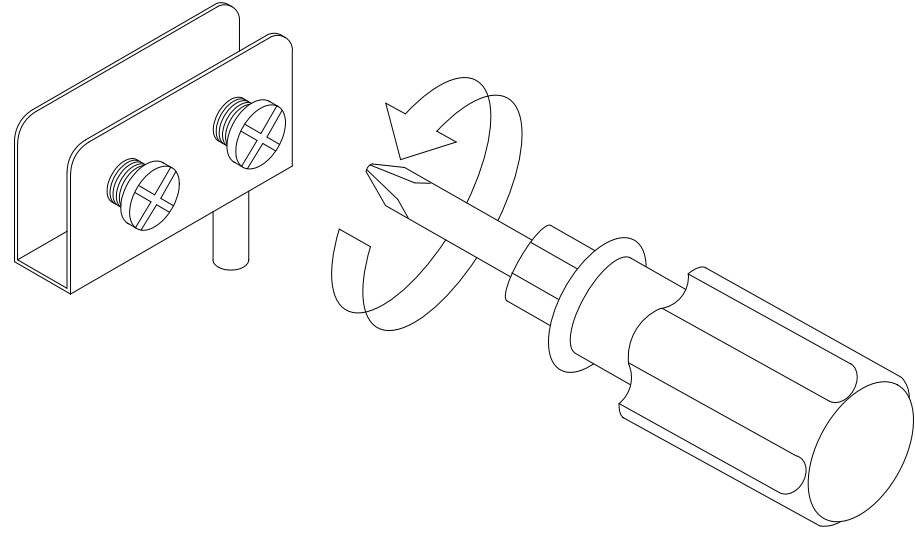

Then take out the black rubber pad from the inside of the part, and the white sponge remains unchanged inside the part.

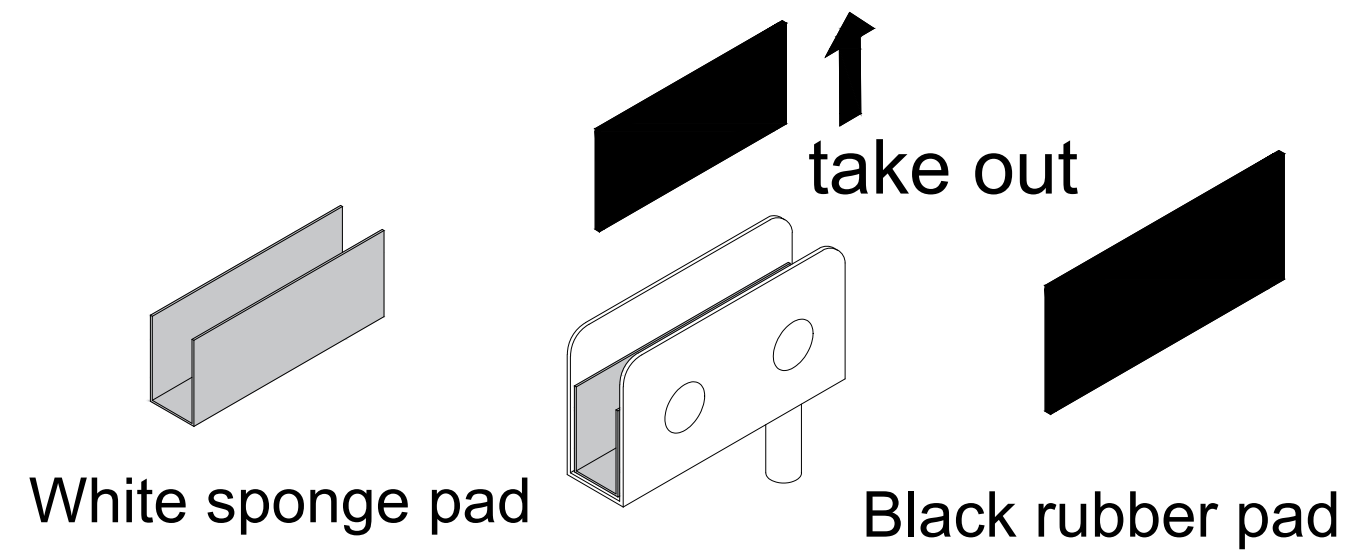

6

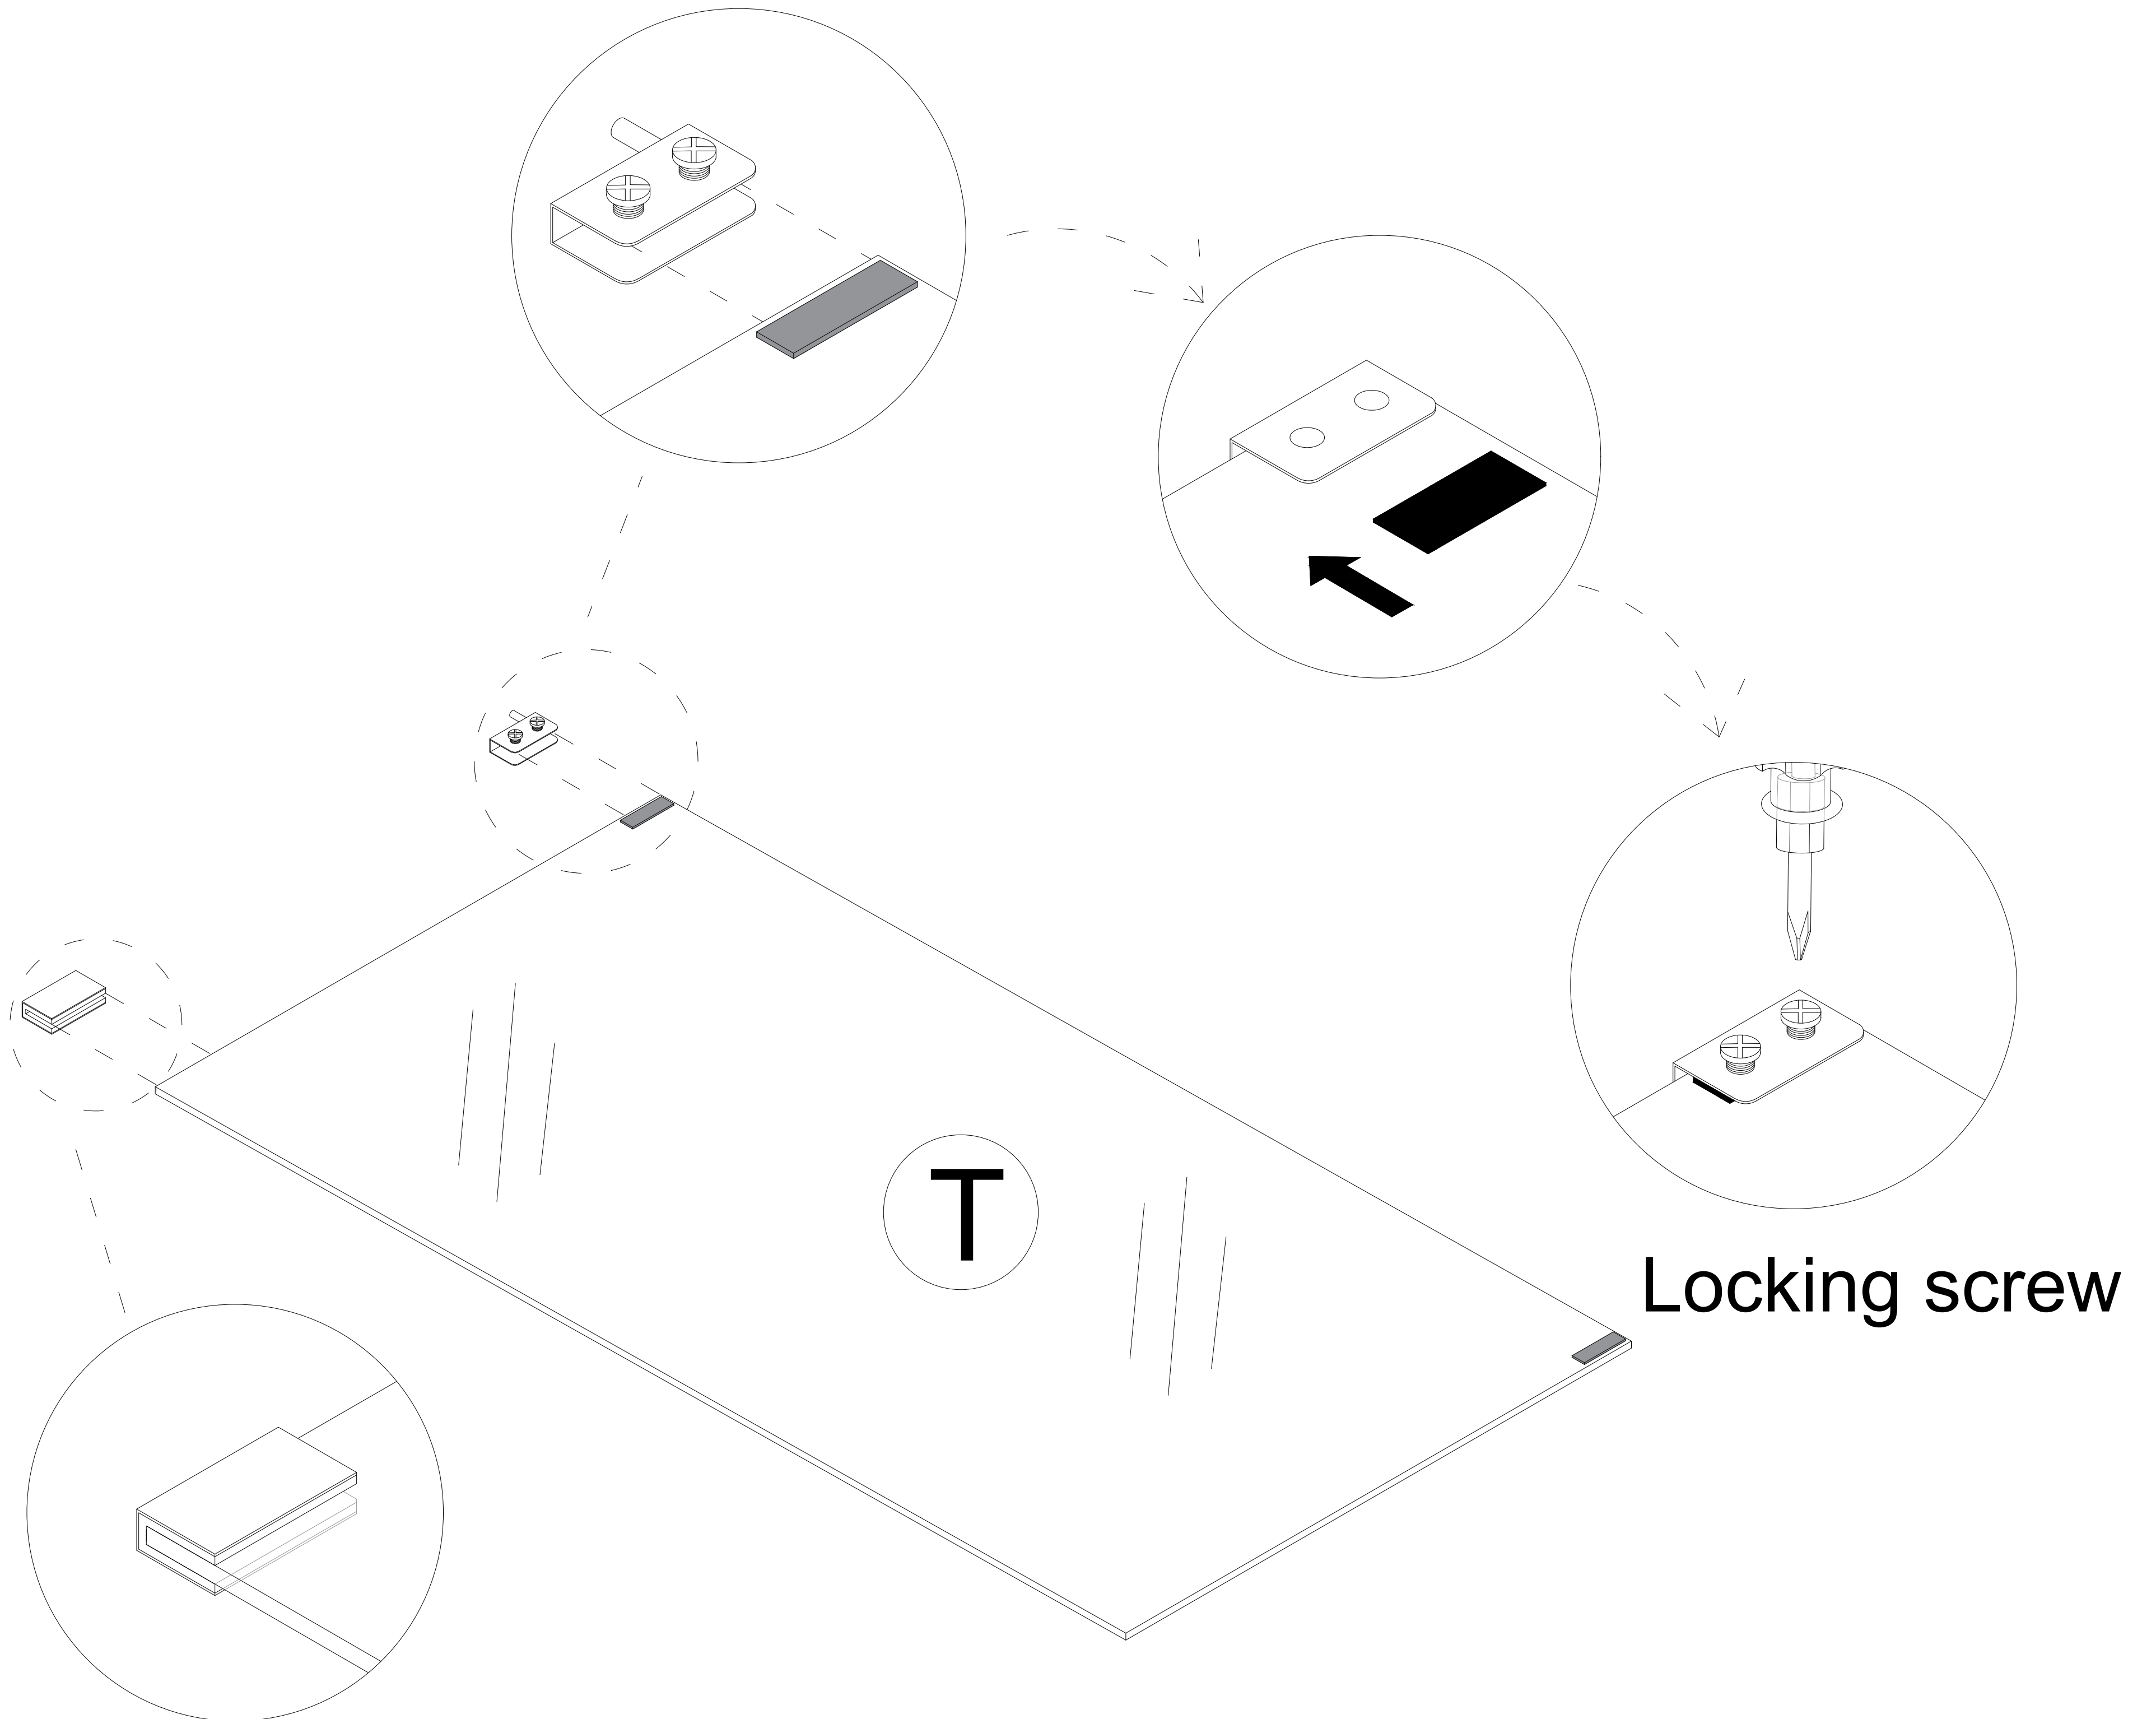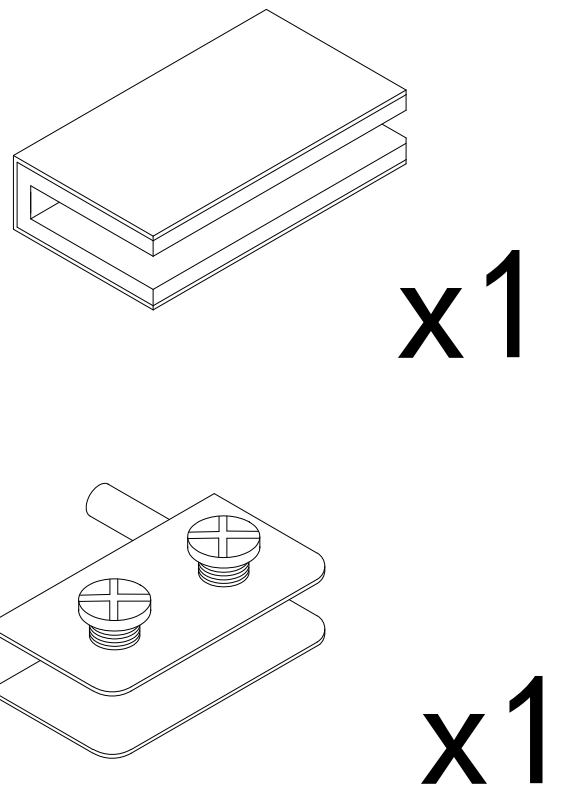


Pay attention to the direction of the door hinge, rotate the screws to compress the black gasket, and do not place it in the opposite direction


Place the black gasket on the side where the screws are installed

Step 32


6

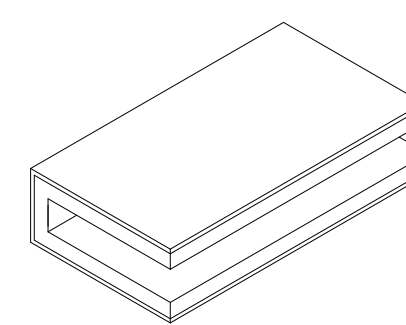

x1

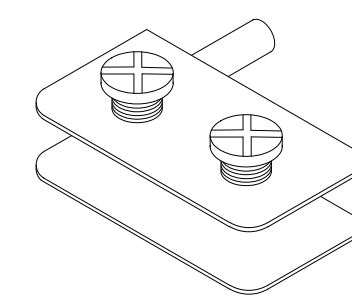

x1

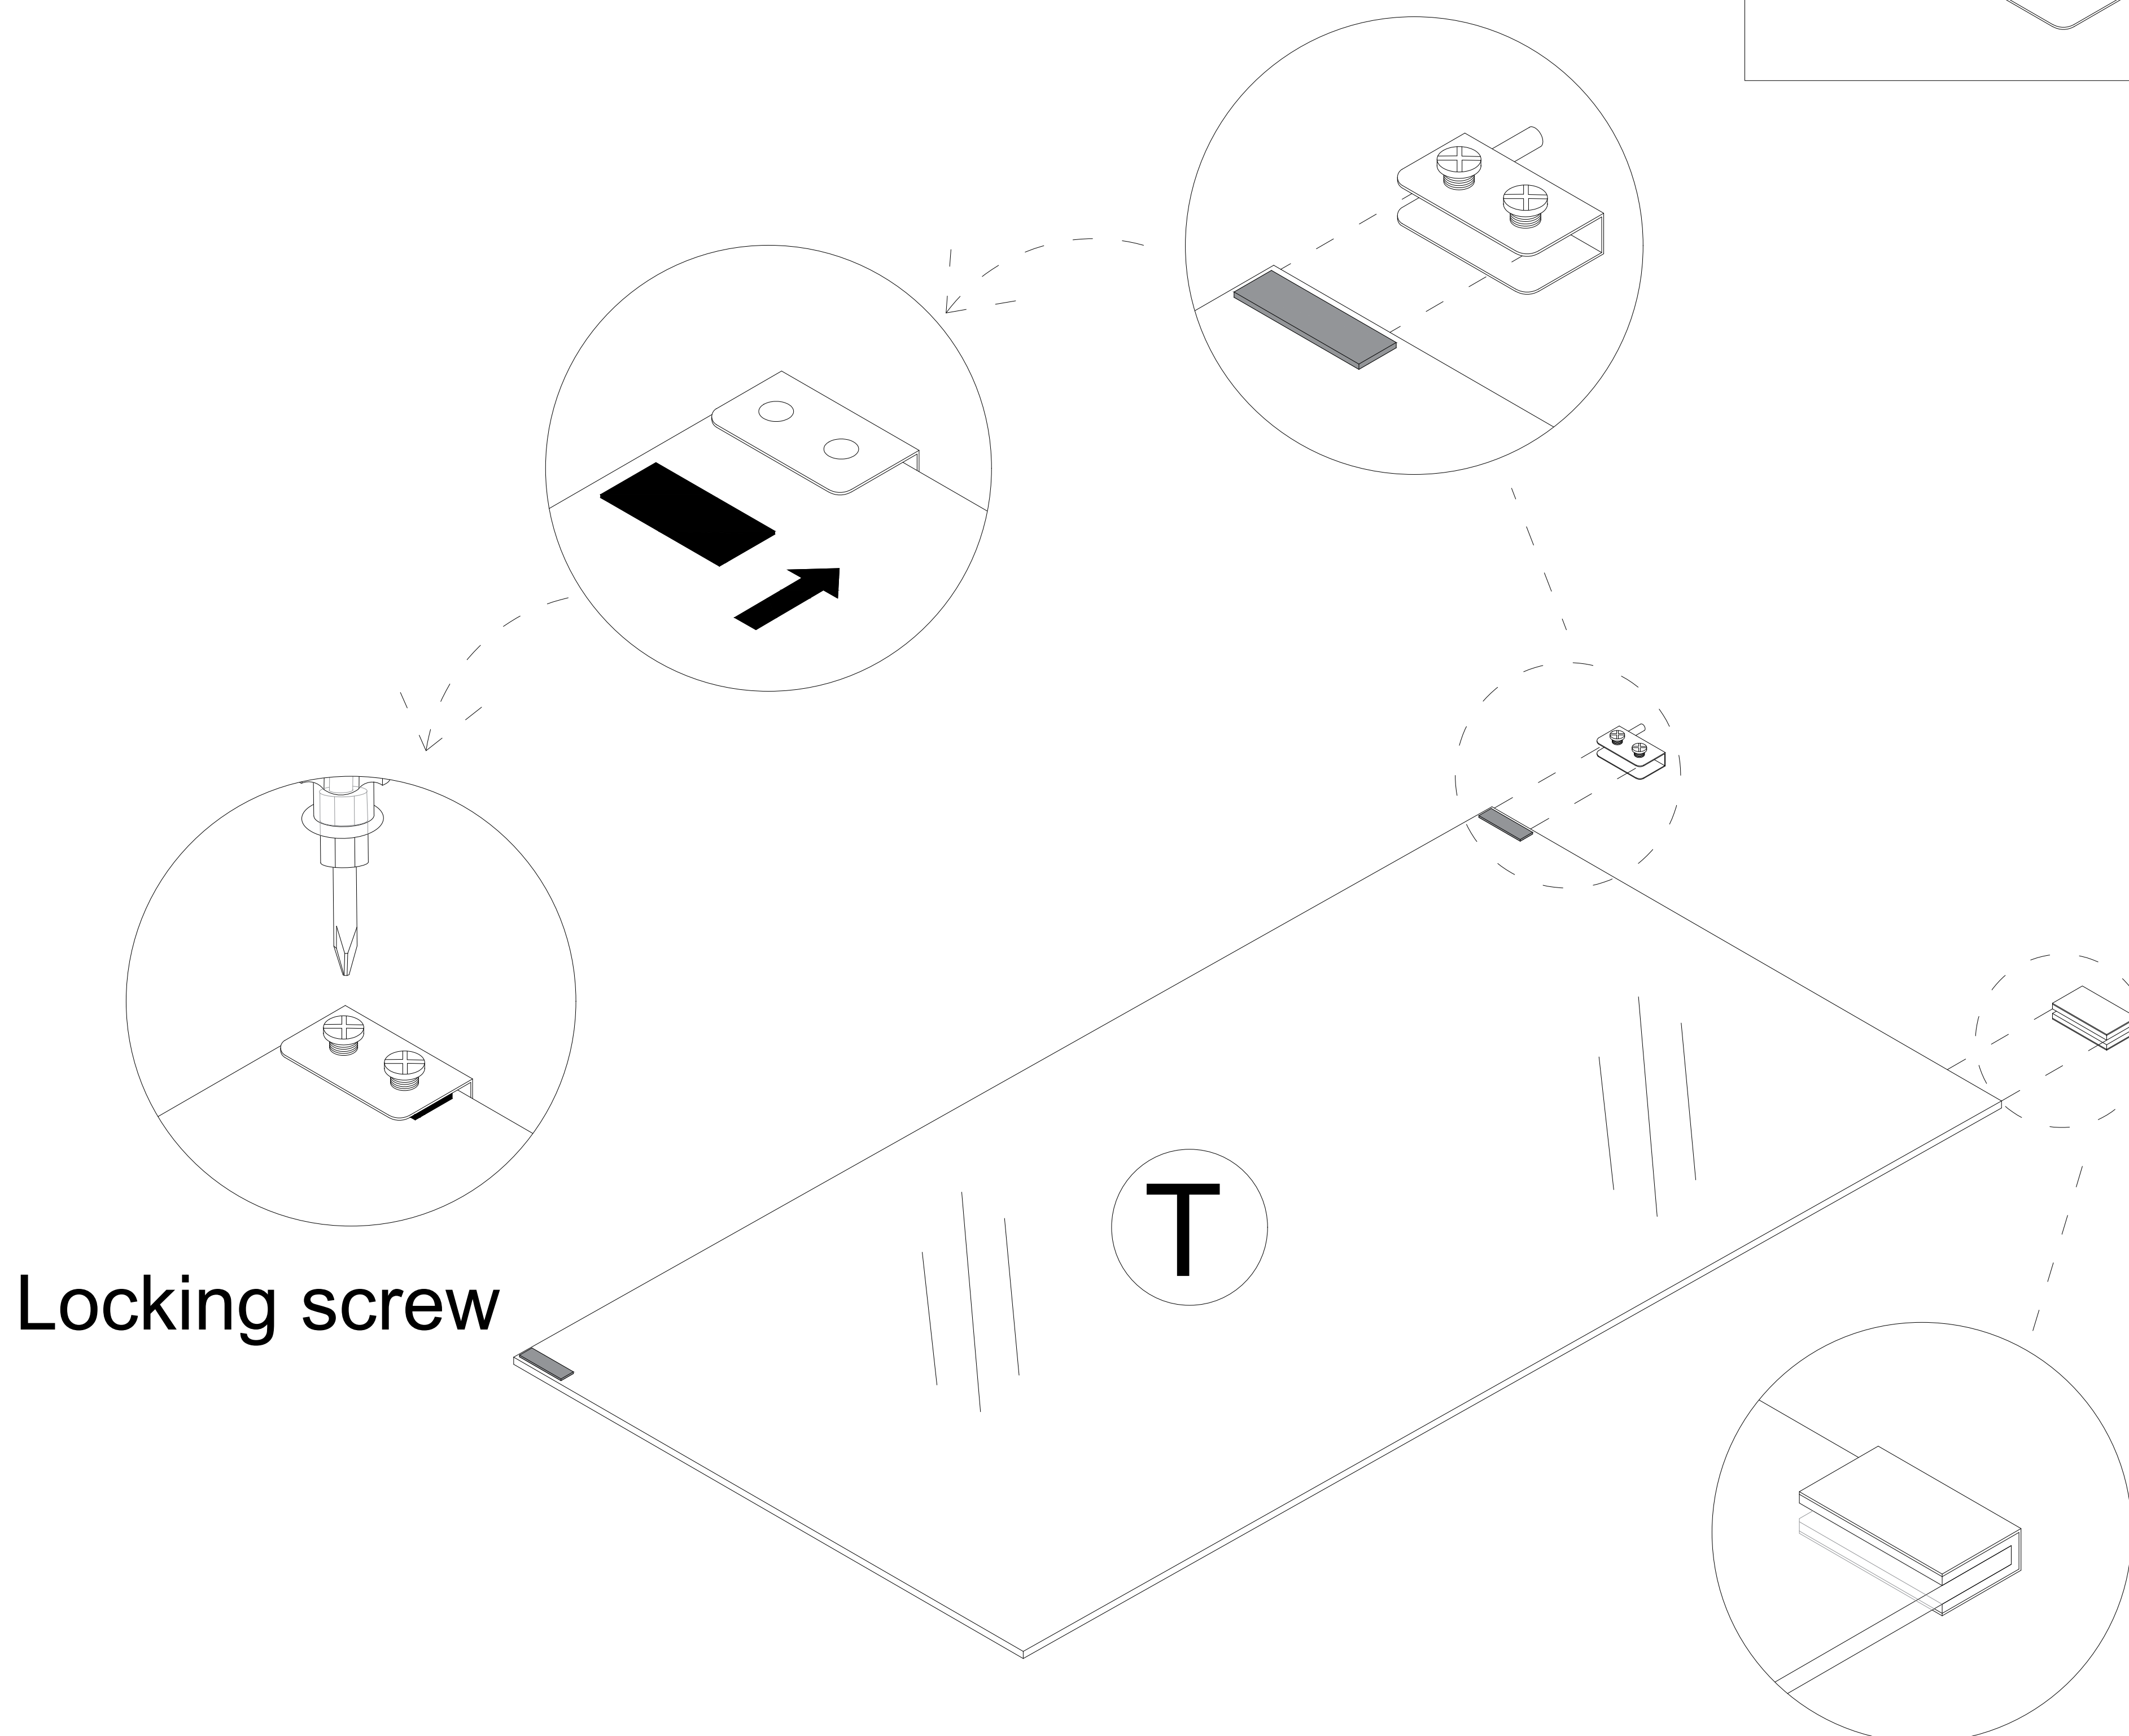


Locking screw


Pay attention to the direction of the door hinge,
rotate the screws to compress the black gasket,
and do not place it in the opposite direction

Place the black gasket on the side
where the screws are installed

Step 33


6









x1

6







x1

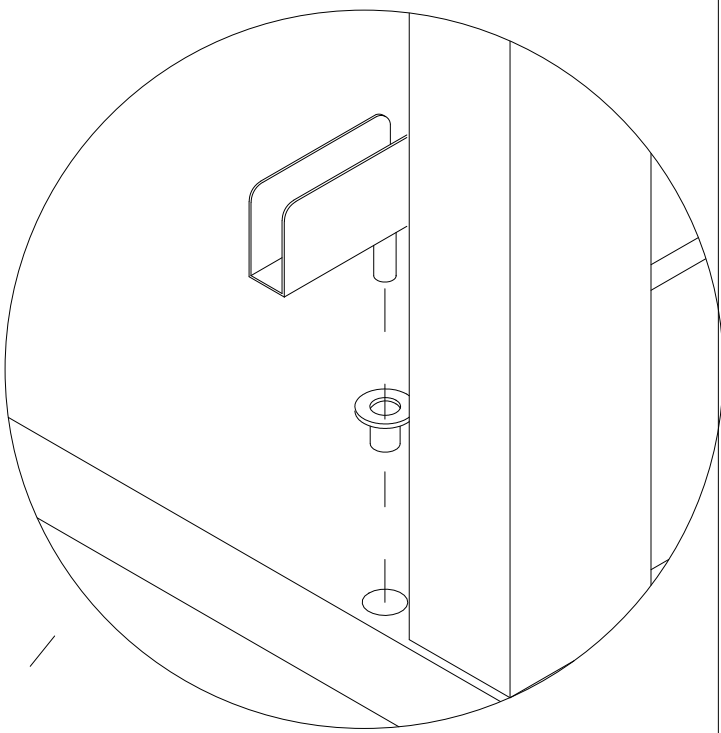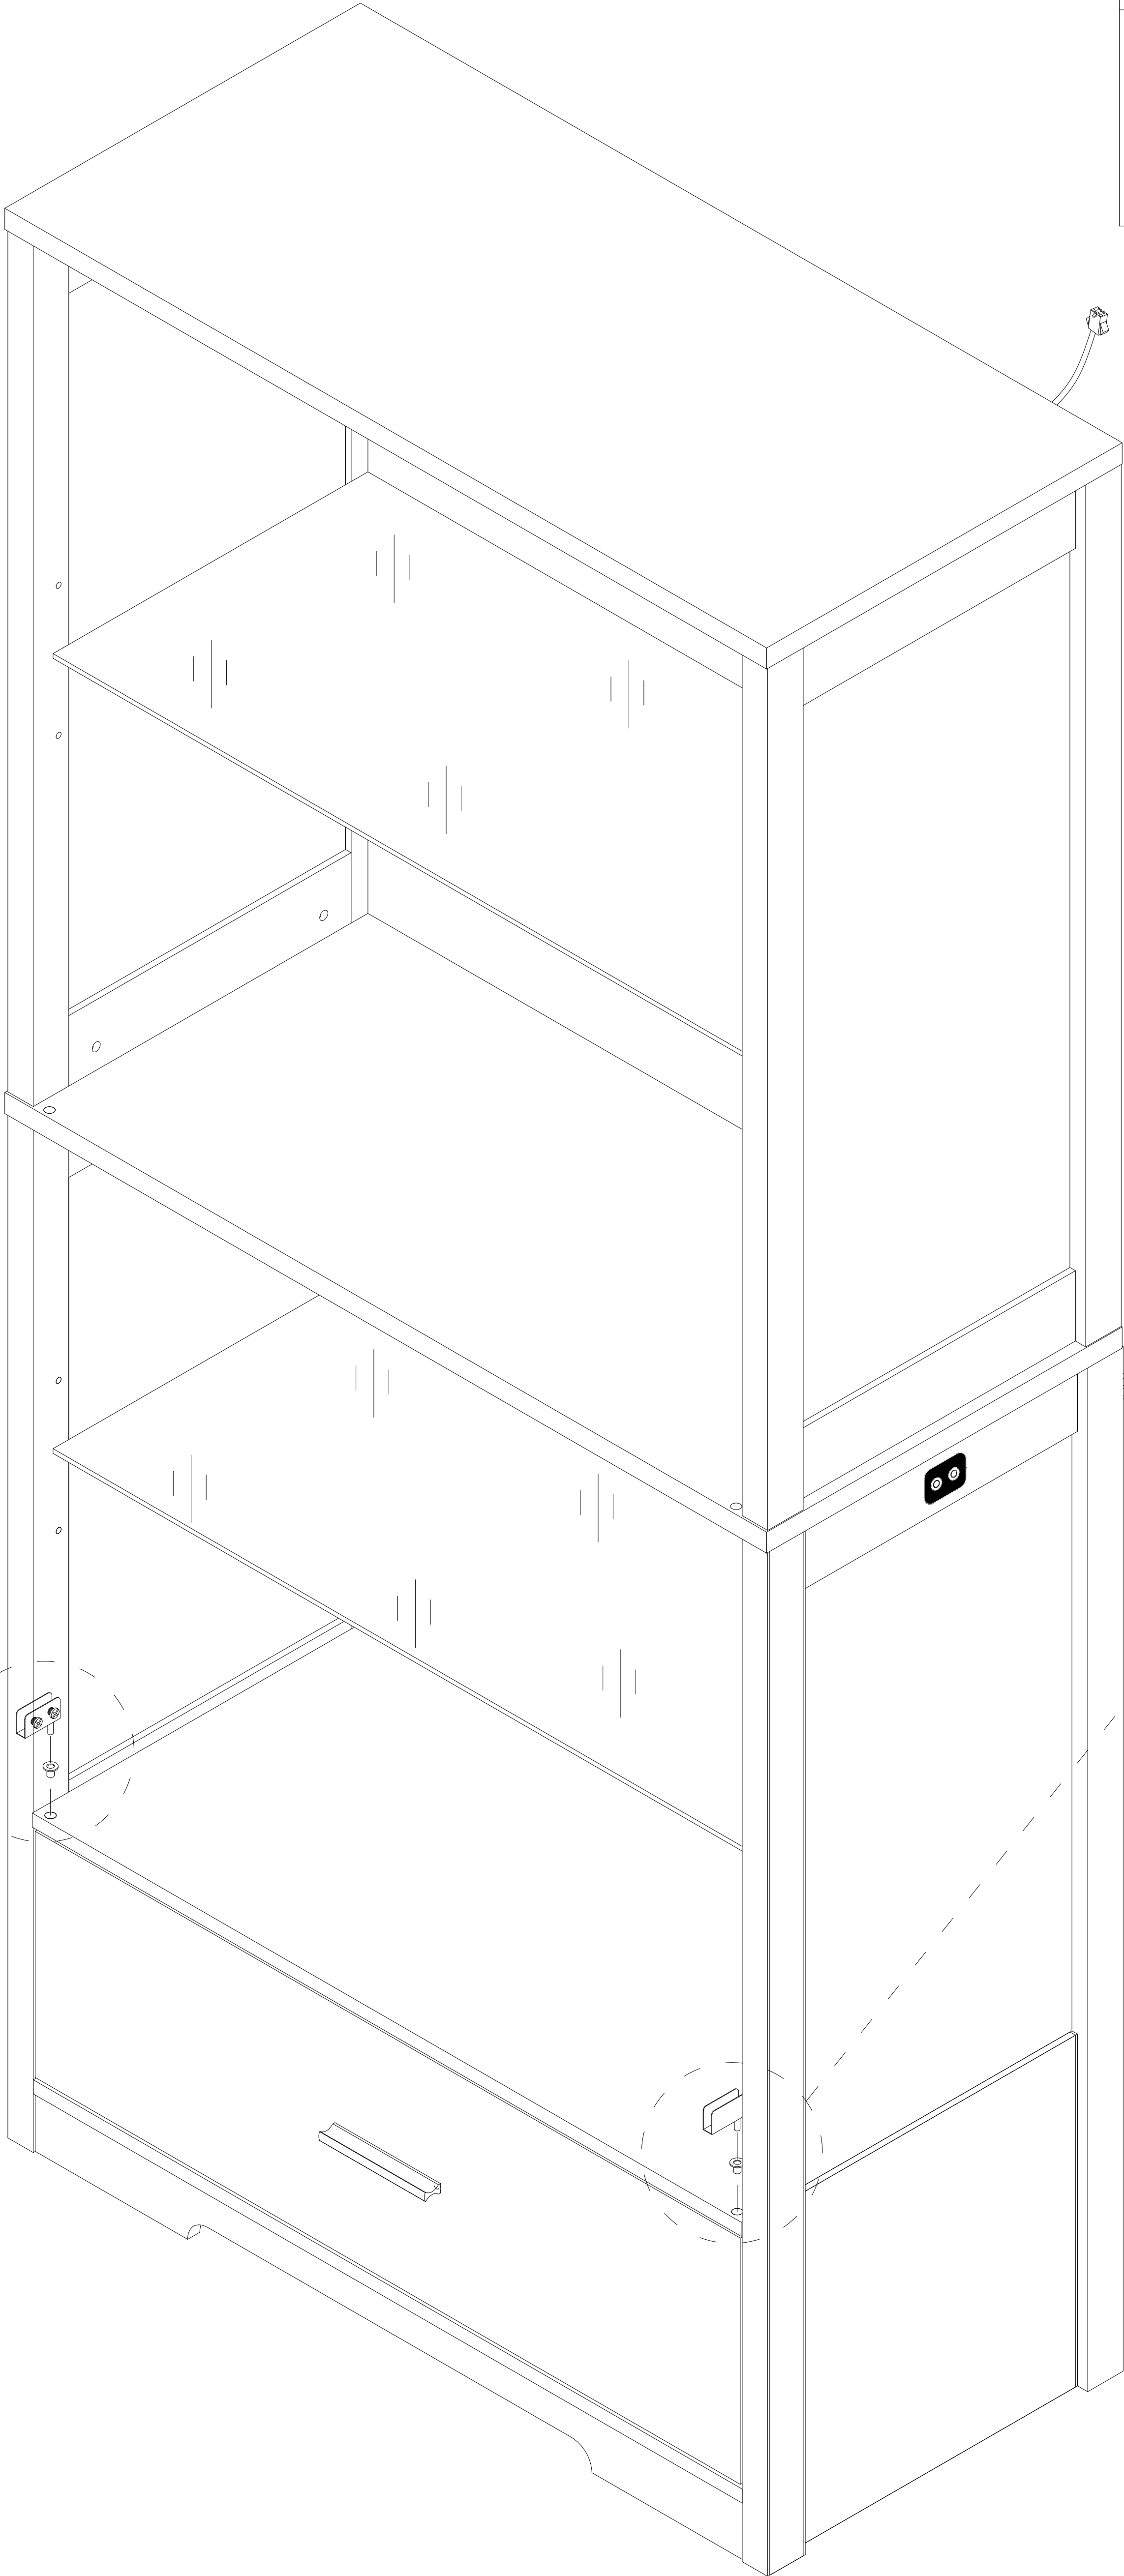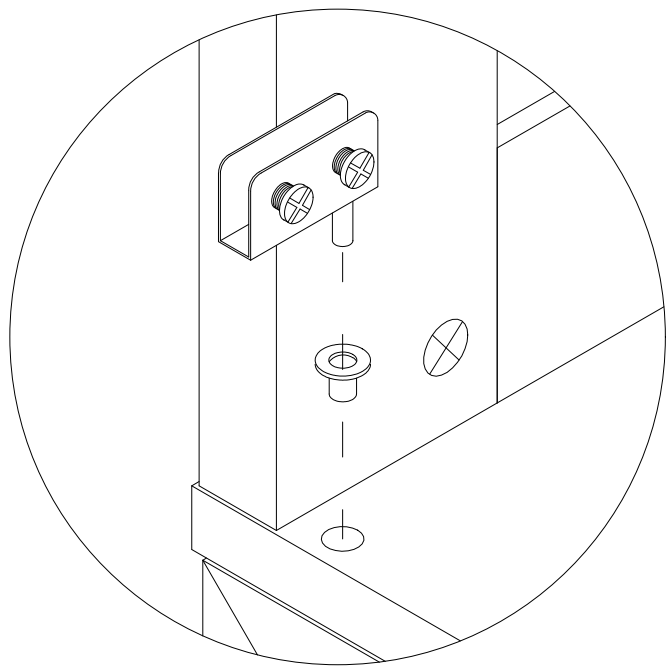


Step 34

6 
x2

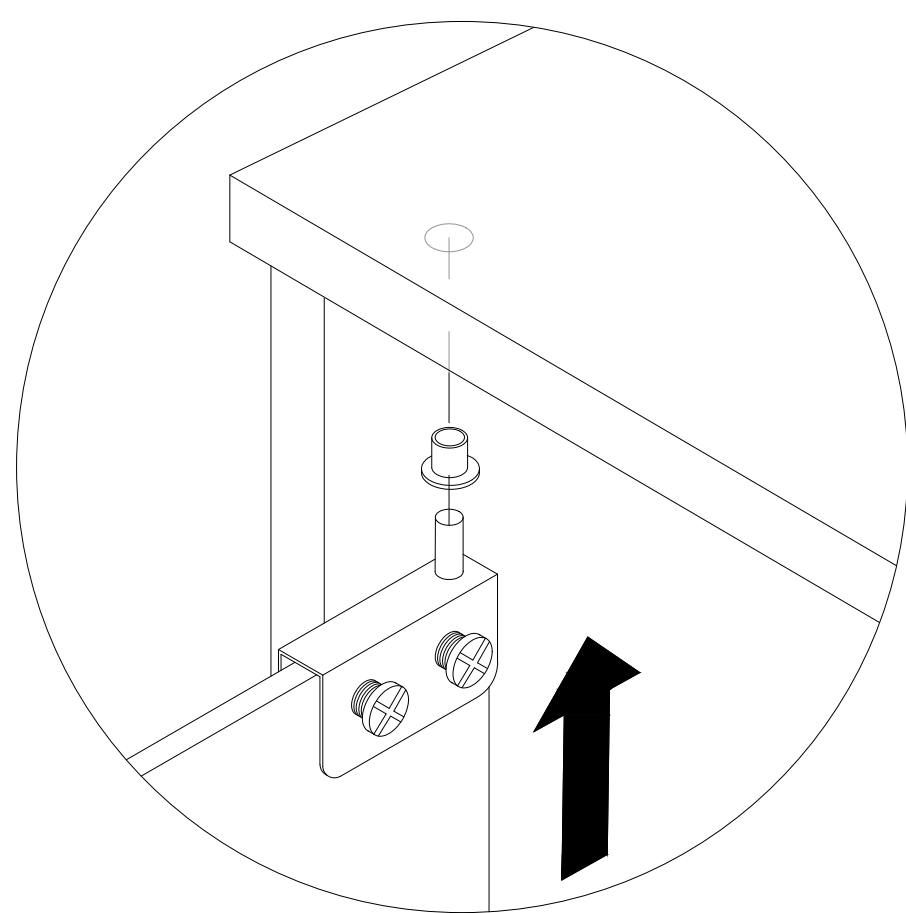


first

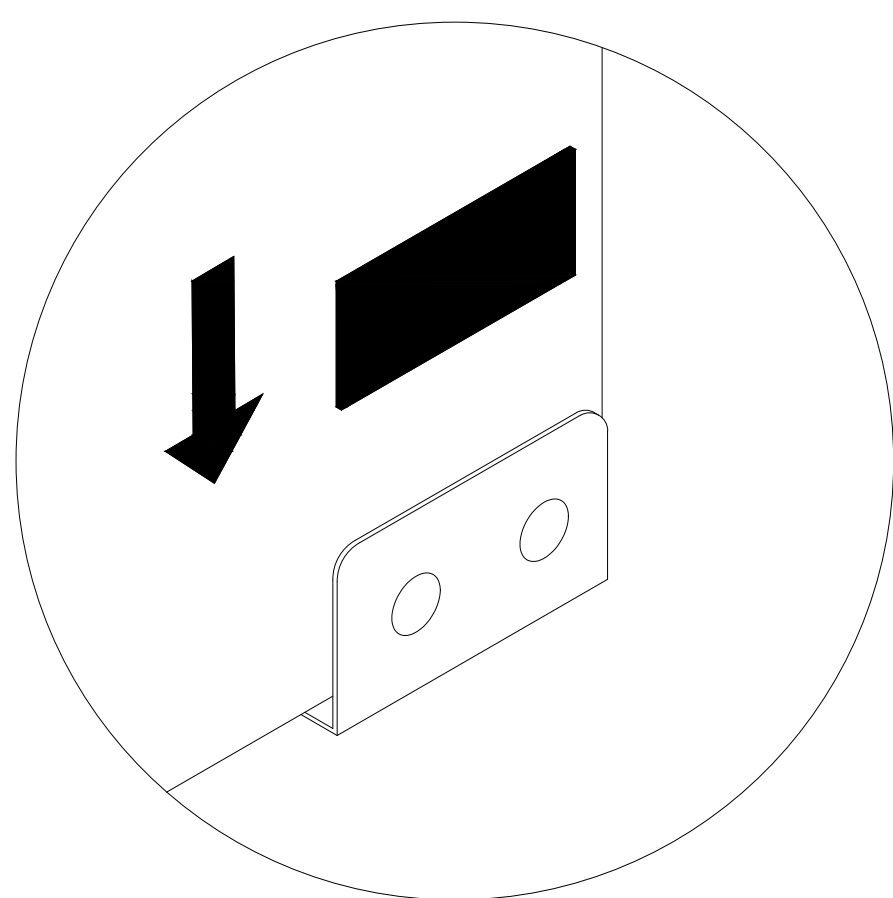


second

After installing the glass door, place the black gasket on the side where the screws are installed

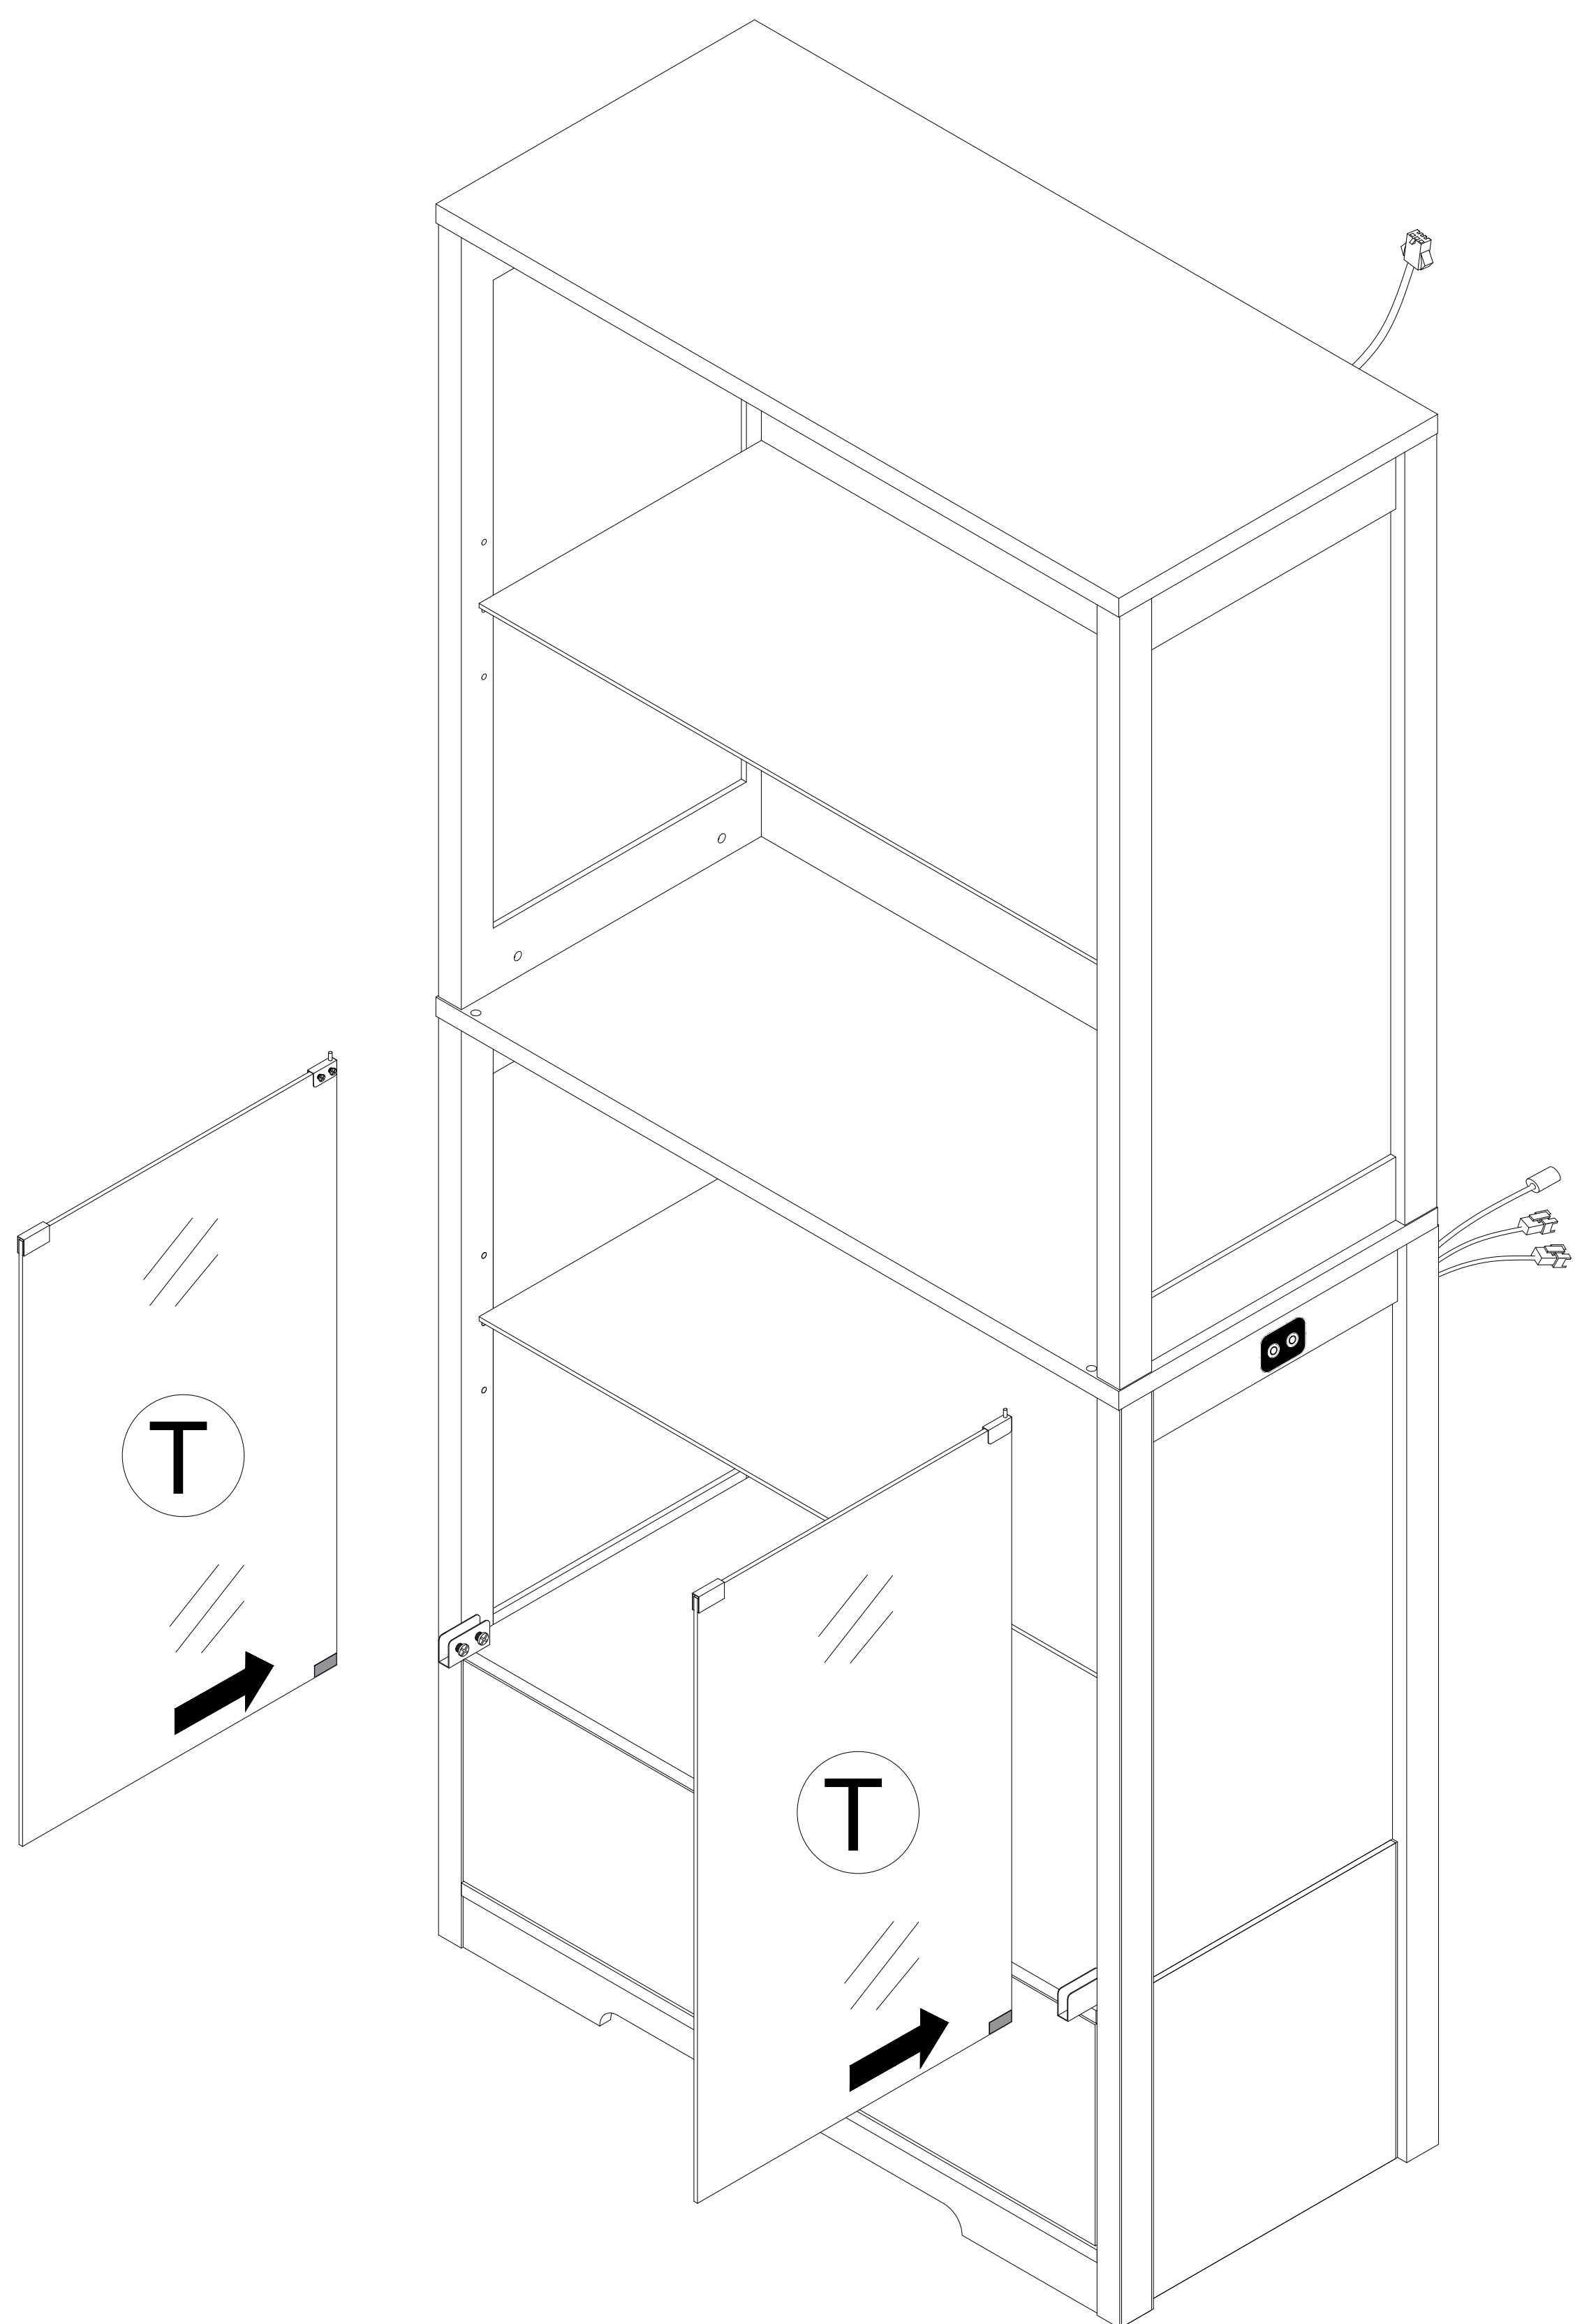

Pay attention to the direction of the door hinge during installation

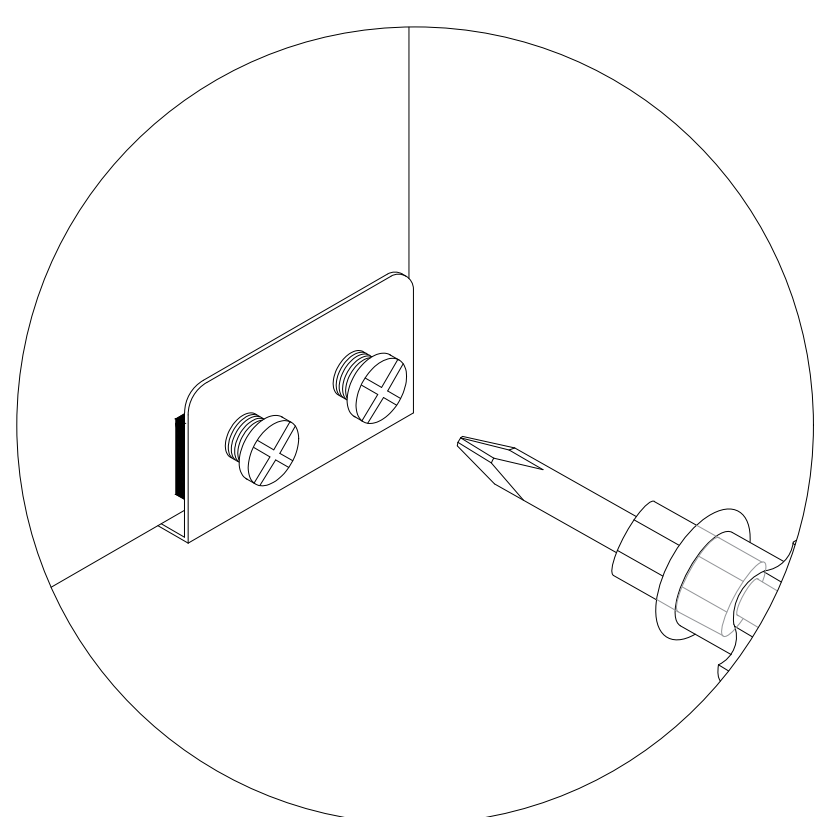


third

Locking screw


When installing a glass door, it is recommended to have two people install it to avoid the glass door colliding or hitting oneself.

Step 35


First, completely unscrew the screws on the parts

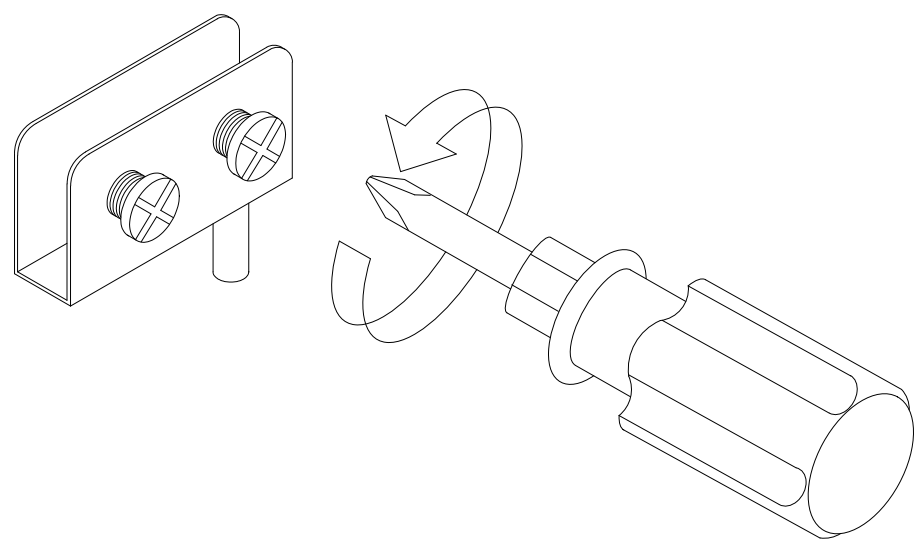


Then take out the black rubber pad from the inside of the part, and the white sponge remains unchanged inside the part.

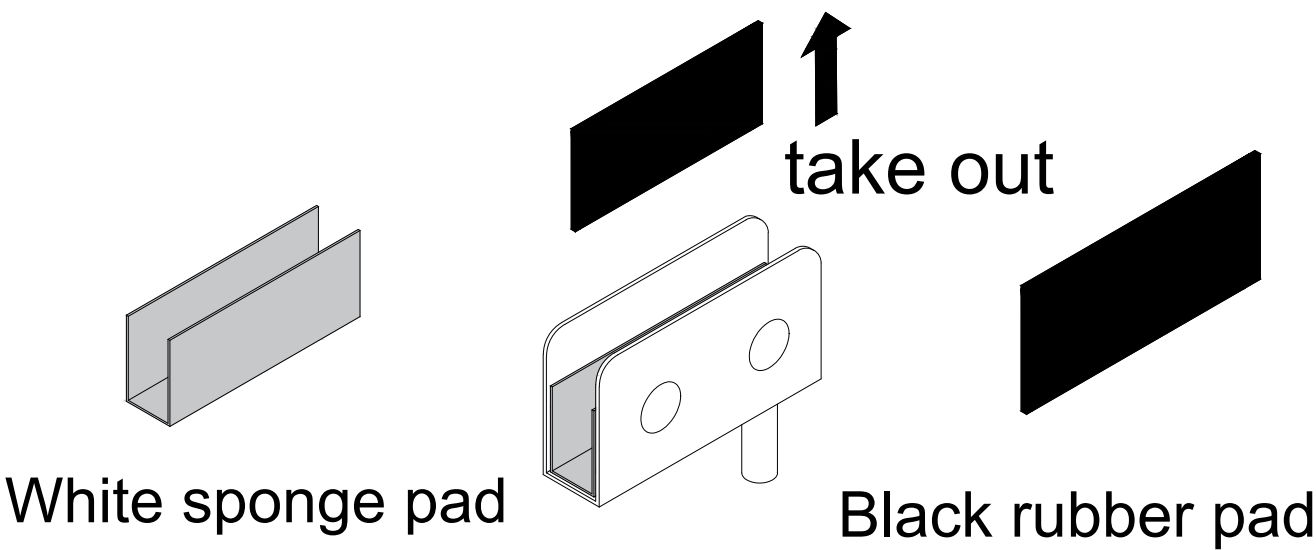


6

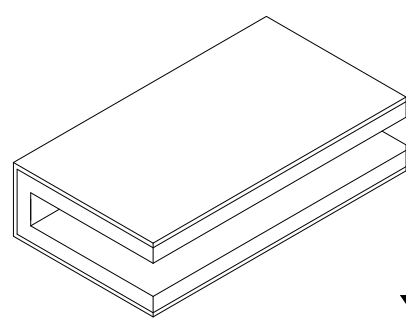

x1

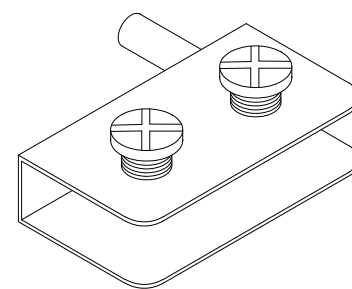

x1

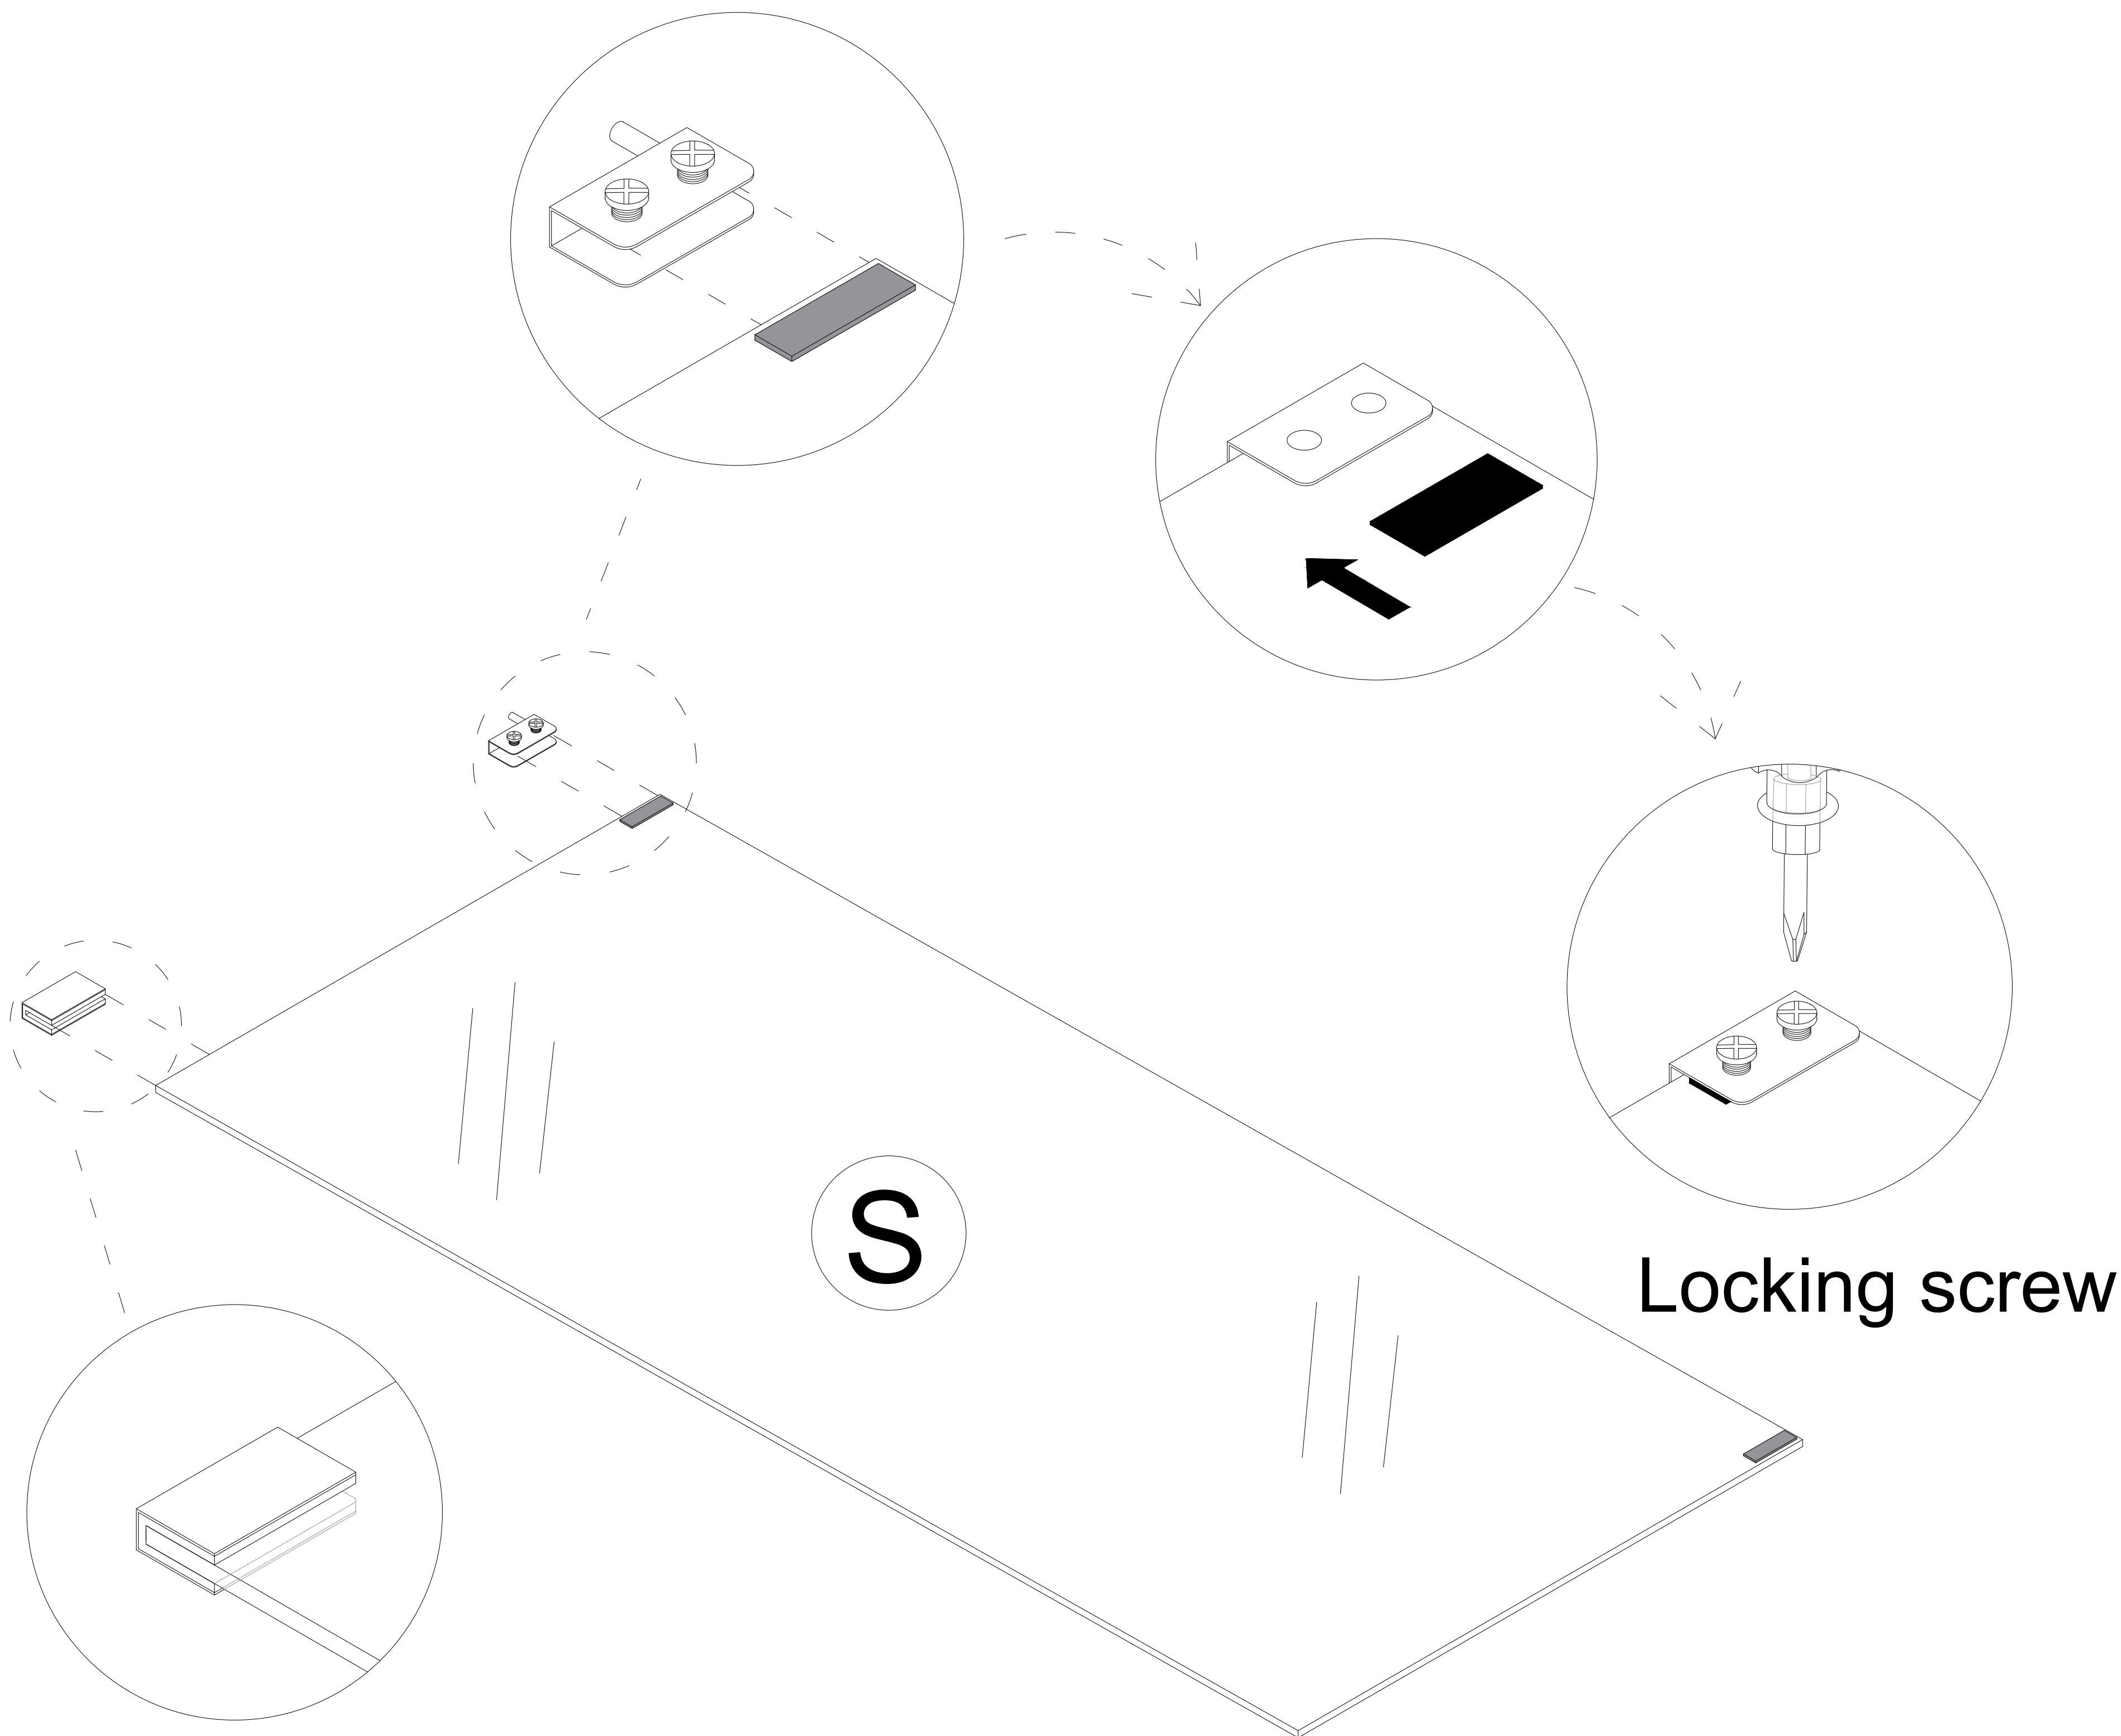


Pay attention to the direction of the door hinge, rotate the screws to compress the black gasket, and do not place it in the opposite direction


Place the black gasket on the side where the screws are installed

Step 36

6

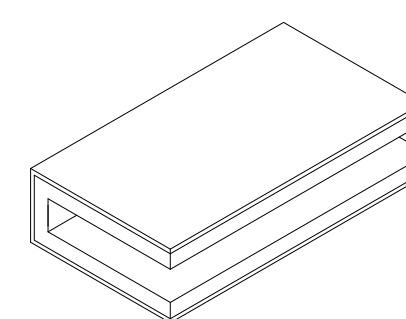

x1

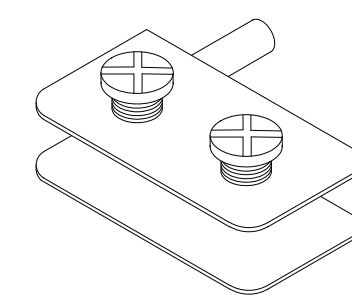

x1

Locking screw


S


Pay attention to the direction of the door hinge,
rotate the screws to compress the black gasket,
and do not place it in the opposite direction

Place the black gasket on the side
where the screws are installed


Step 37


- 6








x1
- 6







x1

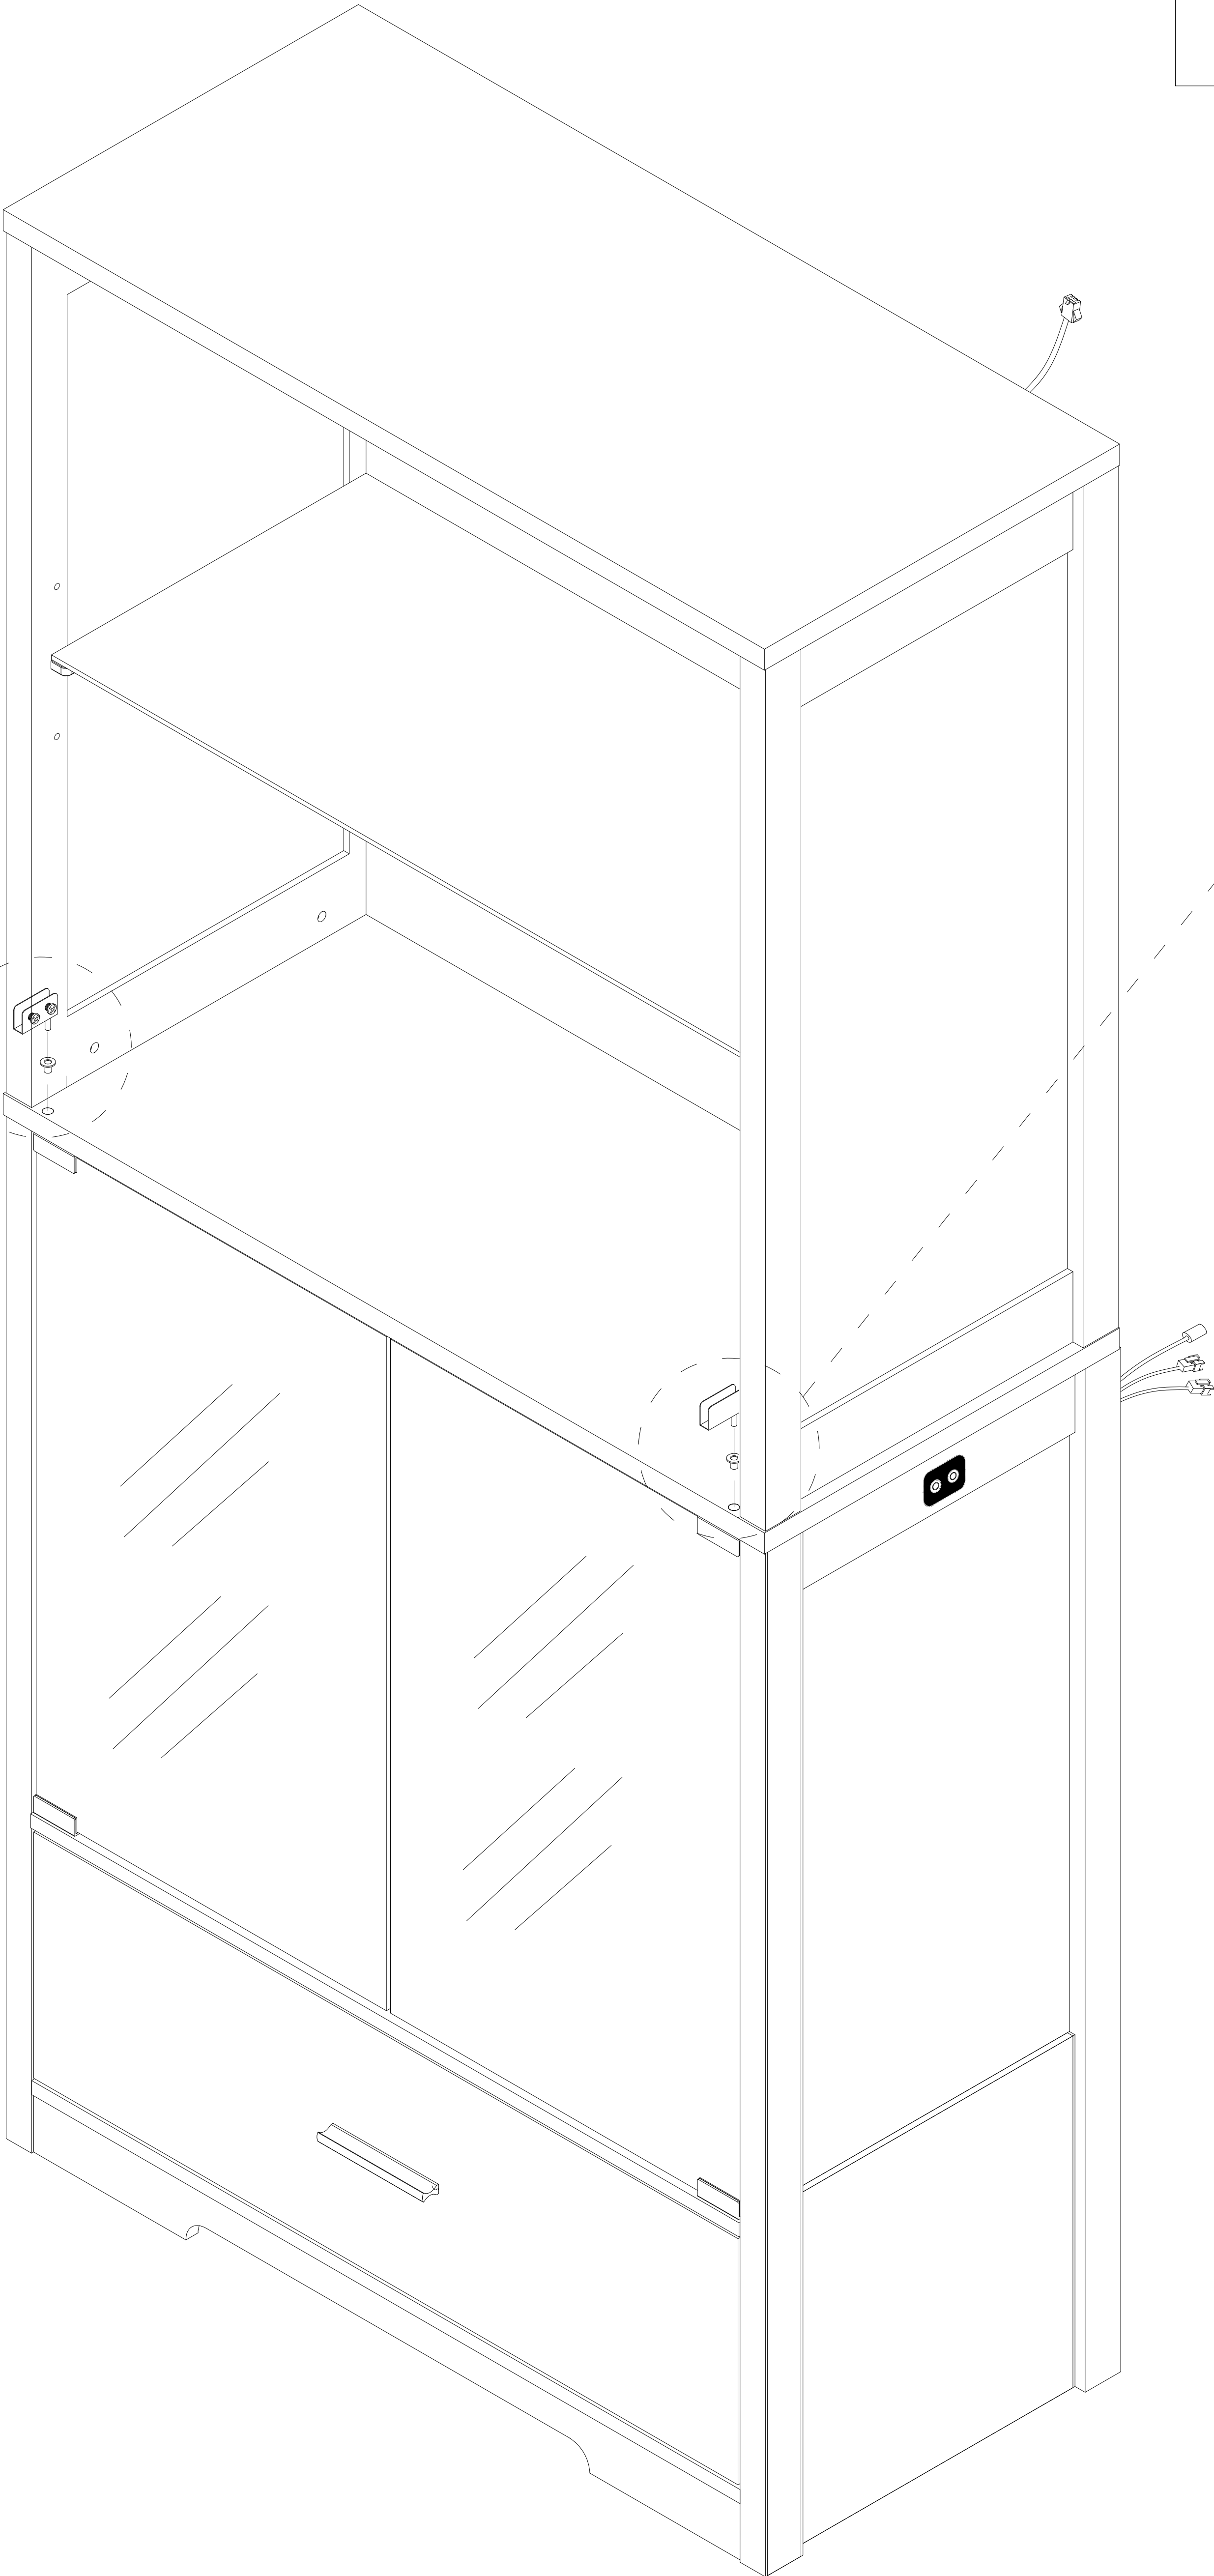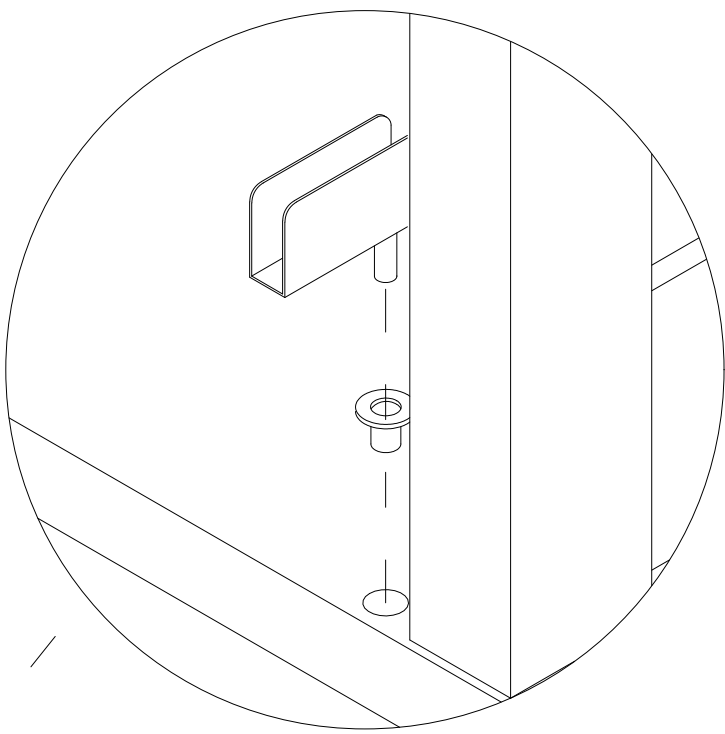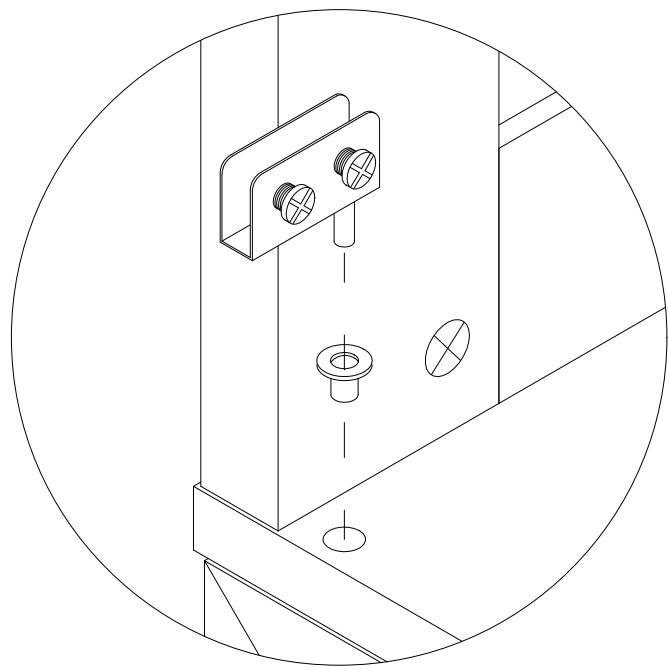


Step 38

6 
x2

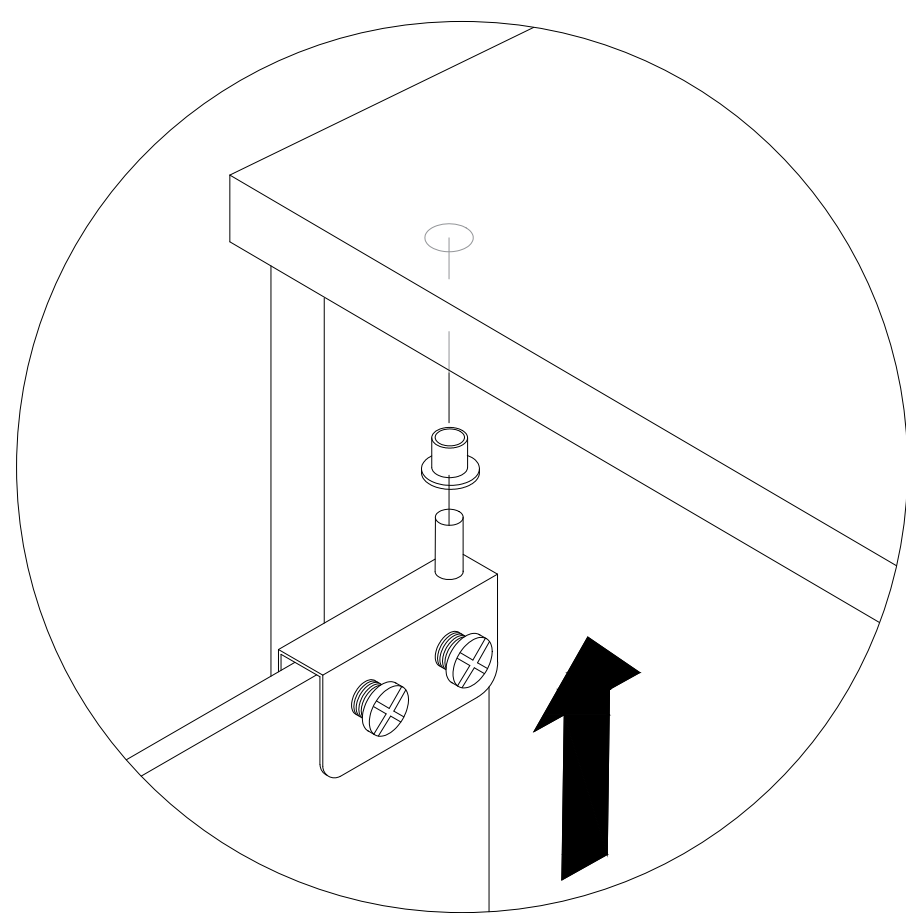


first

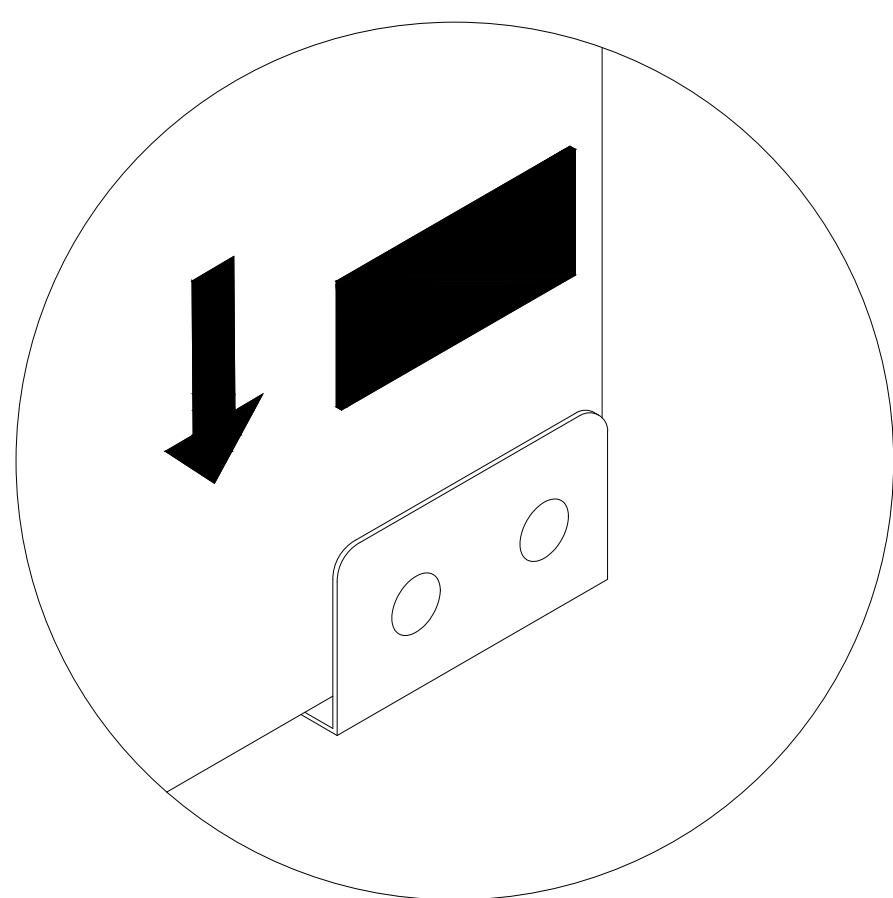


second

After installing the glass door, place the black gasket on the side where the screws are installed

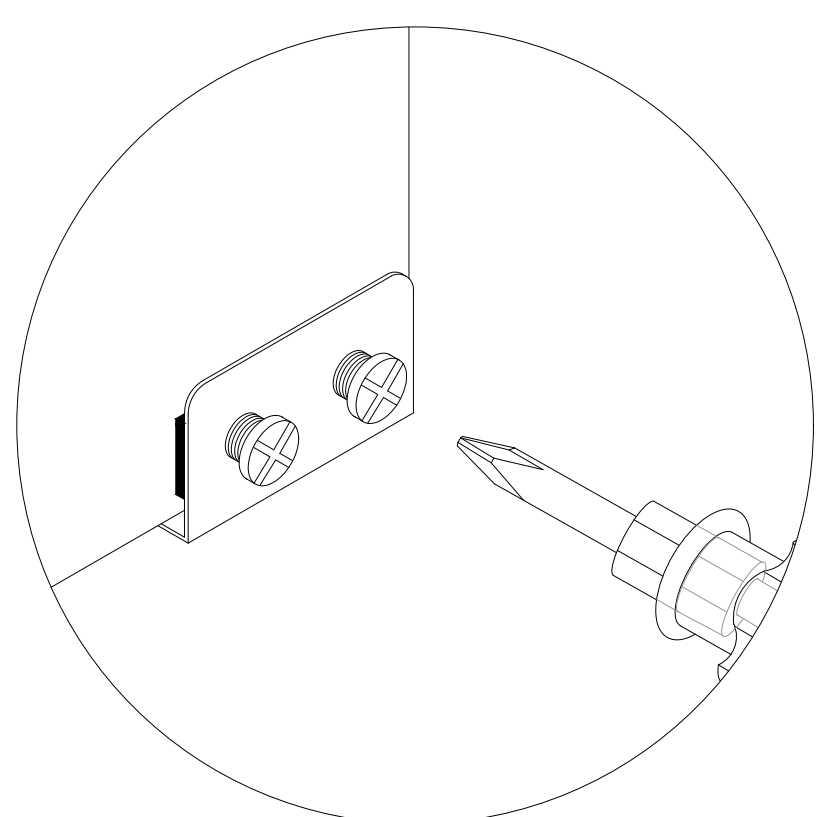

third

Locking screw


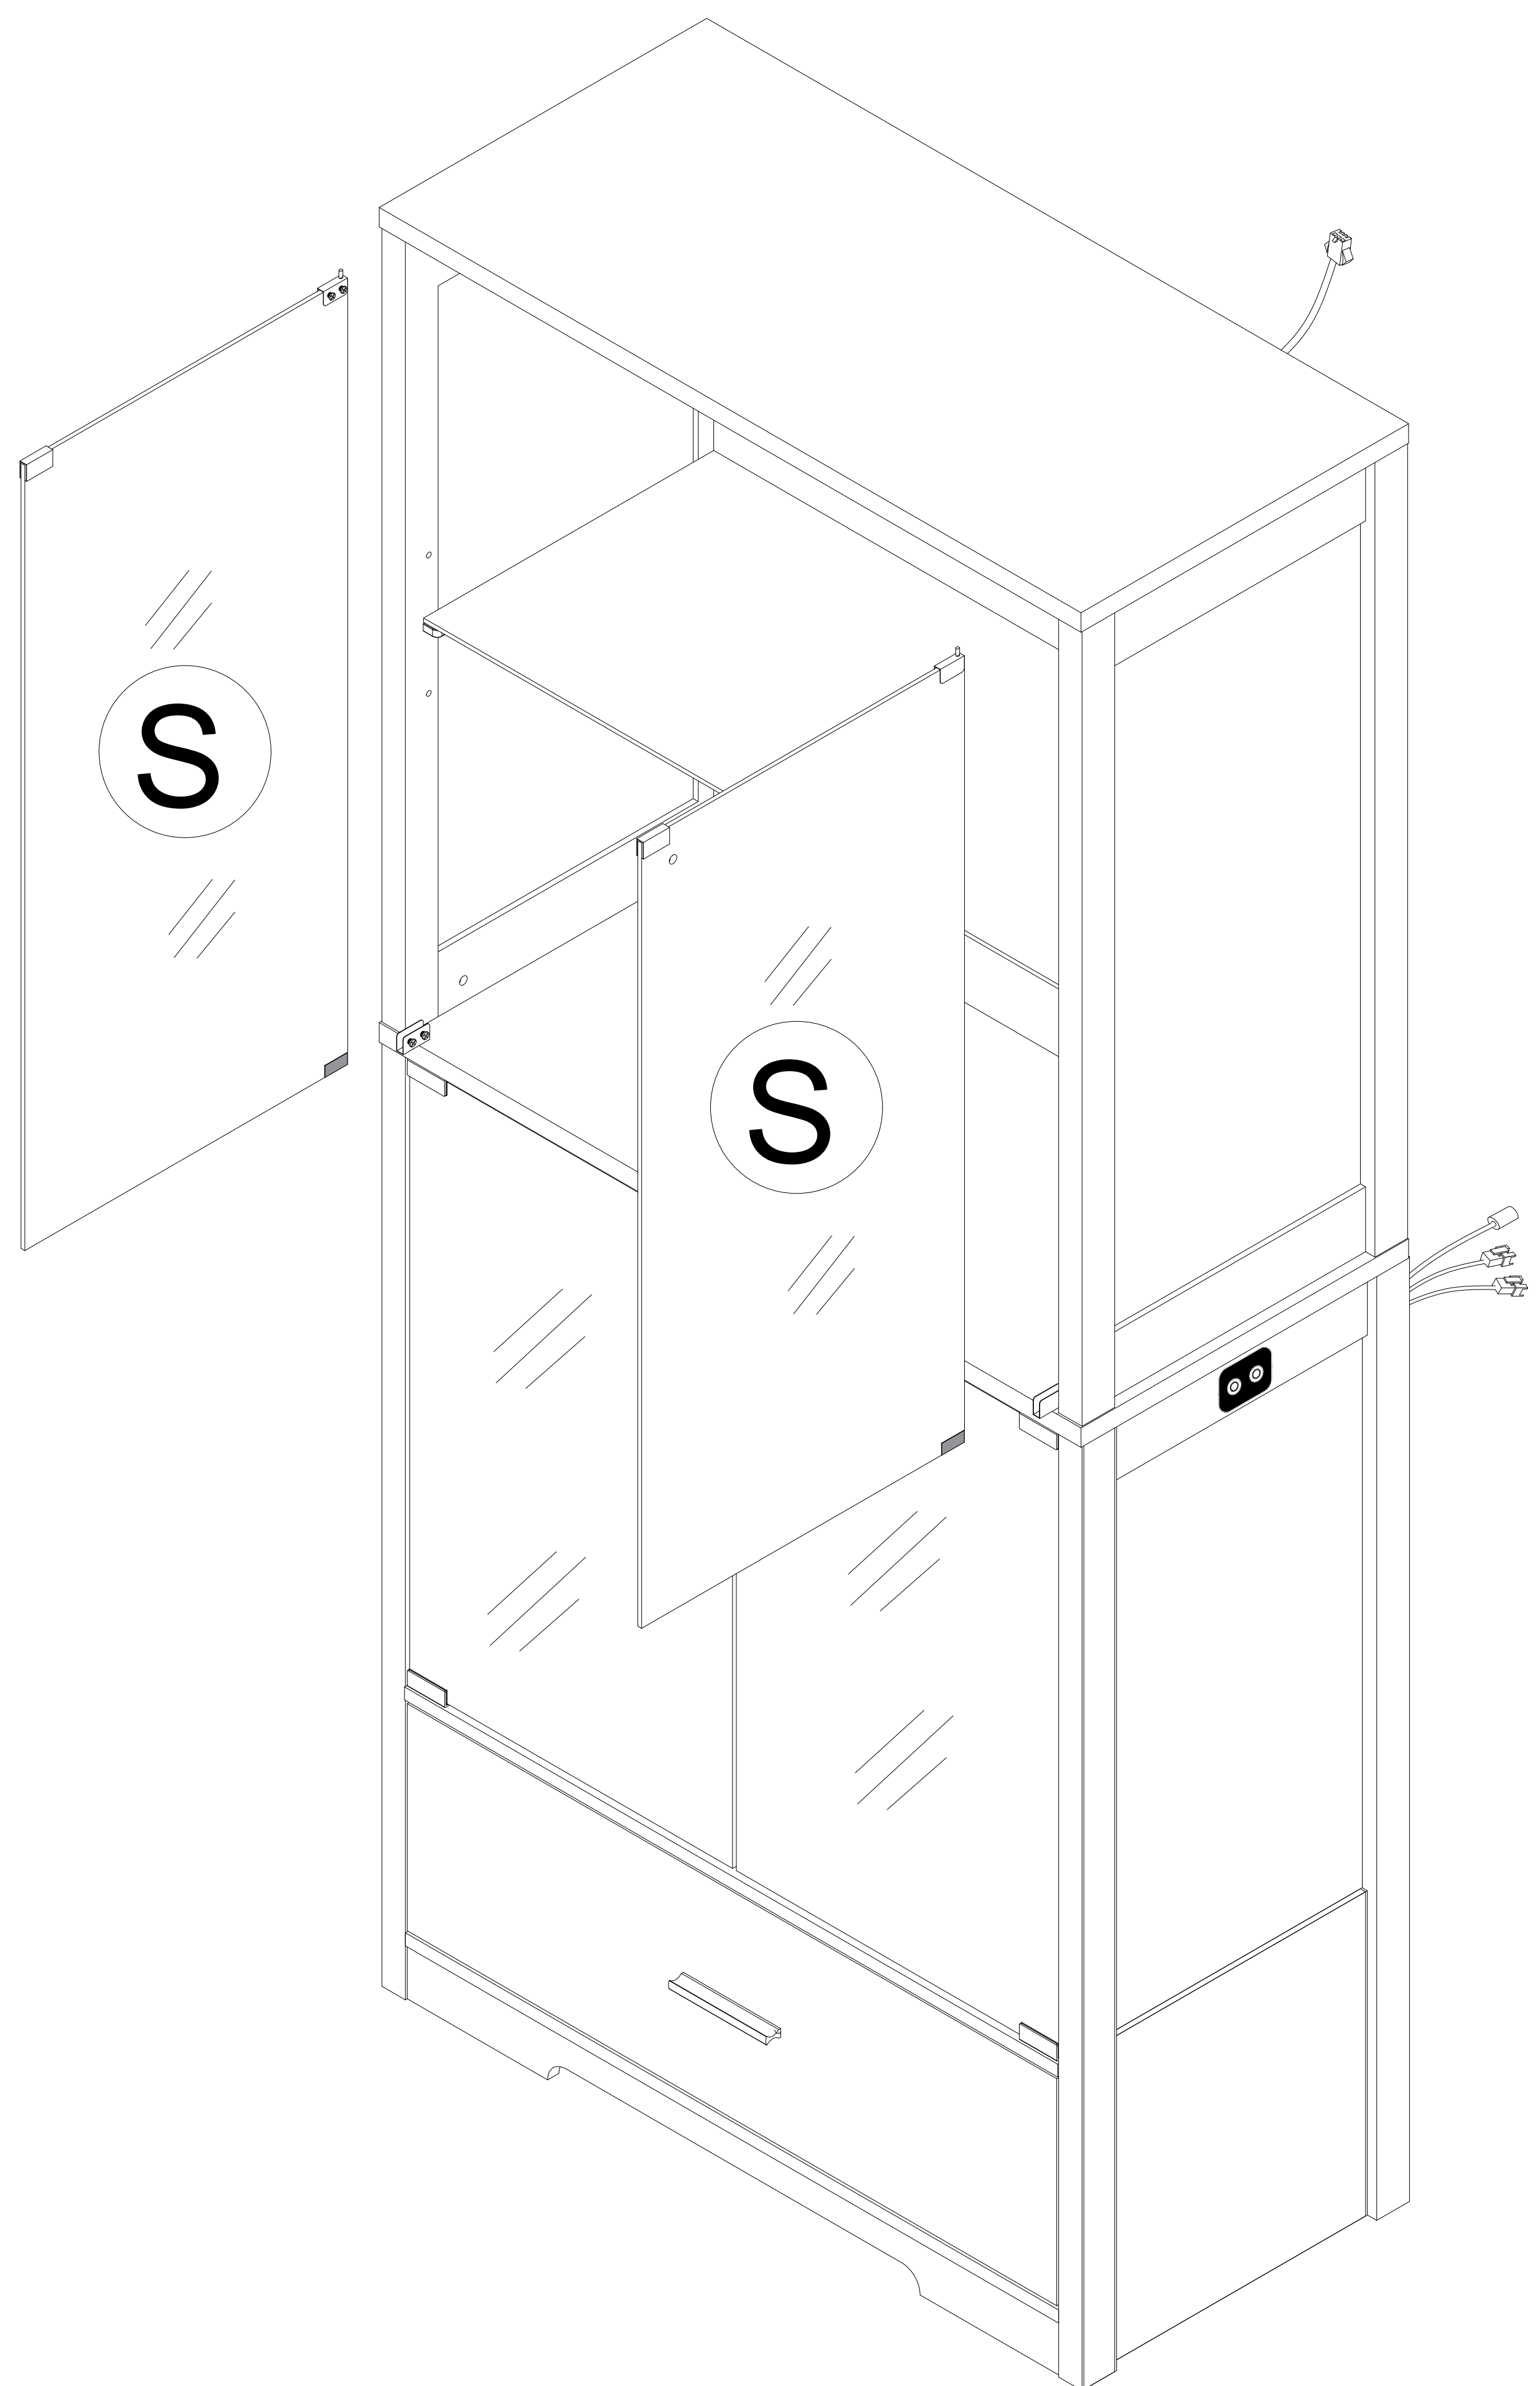


Pay attention to the direction of the door hinge during installation

When installing a glass door, it is recommended to have two people install it to avoid the glass door colliding or hitting oneself.


Step 39

8



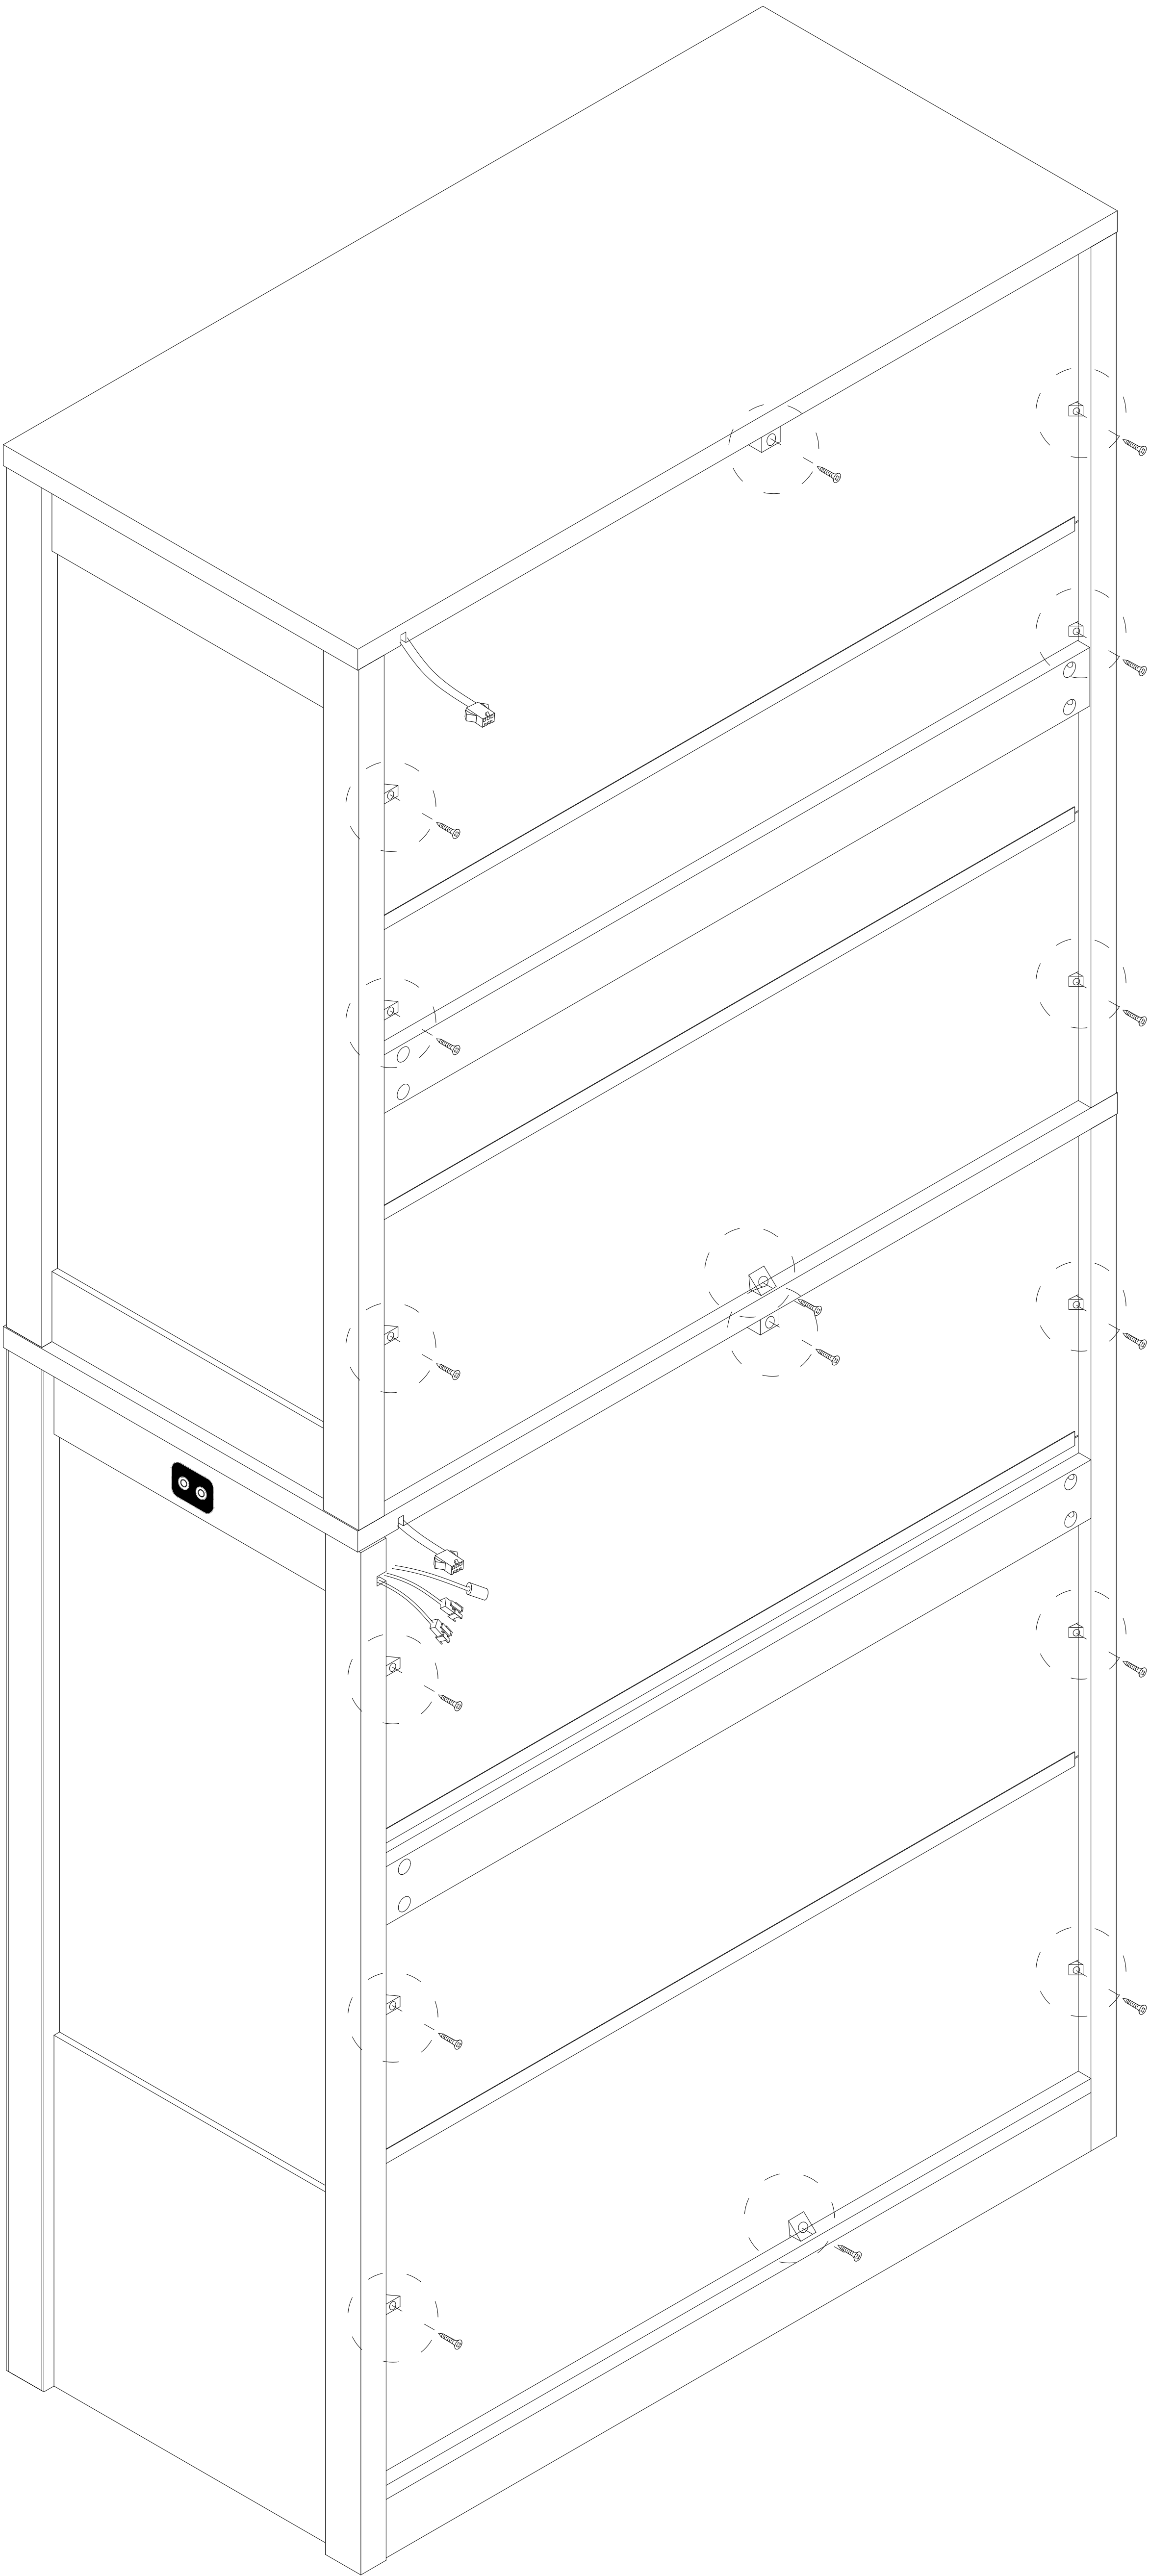
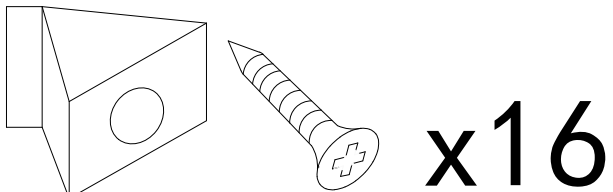



Step 40

9




x1

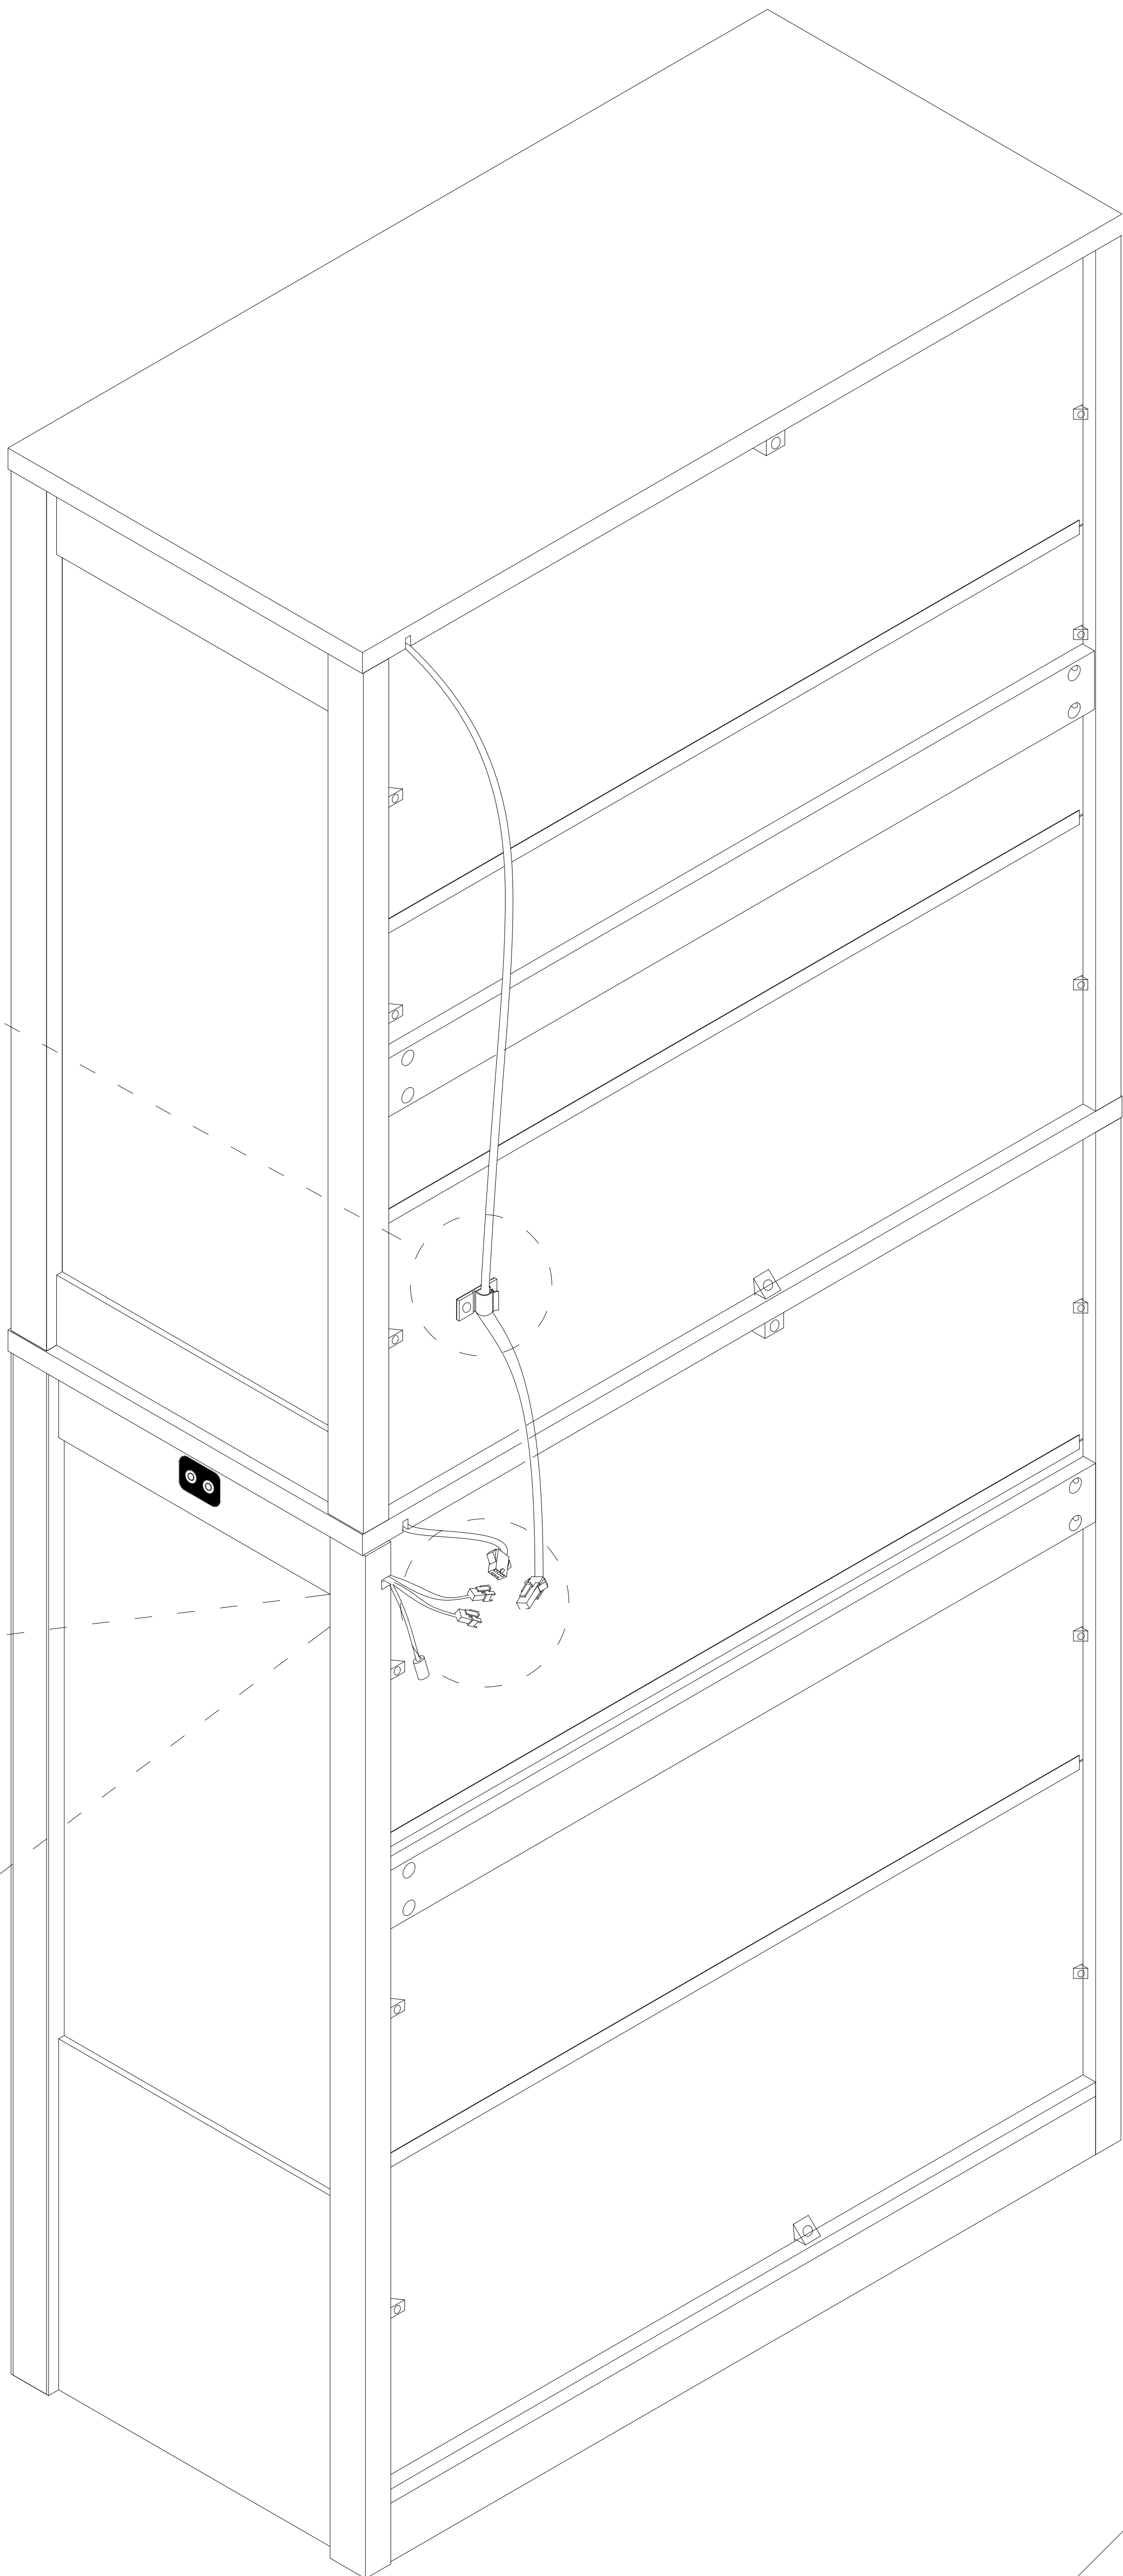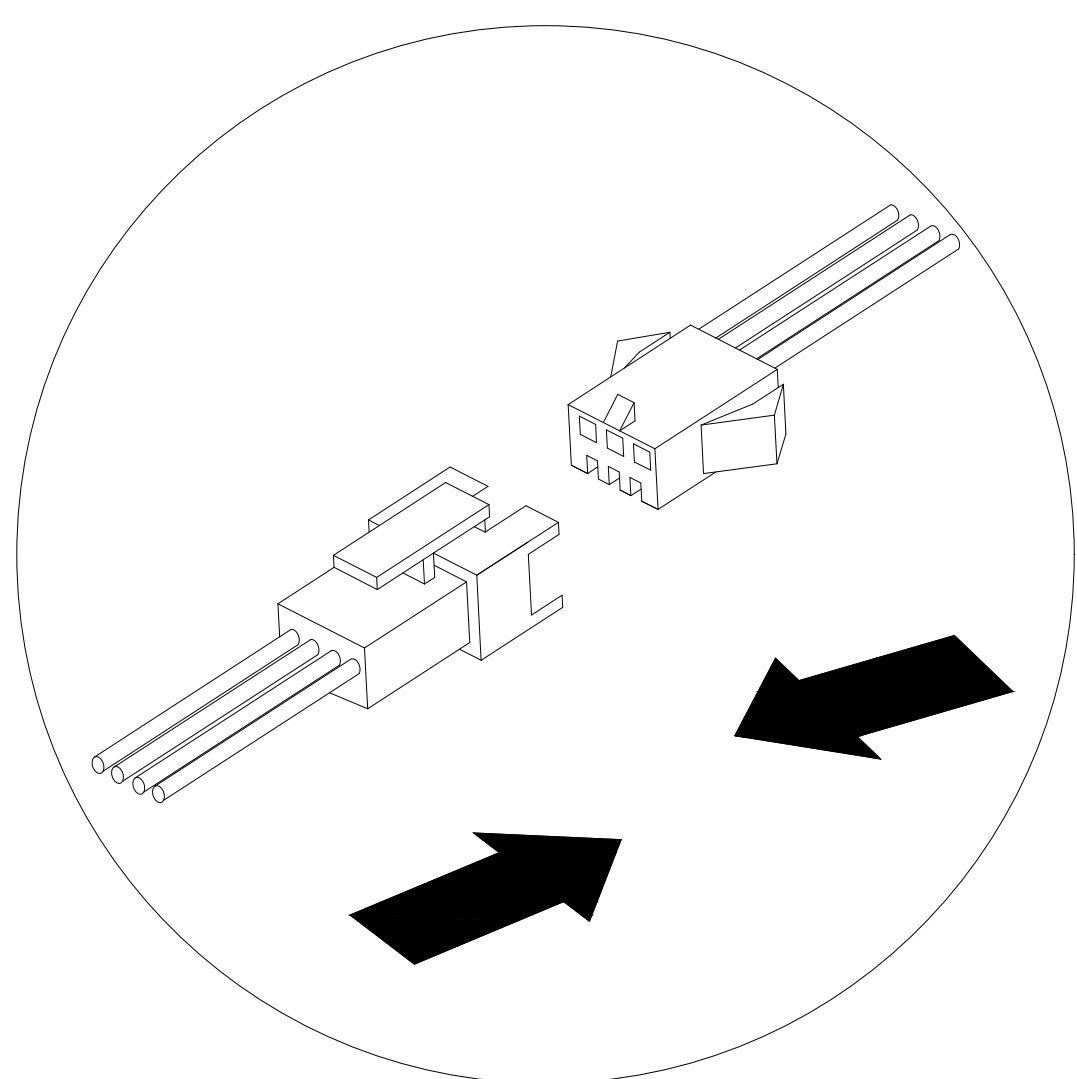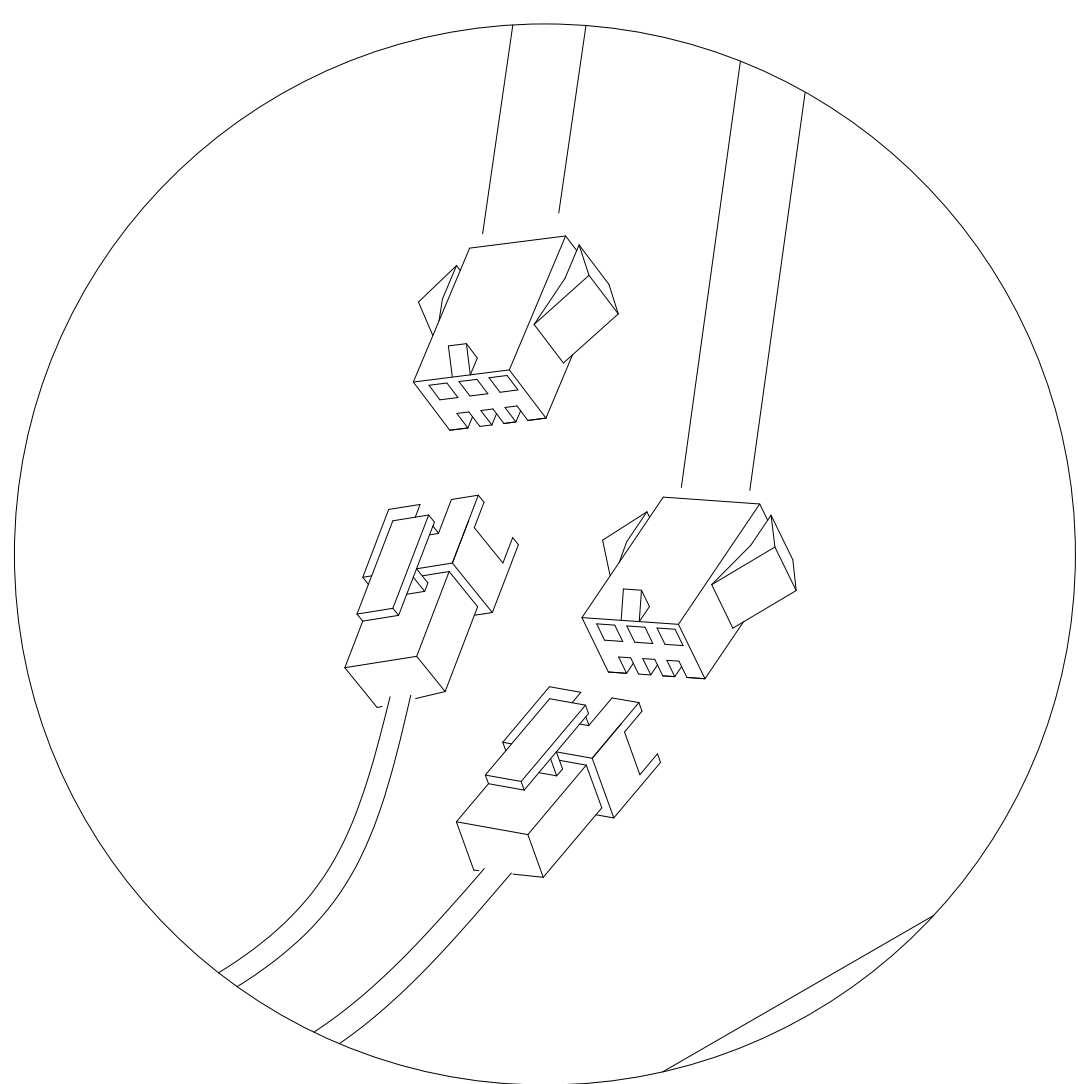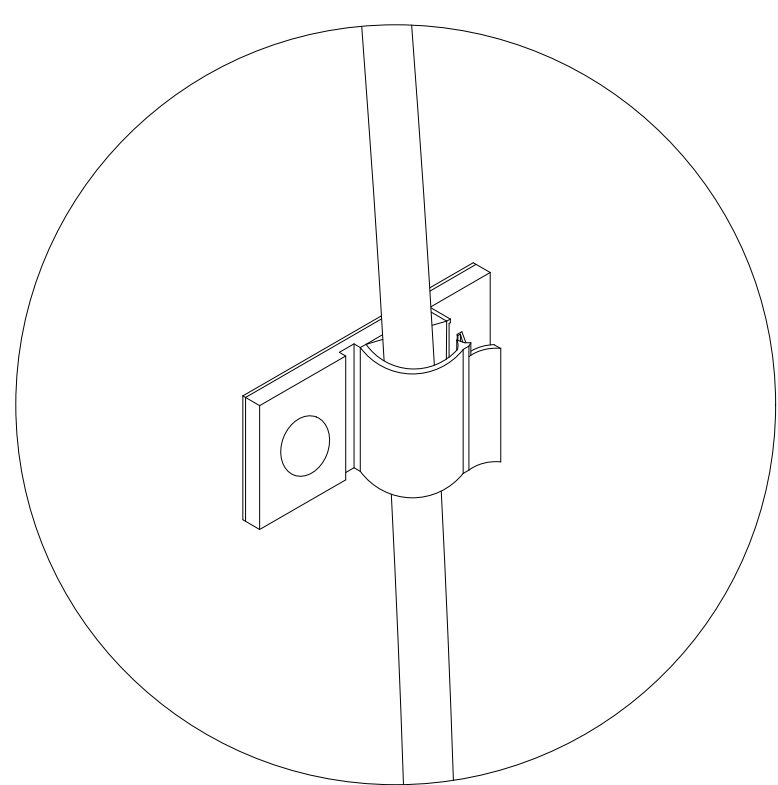

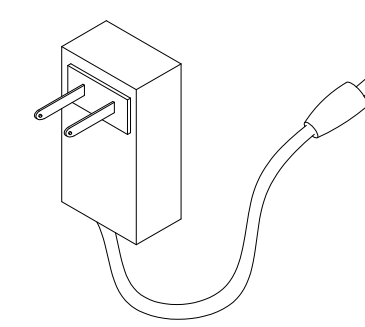

x1


Step 41

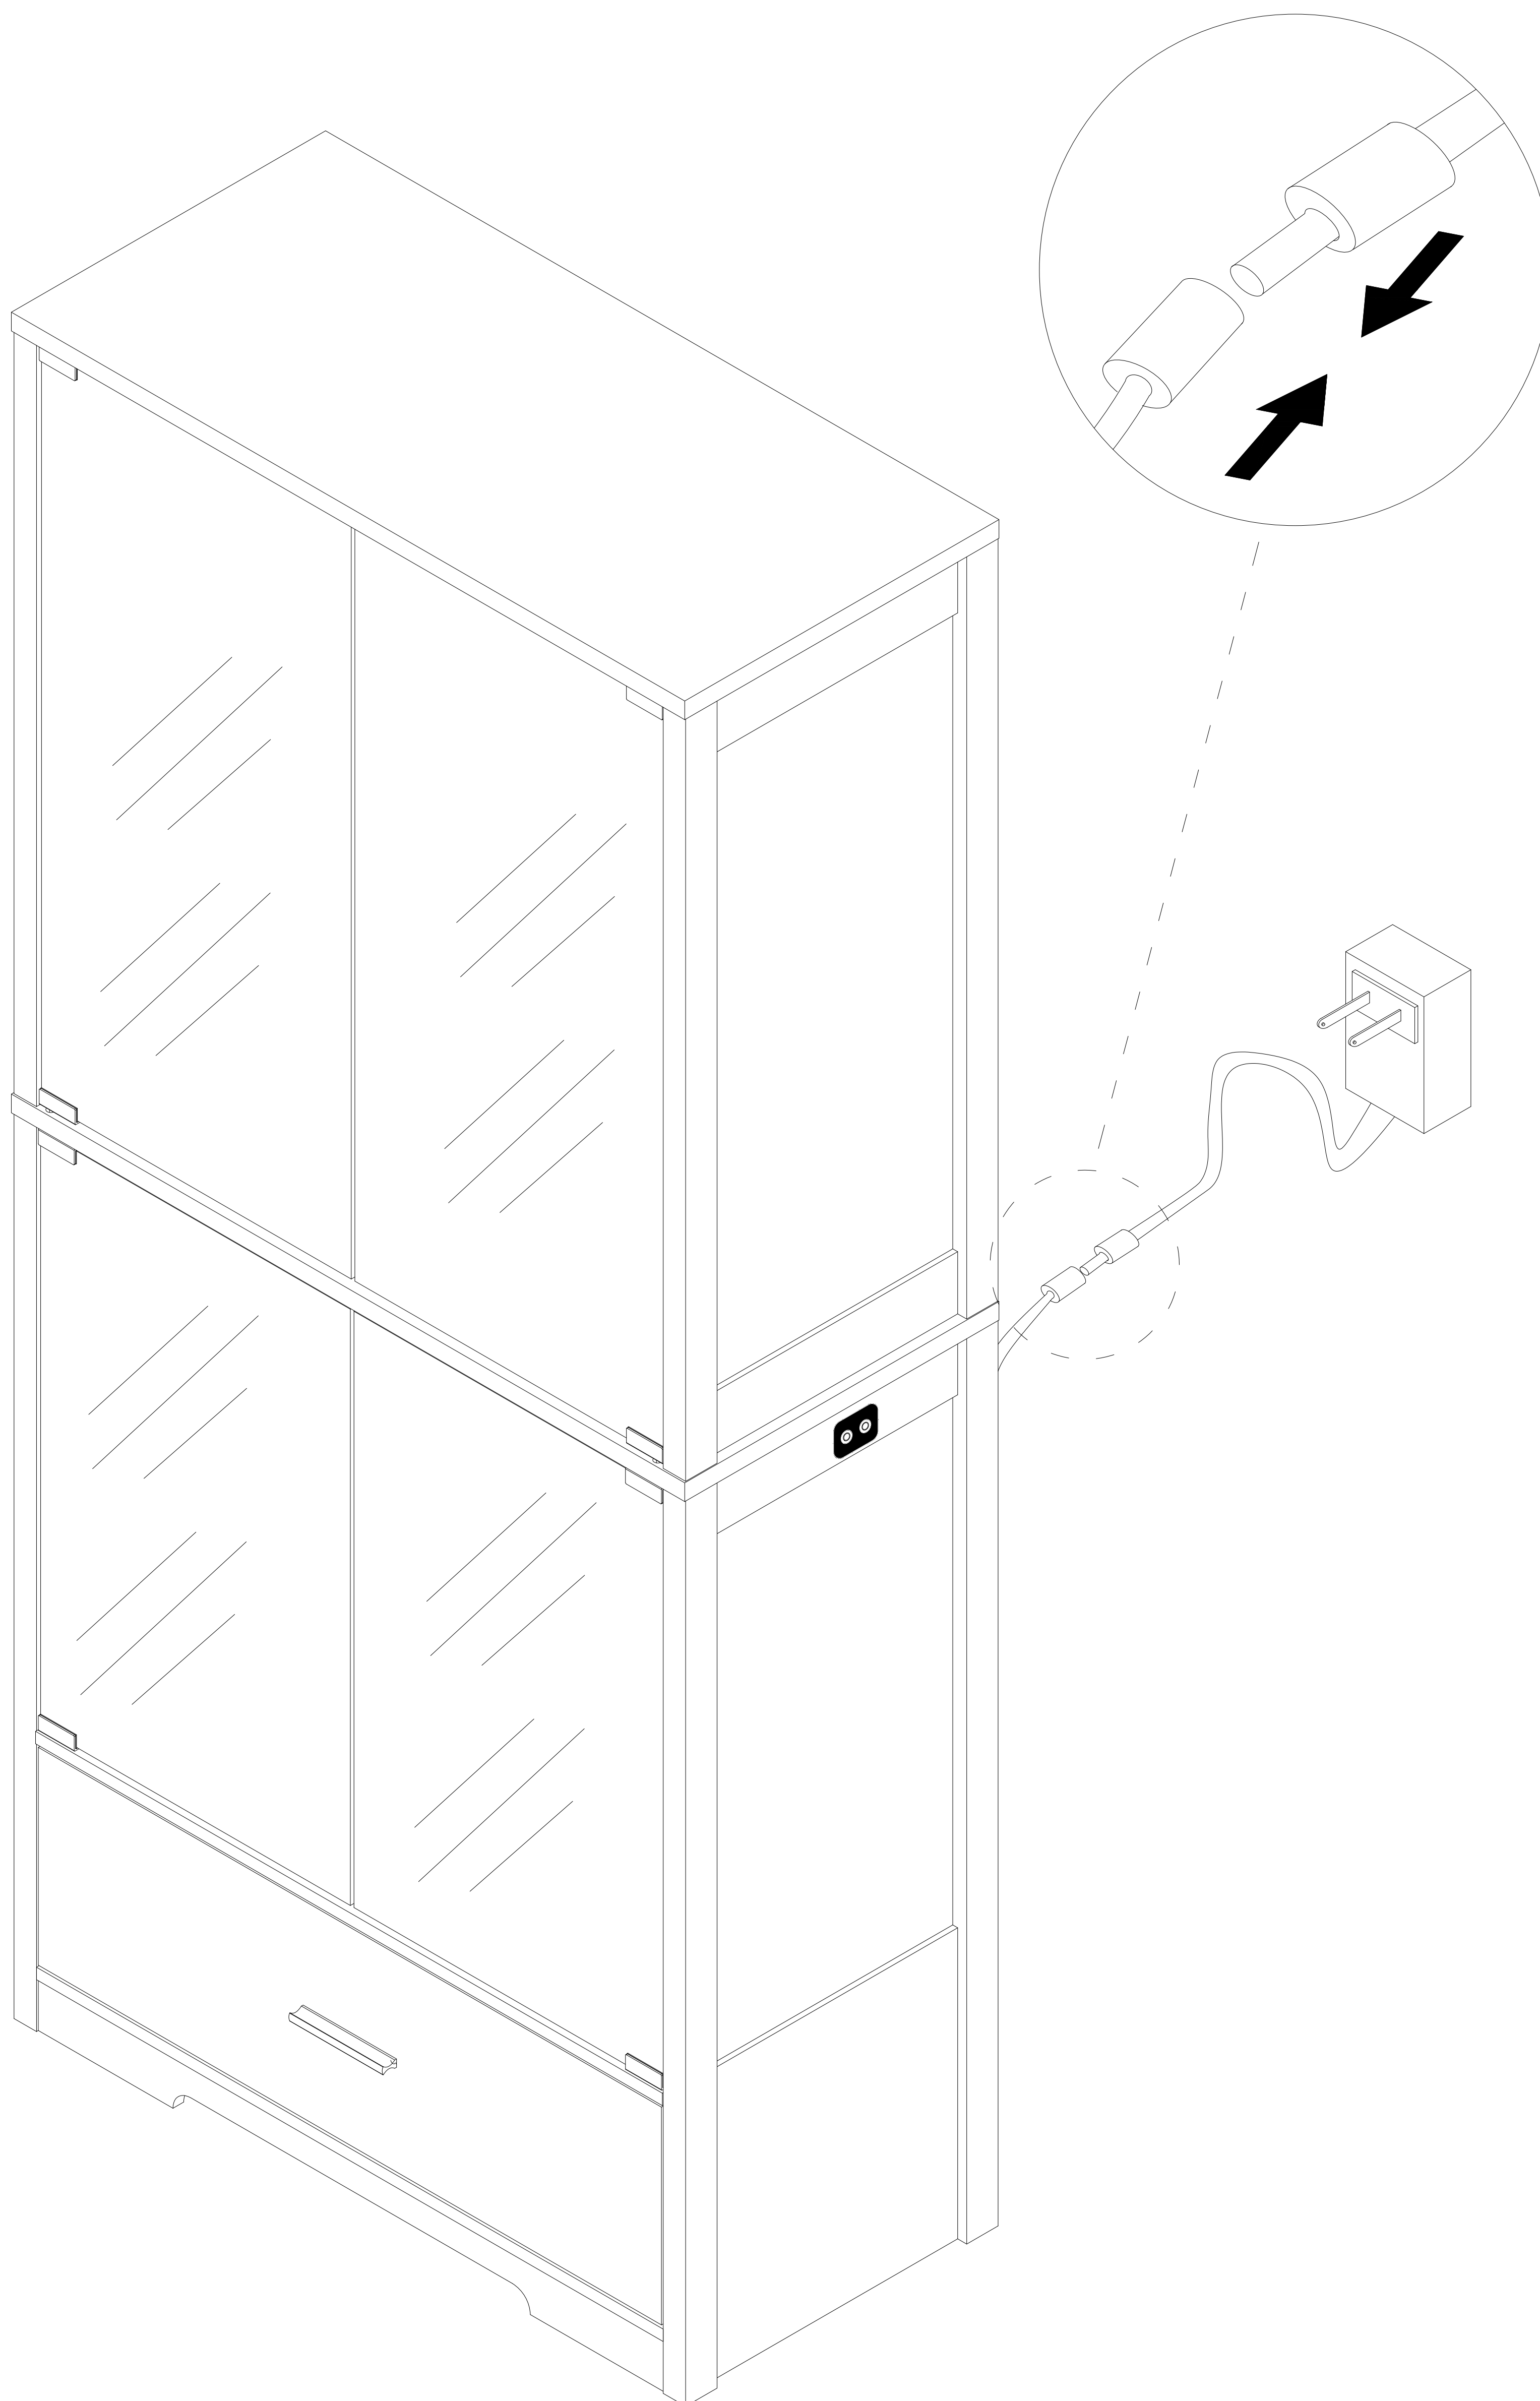


Step 42

Install as required


11



x2

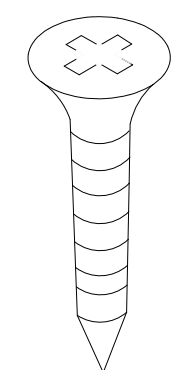


x2






x2

3.5x14mm

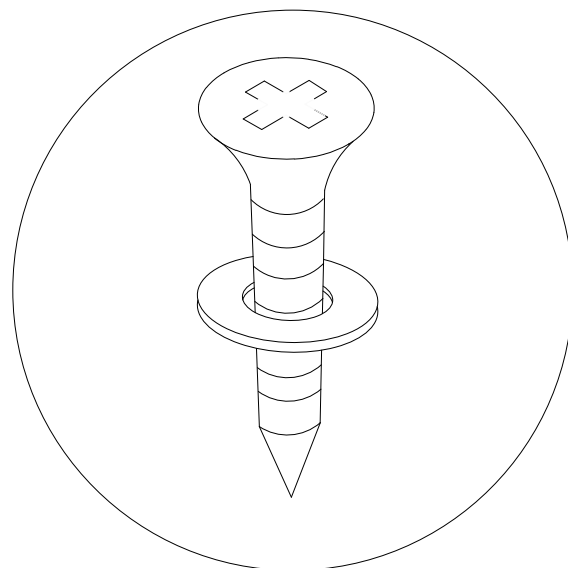


Install the anti fall hardware on the cabinet as shown in the picture first

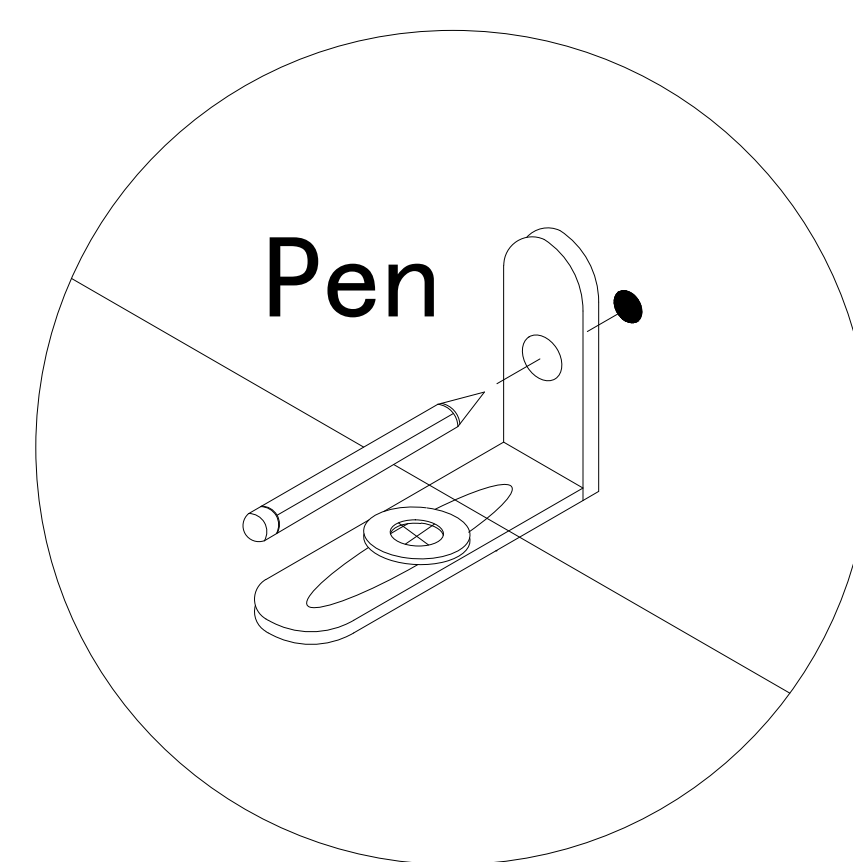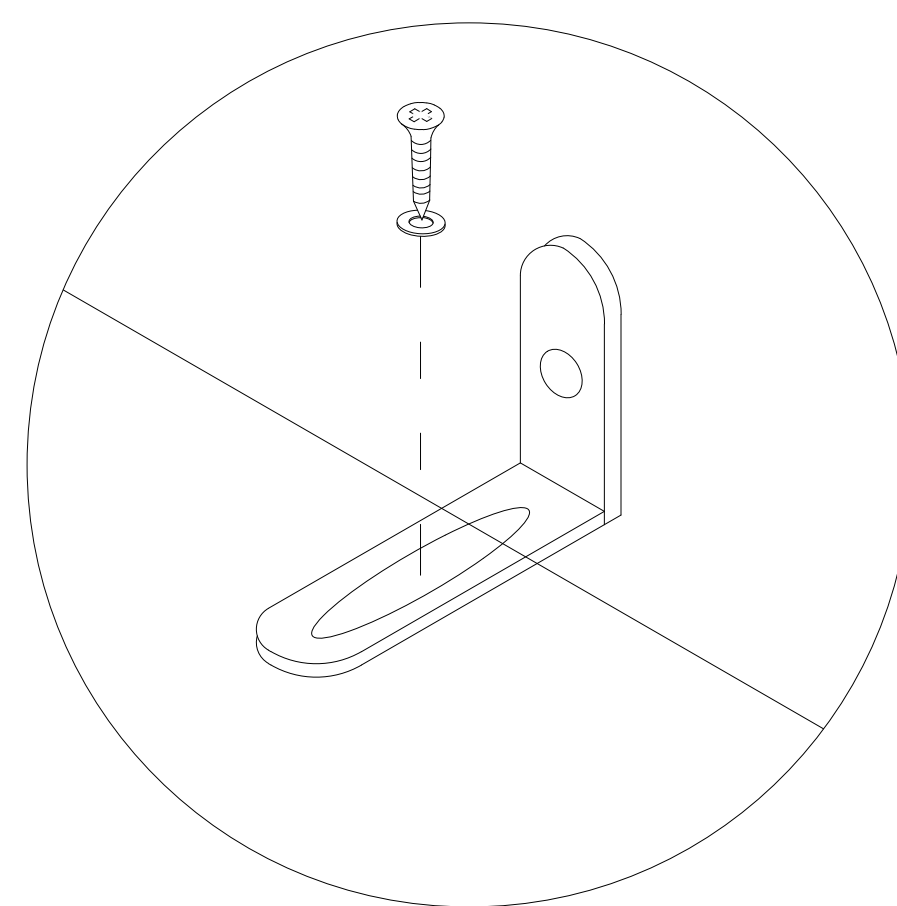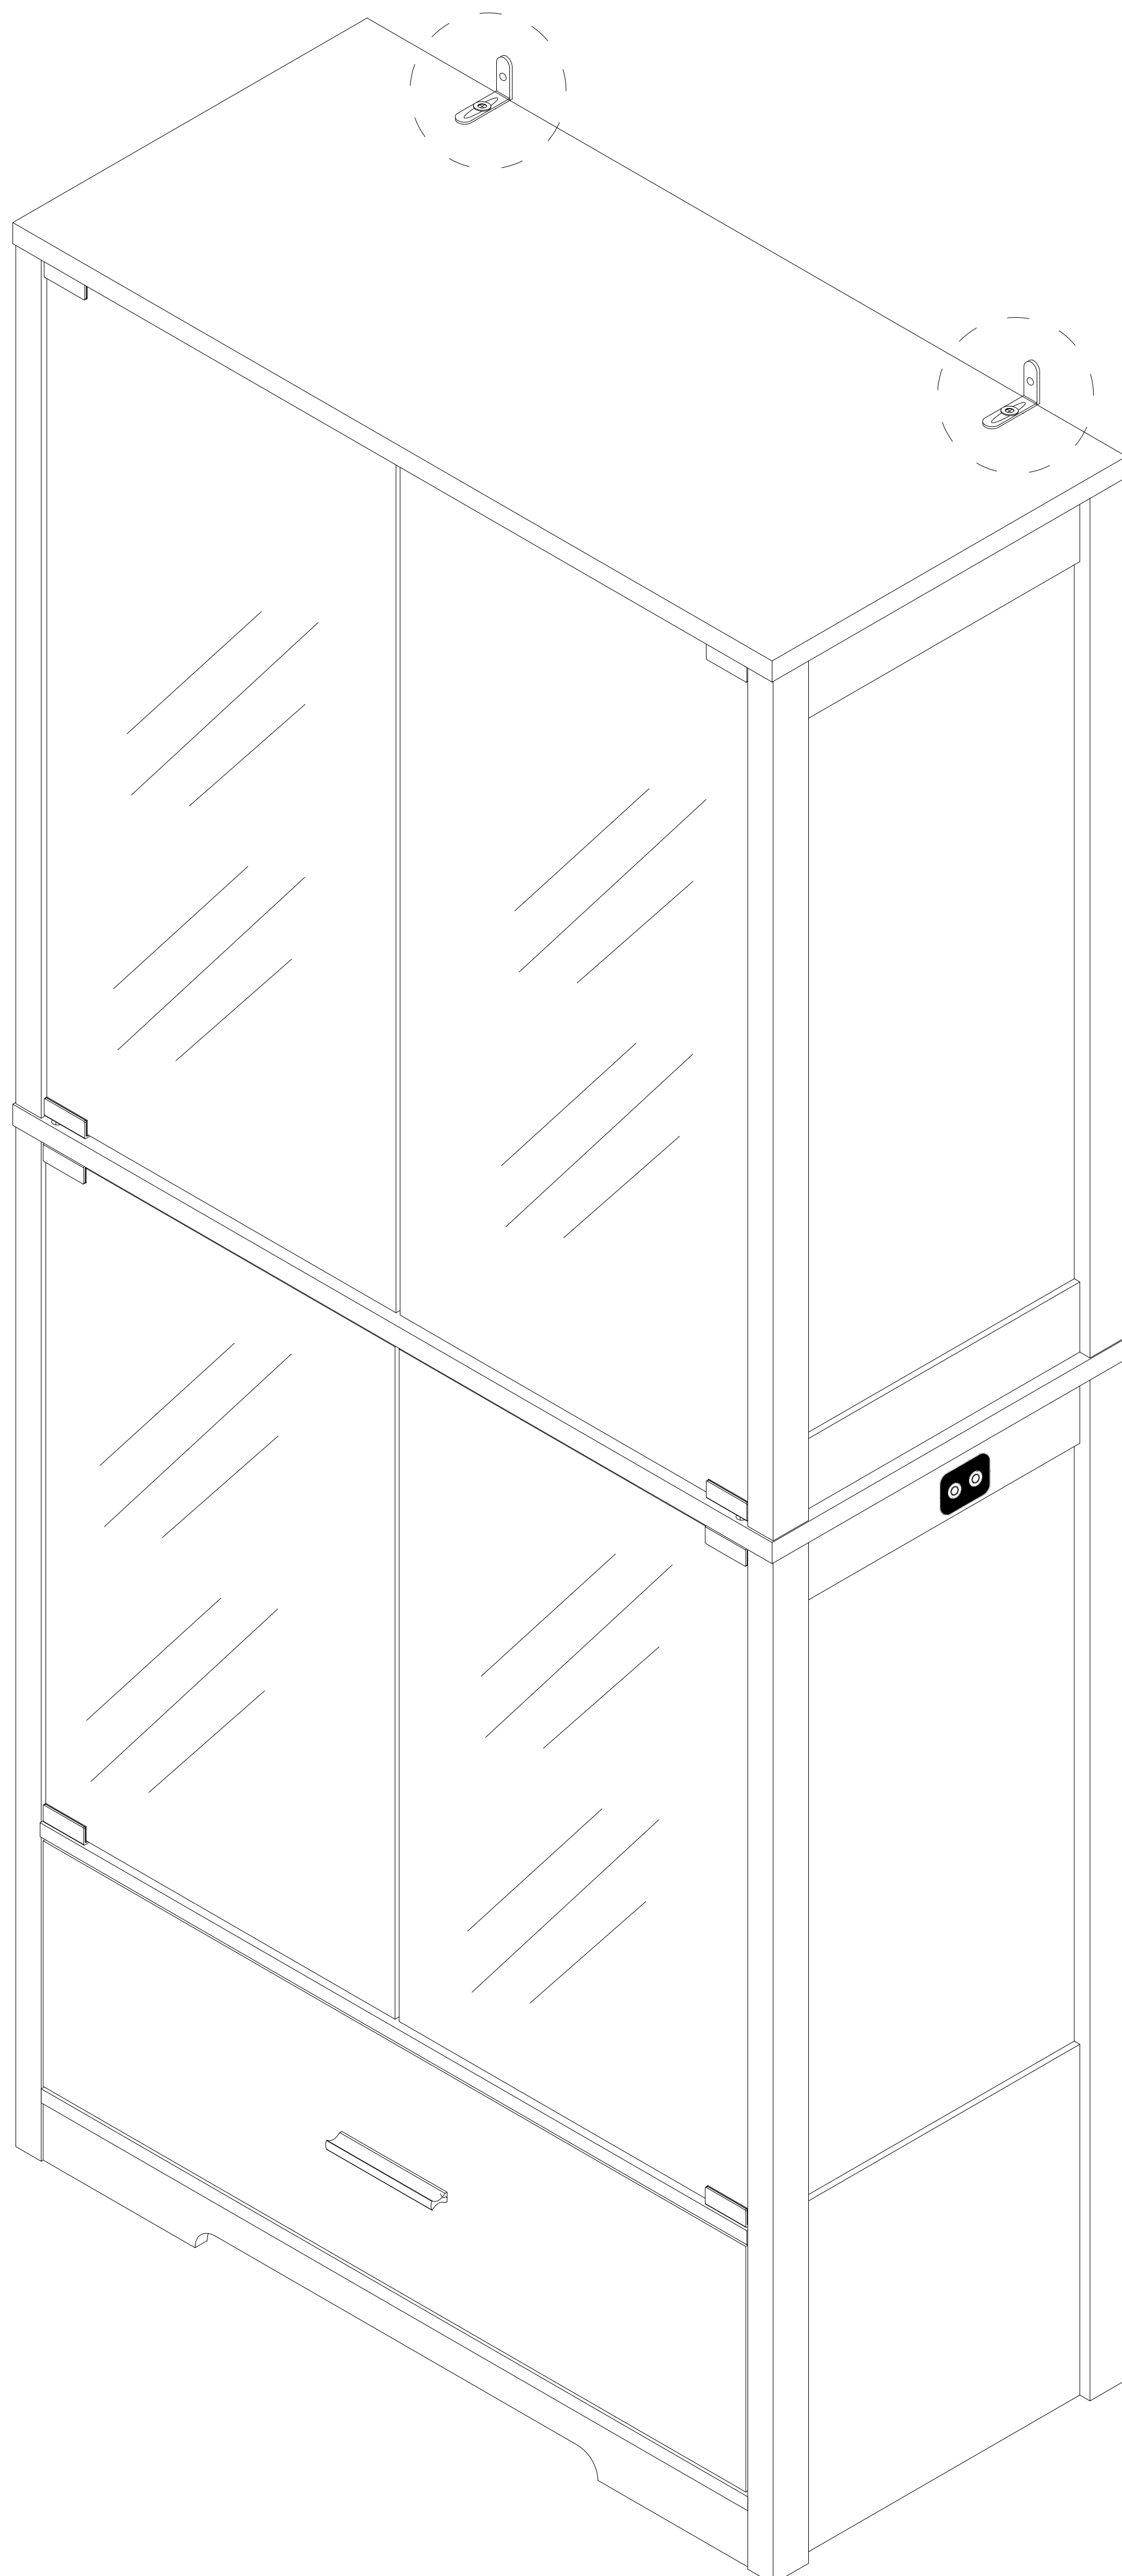

Pen


Then mark the wall with a pen through the holes in the anti-fall hardware

Step 43

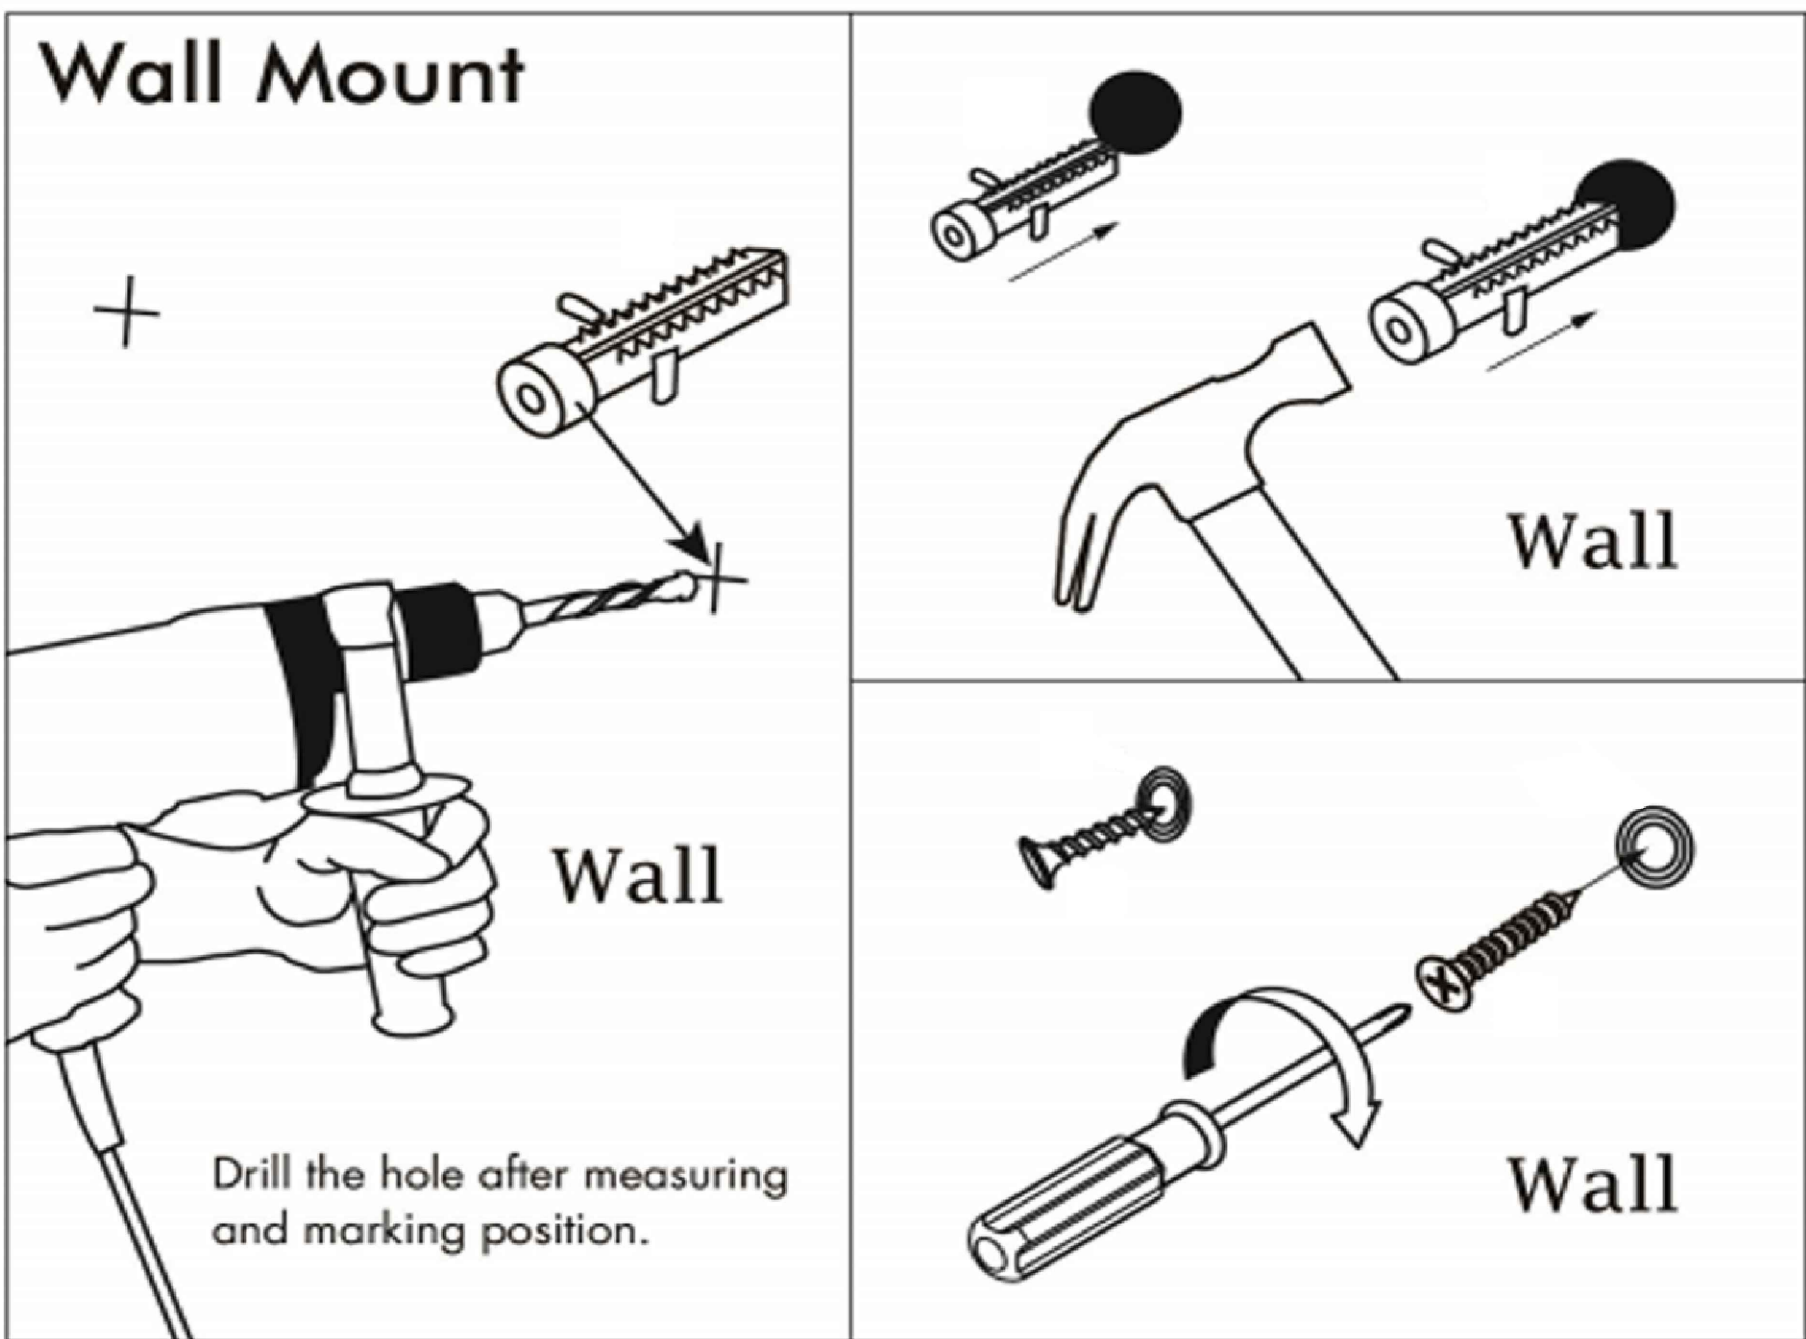


11

x2



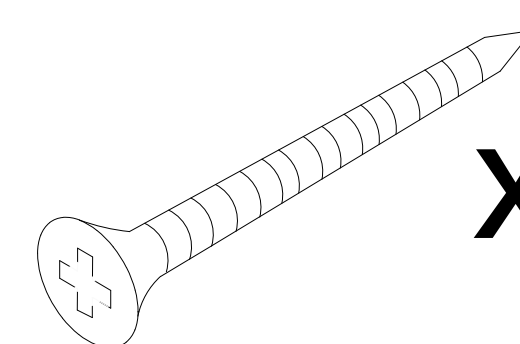


x2



x2

Drill the hole with an electric drill and punch in the colloidal particles

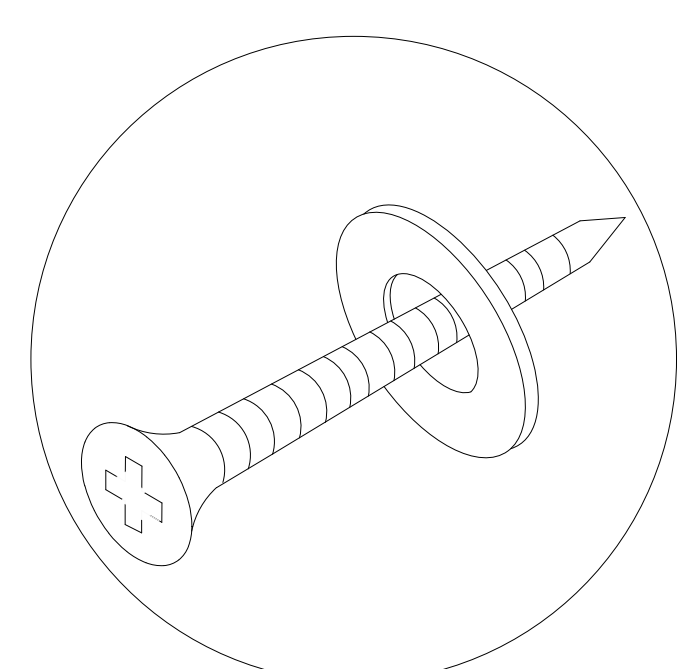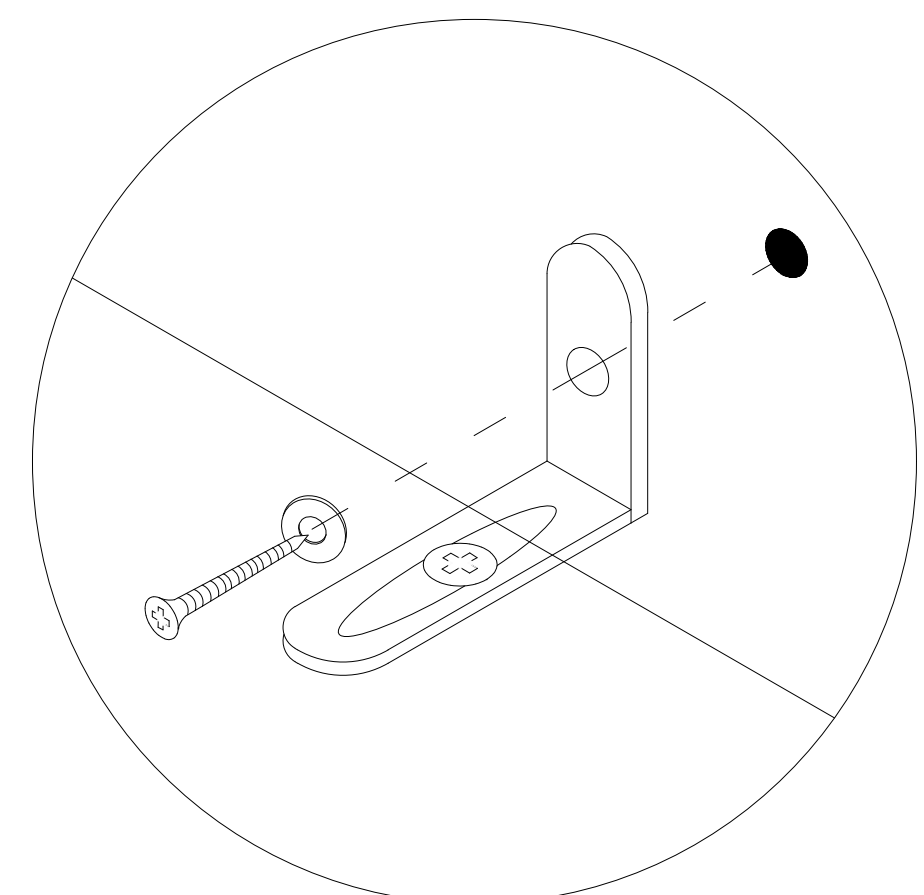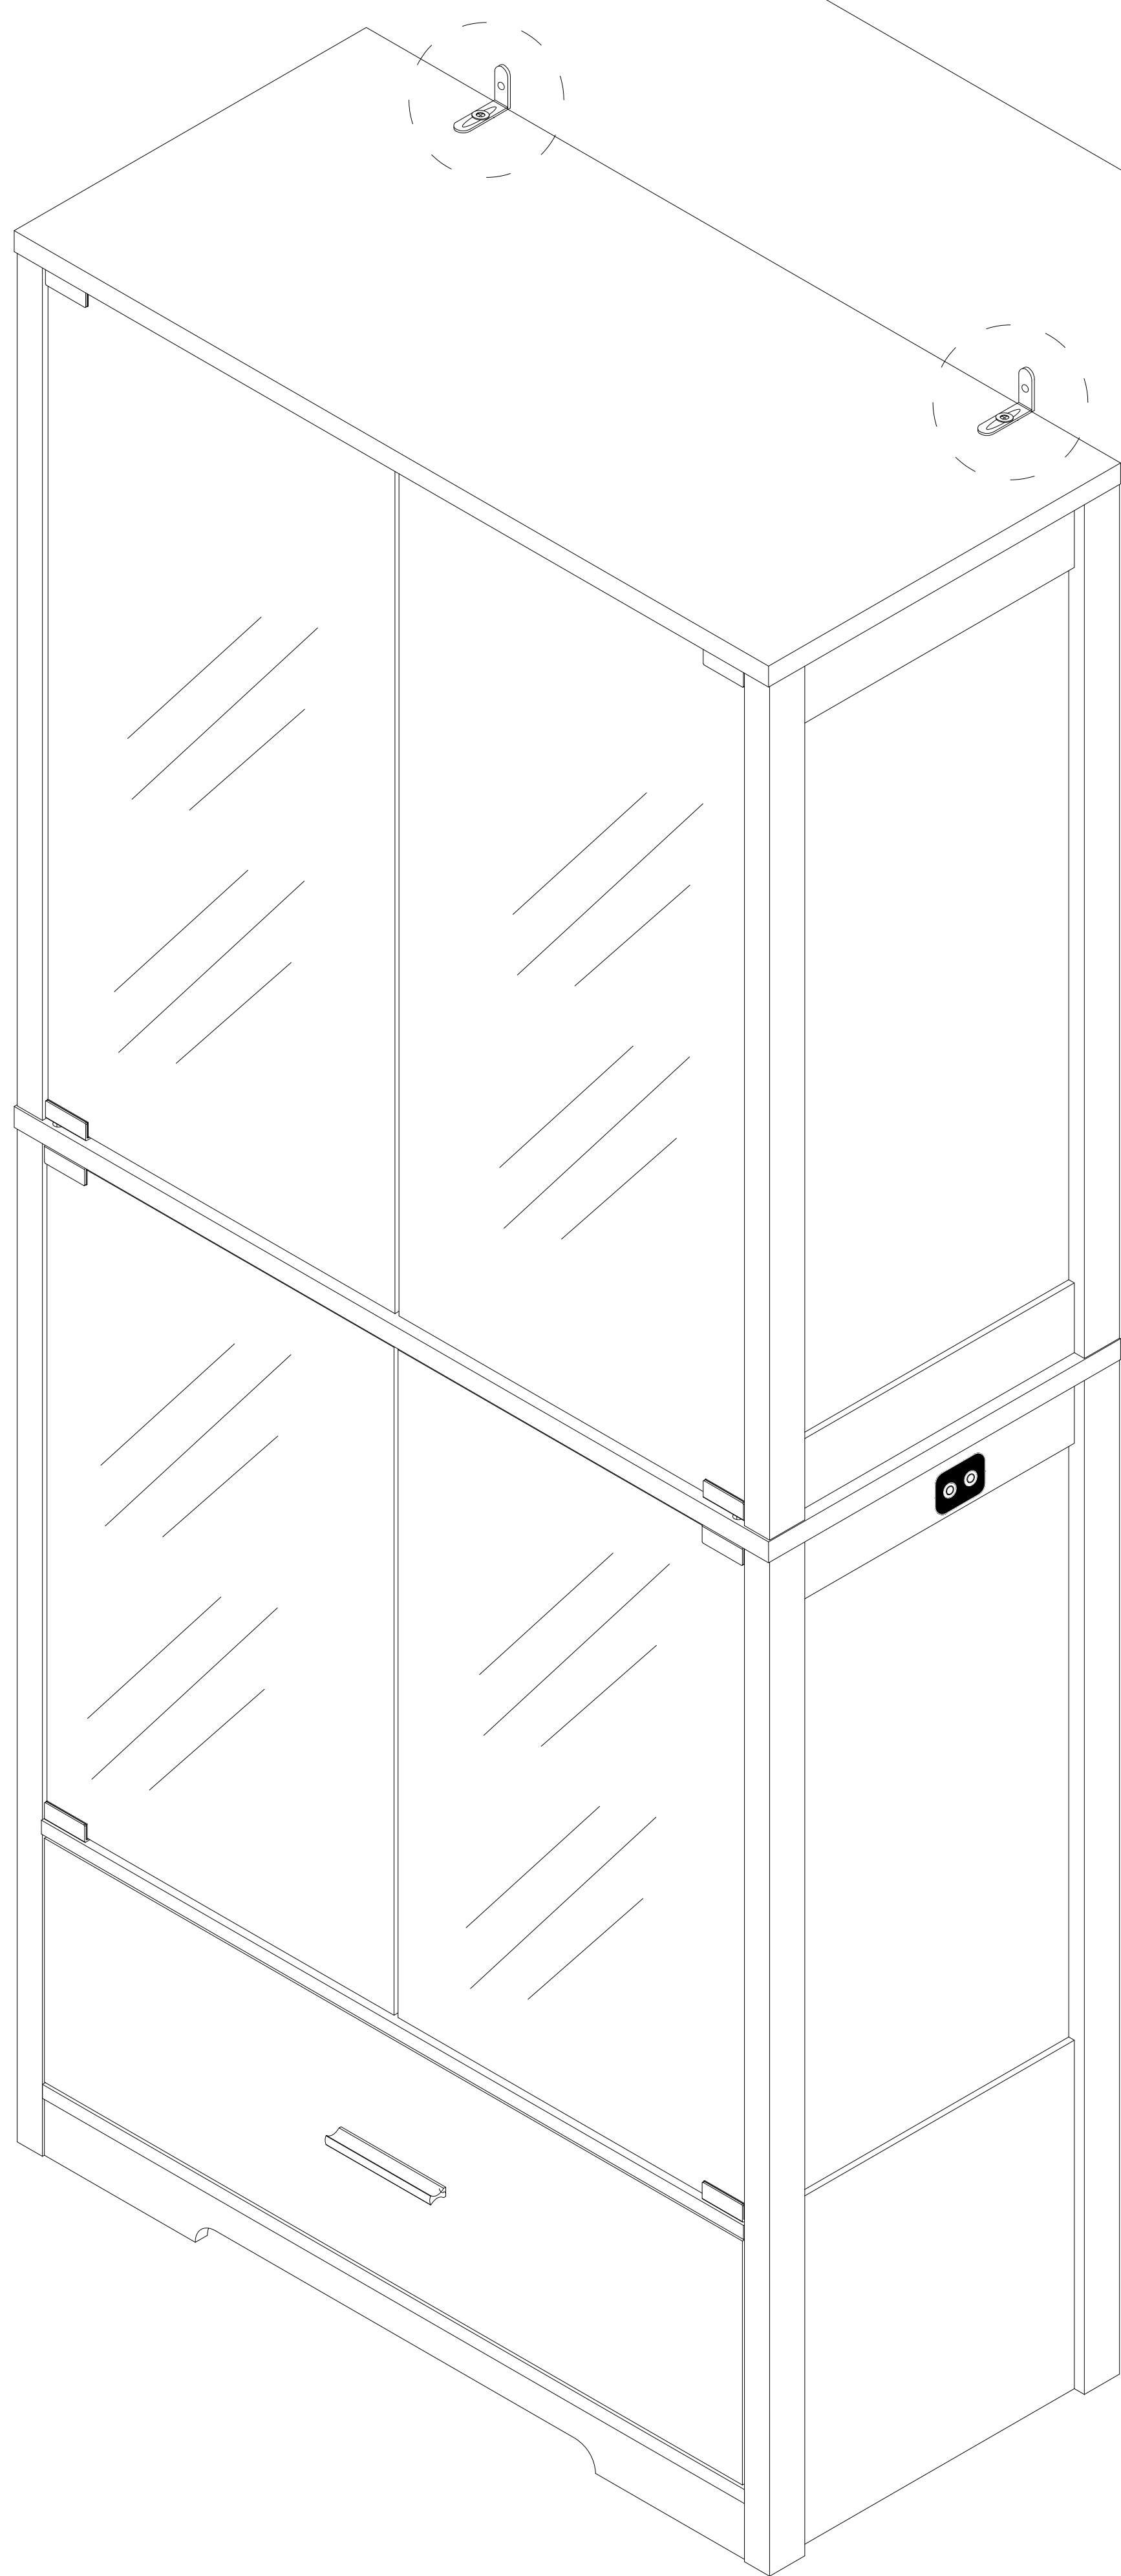

4x45mm

Fix the dressing table to the wall


User's Guide

Thank you for purchasing this product. To use this product, please plug it into a 12V DC power supply. Please use if the product works normally after connecting to power.

Introduction

The box is an intelligent controller with 2 touch buttons. It can turn ON/OFF the light, change light colors, and adjust the light luminance.

Product Show

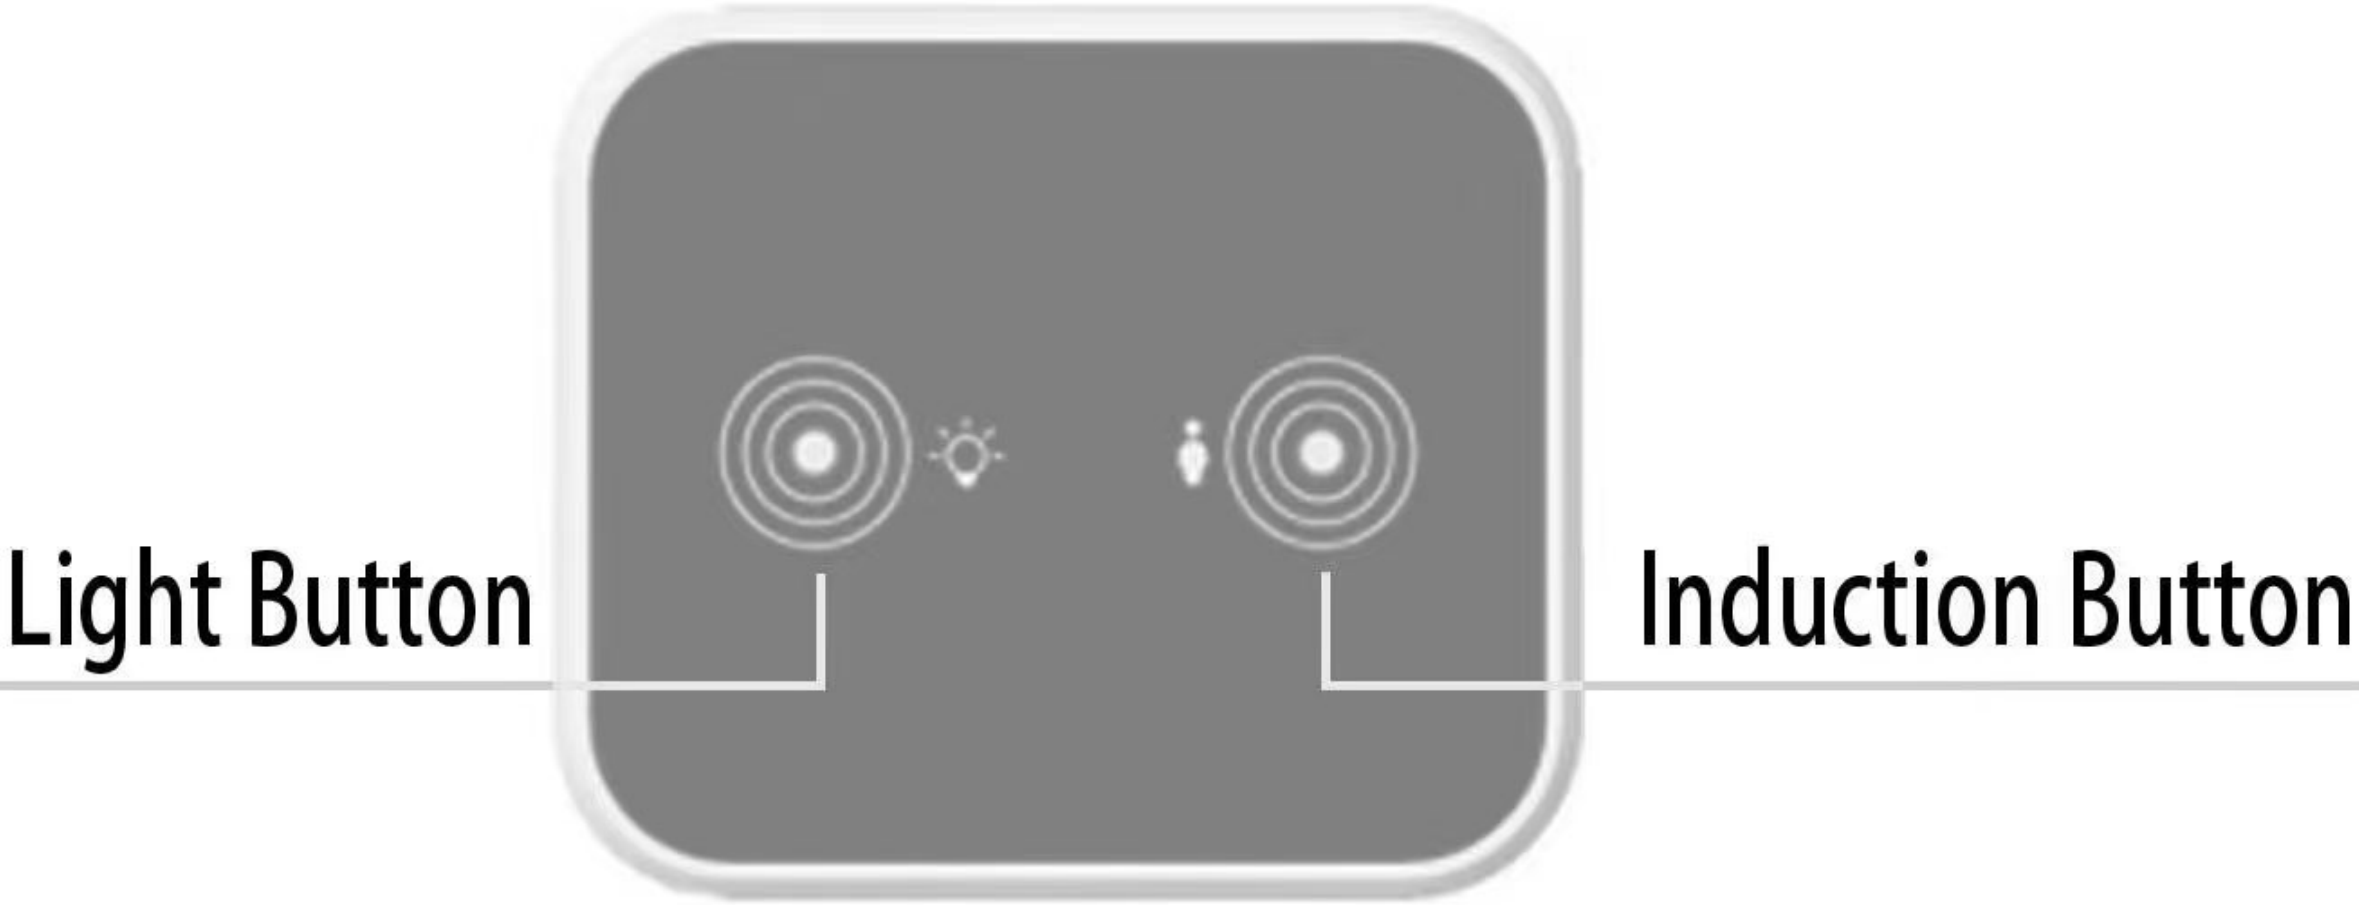

ATTENTION PLEASE

1. If there is no touch response suddenly, Re-plug the power to reset the touch static electricity.
2. If bubbles appear on the panel, remove the protective film.

Operation



This touch button is used to turn on/off, change colors, and adjust brightness.

- A. Short touch -> lighting on -> short touch -> change light color -> short touch -> change light color -> short touch -> lighting off. B. Long touch -> adjust the luminance



This touch button is used to turn on/off the induction function.

- A. Short touch to turn on the induction function. It can auto-turn on the light when people are close to the controller in 1 meters. It can auto power off the light when the body is far away from the controller after 30 seconds.
- B. Long touch to turn off the induction function.
- C. Note: When you touch the light button to change the light modes, the induction function will automatically turn off. It is best to turn on this function after selecting the light color and adjusting the brightness you want.