


BESy

INSTALLATION INSTRUCTIONS

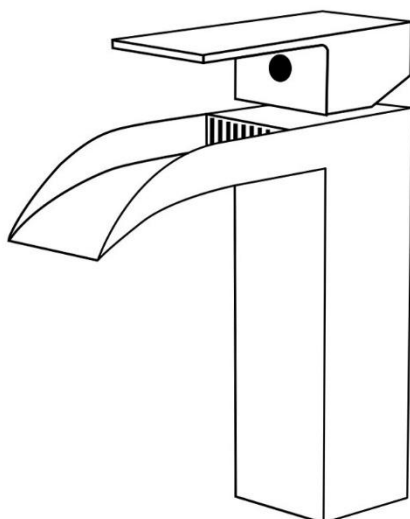

For easy installation of your BESy faucet you will need:

1. To reduce the risk of the injury, read all the instructions before installation.
2. Turn off the water supply valves. Clean the mounting area of the sink.
3. Please **flush the waterlines for 30-60 seconds** until water runs clear otherwise dirt will make faucet blocked.
4. **A little water maybe appeared inside the faucet:** because of the water test for each faucet before shipped.
5. Please **contact BESy Customer Service Team** first for installation Help Missing or Replacement Parts.

Specifications:


1. Flow Rate: 2.2 GPM (8.32L/min)
2. Operating Temperature: 40-158°F (4-70°C)

You may need:




Installation Requirements:

1. Diameter of mount holes must be 25mm-38mm (1"-1.5").
2. Max countertop thickness is 35.8mm (1.4")

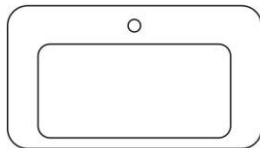


1Hole ✓




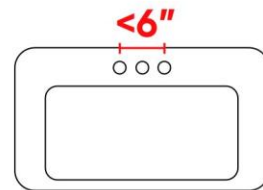


3Hole ✓





PARTS & COMPONENTS

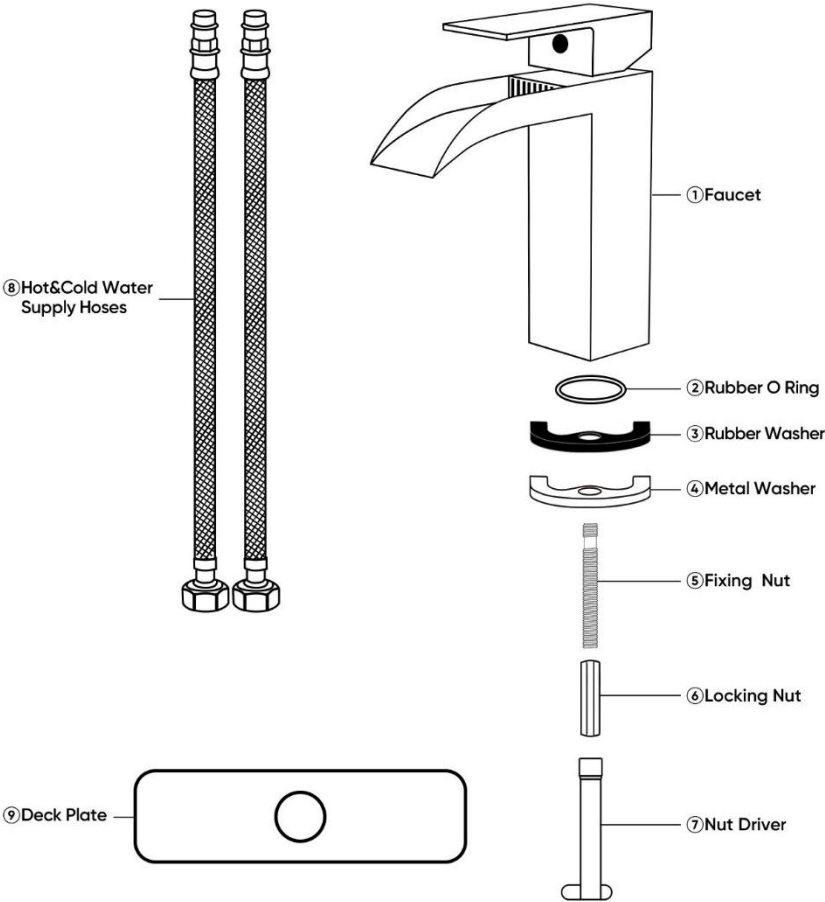

Installation Steps

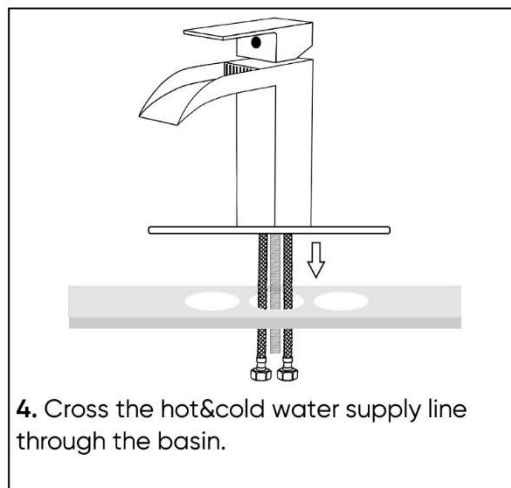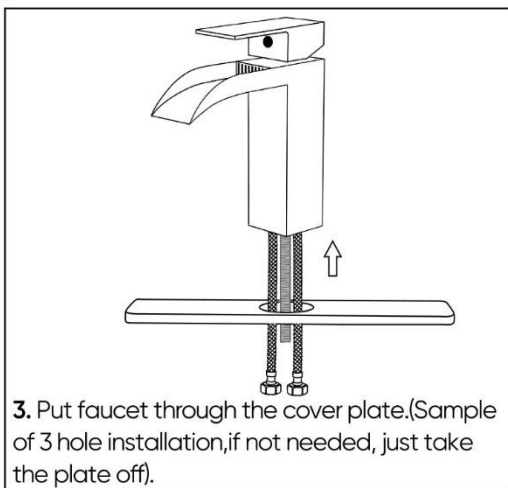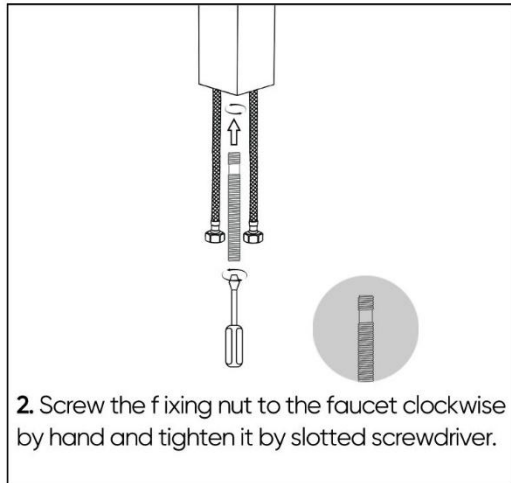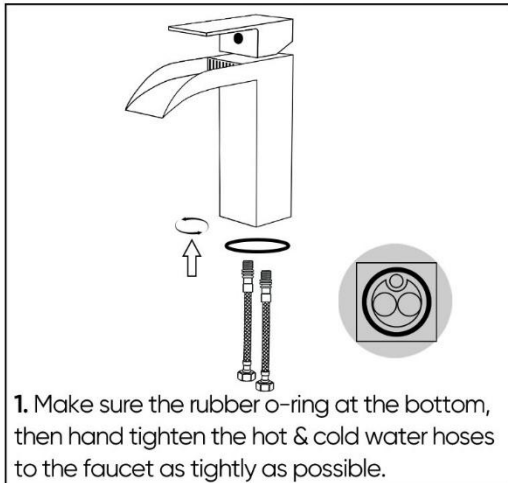

Installation Steps

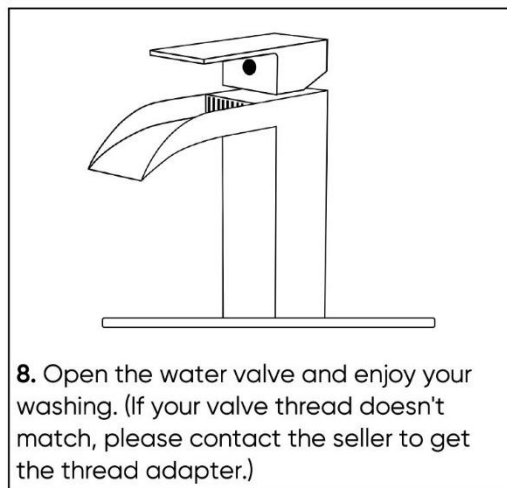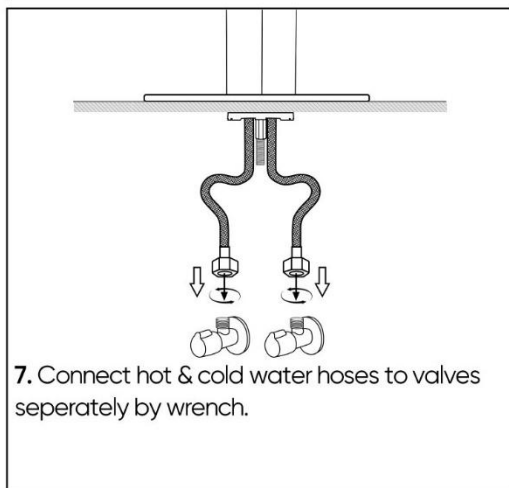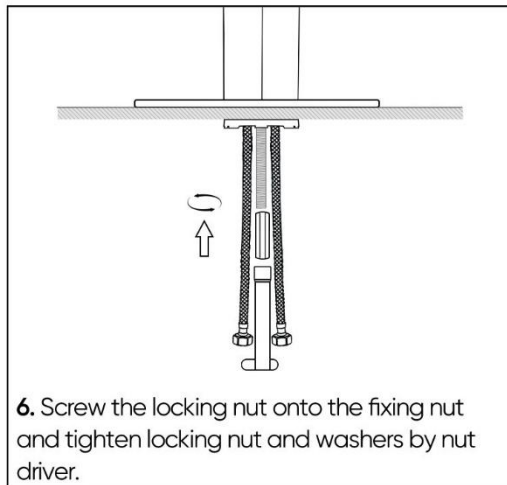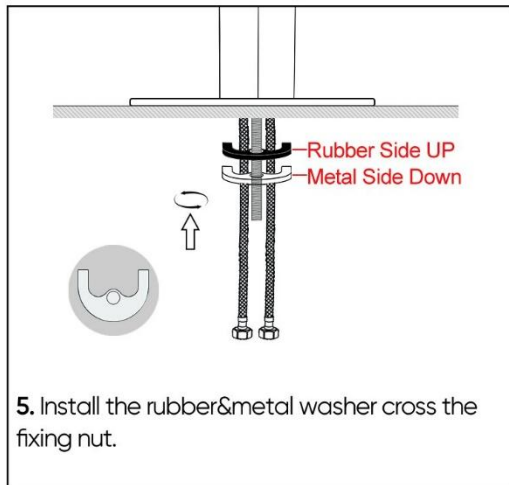

Limited Warranty on BESy® Faucets

Limited Warranty on BESy®

Limited Warranty: BESy® offer lifetime limited warranty, all parts and finishes of this BESy® are warranted to the original consumer purchaser to be free from defects in material and workmanship, in each case from the date of purchase.

Cleaning and Care

Care should be given to the cleaning of this product. Although its finish is extremely durable. It can be damaged by harsh abrasives or polish. To clean, simply wipe gently with a damp-cloth and blot dry with a soft towel.