


# Light Fixture Instruction



## 1、Product profile & packing

### 1.1 Profile

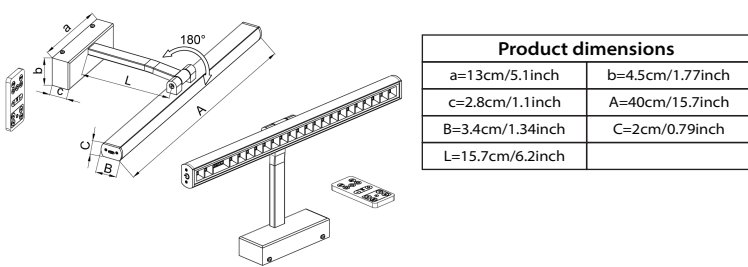

### 1.2 Packing List


| NO | Part name        | Specification        | QTY |
|----|------------------|----------------------|-----|
| A  | LED Light Source | LED, Remote Control  | 1   |
| B  | Mounting Plate   | Metal                | 1   |
| C  | Remote Control   | 11 buttons           | 1   |
| D  | Charging Cable   | Type-C, 100cm/39.4in | 1   |
| E  | Expansion Screw  | Plastic              | 3   |
| F  | Screw            | ST3.5x25, Cross      | 3   |

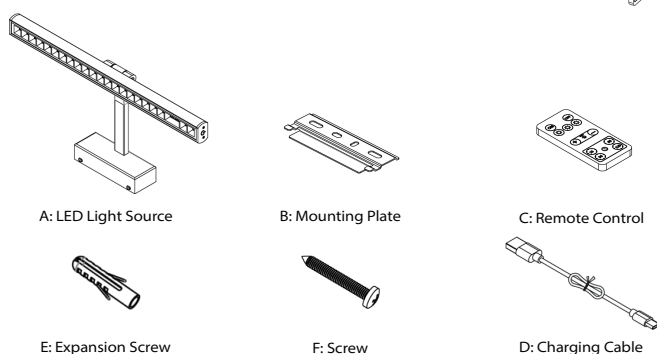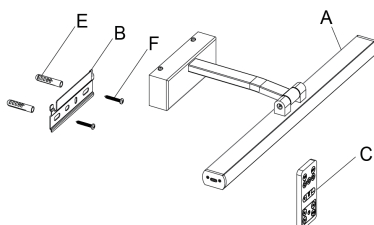

# Light Fixture Instruction



## 1、Product profile & packing

### 1.1 Profile

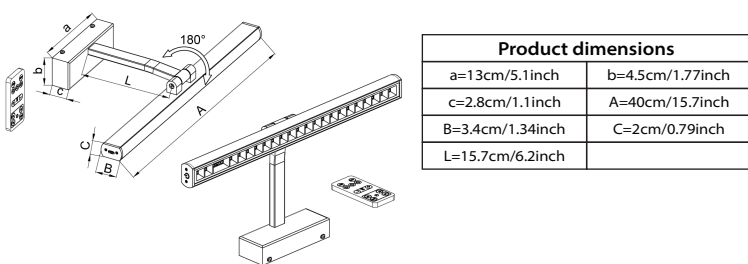


### 1.2 Packing List

| NO | Part name        | Specification        | QTY |
|----|------------------|----------------------|-----|
| A  | LED Light Source | LED, Remote Control  | 1   |
| B  | Mounting Plate   | Metal                | 1   |
| C  | Remote Control   | 11 buttons           | 1   |
| D  | Charging Cable   | Type-C, 100cm/39.4in | 1   |
| E  | Expansion Screw  | Plastic              | 3   |
| F  | Screw            | ST3.5x25, Cross      | 3   |

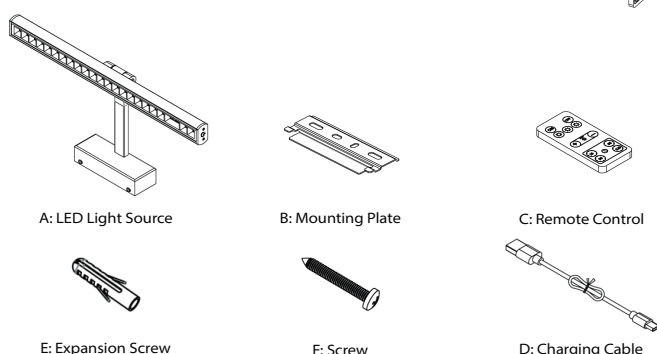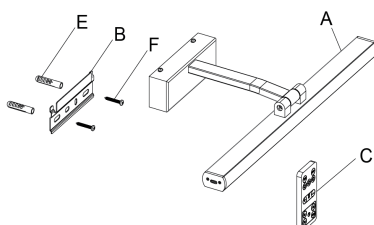

### 1.3 Packing

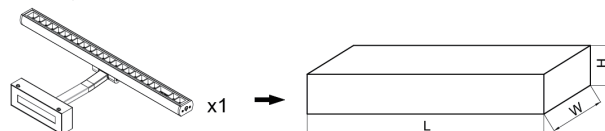

| Package Dimensions |                |               |
|--------------------|----------------|---------------|
| L=42cm/16.5inch    | W=20cm/7.9inch | H=6cm/2.4inch |

## 2.Specification for the LED Light


| Color                  | Black/Gold          |                               |
|------------------------|---------------------|-------------------------------|
| Light                  | CRI                 | Ra $\geq$ 85                  |
|                        | Brightness          | 250-280LM                     |
|                        | Color Temperature   | 3000K-4000K-6500K             |
|                        | Lamp Bead           | 24pcs dual SMD LED            |
|                        | Power               | 3W MAX                        |
| Electricity            | Power Supply        | Built-in rechargeable battery |
|                        | Charging            | DC 5V                         |
|                        | Input               | 2A                            |
|                        | Charging Time       | 4-5 hours (fast charger)      |
|                        | Working Time        | 9-10hours                     |
| Additional Information | Waterproof          | IP40                          |
|                        | Material            | Aluminum alloy+iron+PC        |
|                        | Working Temperature | -20 ~ +50 C                   |
|                        | lifespan            | $\geq$ 25000Hours             |
|                        | Certification       | PES/FCC/CE                    |

## 3.Installation


Warning:

1)Please read the instruction carefully before beginning installation.

Step1: Screw the screw (F) through Mounting Plate (B), and fix it.

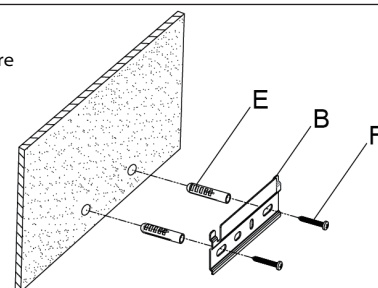

### 1.3 Packing

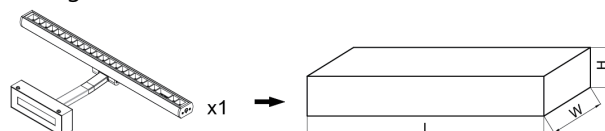

| Package Dimensions |                |               |
|--------------------|----------------|---------------|
| L=42cm/16.5inch    | W=20cm/7.9inch | H=6cm/2.4inch |

## 2.Specification for the LED Light


| Color                  | Black/Gold          |                               |
|------------------------|---------------------|-------------------------------|
| Light                  | CRI                 | Ra $\geq$ 85                  |
|                        | Brightness          | 250-280LM                     |
|                        | Color Temperature   | 3000K-4000K-6500K             |
|                        | Lamp Bead           | 24pcs dual SMD LED            |
|                        | Power               | 3W MAX                        |
| Electricity            | Power Supply        | Built-in rechargeable battery |
|                        | Charging            | DC 5V                         |
|                        | Input               | 2A                            |
|                        | Charging Time       | 4-5 hours (fast charger)      |
|                        | Working Time        | 9-10hours                     |
| Additional Information | Waterproof          | IP40                          |
|                        | Material            | Aluminum alloy+iron+PC        |
|                        | Working Temperature | -20 ~ +50 C                   |
|                        | lifespan            | $\geq$ 25000Hours             |
|                        | Certification       | PES/FCC/CE                    |


## 3.Installation

Warning:


1)Please read the instruction carefully before beginning installation.

Step1: Screw the screw (F) through Mounting Plate (B), and fix it.

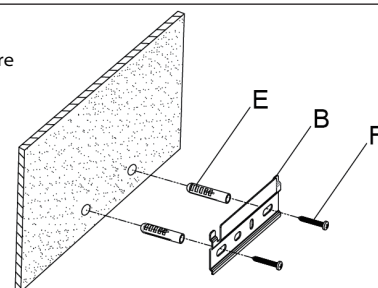

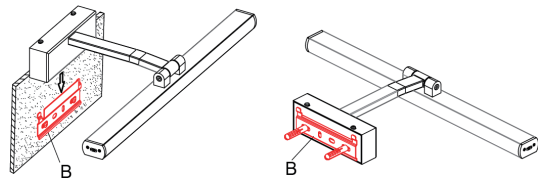

**Step2: Hang the LED light source (A) on the mounting plate (B).**

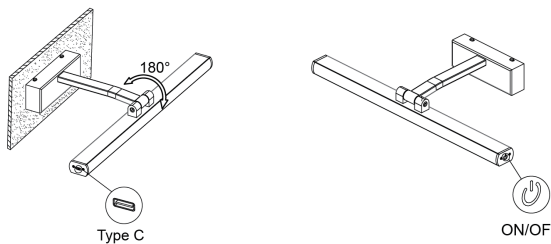

**Step3: The LED light source (A) can be rotated 180°, Type C charging port, and touch the “ON/OFF” button to turn on/off the light or adjust the brightness.**

#### The Instruction of Charging

- 1.Type C charging port: DC5V/2A
2. Take down the light tube to recharge,indicator light is red when charging, turn green when finished.


#### The Instruction of Touch Key

- 1.Short press: Touch once the button int to turn ON, twice for cool white light,third for warm light,forth for nature light ,the last to turn OFF. Touch the button and hold for seconds to adjust any level brightness.
- 2.Long press: after touching the buttons for a few seconds, adjust the light brightness.


## 4.The Instruction of Remote Control

Tips:

- 1) Remove the insulation tabs from the Remote Controller before use
- 2) Remote distance: The remote-control distance is 4M/13FT. Aim at the picture light

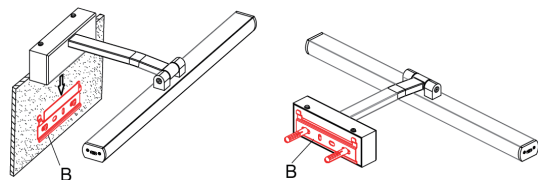

**Step2: Hang the LED light source (A) on the mounting plate (B).**

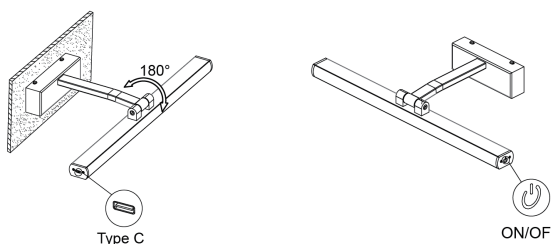

**Step3: The LED light source (A) can be rotated 180°, Type C charging port, and touch the “ON/OFF” button to turn on/off the light or adjust the brightness.**

#### The Instruction of Charging

- 1.Type C charging port: DC5V/2A
2. Take down the light tube to recharge,indicator light is red when charging, turn green when finished.

#### The Instruction of Touch Key

- 1.Short press: Touch once the button int to turn ON, twice for cool white light,third for warm light,forth for nature light ,the last to turn OFF. Touch the button and hold for seconds to adjust any level brightness.
- 2.Long press: after touching the buttons for a few seconds, adjust the light brightness.

## 4.The Instruction of Remote Control


Tips:

- 1) Remove the insulation tabs from the Remote Controller before use
- 2) Remote distance: The remote-control distance is 4M/13FT. Aim at the picture light


- The function of Remote Control
- 1.On and Off switch
  - 2.Color temperature adjustment
  - 3.Brightness adjustment
  - 4.Timing modes

### Introduction of the Remote Control Key


- ON On switch: Turn on the LED Light
- OFF Off switch: Turn off the LED Light
- ☀️ ☀️ ☀️ "Warm White", "Natural White", "Cool White"
- 🌟 + Adjust brightness: "-" Turn down, "+" turn up
- 15 60 30 120 Auto timer power-off in "15MIN", "30MIN", "60MIN" or "120MIN"



### 4.2 Replace the Battery of Remote Control



1. Pull out the battery holder with force as shown in the picture.



2. Remove the battery and replace it.

## 5.Failure Analysis and Solutions

| The fault phenomenon         | Cause analysis                                                                                                                               | The solution                                                                                                   |
|------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|
| Light does not work          | 1.Battery has run down                                                                                                                       | 1. Charge the lamp                                                                                             |
| Remote control does not work | 1.Insulation piece not dialed down.<br>2. Remote control is not aligned with the wall sconces.<br>3. The remote control distance is too far. | 1. Remove the insulation tabs<br>2. Replace the battery<br>3. The remote control distance is no more than 13ft |

### Warranty

Dear Customer,


For your better using experience, we offer efficient after-sale customer service, If you have any question, please don't hesitate to contact us via amazon email from your order page. We are always here providing prompt response and good solutions to you within 12 hours.

The function of Remote Control


- 1.On and Off switch
- 2.Color temperature adjustment
- 3.Brightness adjustment
- 4.Timing modes

### Introduction of the Remote Control Key


- ON On switch: Turn on the LED Light
- OFF Off switch: Turn off the LED Light
- ☀️ ☀️ ☀️ "Warm White", "Natural White", "Cool White"
- 🌟 + Adjust brightness: "-" Turn down, "+" turn up
- 15 60 30 120 Auto timer power-off in "15MIN", "30MIN", "60MIN" or "120MIN"

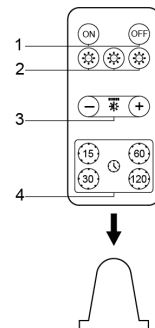

### 4.2 Replace the Battery of Remote Control



1. Pull out the battery holder with force as shown in the picture.



2. Remove the battery and replace it.

## 5.Failure Analysis and Solutions

| The fault phenomenon         | Cause analysis                                                                                                                               | The solution                                                                                                   |
|------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|
| Light does not work          | 1.Battery has run down                                                                                                                       | 1. Charge the lamp                                                                                             |
| Remote control does not work | 1.Insulation piece not dialed down.<br>2. Remote control is not aligned with the wall sconces.<br>3. The remote control distance is too far. | 1. Remove the insulation tabs<br>2. Replace the battery<br>3. The remote control distance is no more than 13ft |

### Warranty

Dear Customer,

For your better using experience, we offer efficient after-sale customer service, If you have any question, please don't hesitate to contact us via amazon email from your order page. We are always here providing prompt response and good solutions to you within 12 hours.