


Features

- Acrylic
- Bask™ heated lumbar support with three temperature settings
- 5 fully adjustable color-matched hydro-massage jets
- Molded lumbar support and armrests for comfort
- Textured bottom surface
- Integral tile flange [K-1239-LW and K-1239-RW]
- Drop-in Installation [K-1239-W1] or 3-wall alcove installation [K-1239-LW and K-1239-RW]
- Reversible drain [K-1239-W1] or left/right drain [K-1239-LW and K-1239-RW]
- 60" (1524 mm) x 36" (914 mm) x 20" (508 mm) - Drop-in models
- 60" (1524 mm) x 36" (914 mm) x 21-1/4" (540 mm) - Integral flange models

5' BATH WHIRLPOOL WITH BASK™ K-1239-W1 ALSO K-1239-LW, K-1239-RW

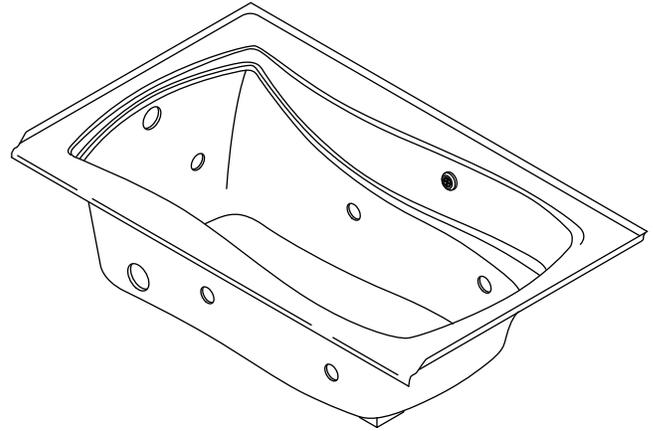

Codes/Standards Applicable

Specified model meets or exceeds the following:

- UL 1795
- CSA B45.5/IAPMO Z124
- ASME A112.19.7/CSA B45.10
- ASTM E162
- ASTM E662

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes
- CP: Polished Chrome
- PB: Vibrant® Polished Brass

Specified Model

Model	Description	Colors/Finishes	
K-1239-W1	5' Bath whirlpool with Bask – drop-in	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
K-1239-LW	5' Bath whirlpool with Bask – three-wall alcove, left drain (shown)	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
K-1239-RW	5' Bath whirlpool with Bask – three-wall alcove, right drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____

Recommended Accessories

K-7161-AF	Adjustable pop-up drain with tailpiece	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other _____
-----------	--	-----------------------------	-----------------------------	--------------------------------------

Optional Accessories

K-1278	Removable apron	<input type="checkbox"/> 0		<input type="checkbox"/> Other _____
K-9695	Metal finish 5 jet trim kit		<input type="checkbox"/> CP <input type="checkbox"/> PB	<input type="checkbox"/> Other _____

Product Specification

The acrylic bath whirlpool shall be 60" (1524 mm) in length, 36" (914 mm) in width, and 20" (508 mm) in height (drop-in models), or 60" (1524 mm) in length, 36" (914 mm) in width, and 21-1/4" (540 mm) in height (integral flange models). Bath shall feature Bask heated lumbar support with three temperature settings. Product shall have 5 fully adjustable color-matched hydro-massage jets. Product shall feature molded lumbar support and armrests for comfort and textured bottom surface. Product shall have integral tile flange [K-1239-LW and K-1239-RW]. Product shall be for drop-in Installation [K-1239-W1] or 3-wall alcove installation [K-1239-LW and K-1239-RW]. Product shall have reversible drain [K-1239-W1] or left/right drain [K-1239-LW and K-1239-RW]. Bath whirlpool shall be Kohler Model K-1239-W1-____ or K-1239-____-____.

MARIPOSA®

Technical Information

Fixture*:			
Basin area:			
Bathing area, bottom	46" (1168 mm) x 24" (610 mm)		
Bathing area, top	54" (1372 mm) x 27" (686 mm)		
Weight	111 lbs (50.3 kg)		
To overflow:			
Water depth	14" (356 mm)		
Capacity	63 gal (238.5 L)		
* Approximate measurements for comparison only.			
Drop-in cut-out		58" (1473 mm) x 34" (864 mm)	
	V	Hz	A
1-speed pump	120	60	7
Heated surface	120	60	0.5

Required Electrical Service

Dedicated circuit required, protected with a Class A Ground-Fault Circuit-Interrupter (GFCI):	
Pump/Control/Heated surface	120 V, 15 A, 60 Hz


Installation Notes

Install this product according to the installation guide.

Floor support under whirlpool must provide for a minimum of 44 lbs/square foot (214 kg/square meter) loading.

The apron must be installed before the finished floor and wall materials are installed.

Locate a GFCI-protected 120 V, 15 A, grounded duplex electrical outlet within 24" (610 mm) of the bath junction box.

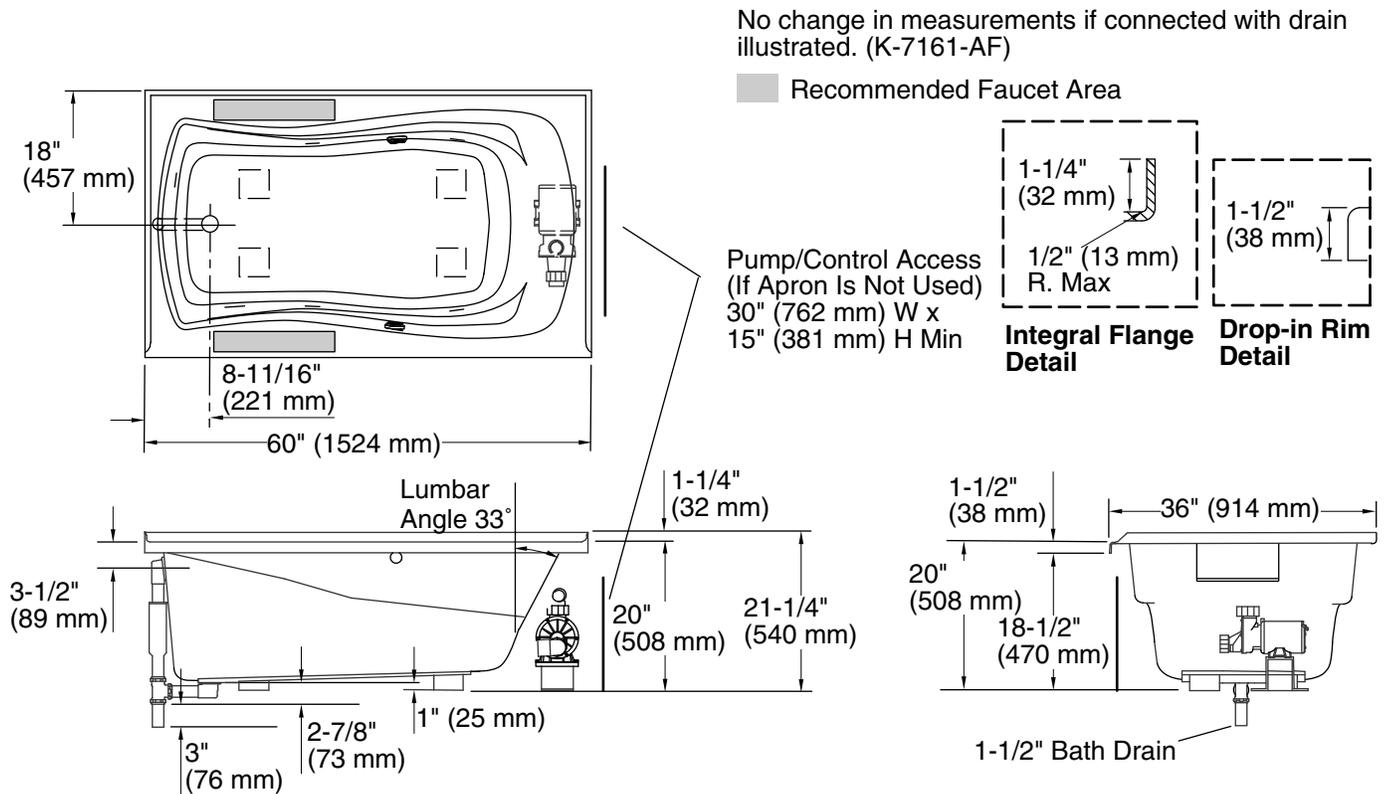

Product Diagram