

Instructions

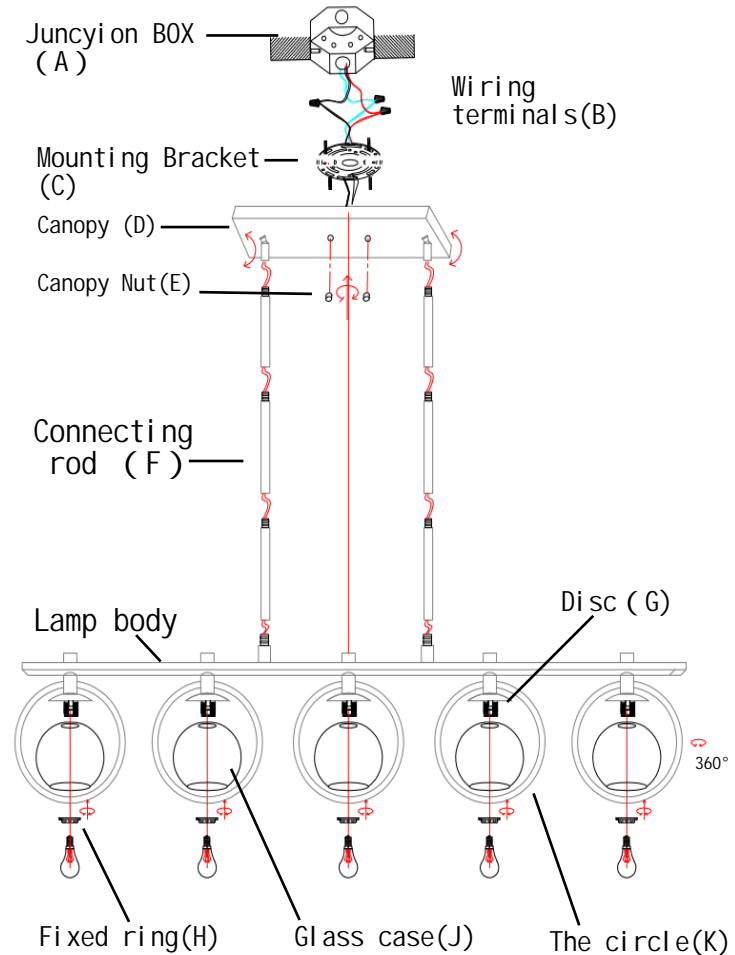
WARNING



- Check for electric, gas, & plumbing lines before drilling or consult a professional.
- Turn off your electricity at the circuit breaker or main fuse box before installation. Do not restore power to the line until the light has been fully installed.
- Do not use with bulbs exceeding the recommended wattage.
- Always switch off the electricity supply and allow bulbs to cool for 10 minutes before changing it.
- Do not look directly at lit bulb.

ASSEMBLY

It is recommended to use two or more persons during the assembly process.

1. Connect the lamp body to the connecting rod (F)
2. Select the required length for the connecting rod (F)
3. Fix the installation bracket (C) onto the junction box (A)
4. Refer to the wiring diagram and connect the power cord using terminal block (B). Pay attention to distinguishing between positive and negative electrodes
5. Cover the terminal block (B) with the top cover (D) and tighten it with the top cover nut (E)
6. Insert the CD (G) and glass case (J) into the lamp holder and secure them with a fixing ring (H)
7. Rotate the circle (K) (which can be 360°) to adjust to your preferred position and screw in the E12 bulb MAX60W
8. After installation, turn on the power switch and test if the lighting fixtures are on. Due to the large size of the lamp body and relatively complex installation, it is recommended to have a professional electrician complete it!



d1		x 3
d2		x 2

E12 Socket Max
.60W Bulbs
(not included)