


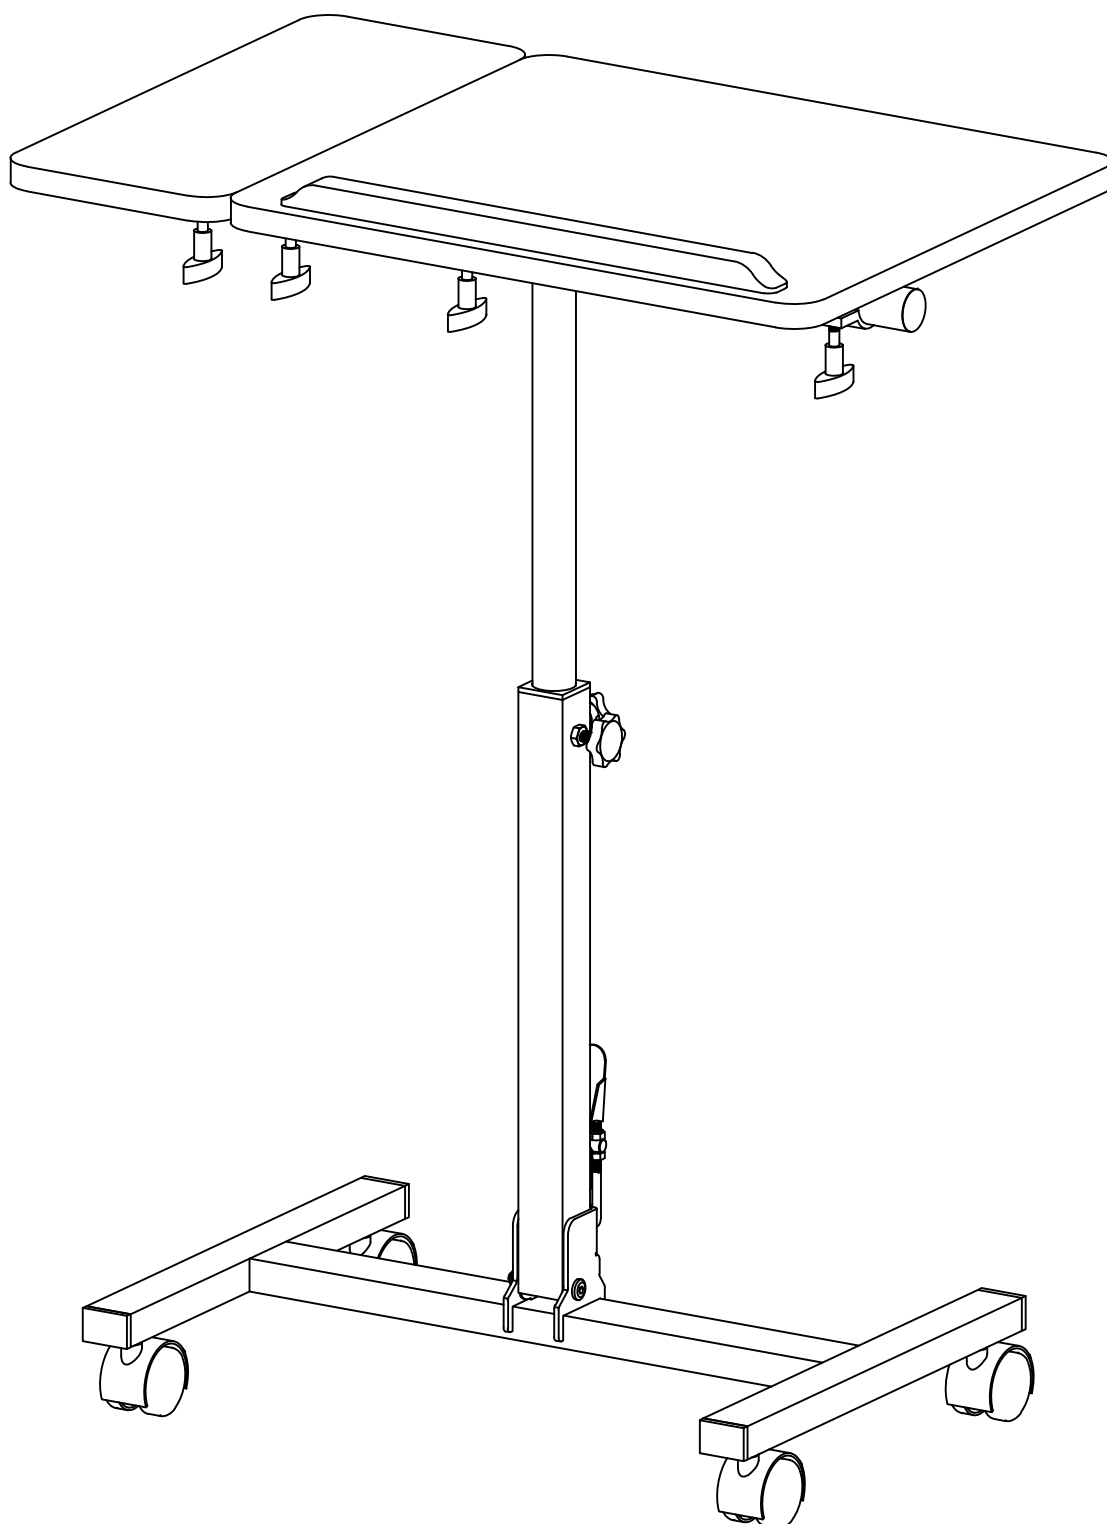


INSTALLATION INSTRUCTIONS

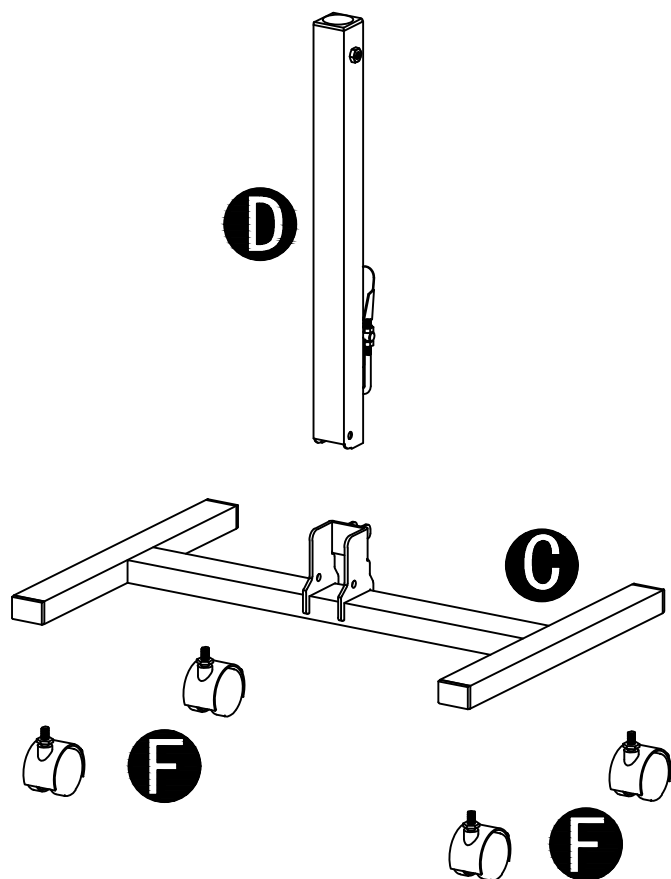

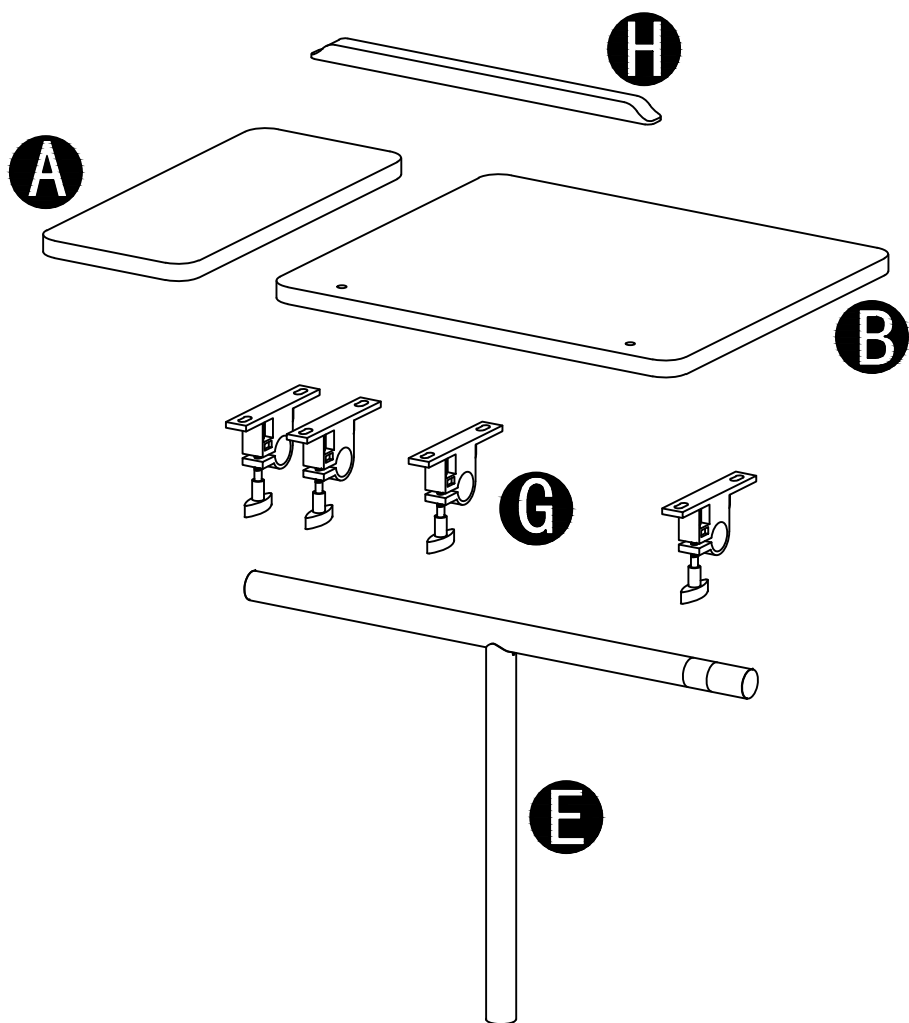


A




1 pc

B

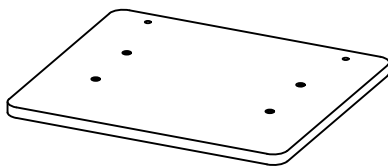


1 pc

C

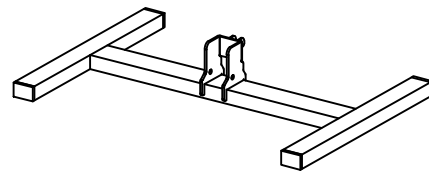


1 pc

D



1 pc

E




1 pc

F




Swivel Caster
4 pcs

G



Rotating Bracket
4 pcs

H



Plastic Baffle Strip
1 pc

1




M6×14mm
8 pcs

2




M6×20mm
2 pcs

3



Hex Nut
M6×45mm
1 pcs

4



Plum Knob Screw
2 pcs

5




M6 Hex Key
1 pc

6




M5 Hex Wrench
1 pc

7





M6 Hex Wrench
1 pc

1

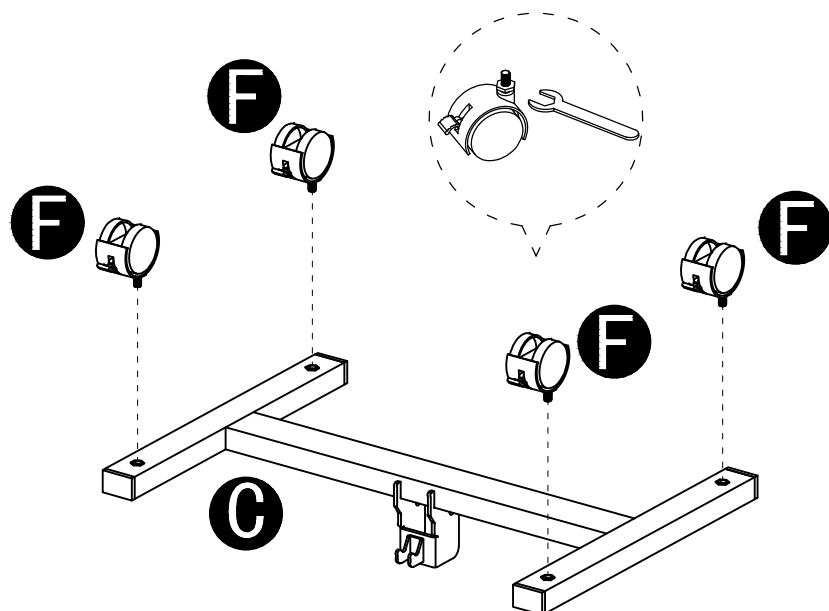


2

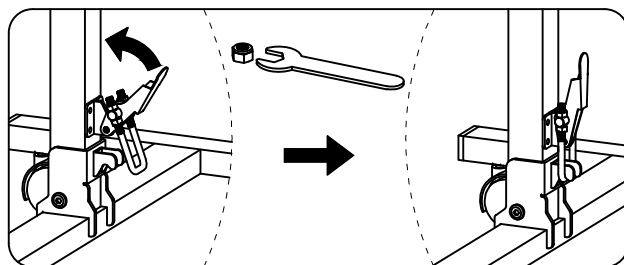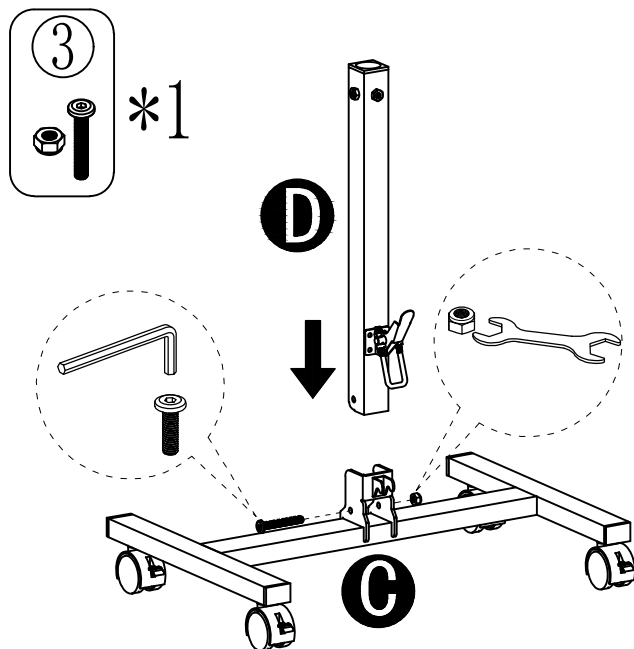

First, tighten the screw No. 3, and then fasten the lock latch (if the lock latch pull ring is too loose or too tight, you can adjust the travel of the nut on the pull ring).


3

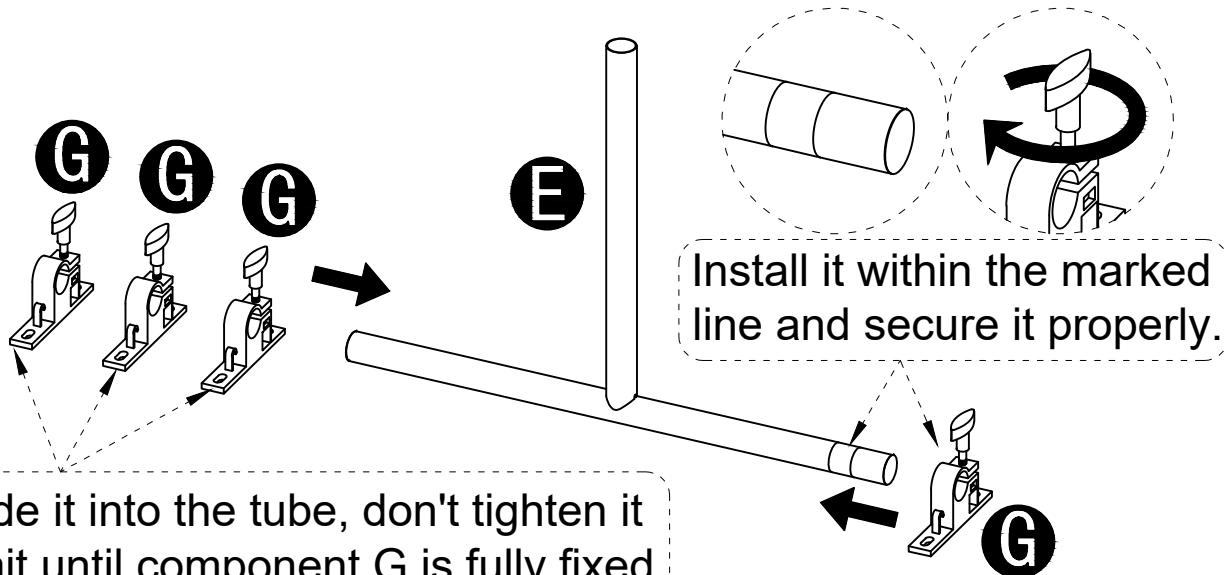


Just slide it into the tube, don't tighten it yet. Wait until component G is fully fixed to the wooden board before tightening.

Install it within the marked line and secure it properly.



4





Adjust the desktop direction based on left- or right-hand preference.

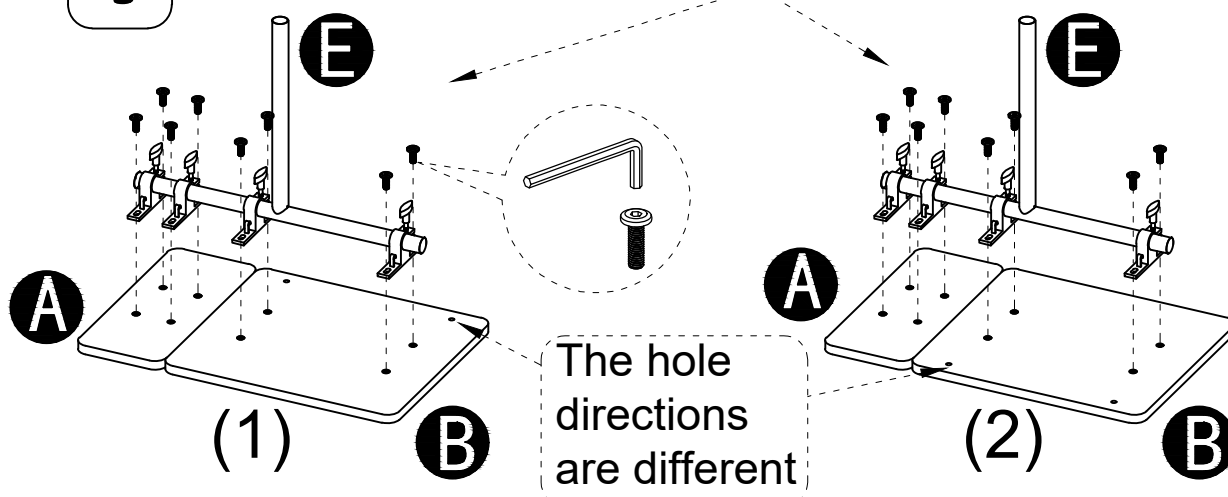


5

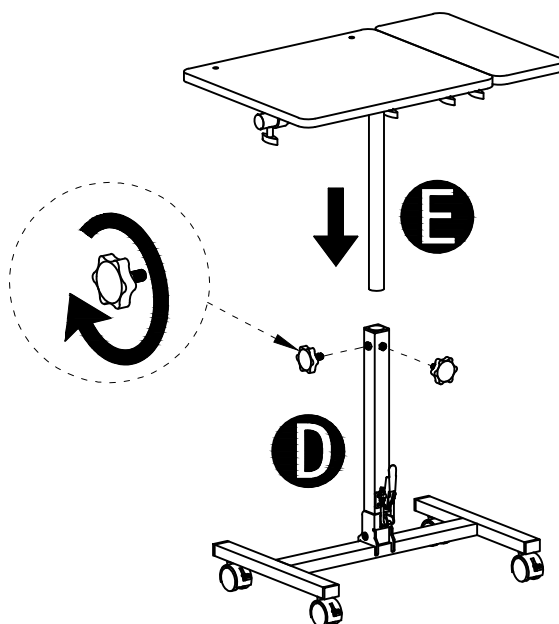

6

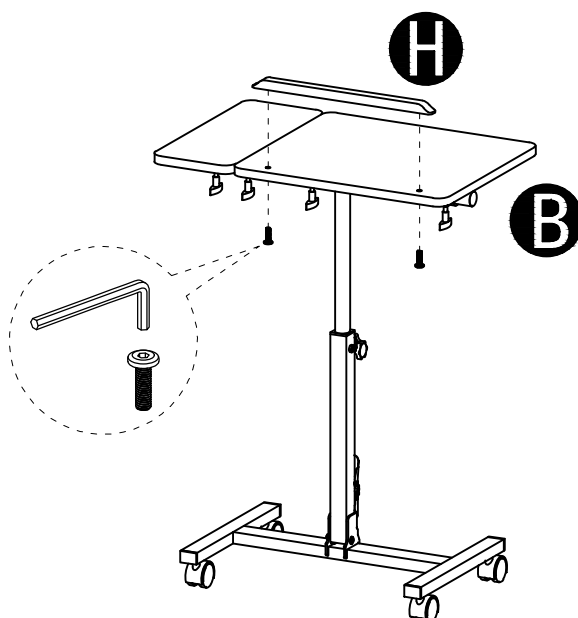


Height Adjustment

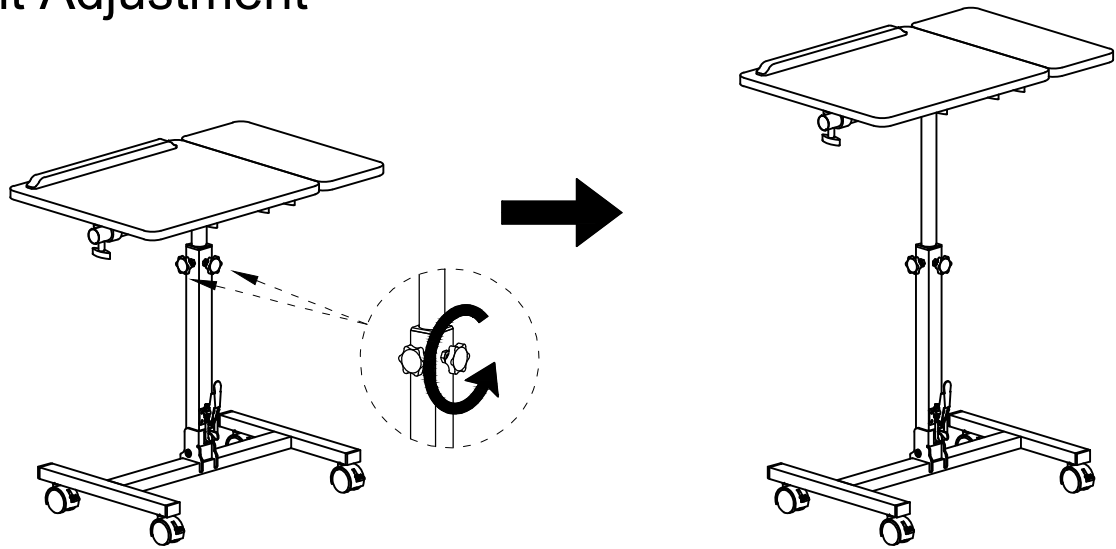


Loosen the screw handle here to adjust the desktop height.

Angle Adjustment

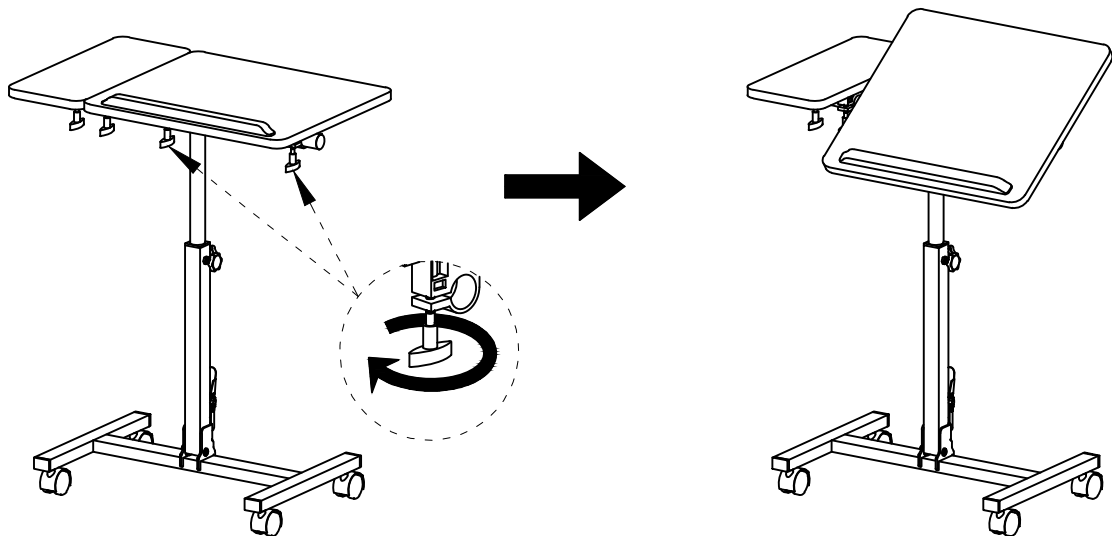

Loosen the screw handle here to adjust the desktop angle.

Folding Method

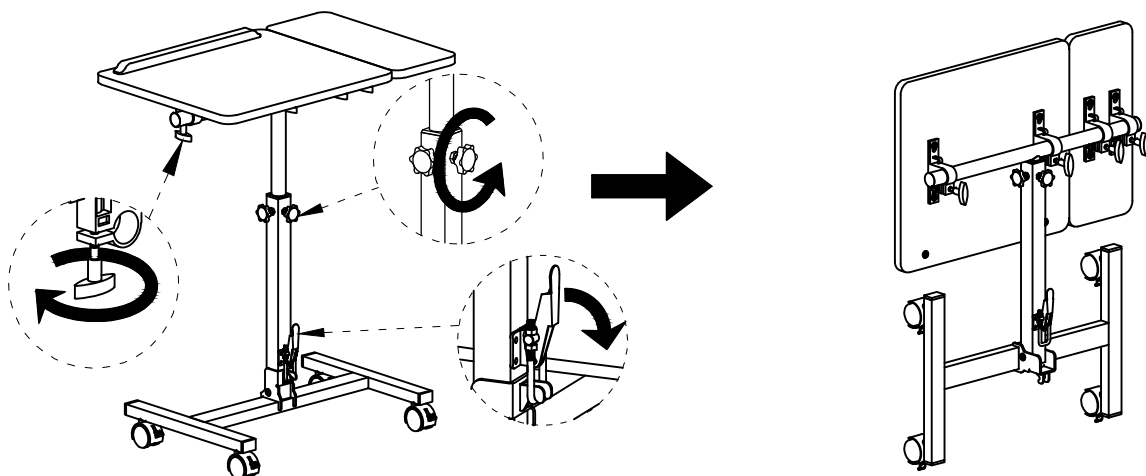

After loosening the screws and opening the buckle handle, the table can be folded.