





# Assembly Instructions

**Caution: You must read this before you proceed.**





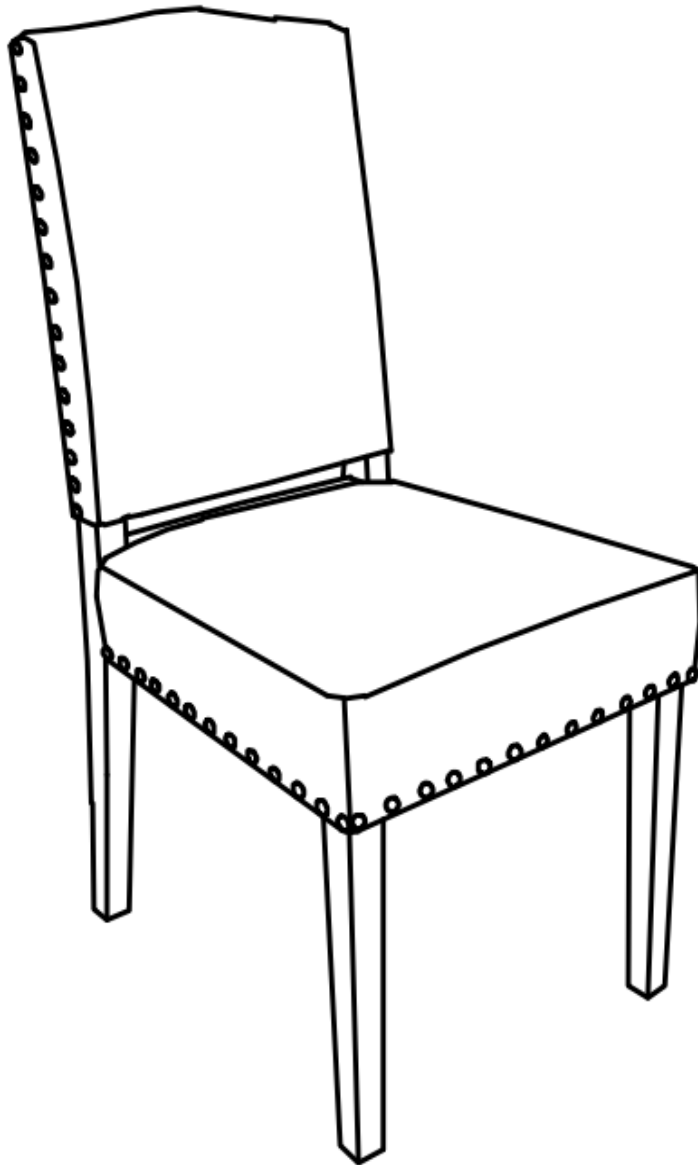
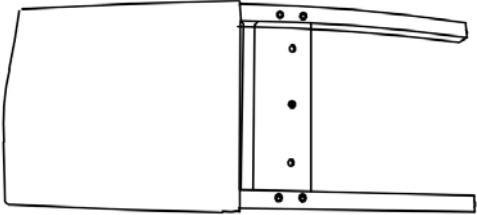
## Dining Chair



## Parts List


Label	Picture	Description	QTY
A		Chair Back	1PC
B		Chair Seat	1PC
C		Front Legs	2PCS

## Hardware

Label	Picture	Description	QTY
a		Dia. M8 Bolt: 90 mm(L)	5
b		Dia. M8 Bolt: 60 mm(L)	5
c		Dia. M8 Bolt: 60 mm(L)	1
d		Flat Washer Ring	11
e		Spring Washer Ring	11
f		Allen Key	1

# Assembly Preparation


Before Beginning Assembly: Unpack all the parts for a clear overview.

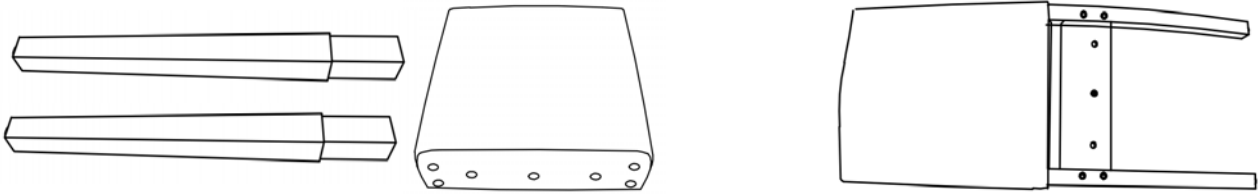


Pack A for assembling the Seat Frame (B) to the horizontal panel with two dowels of Chair Back (A) at the central point:  
 1pc of 60mm Short Bolt + 1pc of Flat Washer Ring + 1pc of Spring washer + one Allen key



Pack B for assembling the Seat Frame (B) to the hind legs of Chair Back (A): 4pcs of 90mm Long Bolts + 4pcs of Spring Washer Rings + 4pcs of Flat Washer Rings

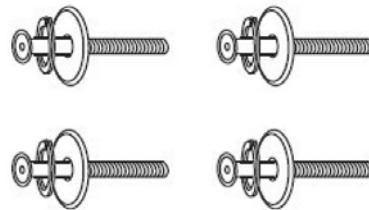

Pack C for assembling the Seat Frame (B) to the Front Leg Frame (C): 4pcs of 60mm Short Bolts + 4pcs of Flat Washer Rings + 4pcs of Spring Washer Rings



- Read instructions, cover to cover-



- Have 2 adults on hand for assembly-



- Do not assemble on flooring or carpet-




- Assemble on a clean non-marring surface (packing foam)-




- Save all packaging until finished-

# Assembly Steps

Step  
1

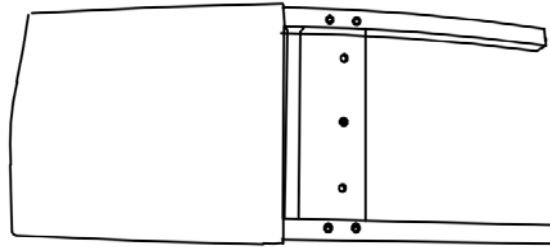

Chair Back

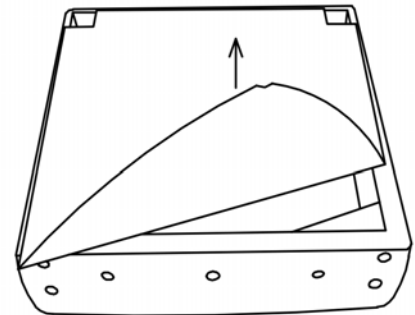


Chair Seat


Place the Chair Back(A) on a soft surface to avoid any scratches on the products.

Take out the 2 wooden legs and the package of hardware accessories.

Step  
2

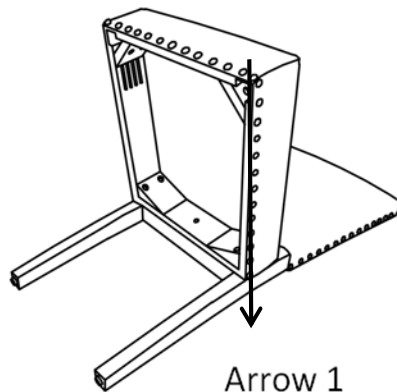

Arrow 1

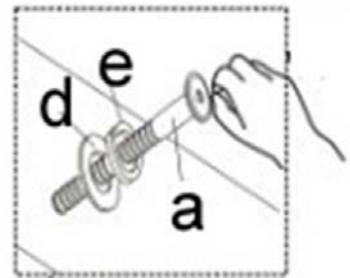

Put the Chair Back( A) onto a flat table or panel.

Align the positioning dowels on the Chair Seat(B) with the holes located on the Chair Back(A)-panel and Chair-Seat(B) panel.

Use your left hand to push the seat frame floorwards, depicted by Arrow 1.

This action helps to ensure the Chair Seat(B) is pressed towards to the Chair Back(A) with no gap between these.


Then, lock the middle hole and the corner holes.

The hardware for these are : use 5 Bolts (a)+ 5 Flat Washers (d) + 5 Spring Washers (e) with the Allen Key(f).



**At this point of assembly, DO NOT overtighten.**

## Step

3

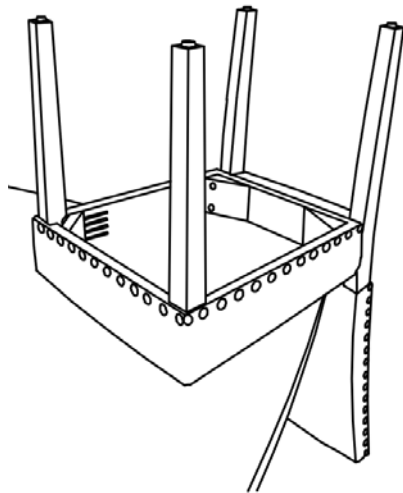

(1)

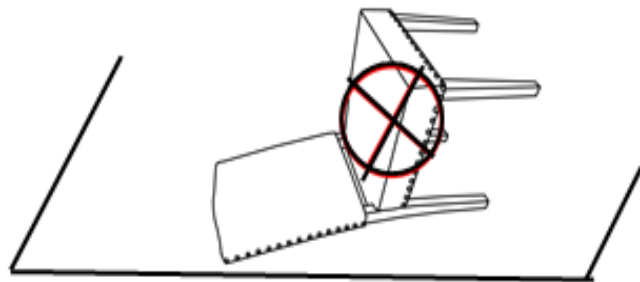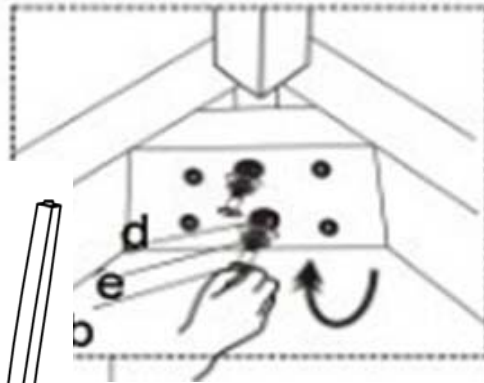

(2)

Next, place the chair onto the side of a table as shown in Picture 1. You will now have the chair bottom and all 4-legs facing skywards. Insert each front leg completely vertically into each seat frame corner. **PRESS FIRMLY DOWN** with your hand until there is no gap.

**WARNING!! DO NOT POSITION THE FRONT LEG AS SHOWN IN PICTURE 2 .**

THIS PICTURE SHOWS THE CHAIR BACK STAYS AGAINST THE GROUND and THE FRONT LEGS HORIZONTAL IN MIDAIR.


Now tighten the bottom bolt first, then the bolt on the top by using 4 Bolts (b) and 4 Flat Washers (d) and 4 Spring Washers (e). **DO NOT** tighten the top bolt first.

**WARNING!! DO NOT OVER TIGHTEN.**

**OVER TIGHTENING COULD LEAD TO DAMAGE OF THE PRODUCT.**

**TIGHTEN ONLY UNTIL SECURE AND STABLE.**

Step 4

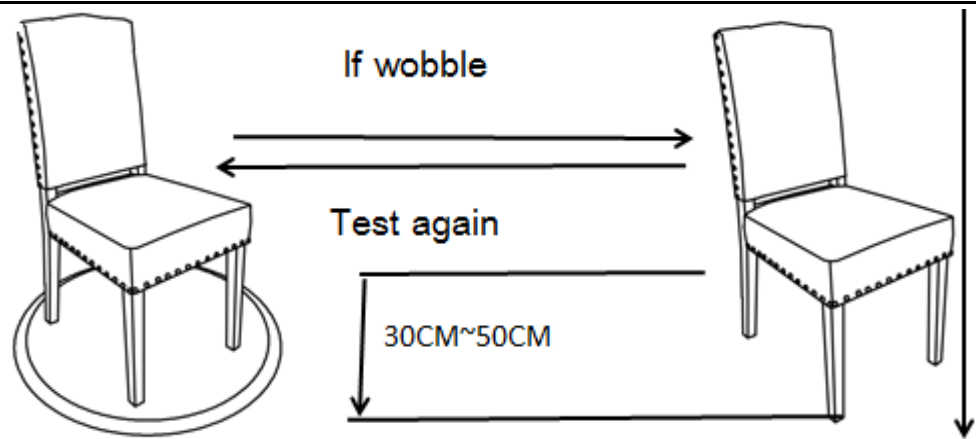

Place the chair on a LEVEL SURFACE to see if it wobbles. If it wobbles, lift the chair to some 30cm to 50cm height from the ground.

Keep your feet and toes well away from the drop zone.

Drop the chair freely and vertically with the four legs, hitting the ground, at the same time.

This Drop Test will help to ensure that all the bolts and gaps to all reach full alignment status.

Test again for evenness on a LEVEL SURFACE.

If no wobbles found, proceed to tighten all the bolts.

**CAUTION : When tightening these bolts, tighten sequentially.**


**DO NOT tighten any screw fully and then towards the next one.**

This would cause the frame to warp.

If there is still wobbles, loosen the bolts and execute this same drop tests.

**WARNING!! IF CHAIR IS NOT STABLE , IT COULD LEAD TO DAMAGING THE PRODUCT.**









Step 5




Finally, seal the Seat Base Cover back on to the underside of the chair seat .

Turn it the right side up. The chair is ready for use.

## Care & Maintenance

-  Do not put hot items directly on furniture surface.
-  Do not clean furniture with harsh cleansers or polish.
-  Do not place furniture under direct sunlight.
-  Do not place furniture near heating or cooling vents.
-  Do not write on furniture without a padded barrier to protect the surface.
-  Do not place furniture outside. For indoor use only.
-  Not for commercial use. For residential use only.
-  Stains may be removed with mild soap solution and damp cloth.

- 
-  Dust and pick-up spills using a clean, non-colored, lint-free cloth.