




# Assembly Instruction Sheet for Model HL515842

## Package Contents


Part	Description	Quantity
A	Socket	1 pc.
B	Fixture Arm	1 pc.
C	Backplate	1 pc.
D	Metal Shade	1 pc.

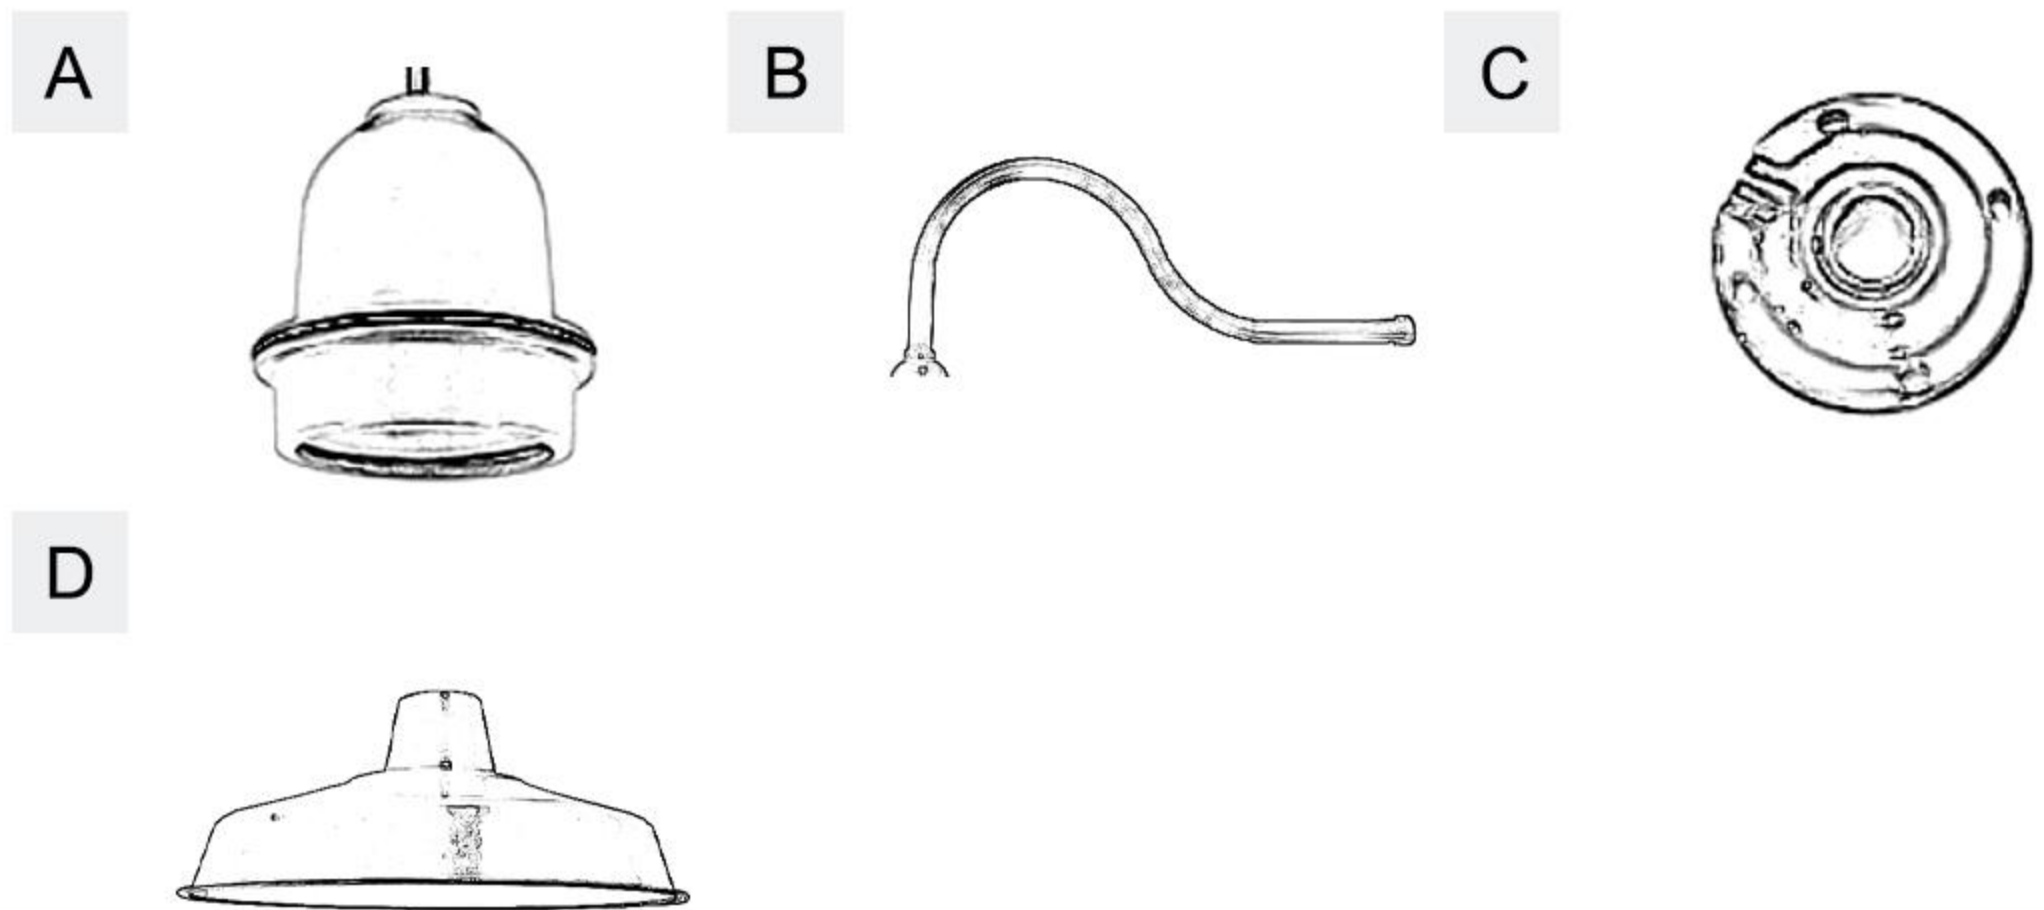

Unscrew the socket shell and remove the interior socket.



Screw electric wires to the holes of the interior socket.

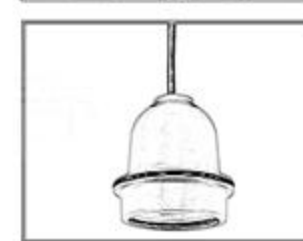

Thread the wires through the socket shell, align the groove of the interior socket to the tips inside the shell and push the interior socket back to the shell.



Hot Contact

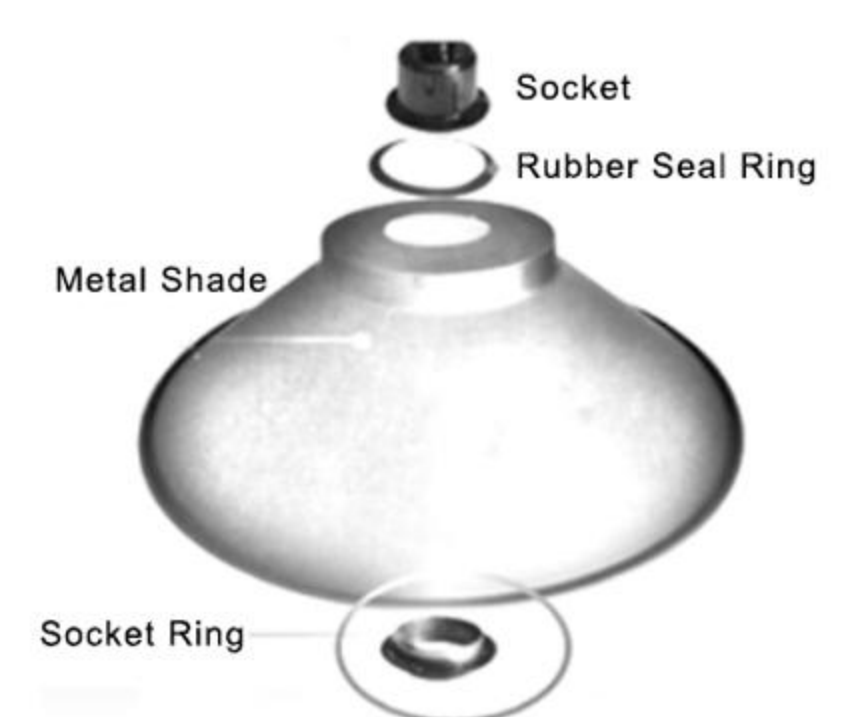
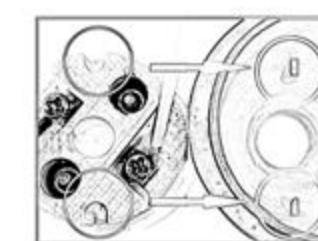


figure 1

figure 2

### STEP 1

Add wires to the Socket(A) according to figure 1.

### STEP 2

Thread the wire of Socket(A) through the Fixture Arm(B), and twist to fix the Socket(A) to the Fixture Arm(B).

### STEP 3

Thread wires from the Fixture Arm(B) to the hole of Backplate(C), and screw the Fixture Arm(B) to the Backplate(C).

### STEP 4

Mark the drilling position on wall with the help of the Backplate(A). Drill holes on the marks and stick the expansion anchors into the holes.

### STEP 5

Hold the fixture close to the wall.  
Connect live line to wire color Black/Red from the Backplate(C).  
Connect neutral line to wire color White/Blue from the Backplate(C).

### STEP 6

Attach the Backplate(A) to the expansion anchors with self-tapping screws.

### STEP 7

Fix the Metal Shade(D) to the Fixture Arm(B) with a socket ring according to figure 2.

### STEP 8

Insert your bulb to the bulb base.

Your fixture is now assembled and ready to use.