Assembly Instructions



1. Insert each Stainless Pipe to Drying Rack Bar by pushing it in until you hear click sound.



★★★

2. Both Drying Rack Bar must face **in the same direction** when inserting Stainless Pipes.



★★★

3. Loosely line up all 4 of opposite side of Stainless Pipes to the other Drying Rack Bar. Insert each Stainless Pipe to the Drying Rack Bar by pushing it in until you hear click sound. (Repeat step 1 and 3 to make all 6 of Drying Rack Assembly)



4. Insert Wheels to each Base Stand (No Wheel in the middle)



5. Insert Base Pipe to Base Stand and secure it by locking safety clamps.



Foldable Base Stand for storage



6. Insert Lower Support Pipe into Base Stand : then, insert Upper Support Pipe into Lower Support Pipe.



7. Insert 3 T-clamps to each support pipe (Check the T-clamp direction)

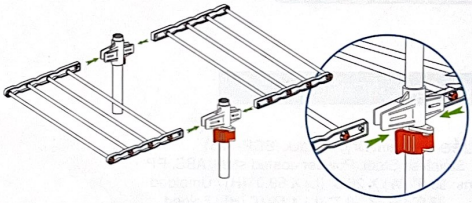

8. Slide in a Drying Rack Assembly into T-clamps.

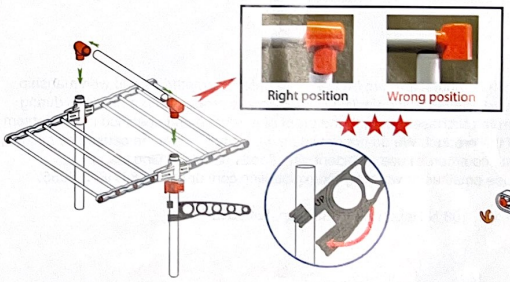

★★★

9. Insert Mult Purpose Pipe to support bars with Sockets and Side Wings. (See the picture for Sockets direction before inserting Multi Purpose Pipe)



10. Insert Sock Hooks to your preferred place outside if Drying Rack Assembly.