# Drake® Close Coupled Toilet, 1.6GPF

## **FEATURES**

- G-Max® flushing system
- Close coupled, high performance toilet
- Round front bowl and tank set, seat sold separately
- Chrome trip lever
- 12" Rough-in, supply line sold separately

#### **MODELS**

- CST743S
   Round bowl, 12" rough-in, less seat
- CST743SB\*
   Same as CST743S with bolt down lid (special order)
- CST743SD\*
   Same as CST743S with insulated tank (special order)
- CST743SDB\*
   Same as CST743S with bolt down lid & insulated tank (special order)
- CST743SR\*
   Same as CST743S with right hand trip lever (special order)

#### **COMPONENTS**

- C743E Round Front Bowl
- ST743S Tank and Cover only Left-hand trip lever
- ST743SB Tank and Cover only Bolt down lid
- ST743SD Tank and Cover only Insulated tank
- ST743SDB Tank and Cover only Bolt down lid and insulated tank
- ST743SR Tank and Cover only Right-hand trip lever
- ST743SBR Tank and Cover only Bolt down lid with right-hand trip lever
- SS113 SoftClose® seat (sold separately)

#### COLORS/FINISHES

 Standard #01 Cotton #03 Bone #11 Colonial White #12 Sedona Beige #51 Ebony





### PRODUCT SPECIFICATION

The two-piece G-Max flushing system toilet shall be 1.6GPF/6.0LPF. Toilet shall have high-profile tank, round front bowl and chrome trip lever. Toilet shall be TOTO Model CST743S

# CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC), State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others



# Drake® Close Coupled Toilet, 1.6GPF

### **SPECIFICATIONS**

Water Use
Flush System
Min. Water Pressure
Water Surface
Trap Diameter
1.6 GPF/6.0LPF
8 G-Max®
8 psi (static)
10-1/4" x 8-1/2"
2-1/8"

Trap Diameter 2-1/8"
 Rough-in 12"
 Trap Seal 2-3/8"

• Warranty One Year Limited Warranty

 Material Vitreous china
 Shipping Weight C743E - 53lbs ST743S - 35lbs

Shipping Dimensions C743E


27-3/4"L x 15"W1 x 10-1/4"W2 x 15-3/4"H

ST743S 20-1/8"L x 8-1/4"W x 15-1/2"H


### **INSTALLATION NOTES**

Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.



To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

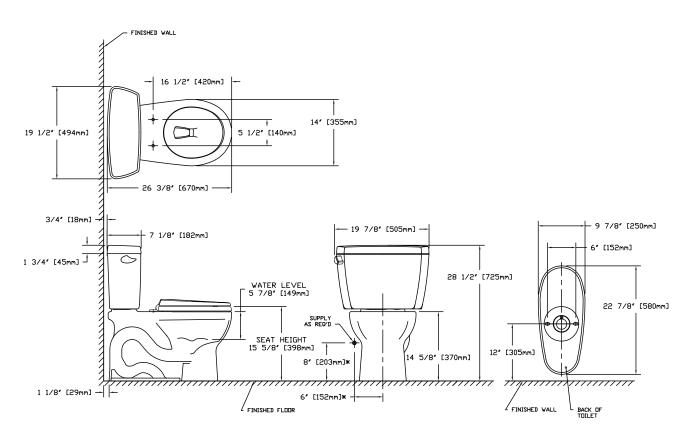

\*SUGGESTED DIMENSIONS