



Memoirs® | K-1170-GHW

66" x 42" drop-in Heated BubbleMassage™ air bath with Bask® heated surface

Features

- 122 airjets release thousands of heated bubbles that surround, support, and massage the body
- Variable-speed blower lets you adjust massage intensity to 18 levels
- Bask® heated surface creates spa-like relaxation with soothing warmth on your back, shoulders, and neck
- Built-in heater
- Automatic and manual purge cycles remove residual water from air channels after use
- 60-minute automatic shutoff timer
- Spacious design accommodates up to two bathers
- Integral lumbar support
- Keypad control
- Textured bottom surface
- Coordinates with other products in the Memoirs collection



Available Colors/Finishes

Color tiles intended for reference only.

- | | |
|----|---------|
| 0 | White |
| 96 | Biscuit |



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
7-30-2026 01:55 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

ASME A112.19.7/CSA B45.10
 CSA B45.5/IAPMO Z124
 ASTM E162
 ASTM E662
 UL 1795
 CSA C22.2 No. 218.2
 cUL Listed
 UL Listed

Technical Information

All product dimensions are nominal.

Drain Location:	Center
Drain Hole Diameter:	2-1/4" (57 mm)
Minimum Flat for Door:	3-13/16" (97 mm)
Basin Area, Bottom:	42" x 27" (1067 mm x 686 mm)
Basin Area, Top:	54" x 30" (1372 mm x 762 mm)
Water Depth:	16" (406 mm)
Water Capacity:	81 gal (306.6 L)
Minimum Floor Load:	44 lbs/ft²
Weight:	156 lbs (70.8 kg)

Material

- Acrylic

Recommended Products/Accessories

K-1446 Remote installation kit for BubbleMassage™ air baths
 K-1491 Bath/whirlpool pillow, removable
 K-1601 Bath/whirlpool footstop, removable
 K-1177 Tiling-in bead, 144" length
 K-7213 Cable bath drain with PVC tubing
 K-7214 Cable bath drain, less PVC tubing
 K-7259 Brass toe tap bath drain

Required Products/Accessories

- K-11677 Adjustable drain, 20-gauge brass, for 18-1/2" to 20-1/2" baths
 or
 K-T37392 Rotary-turn bath drain trim
 K-T37391 Rotary-turn bath drain trim
 or
 K-78438 30" cable bath drain
 K-37383 Rough-in cable bath drain, PVC, 30" cable with tubing
 or
 K-78439 45" cable bath drain
 K-37385 Rough-in cable drain, PVC, 45" cable, less horizontal tube

Technology

- Heated BubbleMassage™ technology warms and humidifies air before it enters the bath



Required Electrical Service

Two dedicated circuits required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

Blower, Heated surface: 120 V, 15 A, 60 Hz

Heater: 120 V, 15 A, 60 Hz

Electrical Component Ratings

Blower: 120 V, 10 A

Heated surface: 120 V, 0.5 A, 60 Hz

Heater: 120 V, 5 A, 60 Hz


Warranty

See website for detailed warranty information.

KOHLER® Plastic Baths and Shower Bases Lifetime Limited
Warranty|KOHLER® Hydrotherapy Components Five-Year
Limited Warranty




No change in measurements if connected with drain illustrated. (K-7161-AF)





Drop-in Rim Detail

Blower Motor Access
20" (508 mm) W x 15" (381 mm) H Min

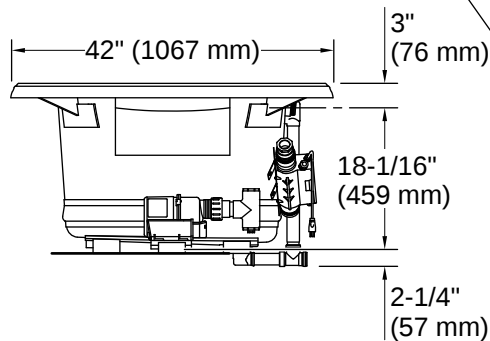

Heater pad is located on this side

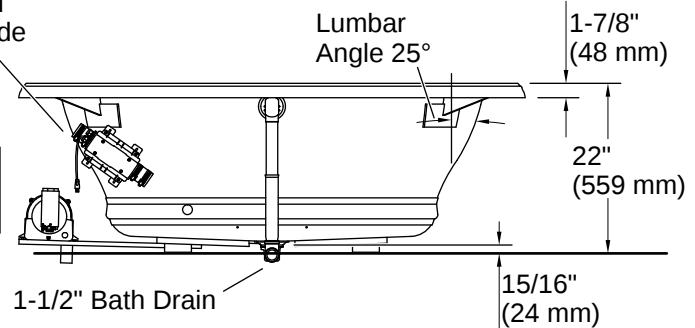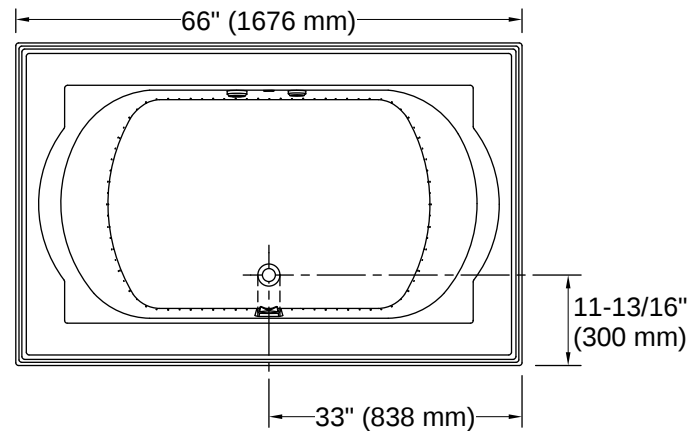

Installation

- Drop-in
- Rear center drain

Installation Notes

Install this product according to the installation instructions.

Measure your actual product for rough-in details.
The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

