














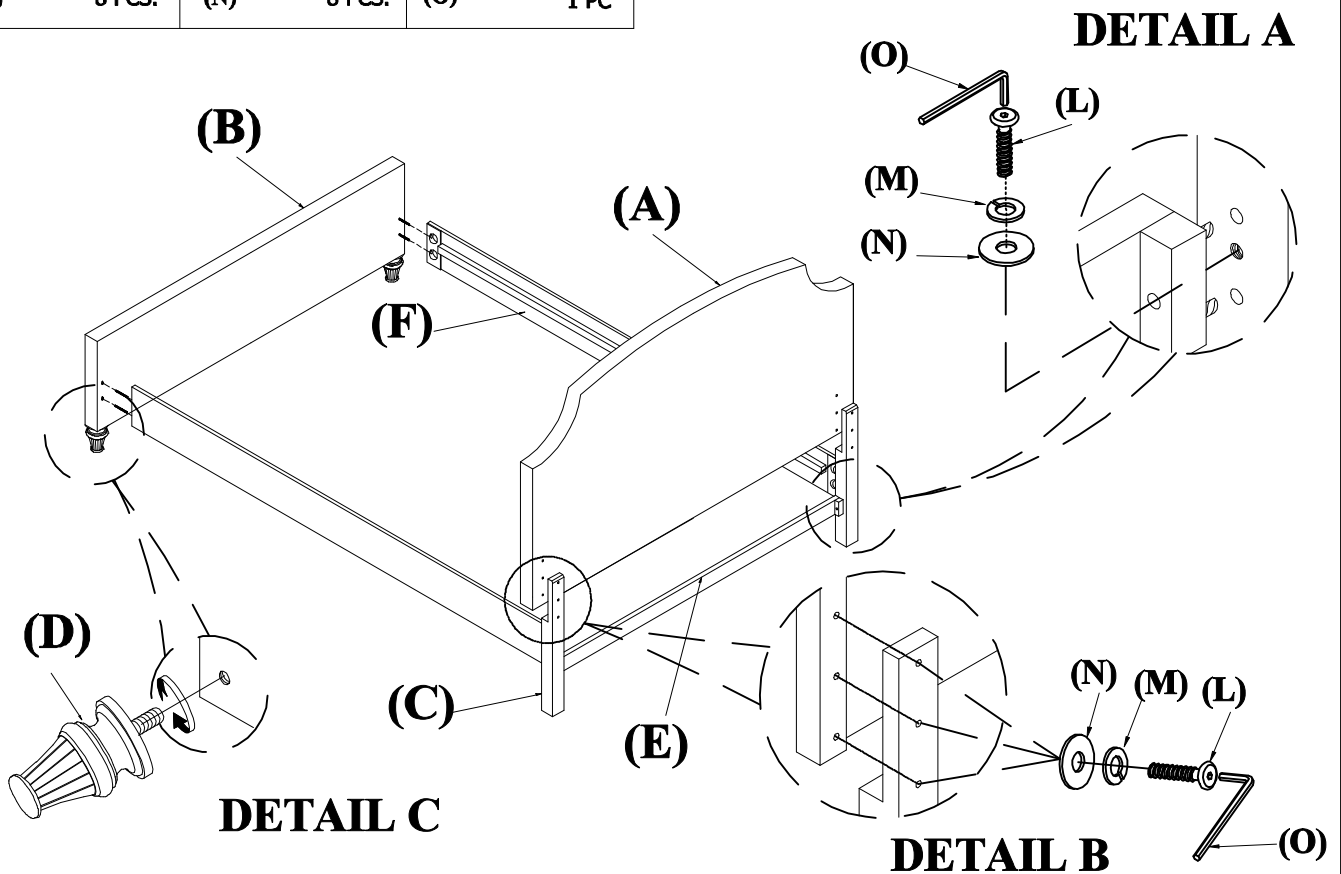


Assembly Instructions

Twin Bed HB+FB+SLATS

Component And Hardware List

HEADBOARD	FOOTBOARD	LEGS 1 LEFT & RIGHT	LEGS 2	STRETCHER	SIDE RAIL
 (A) 1 PC	 (B) 1 PC	 (C) 2 PCS	 (D) 2 PCS	 (E) 1 PC	 (F) 2 PCS
 (G) 13 PCS	 (H) 8 PCS	 (I) 8 PCS	 (J) 1 PC	 (K) 26 PCS	 (L) 8 PCS
 (M) 8 PCS	 (N) 8 PCS	 (O) 1 PC			




ASSEMBLY PROCEDURE:


1. Place the Stretcher (E) and Legs(C) on a soft and smooth surface.
2. Assemble Stretcher (E) to the Legs 2 (C) by using Bolt (L) Washer (N) Lock Washer (M) as shown in **DETAIL A**.
3. Assemble Headboard (A) to the Legs 2 (C) by using Bolt (L) Washer (N) Lock Washer (M) as shown in **DETAIL B**.
4. Screw the Legs 2(D) to the Footboard (B) as shown in **DETAIL C**.

Assembly Instructions

Twin Bed HB+FB+SLATS

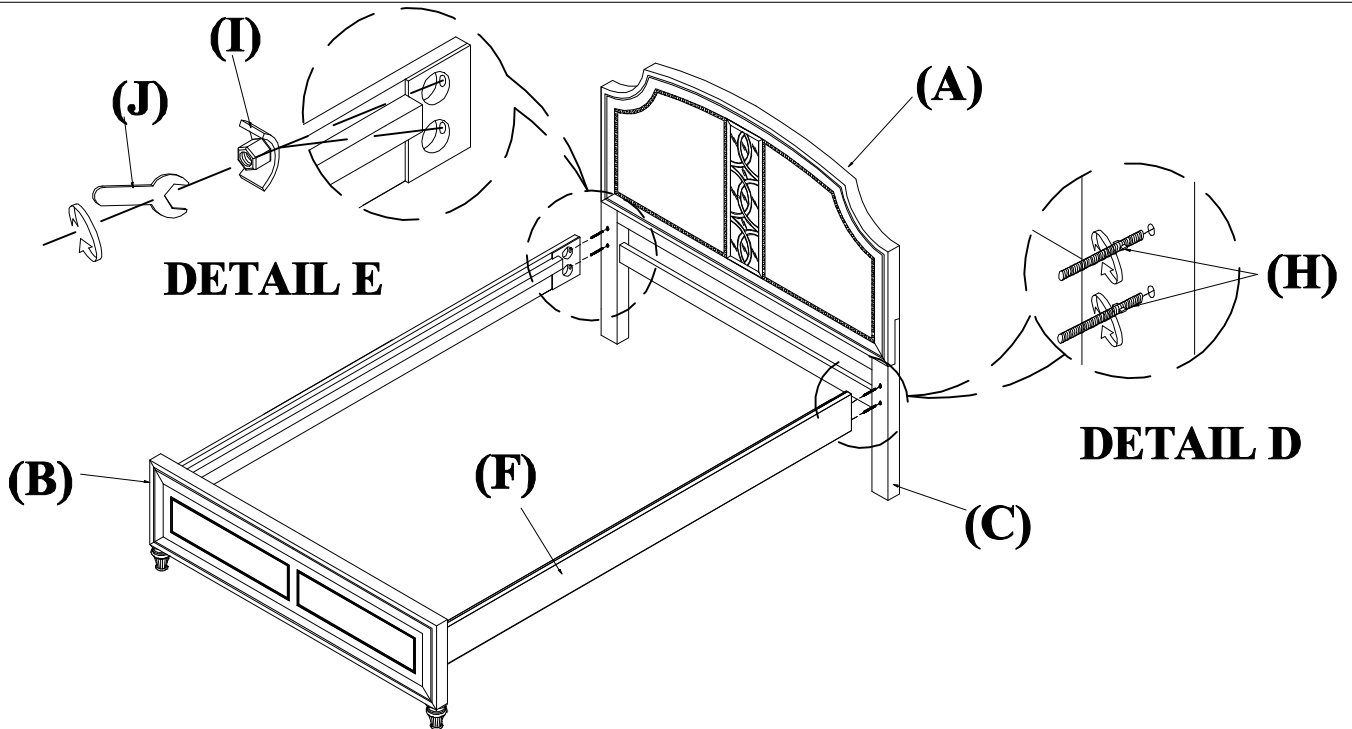

4. Insert the Bolt (H) with the shorter distance to the “CRIMP” in the Bolt, into The legs(c)and footboard (B) as shown in **DETAIL D**.
5. Assemble Side Rail (F) to the Legs 2 (C) and Footboard (B) by using Hex nut (I) as shown in **DETAIL E**.

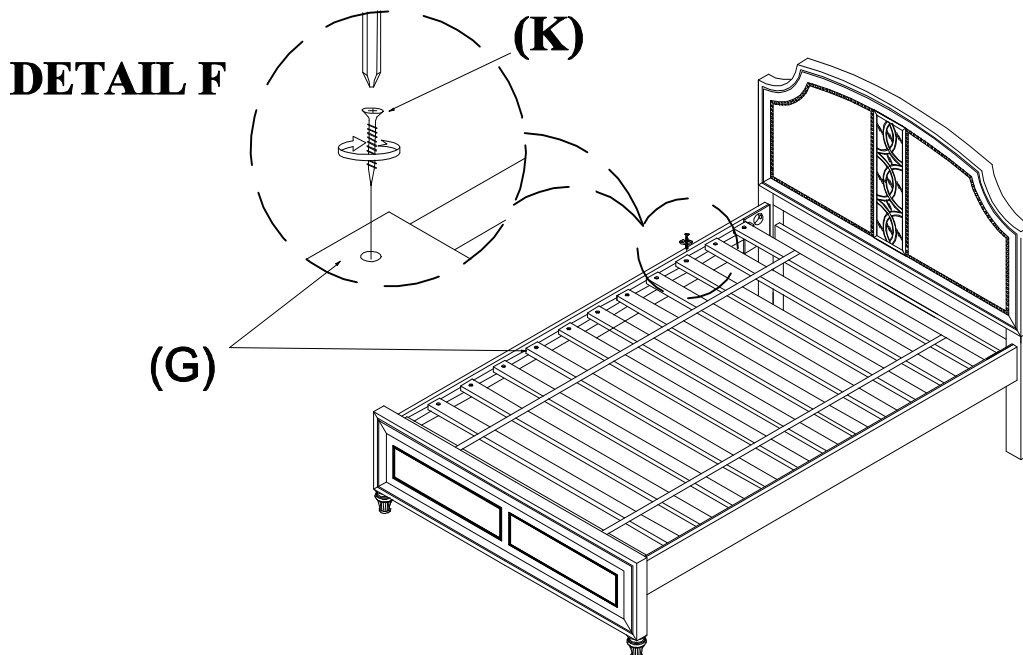

6. Place Slat roll (G) to the Side Rails (F). Screw in (K) on each end of the Slats Frame . As shown in **DETAIL F**.

THANK YOU FOR YOUR PURCHASE.

Page 2 of 2