


# DIMENSIONS AND CLEARANCES

The range may be installed flush to the rear wall.

You may install a non-combustible material, such as tile, on the rear wall above the range and up the vent hood.


It is not necessary to install non-combustible materials behind the range below the counter top height.

The minimum distance from the side of the range above the counter top to combustible sidewalls must be at least 10 inches.

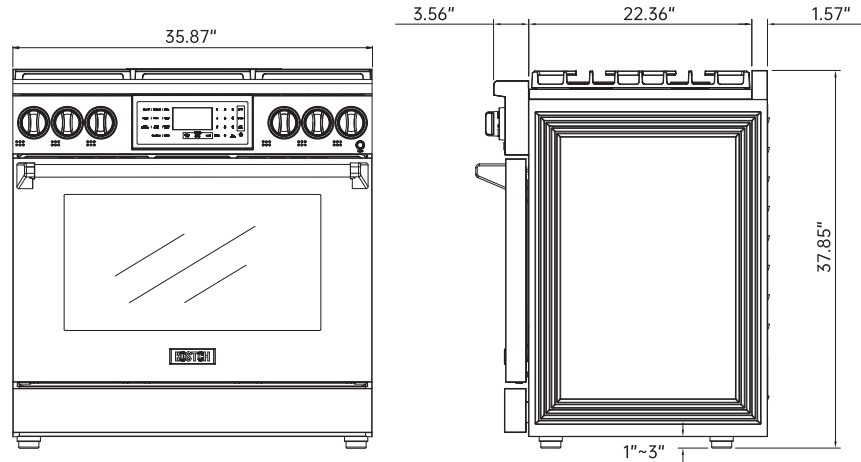


The maximum depth of cabinets installed above cooking tops be 13 in (330mm).

## 36" Gas Range Clearance

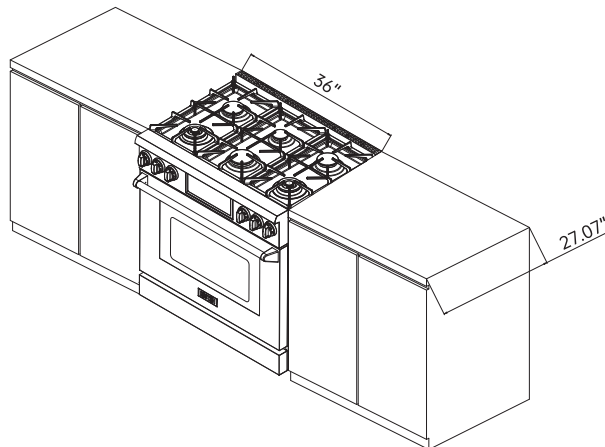

# DIMENSIONS AND CLEARANCES

## Top hood and cabinet specifications

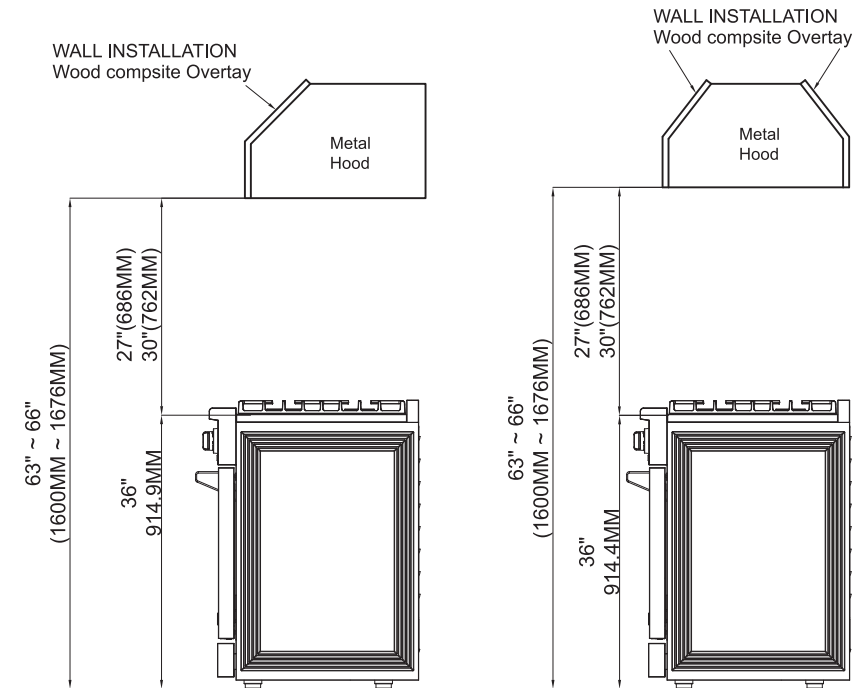

| Condition                                                                                                                                                                                                                                                                                                                                                            | Minimum clearance allowed |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|
| Clearance between the top of the cooking surface and the bottom of an unprotected wood or metal cabinet                                                                                                                                                                                                                                                              | 36"                       |
| cabinet that is protected by not less than: <ul style="list-style-type: none"> <li>1/4-inch-thick flame-retardant mill board covered with not less than: <ul style="list-style-type: none"> <li>No. 28 MSG sheet steel or</li> <li>0.015-inch-thick stainless steel or</li> <li>0.024-inch-thick aluminum or</li> <li>0.020-inch-thick copper</li> </ul> </li> </ul> | 24"                       |