



Owner Manual

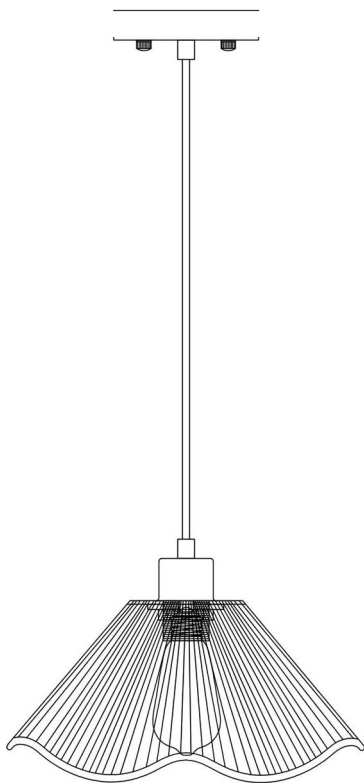


EXPLODED

— VIEW

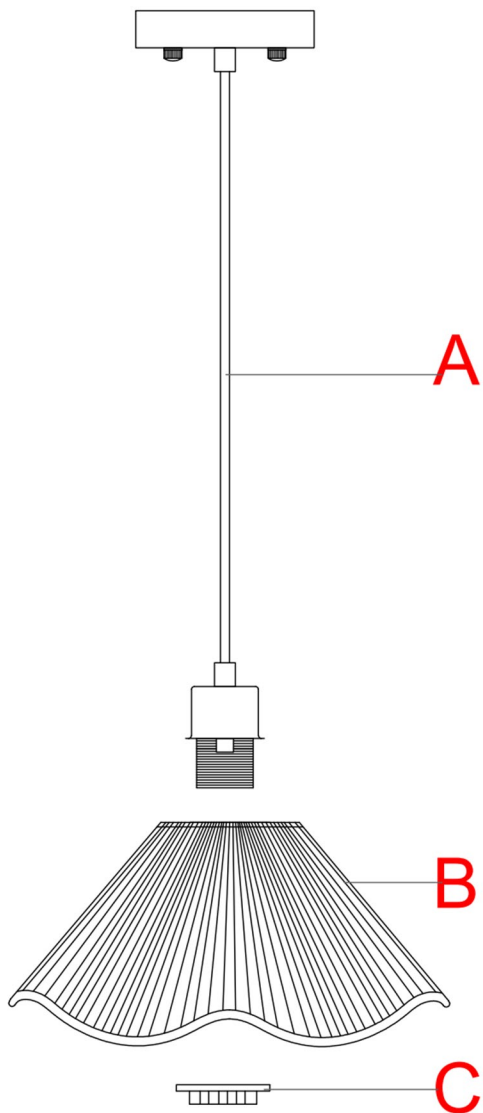

PARTS

A*1



Lamp standard

B*1



Lampshade

C*1



Light ring

①*2



Mounting
Screws

②*2



Nuts

③*1



Mounting Unit

④*3



Wire Nuts

ATTENTION

Please inspect the wires before installation, if the wire shows any cut or abrasion, or has exposed copper wires, DO NOT use the fixture, it might be caused during transportation or defect product.

Before starting installation of the fixture, please remove the previous fixture (if any).

Disconnect the power by turning off the electric break for your property (Please ask for professional help if needed).

MAINTENANCE AND WARNING

Verify the lamp model suits the environment (indoor/outdoor, IP rating) and check all accessories (body, screws, cord, manual).

Only use with bulbs of the recommended type and wattage. Exceeding the maximum wattage may cause overheating or fire.

Do not install the fixture if any part is damaged or missing. Contact the manufacturer or seller for replacement parts.

The fixture may become hot during use. Allow to cool before handling.

Clean dust accumulation in recessed lamps regularly (to prevent overheating), but only when powered off; never rinse with water.

If the fixture includes a dimmer switch, ensure it is compatible with the fixture before installation.

Do not modify the fixture in any way; tampering with electrical components can result in malfunction or risk of fire.

TOOLS REQUIRED



Ladder



**Safety
glasses**



**Electrical
tape**



**Phillips
screwdriver**



**Flat blade
screwdriver**



Pliers




**Wire
strippers**

step 1

Unscrew the ball nuts (2) from the mounting unit(3).



Use the mounting screws (1) to attach the mounting unit to the junction box (not included).

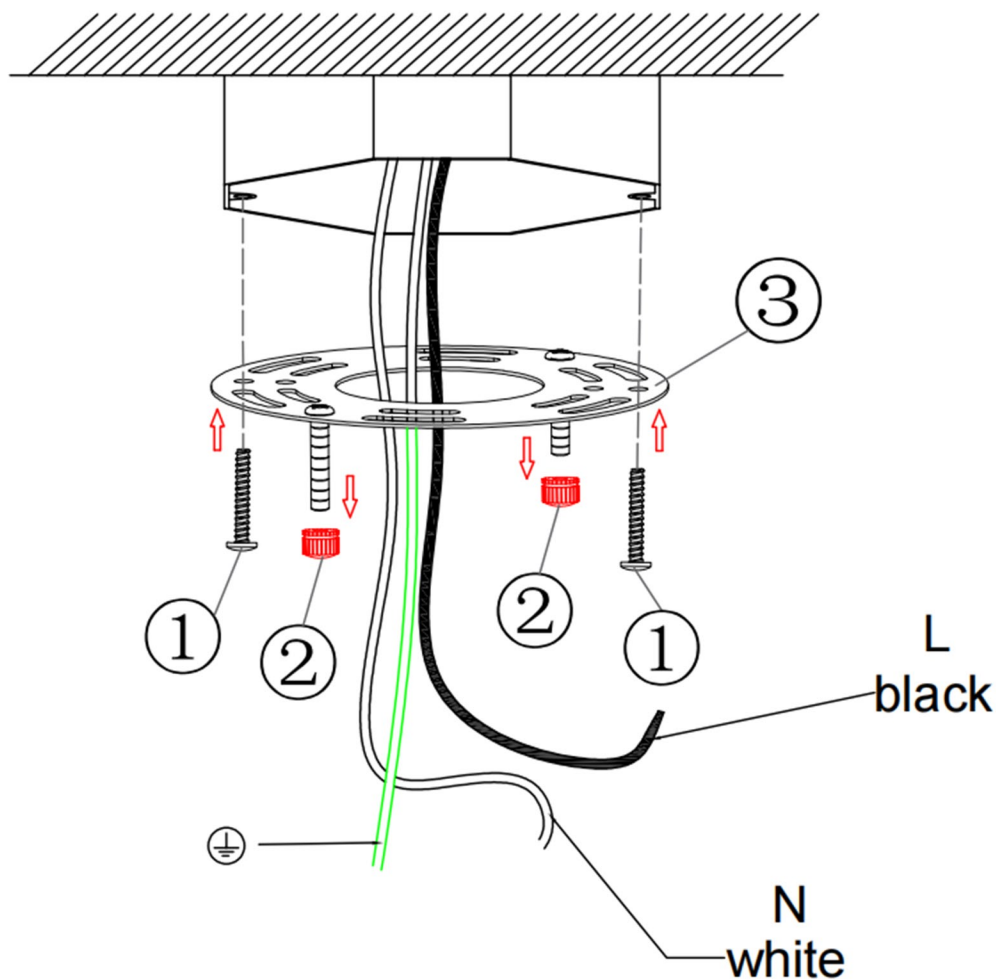

step 2


Make the electrical connection from the junction box to the fixture. Connect the ground wire to the mounting unit using the preinstalled green ground screw. Then, connect the positive, negative and ground wires with the supplied wire nuts. Secure with electrical tape.

Attach the fixture to the mounting unit through screw holes as shown, and secure it with ball nut (2).

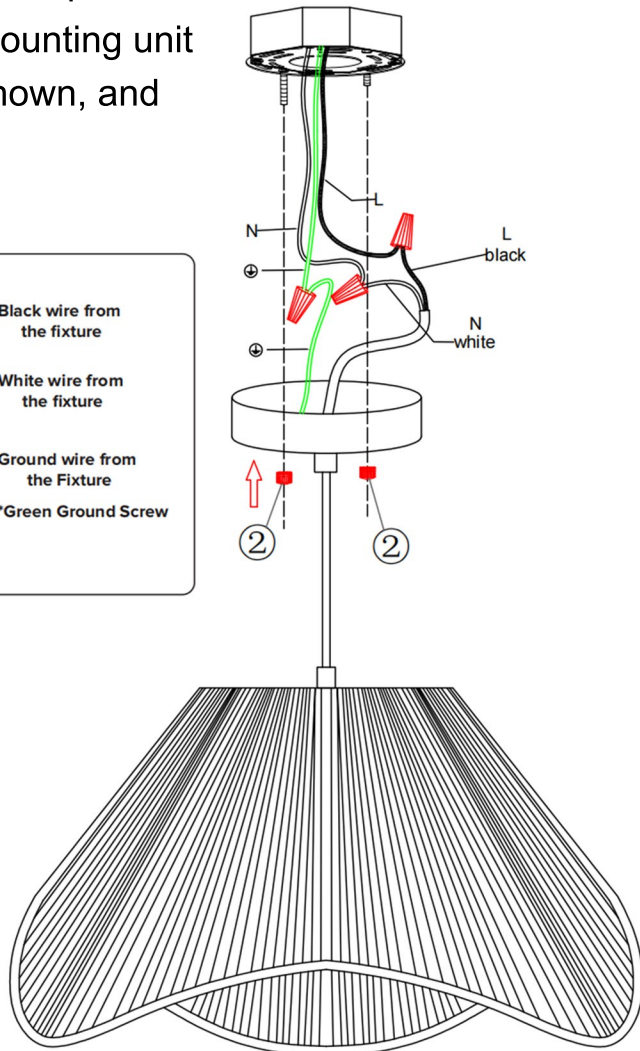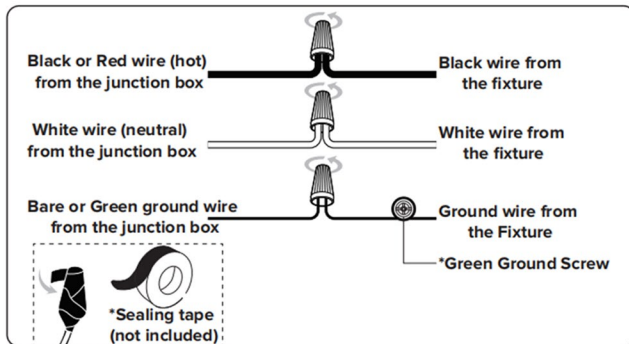


step 3

Insert the lampshade (B) into it as shown.

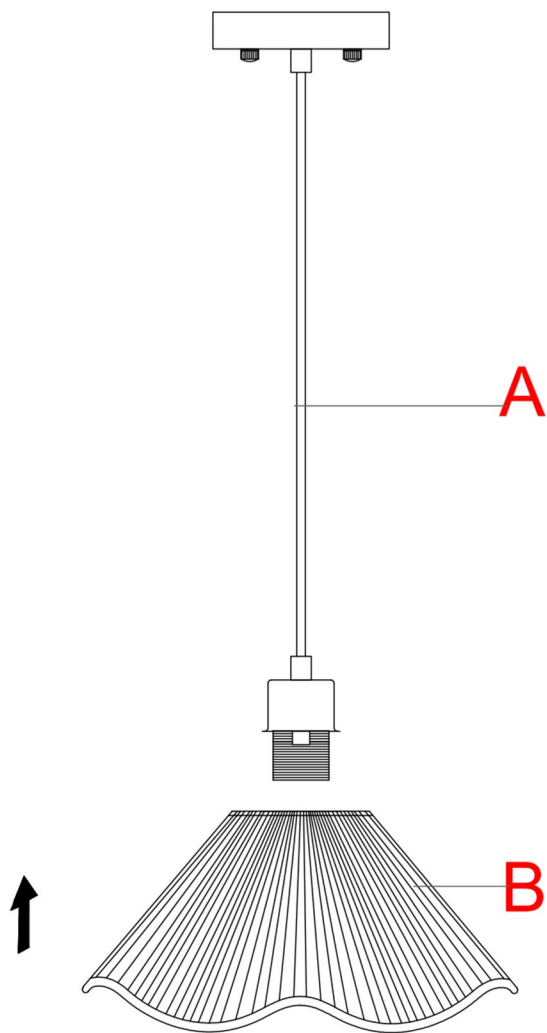


step 4

Screw the Light ring (C) into it as shown.

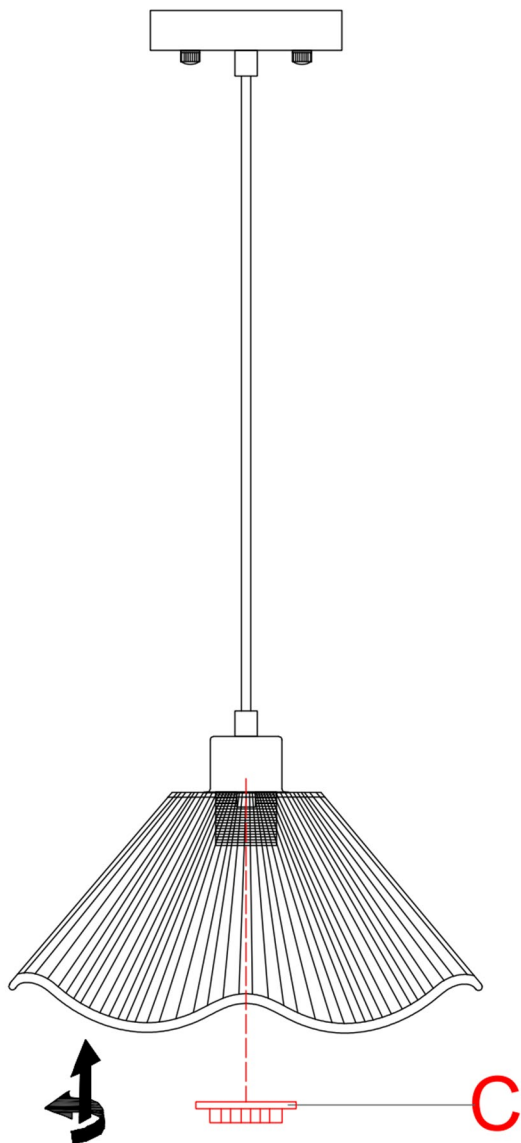

step 5

Screw the lamp bulb (**Not include**) into it .

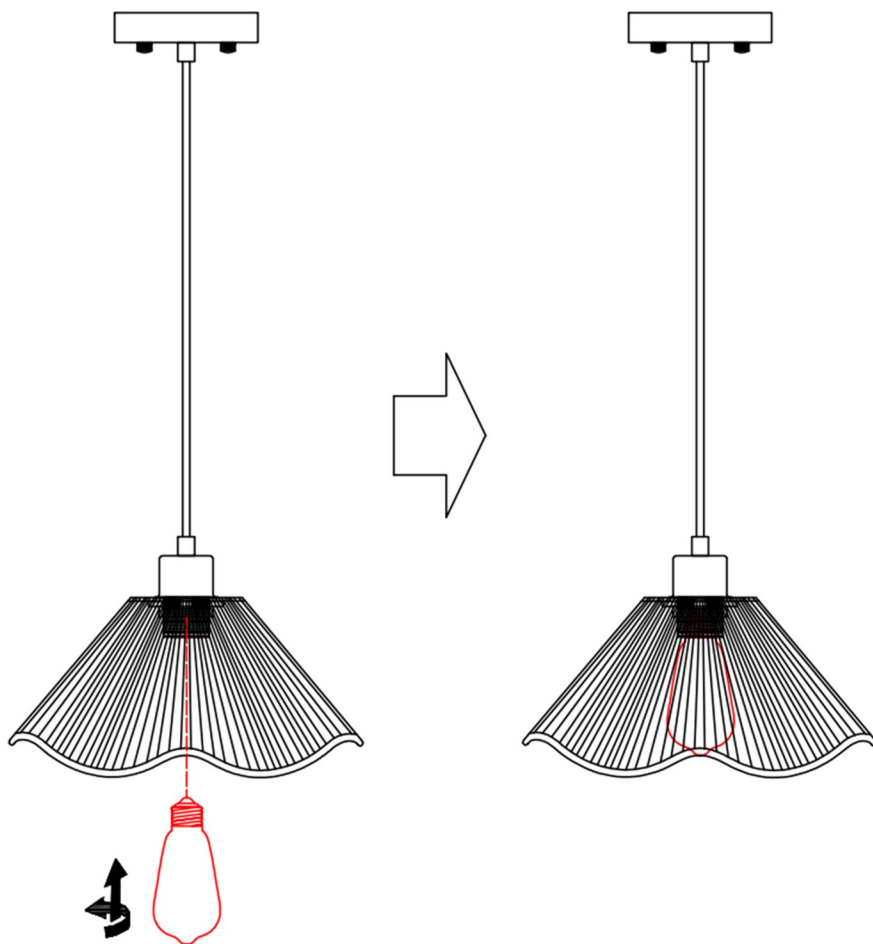

Product Overview

