

## CEILING

### CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

### GENERAL PRODUCT INFORMATION:


These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.


All rights reserved.

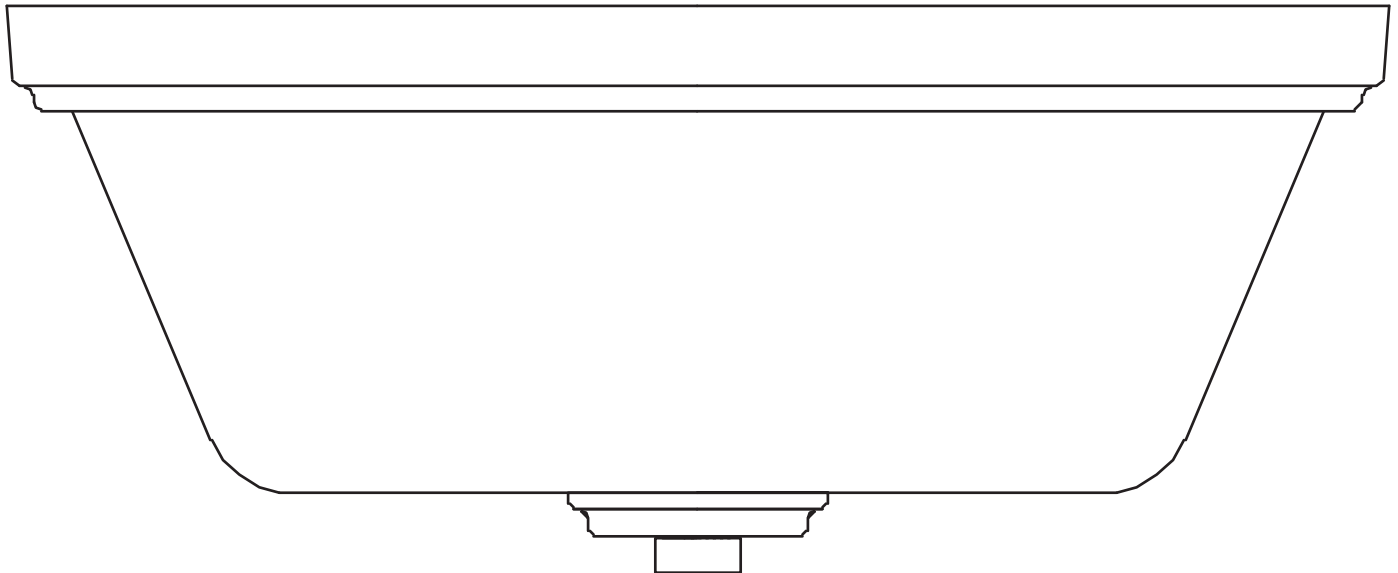

**SAVE THESE INSTRUCTIONS!**

## Install the Fixture

1A

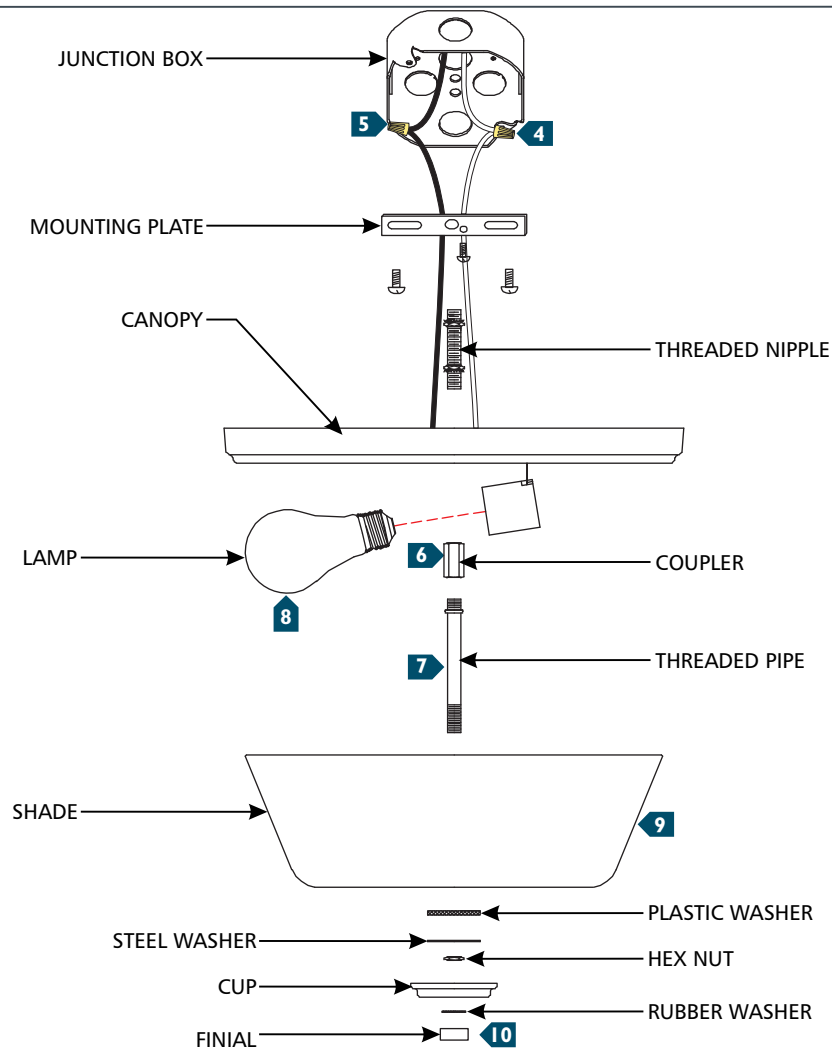

- 1 If necessary, screw the threaded nipple tightly onto the mounting plate.
- 2 Secure the mounting plate to the junction box.
- 3 Connect the fixture to a suitable ground in accordance to local electrical codes.
- 4 Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 5 Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 6 Neatly place all the wires into the junction box, place the canopy onto the threaded nipple, and secure it in place by screwing the coupler onto the nipple.
- 7 Screw the threaded pipe to the bottom of the coupler.
- 8 Screw the lamps into the sockets. Refer to the label on the socket for Max Wattage Information.
- 9 Place the shade, plastic washer, and steel washer onto the threaded pipe, then secure them in place by screwing the hex nut onto the pipe.
- 10 Place the cup and rubber washer onto the pipe, then secure them in place by screwing the finial onto the pipe.