


IMPORTANT INSTRUCTIONS AND OPERATING MANUAL

ELECTRIC FIREPLACE

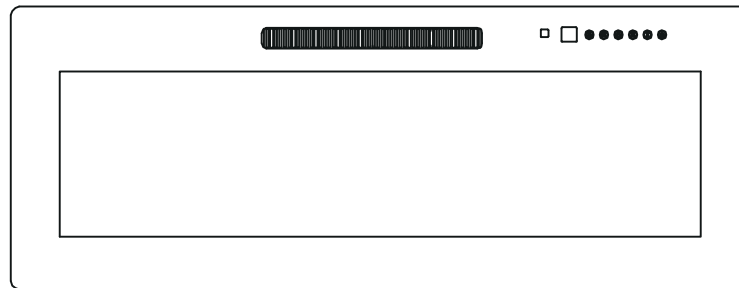

**Attention: The Fireplace and TV stand come in two packages.
May deliver on different days.**

**Attention: The LED light strip comes with fireplace. Please install the
light strip after receive all the two packages.Thanks.**

NO VENTING REQUIRED

WARNING

Read and understand this entire owner's manual, including all safety information before plugging in or using this appliance. Failure to do so could result in fire, electric shock, or serious personal injury.

CERTIFIED UNDER CANADIAN AND AMERICAN NATIONAL STANDARDS: ETL




TABLE OF CONTENTS

IMPORTANT SAFETY INSTRUCTIONS.....	1
1.0 PACKING LIST	3
1.1 PACKING LIST.....	3
1.2 DIMENSIONS.....	4
2.0 ELECTRICAL INSTALLATION NOTES.....	6
3.0 INSTALLATION INSTRUCTIONS.....	7
3.1 UNPACKING AND TESTING APPLIANCE WALL.....	7
3.2 GROUNDING APPLIANCE.....	7
3.3 INSTALLATION STEPS	8
(1)BUILD IN TYPE	8
(2)TV STAND TYPE	11
4.0 FINISHING	14
5.0 OPERATING INSTRUCTIONS	15
5.1 CONTROL PANEL OPERATION	15
5.2 REMOVE CONTROL.....	16
6.0 TROUBLE SHOOTING GUIDE	17
7.0 MAINTENANCE.....	19
7.1 PARTIALLY REFLECTIVE GLASS CLEANING	19
7.2 SCHEMATIC DIAGRAM	20
8.0 LIMITED WARRANTY	20
9.0 Q&A AND CONTACT INFORMATION	21


1.0 PACKING LIST

(1) PACKING LIST(For Build in type & TV Stand type)

No.	Description	Quantity
1	Front Frame	1 pc
2	Electric Fireplace	1 pc
3	Manual	1 pc
4	Decorative Stuff	Varies
5	Remote Control (without battery)	1 pc
6	LED Light Strips	2 pc
A	Anchor Screw M5*30	6+2
B	Screw ST4*12 M4*12	8+2
C	Wall Anchor 8*35	6+2
D	Buckle	6
E	M3*10	12+2

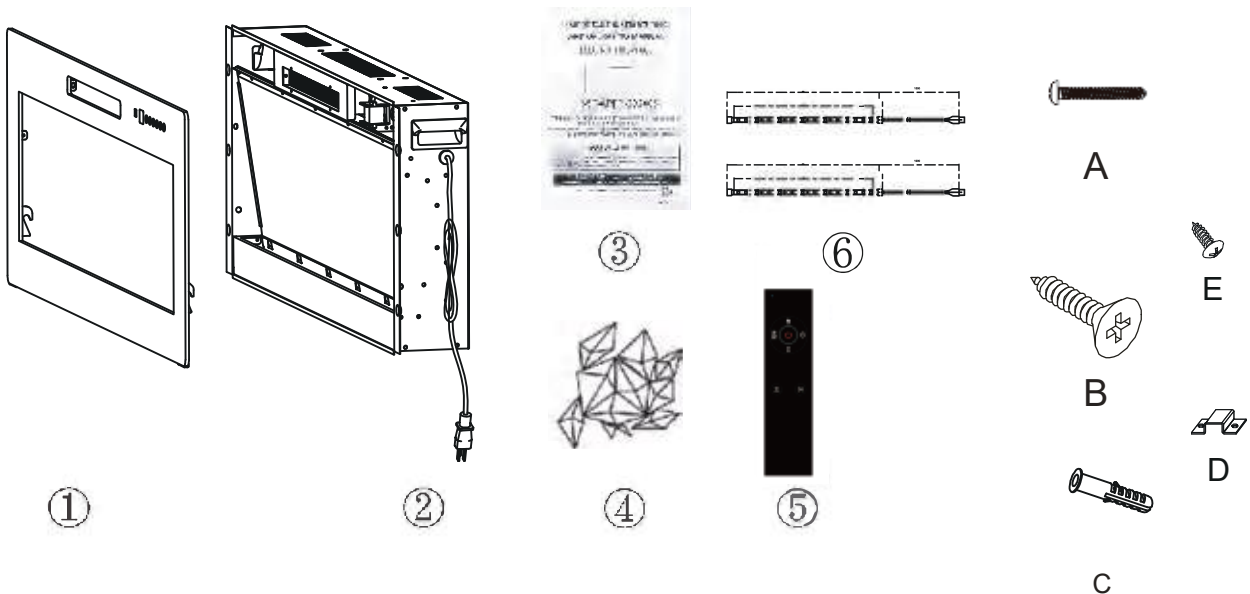


1.1 DIMENSIONS Specific Size of the Product

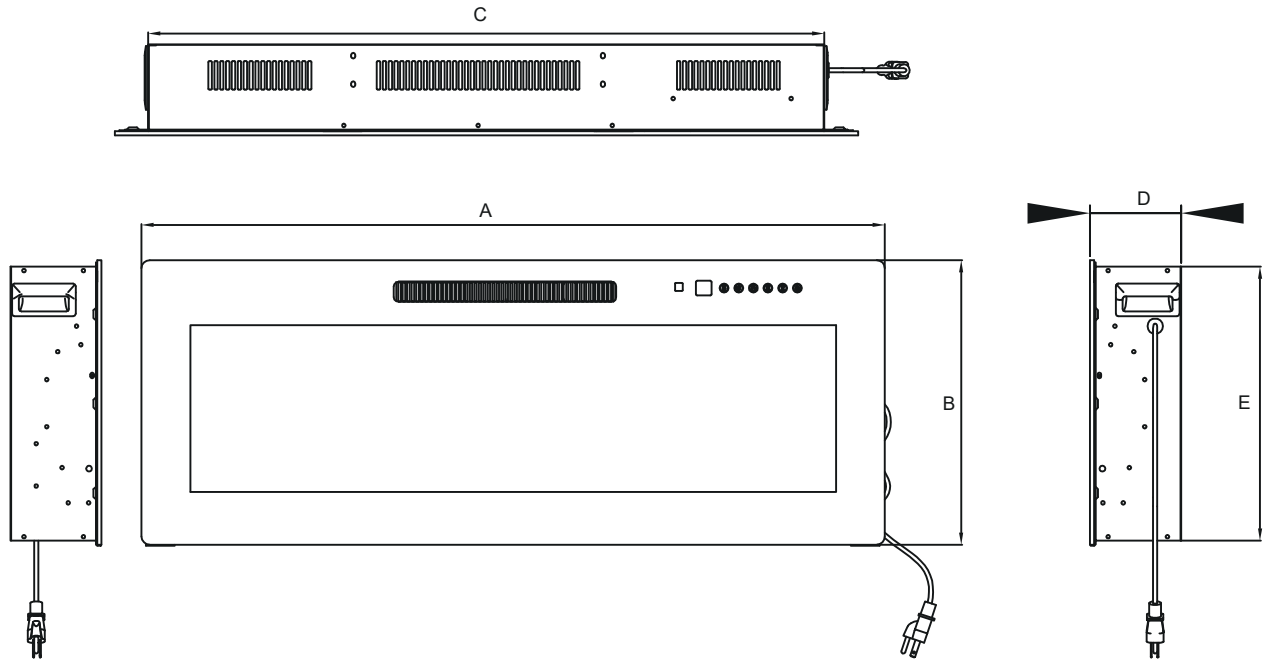

Model	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	A(in)	B(in)	C (in)	D (in)	E (in)
A	914	350	832	113	338	36	13.78	32.76	4.45	13.31
B	1067	350	984	113	338	42	13.78	38.74	4.45	13.31
C	1270	350	1188	113	338	50	13.78	46.77	4.45	13.31
D	1524	350	1441	113	338	60	13.78	56.73	4.45	13.31
E	1829	350	1746	113	338	72	13.78	68.74	4.45	13.31

Specific Size of the Wall

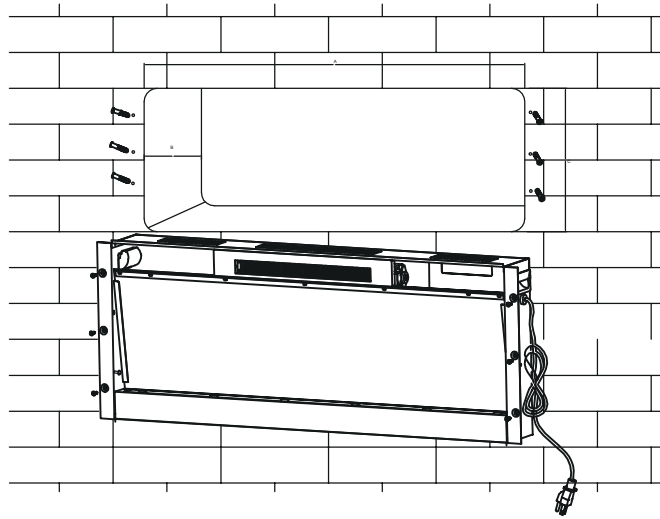

Model	A (mm)	B (mm)	C (mm)	A (in)	B (in)	C (in)
A	836-846	102-110	341-347	32.91-33.31	4.02-4.33	13.43-13.66
B	988-998	102-110	341-347	38.92-39.3	4.02-4.33	13.43-13.66
C	1192-1202	102-110	341-347	46.93-47.32	4.02-4.33	13.43-13.66
D	1445-1455	102-110	341-347	56.89-57.28	4.02-4.33	13.43-13.66
E	1750-1760	102-110	341-347	68.9-69.29	4.02-4.33	13.43-13.66



NOTE:

※ Please leave enough space to place the power cord on the right side of the fireplace.

This appliance has qualified with the ETL Standards for fixed and location-dedicated electric room appliances in the United States and Canada. If you need assistance during installation, please contact your local dealer.

NOTE: This appliance must be electrically wired and grounded in accordance with local or, in the absence of local, with National Electric Code ANSI/NFPA 70-latest edition in the United States or the Canadian Electric Code, ETL in Canada.

Model No.	
Description	Recessed Appliance
Voltage	120VAC
Watts	Max 1500W
Amps	12.5AMP
BTUs	5100BTU

2.0 ELECTRICAL INSTALLATION NOTES



CAUTION - Some parts of this product can become hot and it easy to cause burns. Pay attention to keep away from them.

1. Please confirm that house circuit breakers for the outlet are on, before plugging your appliance into an electrical outlet.
2. The appliance may emit a slight harmless odor when first used. It is caused by the initial heating of internal appliance elements and will not occur again.
3. If your appliance does not emit heat, check the operation section of this manual for further information.
4. Use with an ETL or UL certified protector.



1. Risk of fire! The power cord must not be pinched against a sharp edge. Secure cord to avoid tripping or snagging to reduce the risk of fire, electric shock, and personal injury.
2. Do not run cord under carpeting. Do not cover the cord with throw rugs etc.
3. Arrange the cord away from cluttered areas and where it will not be tripped over.
4. To prevent a possible fire, do not block air intake or exhaust valve in any manner. Do not use it on soft surfaces where openings may become blocked.
5. Do not blow or place insulation against the appliance.
6. This electric appliance is tested and listed for use only with the approved optional accessories.
7. Use other accessories that not tested for this electric appliance could disable the warranty and the fire hazard result.
8. A fire result may causing property damage, personal injury, or death if the customer did not follow the instruction exactly.
9. Do not store or use gasoline or other flammable vapors in the vicinity of this appliance.
10. This appliance is heavy. Thus there need two people for installing.
11. In any way, heater vents on the electric appliance can not be covered. as it may lead a fire

3.0 INSTALLATION INSTRUCTIONS


3.1 UNPACKING AND TESTING APPLIANCE WALL

Carefully remove the appliance from the box. Before installing the appliance, make sure the appliance operates properly by plugging the power supply cord into a conveniently located 120 Volt grounded outlet.

3.2 GROUNDING APPLIANCE

This appliance is for use on 120 Volts. The cord has a plug as shown in (A). An adapter as shown in (C) is available for connecting three-blade grounding-type plugs to two-slot receptacles. The green grounding lug extending from the adapter must be connected to a permanent ground such as a properly grounded outlet box. The adapter should not be used if a three-slot grounded receptacle is available.

To disconnect the appliance, turn the controls off, then remove the plug from the outlet.

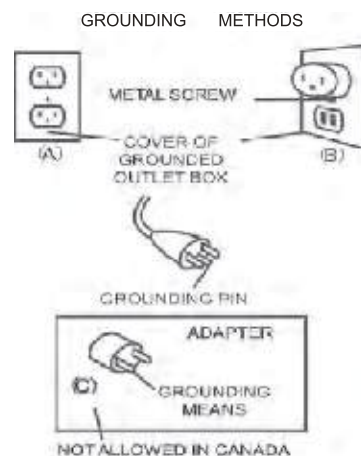

3.3 INSTALLATION STEPS

Build in type


Step 1. Removing the Glass Frame

The fireplace can be installed with 2 options:

- Remove the fixed screw in the side plate
- Lift the glass frame 1-2 cm vertically. Then the entire glass frame can be removed from the front.
- Take the glass frame 10-20 cm away from the appliance, pull out the data cable connector with the help of others or put the glass panel down on the ground before complete separation.




Remove white screw(Right)

The removed screws can be discarded directly.

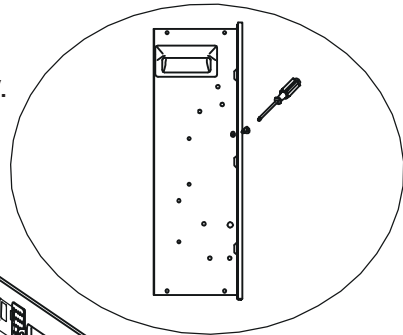


Remove white screw(Left)

The removed screws can be discarded directly.

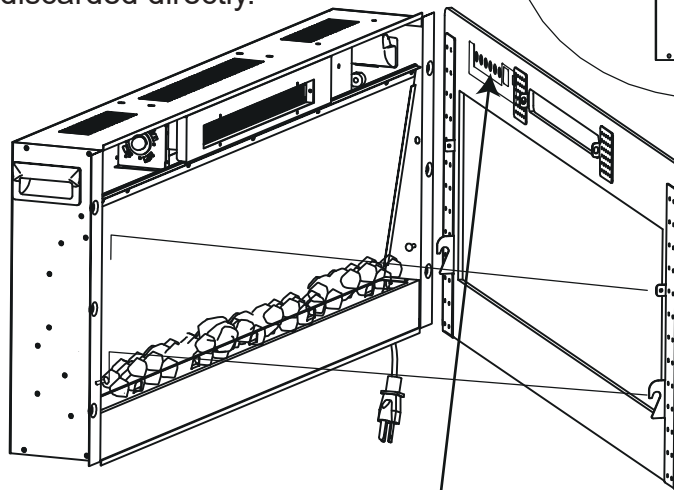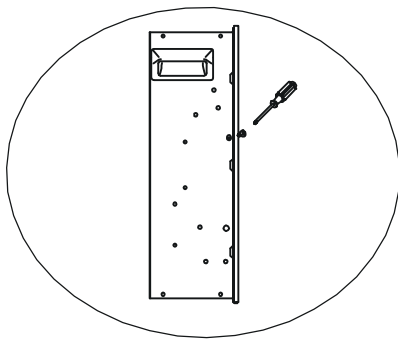

There are connectors on the glass panel that need to be unplugged. When unplugging them, please apply appropriate force to avoid damaging the connectors and plugs.


Step 2. Settling the Holes of Screw

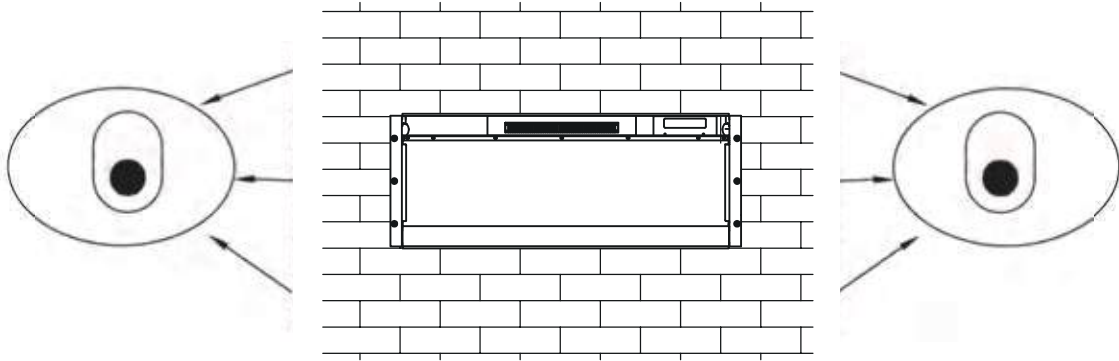


- The appropriate cavity (1-2 cm bigger for each side)needs to be prepared according to the size ofthe-Put the fireplace in place,mark the holes which need to be drilled with a pencil.Then take it out of theappliance.cavity again.
- Put the fireplace in place,mark the holes which need to be drilled with a pencil.Then take it out of theappliance.cav-ity again.

Step 3. Drilling & Installing the Wall Anchors

- Drill the holes 7/25 in. (7 mm) on the prepared marks.
- Insert the wall anchors (Part C) into the holes by using a hammer.

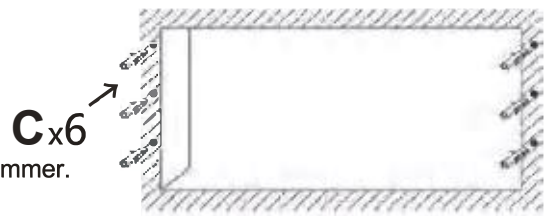

Step 4. Install the Fireplace into the wall

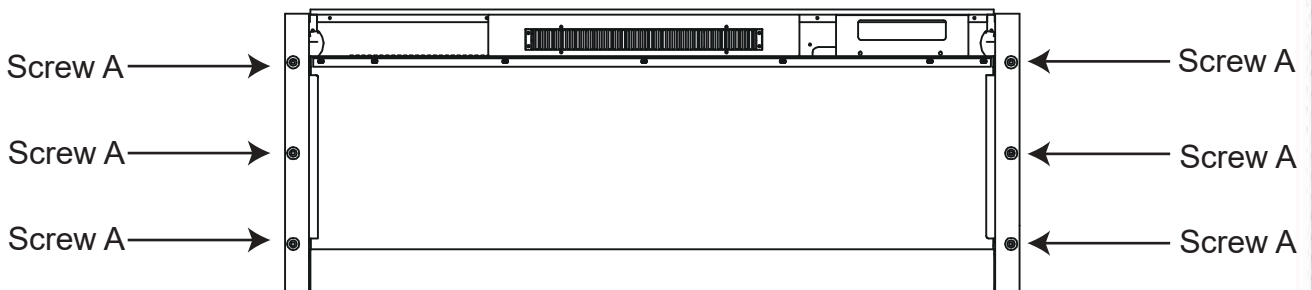

- Screw A pass through the holes from the front of fireplace with screwdriver.
- (Note: Install carefully and don't let the screws fall into the fireplace.)**
- Put the Fireplace into the prepared cavity.
 - Fasten the fireplace firmly into the wall by the screws for each side.

Step 5. Placing the Padsand Fixing the Fireplace


- Carefully place crystal (together with the appliance) or other decoration into the bottom tray on the front of the appliance as illustrated.

NOTE: Media bed kits may have sharp edges, wear safety goggles and gloves when handling.



Step 6. Hanging the Glass Frame & Connect the LED Strips

- Gently push on the glass panel by aligning the 4 hooks until it snaps into position (sinks down 1-2 cm).
- Please remember to install the connector between the glass panel and the fireplace.


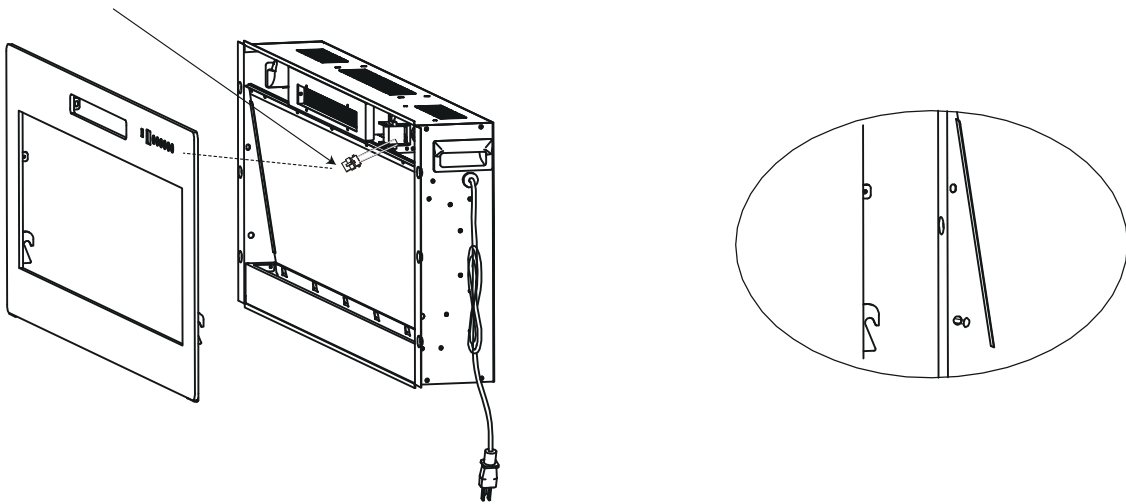


TV STAND TPYE


Step 1. Install the Light Strip with TV Stand Panel (This step also exist in the installation of TV stand).

Attention: The Fireplace and TV stand come in two packages. May deliver on different days.


The position of the lamp interface should face the middle of board 1.

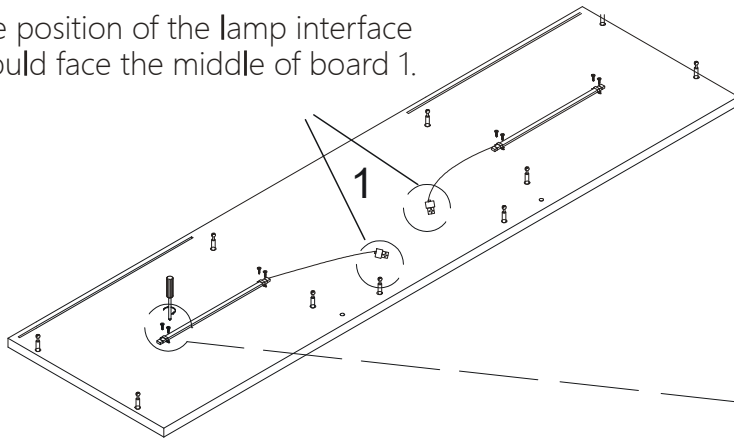

Peel off the double-sided tape and stick on the part ①.

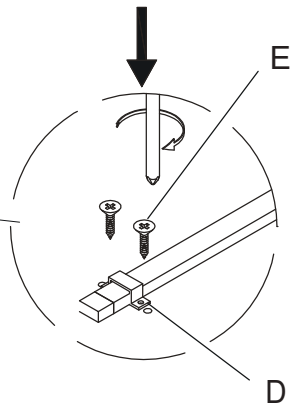


Step 2. Removing the Glass Frame

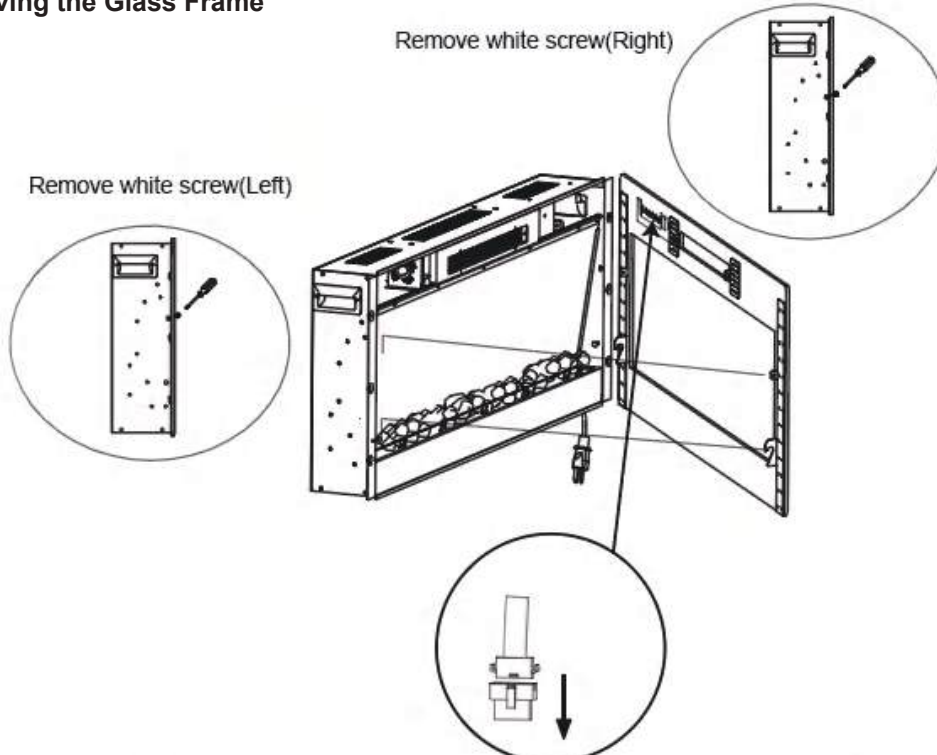

There are connectors on the glass panel that need to be unplugged. When unplugging them, please apply appropriate force to avoid damaging the connectors and plugs.

Step 3. Install the Fireplace to TV Stand

To enhance the impact resistance of the wooden panel, pre-drilled holes were not provided. Please determine the drilling positions yourself and install the fireplace accordingly. The panel material is easy to drill.

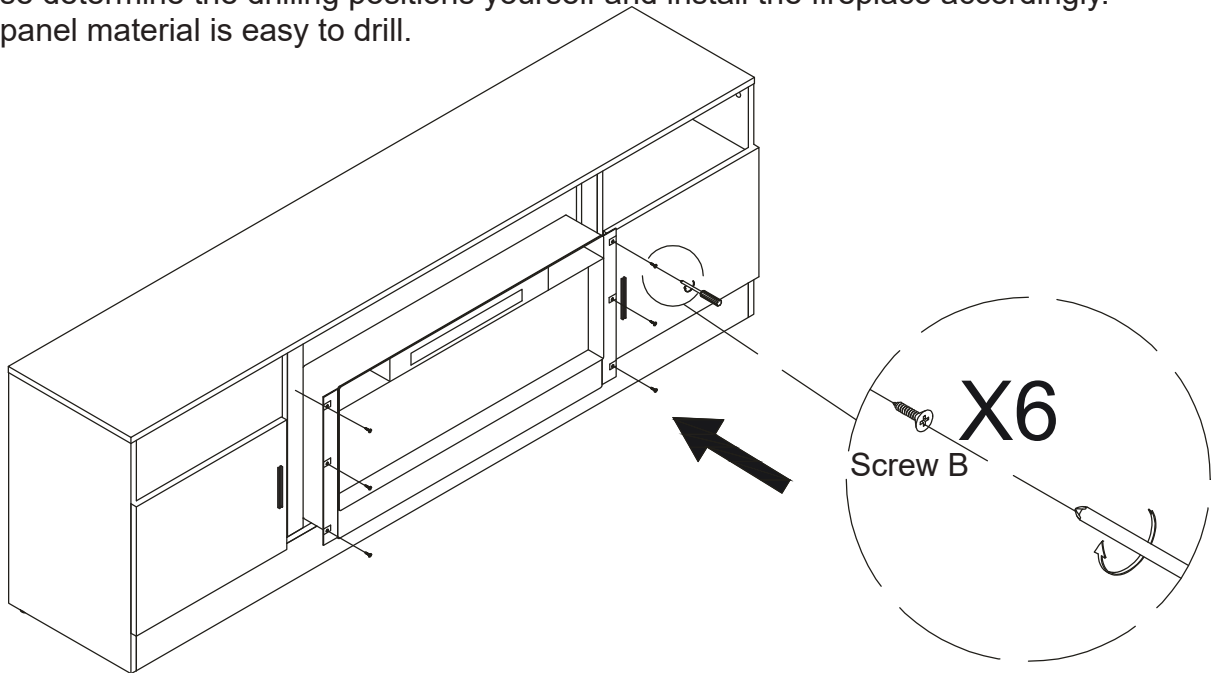

Step 4. Placing the Padsand Fixing the Fireplace


- Carefully place crystal (together with the appliance) or other decoration into the bottom tray on the front of the appliance as illustrated.

NOTE: Media bed kits may have sharp edges, wear safety goggles and gloves when handling.




Step 5. Hanging the Glass Frame & Connect the LED Strips

- Gently push on the glass panel by aligning the 4 hooks until it snaps into position (sinks down 1-2 cm).
- Please remember to install the connector between the glass panel and the fireplace.

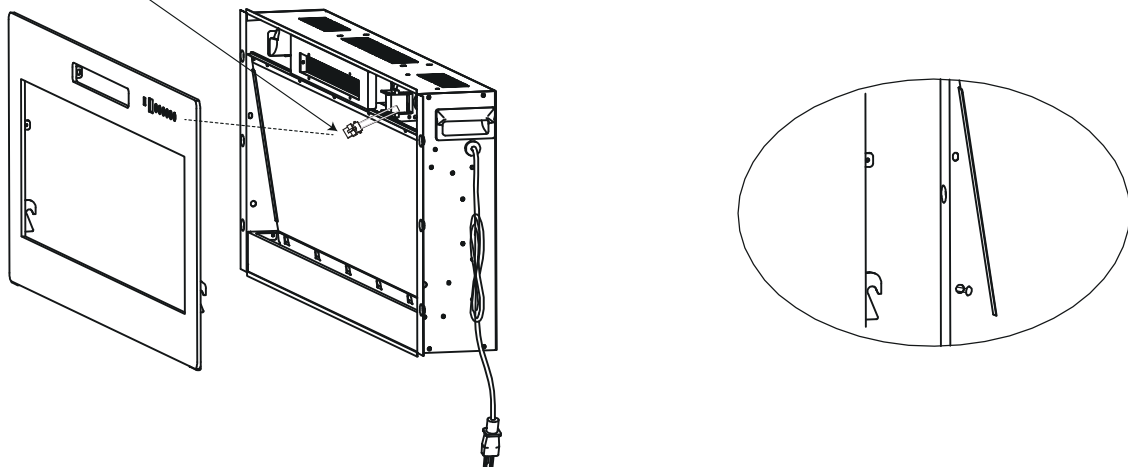

Step 7. Insert the Light Strip into the Fireplace.

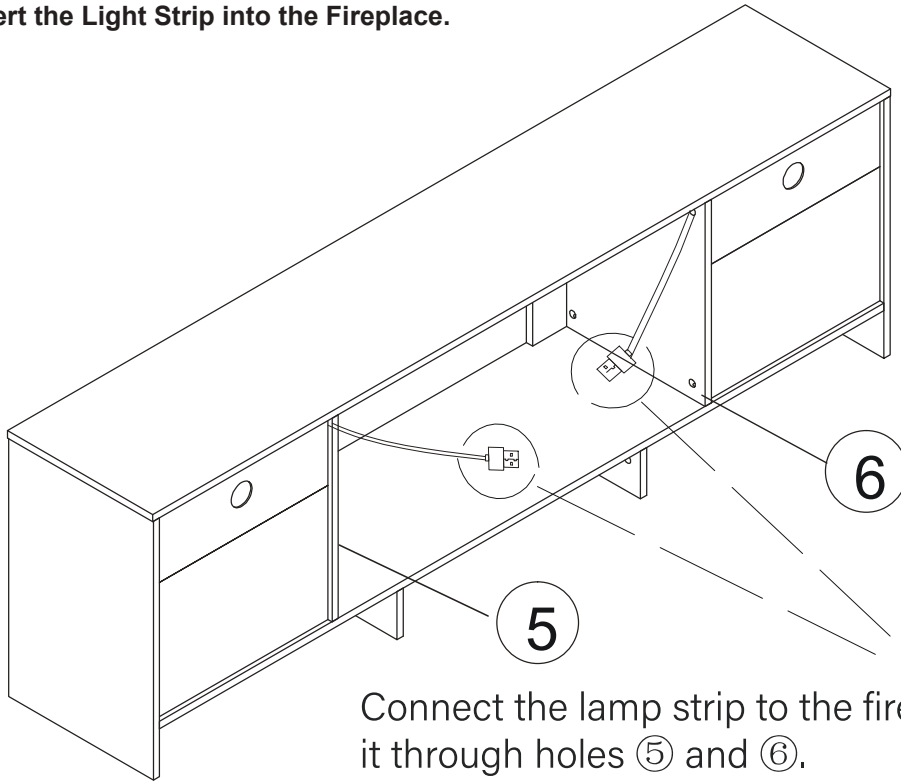

Connect the lamp strip to the fireplace by threading it through holes ⑤ and ⑥.

4.0 FINISHING

Grille may be hot, do not touch air outlet until cooled. The door hooks are part of a safety system and must be properly engaged. Do not operate the appliance with hooks disengaged.

Facing finishing materials must not interfere with air flow through air openings, operation of doors or access for service. Observe all clearances when applying combustible materials.

Before door is removed. Turn the appliance off and wait until appliance is cool. Doors are heavy and fragile, so handle with care.

NOTE: Glass front must be removed and the appliance must be finished in its final location before the media bed kits are installed. Media bed kits may have sharp edges, wear safety glasses and gloves when handling.









5.0 OPERATING INSTRUCTION

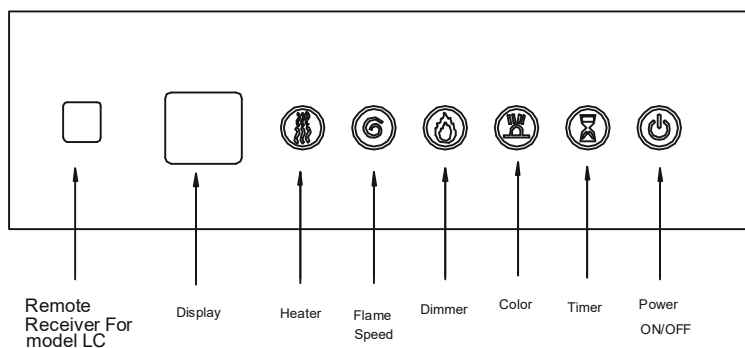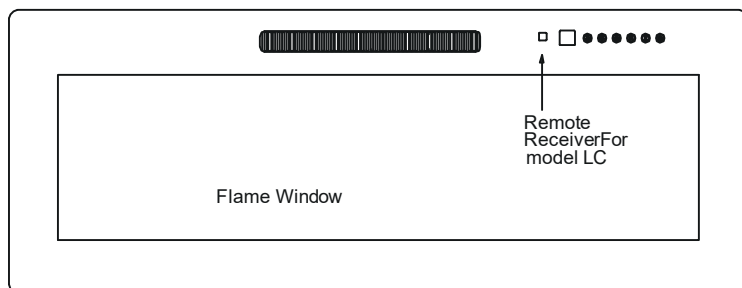


5.1 CONTROL PANEL OPERATION

The touch display panel is shown on the upper right of the front of the appliance.

◆ Before use, open the back cover of the remote control and put in the AAA battery.



POWER		Turn the appliance ON/OFF.
DIMMER		Control Flame brightness. 5 Settings: (L1-L2-L3-L4-L5) Flame dims from L1 to L5. L5 is the brightest setting.
TIMER		Control the Timer. 8 Settings: (1h, 2h, 3h, 4h, 5h, 6h, 7h, 8h) Press button until reach desired setting.
FLAME SPPEED		Control Flame speed. 5 Settings: (V1-V2-V3-V4-V5) Flame speed from V1 to V5. V5 is the largest setting

<p>HEATER</p>		<p>Control the Heater. Press button to initiate the heater. (OFF) no heater or blower. (-), heater blows warm air(750 W) (--), heater blows hot air(1500 W) NOTE: Heater functions cycle from (OFF)(-)(--)</p>
<p>COLOR A</p>		<p>Flame and carbon fire color change together at the same time, set 12 colors, respectively: 1. Red, color; 2. Yellow, color; 3. blue, color; 4. orange, color; 5. Red + yellow; 6. red + blue; 7. red + blue + orange; 8. yellow + blue; 9. yellow + blue + orange; 10. blue + orange; 11. red + yellow + blue; 12. red + yellow + blue + orange;</p>
<p>COLOR B</p>		<p>This series of machines is equipped with the function of external atmosphere light belt, the atmosphere light color change control key on the remote control, boot the default atmosphere light belt is off the state. Atmosphere lights with 20 colors to vary, They are respectively: 01. Red; 02. Gold; 03. Green and yellow; 04. yellow; 05. Pink; 06. Light pink; 07. Purple; 08. Green; 09. Azure green; 10. Sky blue; 11. Blue; 12. Blue and white; 13. Green and white; 14. pink and white; 15. Light blue; 16. Light pink; 17. Light green; 18; peacock blue; 19; warm white; 20 Cold white; 21.20 color discoloration in the order. O O. Turn off the ambiance light.</p>

WARNING: Do not move or remove the mesh trim panel when the appliance is plugged in and operating. This will cause the remote control and touch panel to no longer function.

NOTICE: When the heater is first turned on, a slight odor may be present. This is normal and should not occur again unless the heater is not used for a long period of time.

NOTICE: To improve operation, aim the remote control at the front of the fireplace. DO NOT press the buttons too quickly. Give the unit time to respond to each command.

5.2 REMOTE CONTROL

◆ Before use, open the back cover of the remote control and put in the AAA battery.



Two AAA batteries are required.



Battery must be recycled or disposed of properly. Check with your Local Authority or Retailer for recycling advice in your area.

6.0 TROUBLE SHOOTING GUIDE

PROBLEM	SOLUTION	
The mounting bracket cannot be removed	<ol style="list-style-type: none"> 1. The mounting bracket is pre-attached. Unscrew the two screws at both sides of the fireplace by Phillips screw driver, then remove the pre-attached mounting bracket. 2. If the problem is still not solved, please contact us or message. 	
The control panel functions do not work	<ol style="list-style-type: none"> 1. Make sure the Power Switch on the control panel is turned on before operation. 2. Make sure you have reconnected the data cable which was pull out when you removed the glass frame. 3. If the problem is still not solved, please contact us . 	
Sudden power outage during the heating process	<ol style="list-style-type: none"> 1. Don't cover the air outlet. 2. Unplug the plug, wait for 10 minutes and try to open it again. 3. If the problem is still not solved, please contact us . 	
The appliance does not blow hot air when it turns on and off.	<p>This is normal. The fans blow cool air while the appliance gradually heat up. The fans blow after the appliance turn off to cool the appliance and prevent overheating.</p>	
The appliance does not blow hot air when it turns on and off.	<ol style="list-style-type: none"> 1. Main Power supply switch is off. 	<p>Turn the main power supply switch to "ON" position.</p>
	<ol style="list-style-type: none"> 2. Circuit breaker has tripped. air when it turns on and off. 	<p>Too many appliances on this circuit. Be sure that electrical supply for this unit is an individual circuit.</p>
	<ol style="list-style-type: none"> 3. Heater is unplugged from wall outlet. 	<p>Make sure the power cord is plugged into a functioning and properly grounded 15 Amp 120V AC electrical outlet.</p>
	<ol style="list-style-type: none"> 4. Power cord or power plug are damaged. 	<p>Contact a qualified electrician to replace power cord.</p>
	<ol style="list-style-type: none"> 5. Power outlet for power plug prong is loose. 	<p>Check the power outlet and replace with a new one.</p>
	<ol style="list-style-type: none"> 6. Loose wiring. 	<p>Check all wiring for loose connections. Contact a qualified electrician.</p>
Heater is on, but no flame or low flame intensity.	<ol style="list-style-type: none"> 1. Heater switches in on, but Flame is not on. 	<p>Long-press the "DIMMER" button for 6 seconds, the appliance will go into sleep mode. All the lights off, the heating function goes on. Long-press for 6 seconds again, the appliance will back to normal mode.</p>

	2. Flame Adjusting knob is at low setting.	Turn the knob to maximum setting.
	3. Loose wiring.	Check all wiring for loose connections. Contact a qualified electrician.
Flame are frozen	1. Flame element is not attached to the motor.	
	2. Rotation motor is defective.	
Excessive noise in the lower portion of the heater.	1. Flame element isn't seated properly.	
	2. Motor is defective.	
Heater system doesn't come on.	1. Heater power switch is off.	Turn the heater power switch to the "ON" position.
	2. Heater system is overheated.	Maybe the heater is covered or air inlet or air outlet is blocked; remove the clothes or the blockage and turn off the power switch and unplug it. Wait 10 minutes, and then turn the heater on again.
	3. Loose wiring.	Check all wiring for loose connections. Contact a qualified electrician.
	4. The air inlet or air outlet is blocked completely.	Leave adequate space around the unit. Remove the blockage, on or in front of the air outlet.
"HEAT " switch has been flipped in the on position, but there is no airflow.	1. The heater system is overheated. Temperature Limit thermostat is cut off.	Check the air inlet and outlet. Turn off the power switch and unplug it. Wait 10 minutes, and then tun the heater on again.
	2. Fan motor is defective.	
	3. Fan blower is balanced badly.	
	4. The "POWER" and the "HEAT" switches are not turned on.	Turn these two switches on.
Fan runs but no heat is coming out.	1. Loose wiring.	
	2. Bad heating element.	
	3. Build up of dirt on the fans.	Clean all fans.
	4. Heater fan is defective.	

The remote control does not work.	1. The battery is not properly installed.	Make sure the battery is properly installed. Move the battery's transparent insulating piece away before using.
	2. Not pointing to the right position.	Aim the remote control at the receiver.
	3. Have an obstacle in front of the machine.	Remove objects that may be in the way. Items between the remote control and the remote control receiver will block the signal.
	4. Press the remote control buttons too quickly.	Don't press the remote control buttons too quickly. Give the unit time to respond to your commands.
There is an odor coming from the heater.	The heater may emit a slight, harmless odor when first used. This is a normal condition caused by initial heating of the internal parts and will not occur again.	
<p>NOTE: For the most of functional problems, you can unplug the plug, wait for 10 minutes and plug it again, the machine will reset to the initial status (product originals).</p> <p>If the problem is still not solved, feel free to contact us.</p>		

7.0 MAINTENANCE

DISCONNECT POWER AND ALLOW HEATER TO COOL BEFORE ATTEMPTING ANY MAINTENANCE OR CLEANING TO REDUCE THE RISK OF FIRE, ELECTRIC SHOCK OR DAMAGE TO PERSON.

THE FIREPLACE SHOULD NOT BE OPERATED WITH AN ACCUMULATION OF DUST OR DIRT ON OR IN THE UNIT, AS THIS CAN CAUSE A BUILD UP OF HEAT AND SUBSEQUENT EVENTUAL DAMAGE. FOR THIS REASON THE HEATER MUST BE INSPECTED REGULARLY, DEPENDING ON CONDITIONS AND AT LEAST AT YEARLY INTERVALS.




7.1 PARTIALLY REFLECTIVE GLASS CLEANING

The partially reflective glass is cleaned in the factory during the assembly operation. During shipment, installation, handling, etc., the partially reflective glass may collect dust particles; these can be removed by dusting lightly with a clean dry cloth.

To remove fingerprints or other marks, the partially reflective glass can be cleaned with a damp cloth. The partially reflective glass should be completely dried with a lint-free cloth to prevent water spots. To prevent scratching, do not use abrasive cleaners.

7.2 SCHEMATIC DIAGRAM

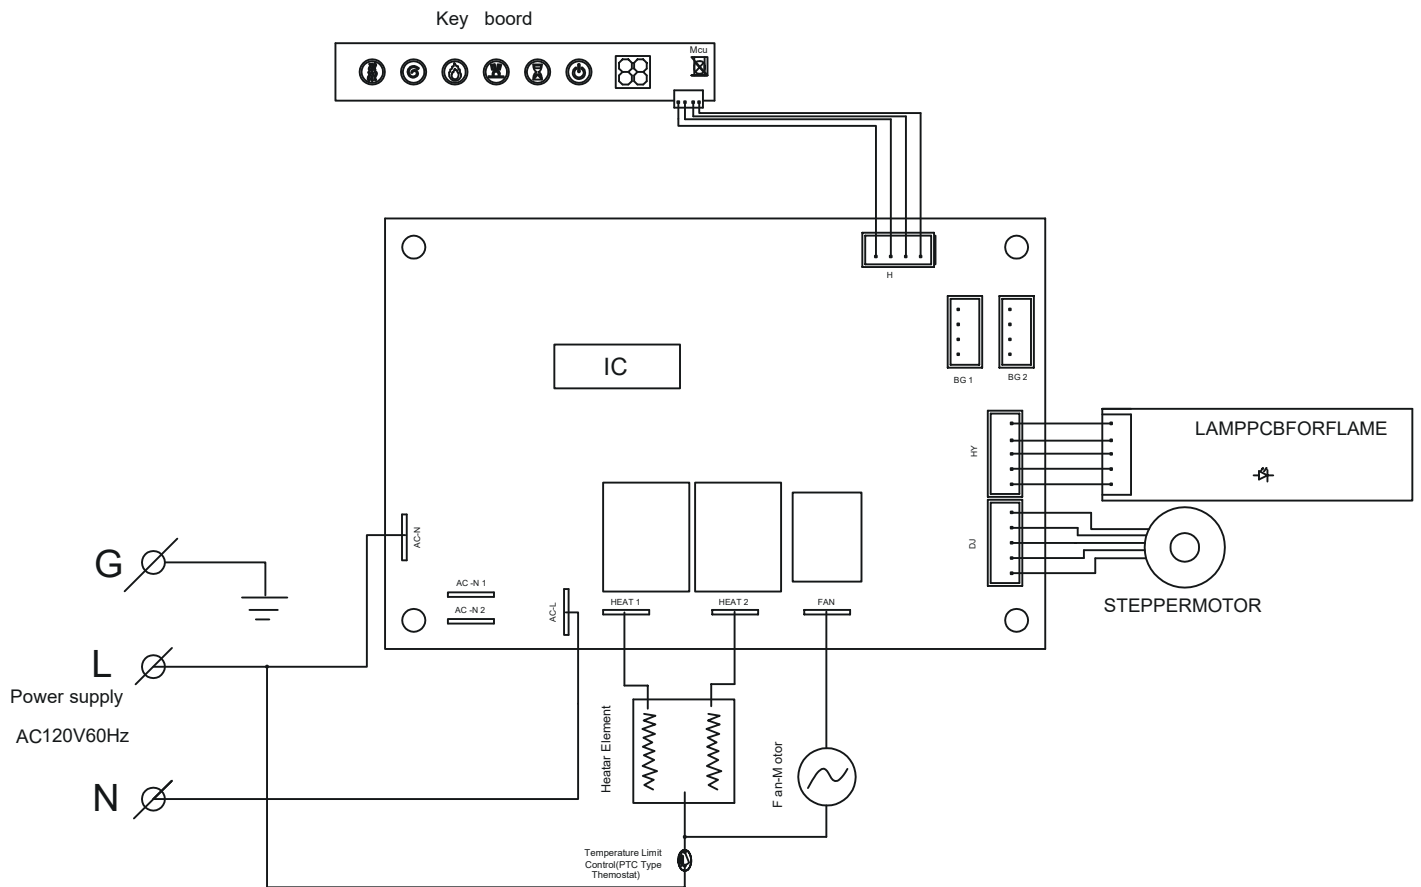

8.0 LIMITED WARRANTY

This warrants to the original purchaser that this product is free from defects in material and workmanship as of the date of purchase and that it will, under normal use and proper care, remain so for one year from the date of purchase. Missing or initially defective parts will be replaced free of charge during the period of this limited warranty.

If parts are unavailable, comparable replacement or refund will be given. **The original dated sales receipt is required for all warranty claims.** This warranty does not cover damage which has occurred during transport from the point of purchase to the consumer's home. This warranty does not cover glass, light bulbs, batteries, transportation, labor, or other issues not associated with the manufacture of the product.

This product is for residential use only. Any and all commercial use of this product voids all warranties, and frees the manufacturer from all liability.

Read and understand all assembly and operating instructions, and all safety information and warnings, before use.

The following will void this warranty: Damage caused from tampering with, modifying, or altering the fireplace insert in any manner; Damage due to incorrect assembly, improper care, misuse, or abuse; Damage from being used with the wrong power source; Water damage; Damage caused from this insert being used outdoors; Damage caused from this insert being used for excessive periods of time; Damage caused by the insert being used in a commercial application; Damage from use as a primary heat source; Other misuse or abuse not specifically listed herein.

This product is not intended to be used as a primary heat source. It is for supplemental heating purposes only.

9.0 Q & A AND CONTACT INFORMATION

1.

Q: After installation, I found that half screen of my fireplace was no light. What should I do?

A: This problem was caused by the lamp strip of the product, which installed in the back inner place of the fireplace. Please check the plug of the lamp strip was fully inserted or not. If the problem couldn't be solved with above step, please contact customer service for help.

2.

Q: I turn on the fireplace and the flame is weak what should I do?

A: This problem is caused by the reflective strip (installed in the back inner place of fireplace). Please contact us to replace the reflective strip to solve this problem.

3.

Q: My fireplace makes a lot of noise, could you please tell me why?

A: Firstly, please confirm where the noise come from? There are usually 3 causes of noise.

(1) Motor noise. It is coming from the bottom of the fireplace and could be solved by changing motor, please contact with customer service for change .

(2) Reflected strip noise. It is coming from the back of the fireplace. Please take the fireplace apart, find the reflective strip, and cut off the excess.

(3) Fan noise. It is coming from top of the fireplace. Please contact customer service. They will send you a repair video and provide you with a repair plan as help to repair the fireplace.

If the problem couldn't be solved by above steps, please contact with customer service for help.

4.

Q: My fireplace does not heat up after plug in, what should I do?

A: It may be the control board is damaged, please send the video and your order number to the email, we will help you solve the problem.

5.

Q: The remote control is insensitive, what should I do?

A: Please confirm you already take out the insulating parts in the remote and load the battery correctly. Then please aim at the upper right corner of the screen to test when using. If the remote still insensitive after above steps, please contact customer service.