


Installation Guide




1 Fit the gasket onto the underside of the spout. Insert the spout through the sink opening. Slide the bracket and washer onto the stud. Thread the nut onto the stud and tighten.





or


1 Place spout with gasket through mounting hole in sink. Secure spout with bracket and nut. Note: If sink is uneven, use silicone under the gasket.

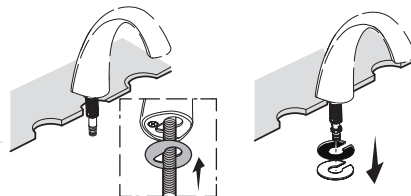


2 Loosely attach each handle with a washer and a threaded ring. Ensure the handles are in the OFF position. Align the handles as shown.



3 Align tabs (1) and tabs (2) on quick connects (3). Push quick connects firmly upward and snap onto receiving tube tab (1). Pull down moderately to ensure each connection has been made.



4 Connect To Water Supplies.



5 Turn on the water supplies. Check all connections for leaks.

