

Assembly Instructions

IMPORTANT:

- ALL INSTALLATION WORK SHOULD BE DONE BY ACCREDITED PROFESSIONAL.
- SHUT OFF POWER SUPPLY AT FUSE OR CIRCUIT BREAKER!
- USE ONLY THE SPECIFIED BULBS. DO NOT EXCEED THE MAXIMUM WATTAGE!


For Customer Service, please contact the place of purchase.

PREPARING FOR INSTALLATION

Note: This fixture may be mounted close-to-ceiling as a semi-flush or with rods as a pendant. These are semi-flush directions.

Remove all of the contents from the carton. See the important notes above. Shut off the power at the circuit breaker and completely remove the old fixture from the ceiling, including the old mounting strap.

1. Take the mounting strap assembly from the parts bag. Mounting strap (B) contains several threaded holes. Two of mounting screws (A) should be attached to mounting strap (B). You may need to tighten nuts (C) which hold these screws in place. If the screws are not attached, please hold canopy (F) up to mounting strap (B). Line up the holes in canopy (F) with the holes in mounting strap (B) and insert mounting screws (A) into mounting strap (B) so that mounting screws (A) protrude through the holes in canopy (F). Mounting screws (A) are long, please test the canopy against the mounting strap to see how far you should insert the screws. Tighten nuts (C) onto mounting screws (A) to hold the screws in place.
2. Pull the house wires through the center of mounting strap (B). Place mounting strap (B) over the junction box so that mounting screws (A) are in alignment with the hole locations on the fixture's canopy (F). Secure mounting strap (B) to the junction box with mounting screws (D) and a screwdriver. Tighten the screws securely.
3. Refer to the "Step 1" diagram. Frame (L) is composed of four panels (1 and 2). The panels are two different sizes. Center rod (N) is on the wires, but not attached to the fixture. Screw center rod (N) onto post (O) and then connect it to the bottom of bracket (S). Use small bracket screws (P) to attach bracket (S) with the fixture's body attached to both of panels (1). Slide panels (2) over the ends of connected panels (1) so that the holes in panels (2) line up with the holes in panels (1). Use screws (T) to secure the panels together. Frame (L) should look like the "Step 2" diagram when completed.
4. Twist connector (K) onto the top threads of post (M) before screwing the open threads onto swivel (H) of canopy (F).

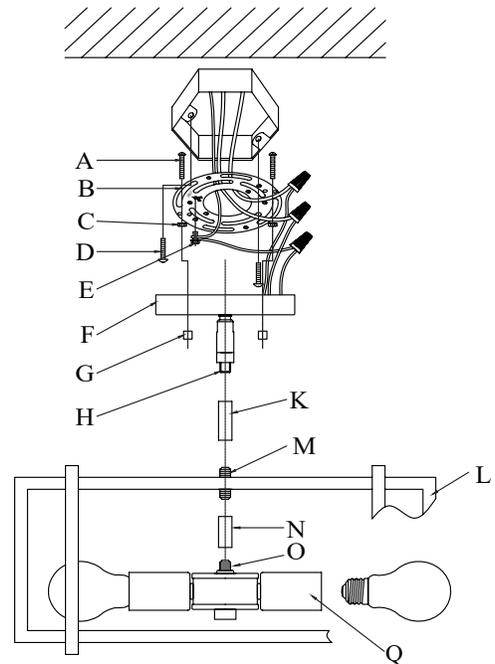


CONNECTING THE WIRES

5. Have an assistant support the weight of the fixture. Refer to the wiring diagram and attach the fixture's wires to the power supply wires from the junction box. Connect Hot to Hot, Neutral to Neutral, and Ground to Ground. Twist the ends of the wire pairs together, and then twist on a wire connector. Make sure all twists are in the same direction. If there is no house ground wire coming from the junction box, locate ground screw (E) on the mounting bracket/mounting strap and wrap the fixture's ground wire around the ground screw. Use a screwdriver to tighten the top of ground screw (E) onto the wires and into the mounting bracket/mounting strap. Tuck the wires into the junction box.

How to Identify the Fixture's Wires			House Wires	
Hot	Neutral	Ground	Hot	Neutral
Smooth	Ribbed	Bare Metal, Green, or Green Inner Thread	Hot	Neutral
Black	White		Neutral	Ground
Black Inner Thread	White Inner Thread		Ground	

This diagram shows the connection of the fixture's wires to the house wires. The fixture wires are labeled as Hot, Neutral, and Ground. The house wires are also labeled as Hot, Neutral, and Ground. The diagram shows the wires being twisted together and connected to a wire connector.

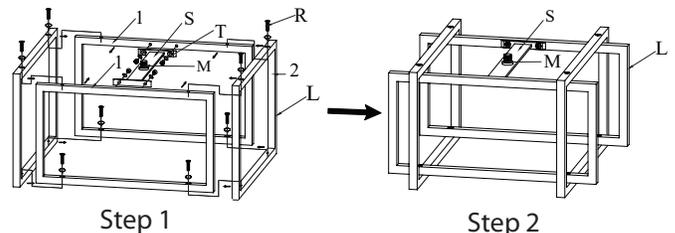

FINISHING THE INSTALLATION

6. Place the fixture's canopy (F) over mounting screws (A) so that they protrude through the holes in canopy (F). Thread deco nuts (G) onto mounting screws (A).
7. Install light bulbs (not provided) in accordance with the fixture's specifications. Do not exceed the maximum recommended wattage.

Your installation is complete. Turn on the power and test the fixture.

CLEANING TIPS

Treat the fixture gently! Regular cleaning will reduce the need for deep cleaning. For regular cleaning, turn off the light and wipe down the fixture with a clean lint-free cotton or microfiber cloth. Never spray cleaner directly onto the fixture.

Assembly Instructions

IMPORTANT:

- ALL INSTALLATION WORK SHOULD BE DONE BY ACCREDITED PROFESSIONAL.
- SHUT OFF POWER SUPPLY AT FUSE OR CIRCUIT BREAKER!
- USE ONLY THE SPECIFIED BULBS. DO NOT EXCEED THE MAXIMUM WATTAGE!

For Customer Service, please contact the place of purchase.

PREPARING FOR INSTALLATION

Note: This fixture may be mounted close-to-ceiling as a semi-flush or with rods as a pendant. These are pendant directions.

Remove all of the contents from the carton. See the important notes above. Remove the old fixture from the ceiling, including the old mounting strap.

1. Take the mounting strap assembly from the parts bag. Mounting strap (B) contains several threaded holes. Two of mounting screws (A) should be attached to mounting strap (B). You may need to tighten nuts (C) which hold these screws in place. If the screws are not attached, please hold canopy (F) up to mounting strap (B). Line up the holes in canopy (F) with the holes in mounting strap (B) and insert mounting screws (A) into mounting strap (B) so that mounting screws (A) protrude through the holes in canopy (F). Mounting screws (A) are long, please test the canopy against the mounting strap to see how far you should insert the screws. Tighten nuts (C) onto mounting screws (A) to hold the screws in place.
2. Pull the house wires through the center of mounting strap (B). Place mounting strap (B) over the junction box so that mounting screws (A) are in alignment with the hole locations on the fixture's canopy (F). Secure mounting strap (B) to the junction box with mounting screws (D) and a screwdriver. Tighten the screws securely.

ASSEMBLING THE FIXTURE

3. Refer to the "Step 1" diagram. Frame (L) is composed of four panels (1 and 2). The panels are two different sizes. Center rod (N) is on the wires, but not attached to the fixture. Screw center rod (N) onto post (O) and then connect it to the bottom of bracket (S). Use small bracket screws (P) to attach bracket (S) with the fixture's body attached to both of panels (1). Slide panels (2) over the ends of connected panels (1) so that the holes in panels (2) line up with the holes in panels (1). Use screws (T) to secure the panels together. Frame (L) should look like the "Step 2" diagram when completed.

4. Center rod (N) is on the wires, but not attached to the fixture. Screw center rod (N) onto post (O) and then connect it to the bottom of bracket (S). There are 3 optional 12 inch rods (I) and 1 optional 6 inch rod (J) included. Decide how long you would like the fixture to hang. By measuring, determine the correct number of rods needed for proper hanging height. To lengthen the fixture, you can contact the place of purchase to order additional rods. Slide rods (I and J) onto the fixture's wires. Pull the wires taut before threading rods (I and J) together. Thread bottom rod (J or I) onto post (M) of the assembled frame (L). Twist the top rod (I or J) into the threads of swivel post (H). Pull the fixture's wires through swivel (H) and through canopy (F). Trim the wires to the desired length adding at least 8 to 10 inches of wire.



CONNECTING THE WIRES

5. Have an assistant support the weight of the fixture. Refer to the wiring diagram and attach the fixture's wires to the power supply wires from the junction box. Connect Hot to Hot, Neutral to Neutral, and Ground to Ground. Twist the ends of the wire pairs together, and then twist on a wire connector. Make sure all twists are in the same direction. If there is no house ground wire coming from the junction box, locate ground screw (E) on the mounting bracket/mounting strap and wrap the fixture's ground wire around the ground screw. Use a screwdriver to tighten the top of ground screw (E) onto the wires and into the mounting bracket/mounting strap. Tuck the wires into the junction box.

FINISHING THE INSTALLATION

6. Place the fixture's canopy (F) over mounting screws (A) so that they protrude through the holes in canopy (F). Thread deco nuts (G) onto mounting screws (A).
7. Install light bulbs (not provided) in accordance with the fixture's specifications. Do not exceed the maximum recommended wattage.

Your installation is now complete. Turn on the power and test the fixture.

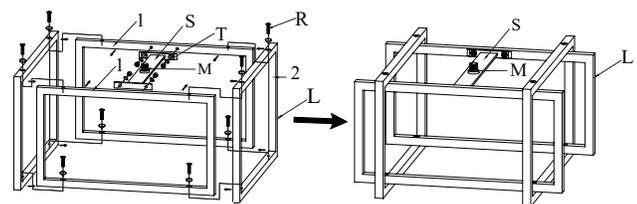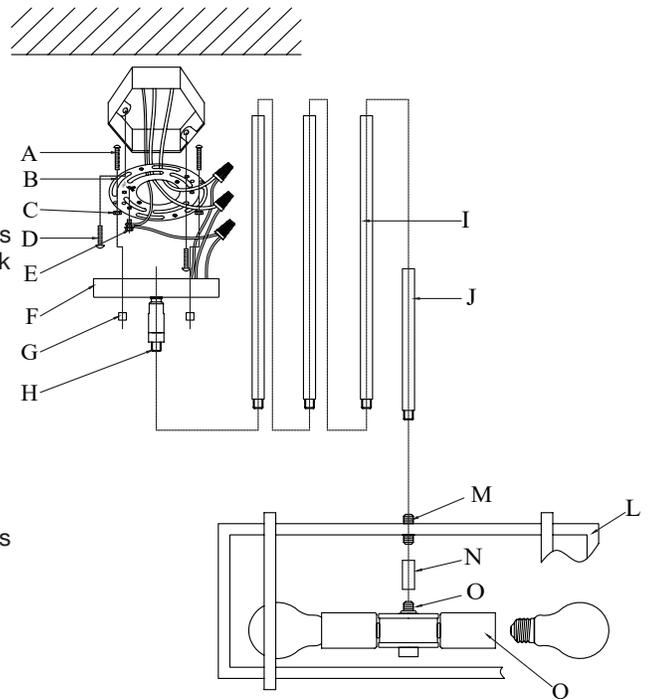

How to Identify the Fixture's Wires			House Wire
Hot	Neutral	Ground	
Smooth	Ribbed	Bare Metal, Green, or Green Inner Thread	Hot
Black	White		Neutral
Black Inner Thread	White Inner Thread		Ground

The wiring diagram shows the connection of the fixture's wires to the house wires. The fixture's Hot wire (smooth) is connected to the house's Hot wire (ribbed). The fixture's Neutral wire (black) is connected to the house's Neutral wire (white). The fixture's Ground wire (black inner thread) is connected to the house's Ground wire (bare metal, green, or green inner thread). The diagram also shows the fixture's wires being connected to the junction box.

CLEANING TIPS

Treat the fixture gently! Regular cleaning will reduce the need for deep cleaning. For regular cleaning, turn off the light and wipe down the fixture with a clean lint-free cotton or microfiber cloth. Never spray cleaner directly onto the fixture.