




1. Adjust the bend profile ⑦ to suitable position like picture shown.
2. Rotate to remove out the ring ④ and cover ⑤.

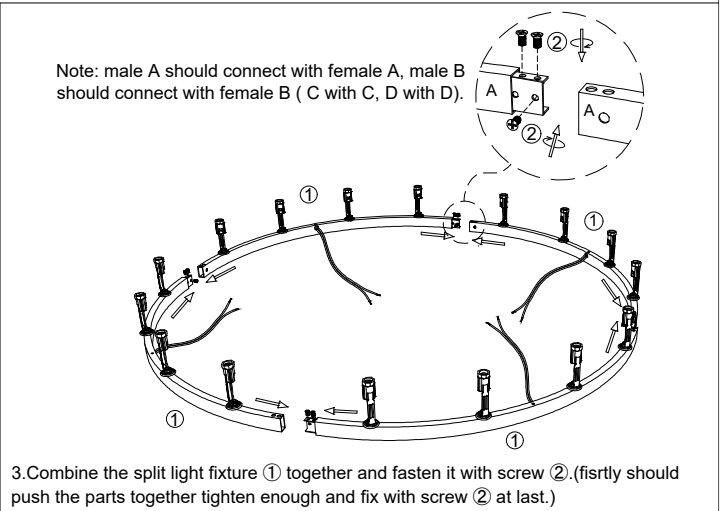


3. Combine the split light fixture ① together and fasten it with screw ②. (firstly should push the parts together tighten enough and fix with screw ② at last.)

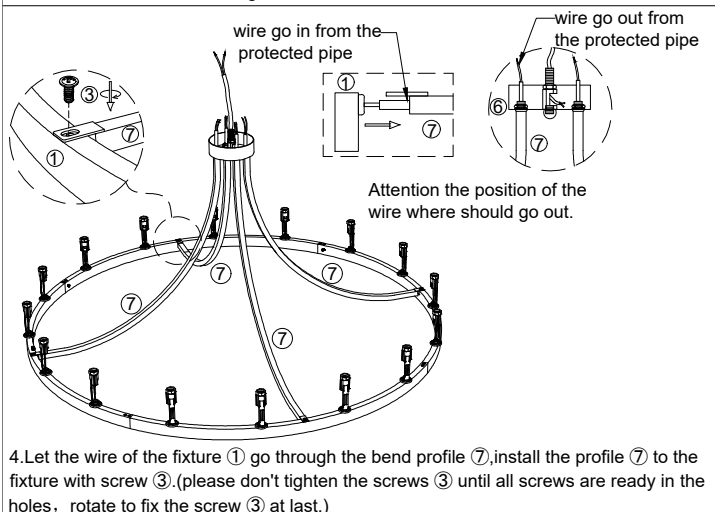


4. Let the wire of the fixture ① go through the bend profile ⑦, install the profile ⑦ to the fixture with screw ③. (please don't tighten the screws ③ until all screws are ready in the holes, rotate to fix the screw ③ at last.)

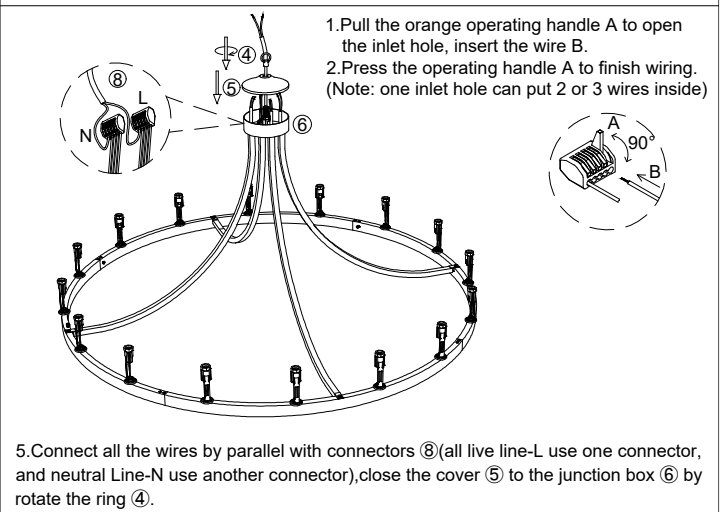

5. Connect all the wires by parallel with connectors ⑧ (all live line-L use one connector, and neutral Line-N use another connector), close the cover ⑤ to the junction box ⑥ by rotate the ring ④.

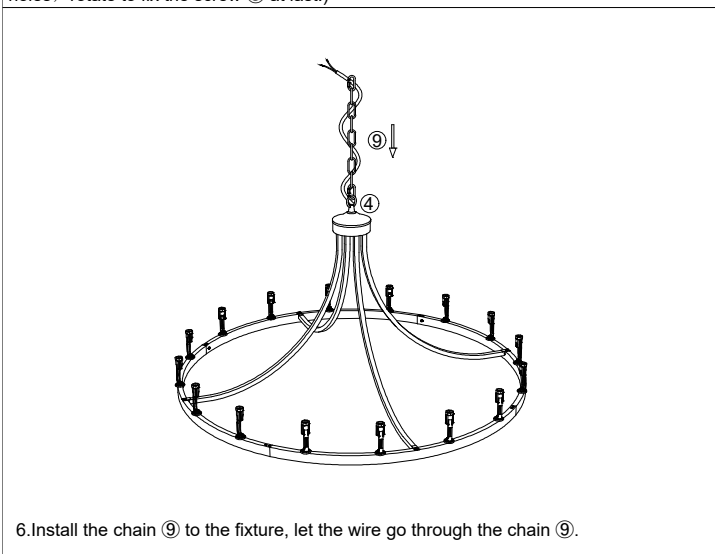

6. Install the chain ⑨ to the fixture, let the wire go through the chain ⑨.

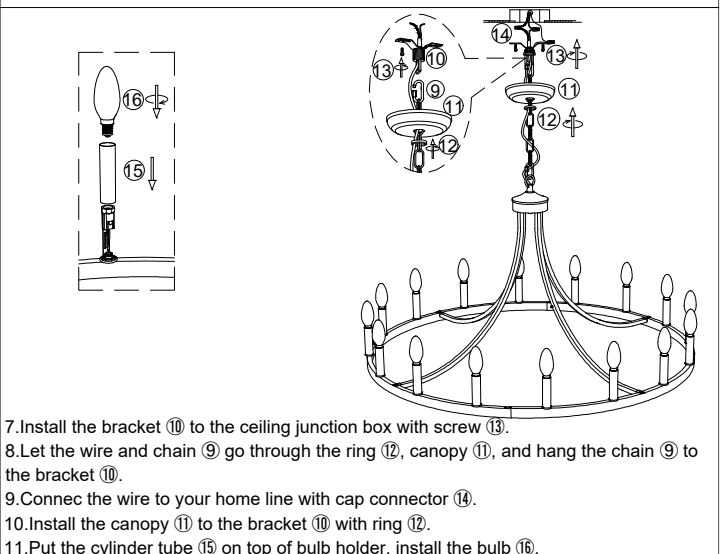

7. Install the bracket ⑩ to the ceiling junction box with screw ⑬.
8. Let the wire and chain ⑨ go through the ring ⑫, canopy ⑪, and hang the chain ⑨ to the bracket ⑩.
9. Connect the wire to your home line with cap connector ⑭.
10. Install the canopy ⑪ to the bracket ⑩ with ring ⑫.
11. Put the cylinder tube ⑮ on top of bulb holder, install the bulb ⑯.

Please read carefully before installation!!!

Note : Please make sure that the electricity is powered off during installation !

Only a professional electrician should install this kind of product !