


# Assembly & Installation Instructions

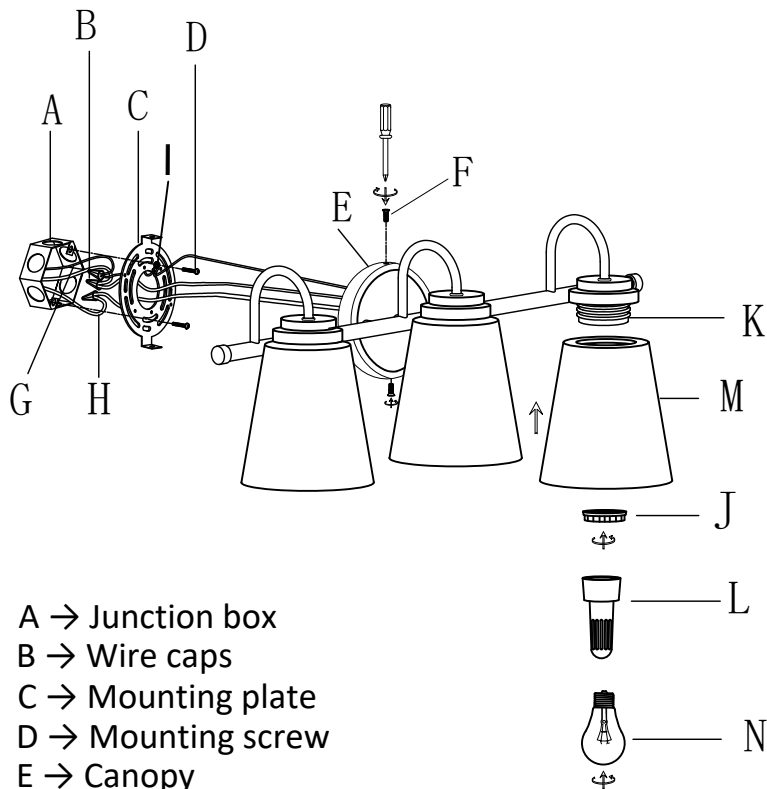

- A → Junction box
- B → Wire caps
- C → Mounting plate
- D → Mounting screw
- E → Canopy
- F → Screw
- G → Home wires
- H → Fixture's wires
- I → Ground ground screw
- J → Lamp socket ring
- K → Lamp socket
- L → Socket ring removal tool
- M → Glass Lampshade
- N → Bulb

## PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

## IMPORTANT:

1. **WARNING** - Disconnect power before relamping or wiring the fixture. Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

## INSTALLATION STEPS:

1. Secure the mounting plate (C) to the junction box (A) using the mounting screws (D).
2. Connect the fixture's wires (H) and home wires (G) using the wire caps (B) as follows:
  - Connect the fixture's **BLACK** wire to the home **LIVE/HOT** wire.
  - Connect the fixture's **WHITE** wire to the home **NEUTRAL** wire.
  - Connect the fixture's **GREEN** wire to the home **GROUND** wire to the mounting plate (C) with the green ground screw (I).

**\*Note:** Ensure no wire strands are exposed.
3. Secure the canopy (E) to the mounting plate (C) with screws (F).
4. Align the hole of the glass lampshade (M) with the lamp socket (K), then tighten the lamp socket ring (J) using the socket ring removal tool (L).
5. Install the bulbs (N) (not included) into the lamp socket (K).