



Act-O-Matic® Shower Head

AC-11

► Description

Act-O-Matic®, Chrome Plated, Self-Cleaning Shower Head with Thumb Screw Volume Control.

► Flow Rate

2.5 gpm/9.4 Lpm maximum

► Specifications

Act-O-Matic, Chrome Plated Shower Head with the following features:

- Spring loaded, Self-Cleaning Spray Disk to prevent particle clogging
- "Cone-within-a-cone" Spray Pattern for total body coverage
- Pressure Compensating 2.5 gpm/9.4 Lpm Flow Control
- All Brass Construction
- Universal Ball Joint with Thumb Screw Volume Control
- 1/2" I.P.S. Inlet

Shower Head shall be in conformance to all requirements of ANSI/ASME Standard A112.18.1M, CSA B-125 and the United States Federal Energy Policy Act.

► Variations




- ☐ YC Spray Arm with Set Screw Flange

► Program Configurations

- | | |
|-----------------------------|-------------------|
| <input type="checkbox"/> PB | Polished Brass |
| <input type="checkbox"/> LG | Luster Gold (24k) |
| <input type="checkbox"/> AB | Antique Brass |
| <input type="checkbox"/> SF | Satin Finish |

NOTE: Shower Head available with 1/2" Whitworth Thread (please specify).

See Accessories Section of the Sloan catalog for details on these and other Shower Head variations.

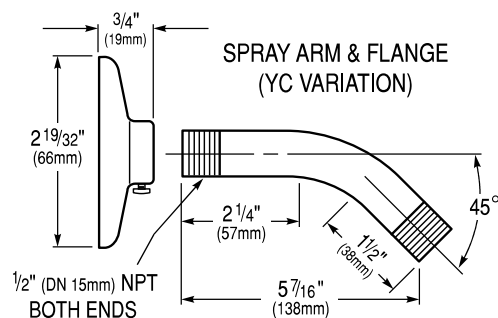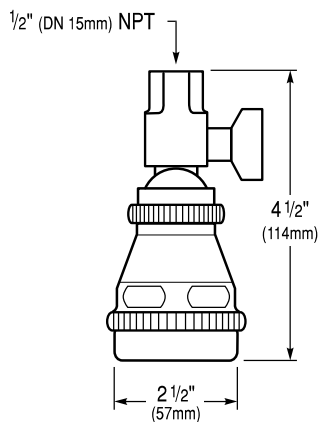

This space for Architect/Engineer approval

The information contained in this document is subject to change without notice.



10500 Seymour Avenue • Franklin Park, Illinois, 60131-1259
Phone 800-671-6970 • Fax 847-671-6944