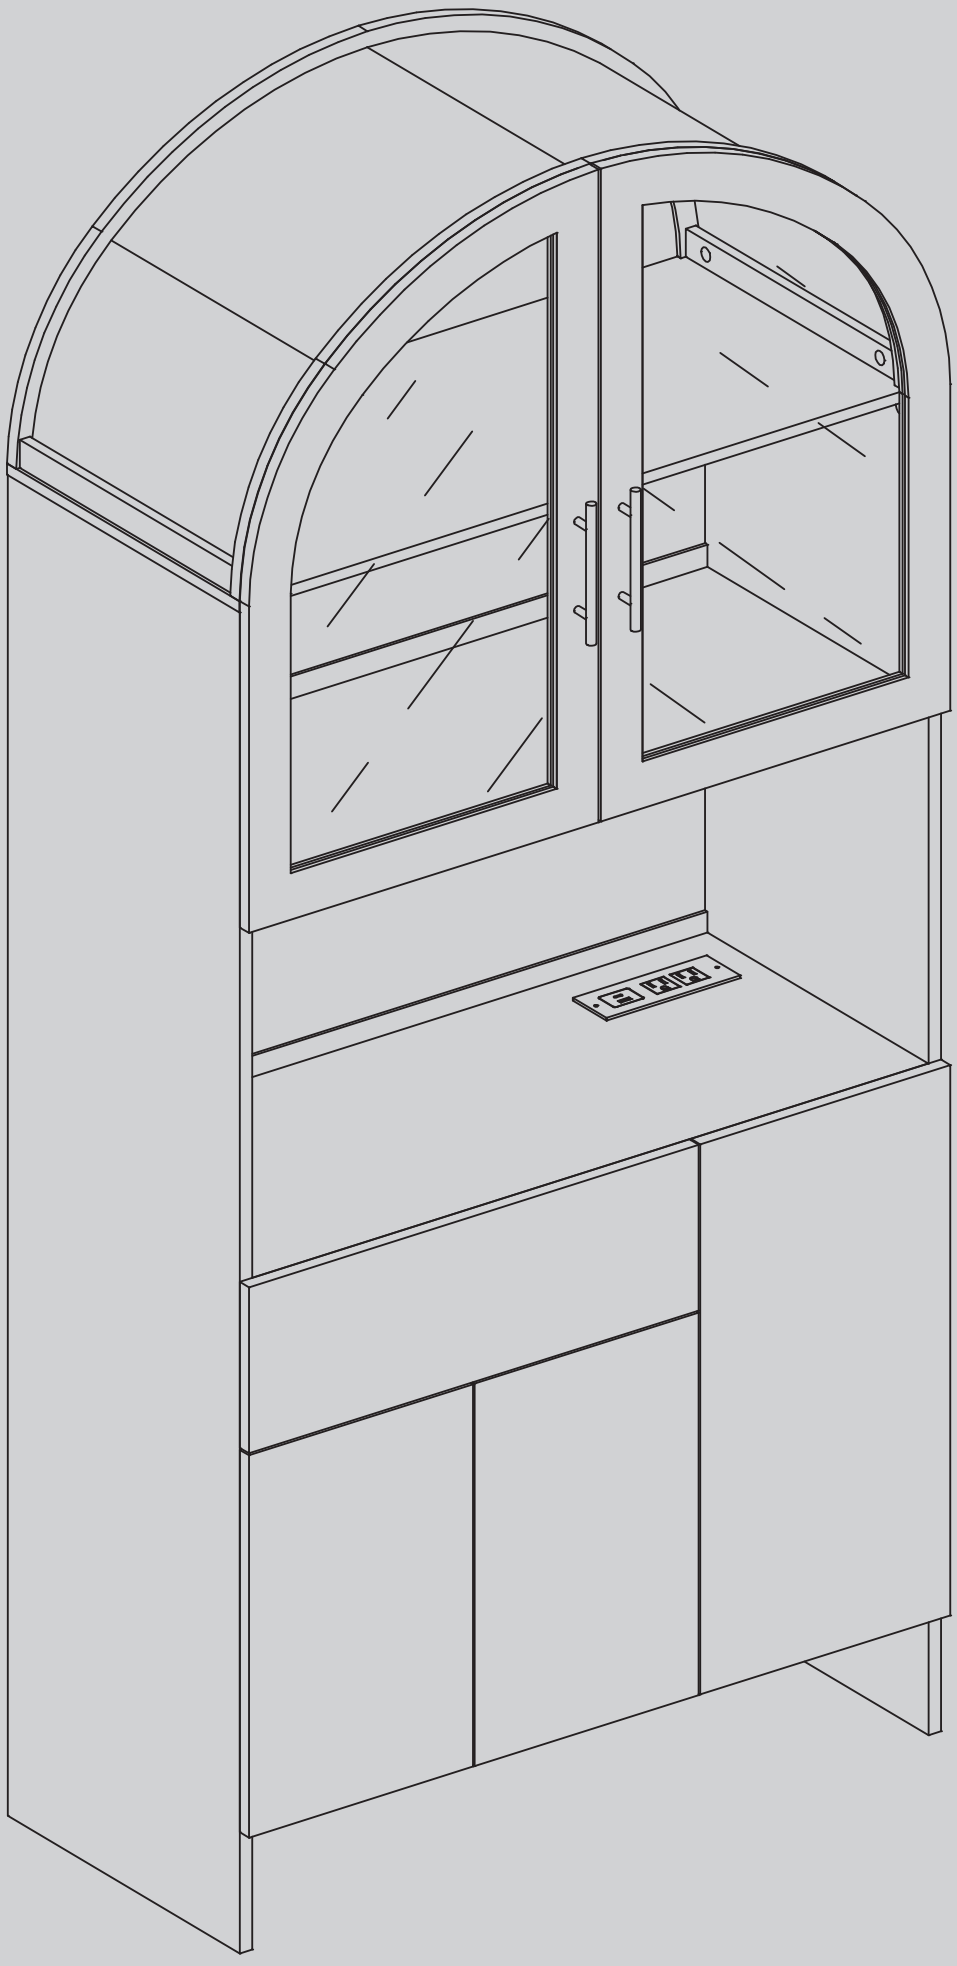


Two people are required to cooperate
for the installation of this product.

Introduction

Thank you for purchasing our products. Please read the instructions carefully before installation and keep it in a safe place for future reference. lf you need any assistance or support, please feel free to contact our customer support team.

Precautions

1.There are many components and accessories in the package. Each component and accessory is labeled with a letter or a number, check carefully before using any of them. Keep them away from children top prevent accidents.

2. Please install the product on a clean and soft underlay (such as carpet or cardboard) to avoid scratching or damaging the surface of the product.

3. The main components of the product is relatively heavy. Please pay attention to safety during installation.

4. The product is not stable during installation. Please do not move it randomly before it is completely installed.

5. lf you have any questions during installation, please contact the customer service in time.

Services


*** PLEASE BE SURE TO FOLLOW THE INSTALLATION STEPS IN THE MANUAL TO AVOID UNNECESSARY LOSSES CAUSED BY IMPROPER INSTALLATION.**


*** IF YOU NEED FURTHER ASSISTANCE, PLEASE CONTACT THE CUSTOMER SERVICE ONLINE.**


Note: Two people are recommended to assemble,
which will greatly improve your assembling efficiency.

Cam Lock Fastening System


This Cam Lock Fastening System will be used throughout the assembly process



































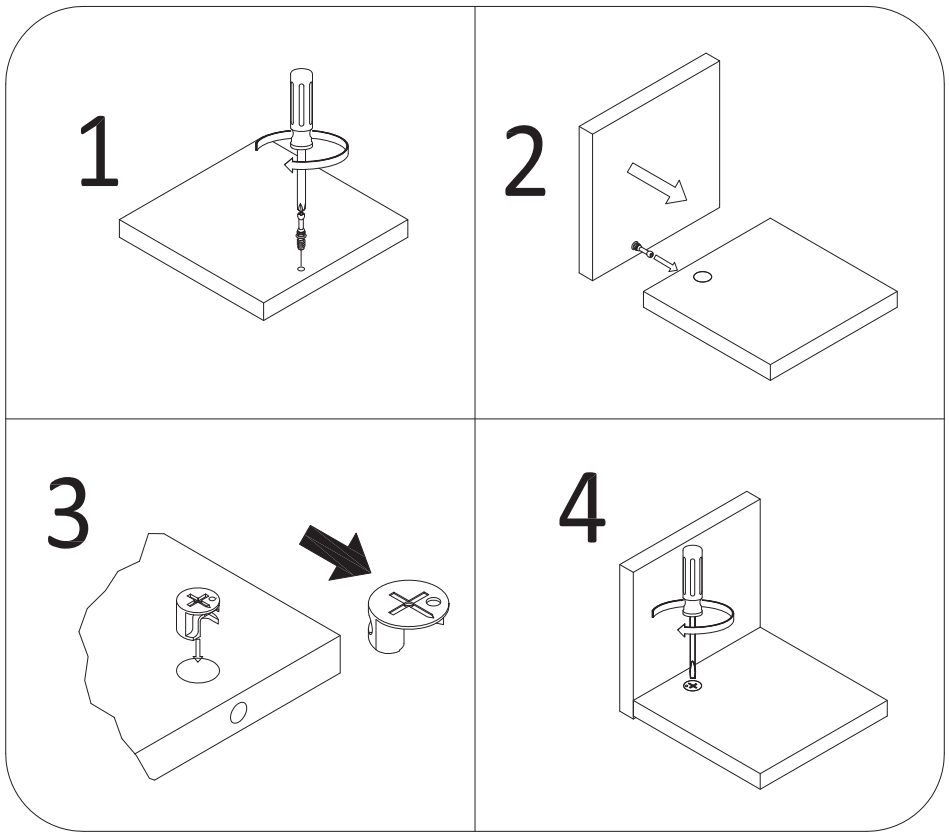

























Exploded Drawing

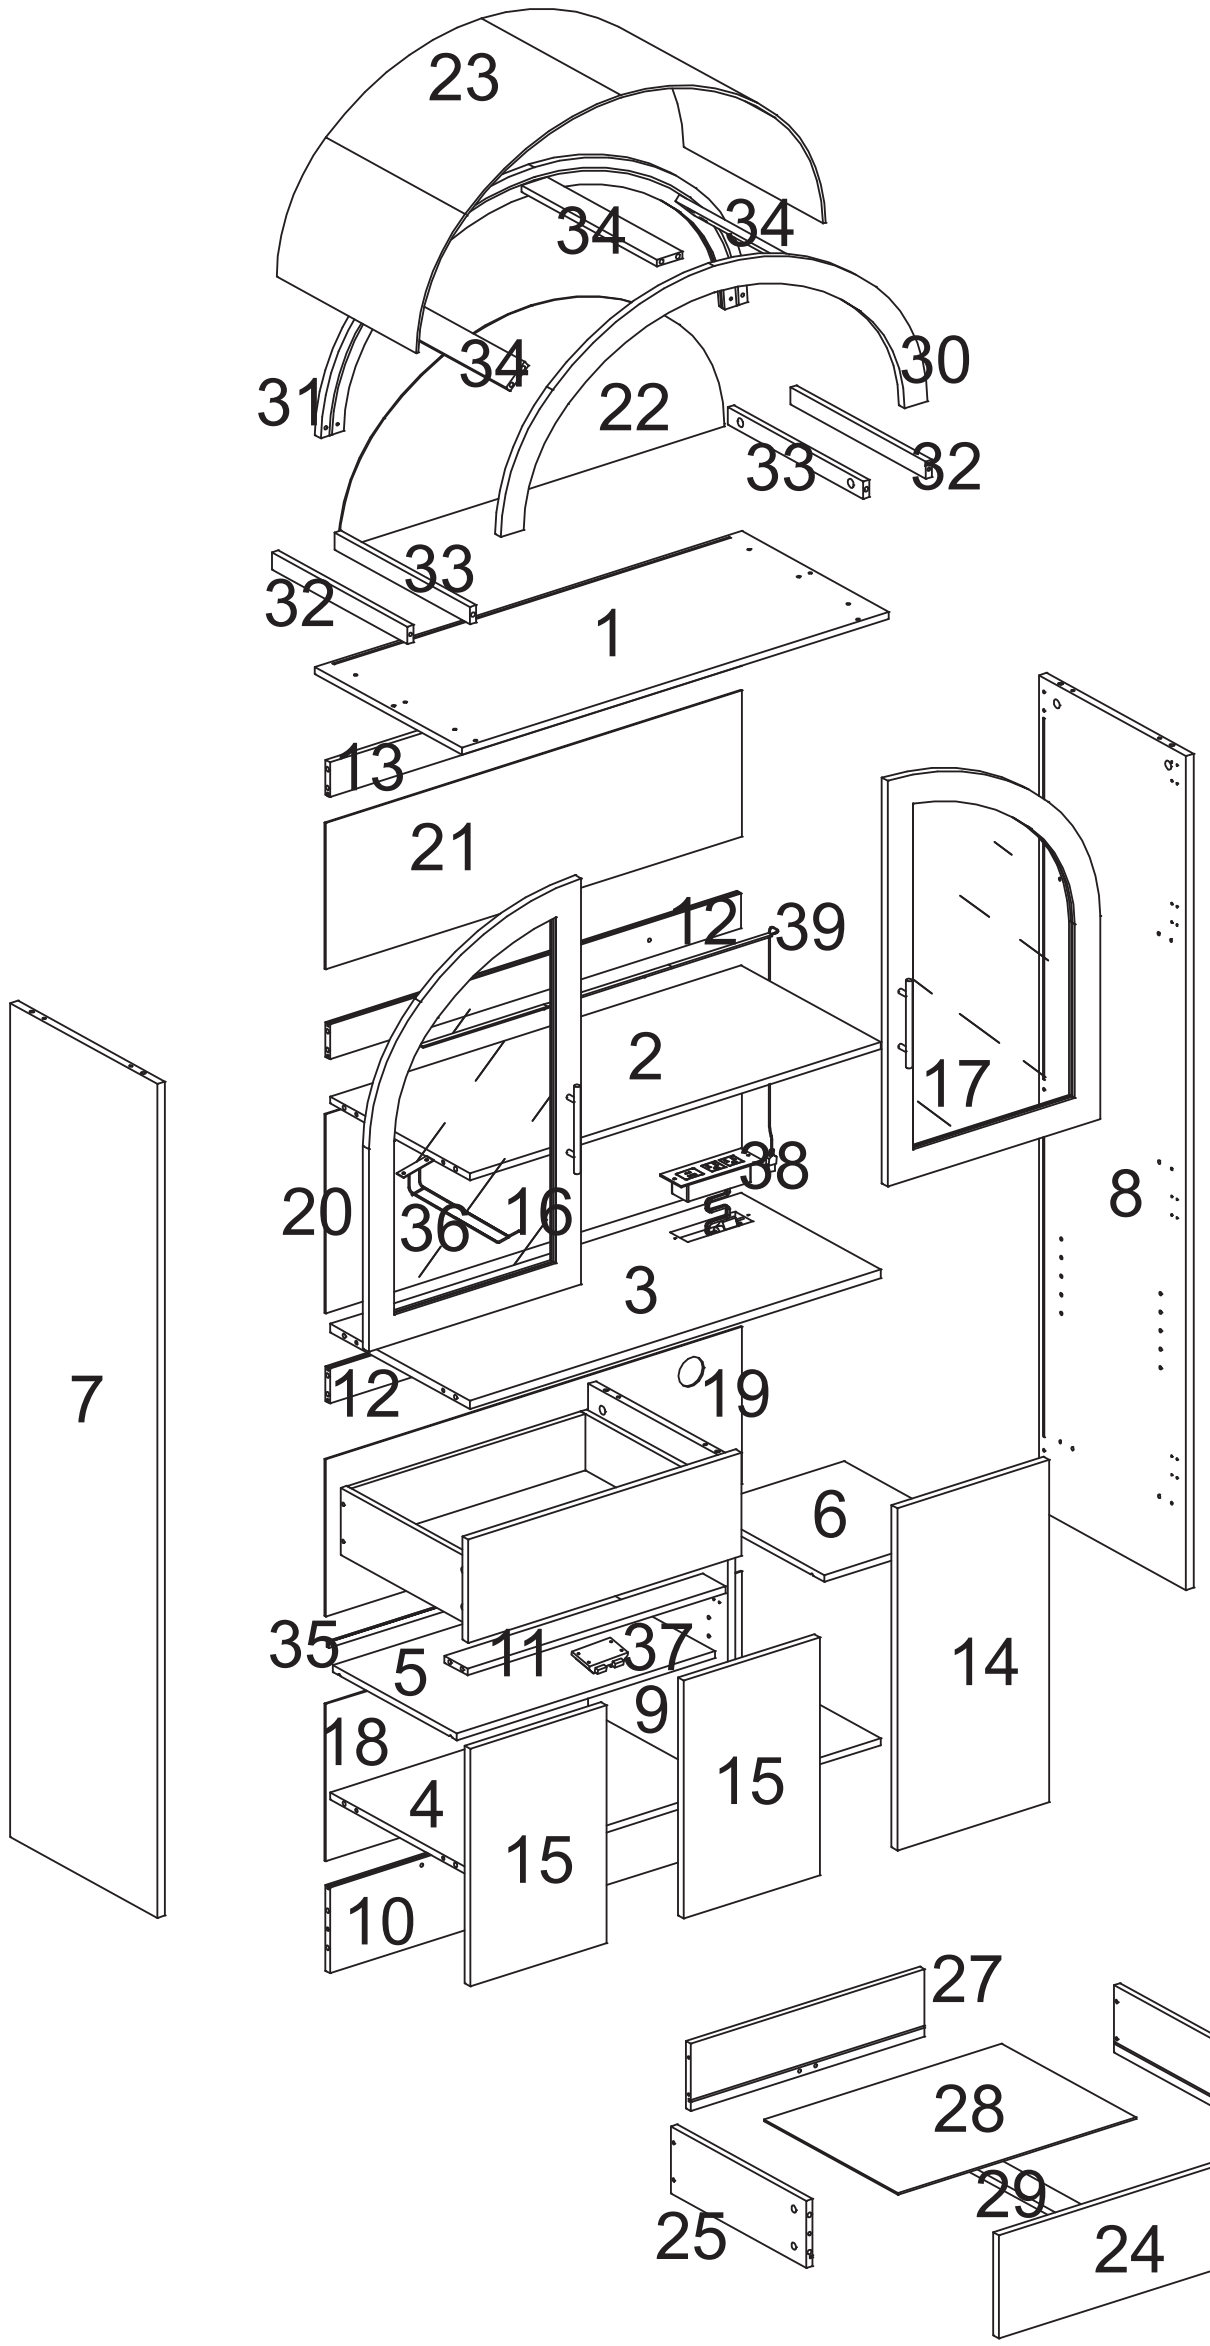

Parts



1  X1	2  X1	3  X1	4  X1	5  X1
6  X1	7  X1	8  X1	9  X1	10  X1
11  X1	12  X2	13  X1	14  X1	15  X2
16  X1	17  X1	18  X1	19  X1	20  X1
21  X1	22  X1	23  X1	24  X1	25  X1
26  X1	27  X1	28  X1	29  X1	30  X1


Parts

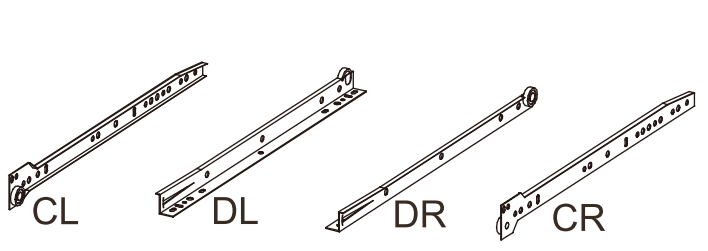31  X1	32  X2	33  X2	34  X3	35  X1
36  X1	37  X1	38  X1	39  X1	
A  X62+2	B M15  X62+2	C M6X10  X2+1	D M5X40  X20+2	E M4X12  X71+4
F M4X20  X4+1	G M6X30  X34+2	H  X8+1	J  X10	K  X2
M  X2	N  X2	P  X1 M3X12 X1 X26	 CL DL DR CR X1	
 M4	 M3			

Assembly Instructions

1

A	E M4X12	G M6X30
		
2 PCS	2 PCS	4 PCS

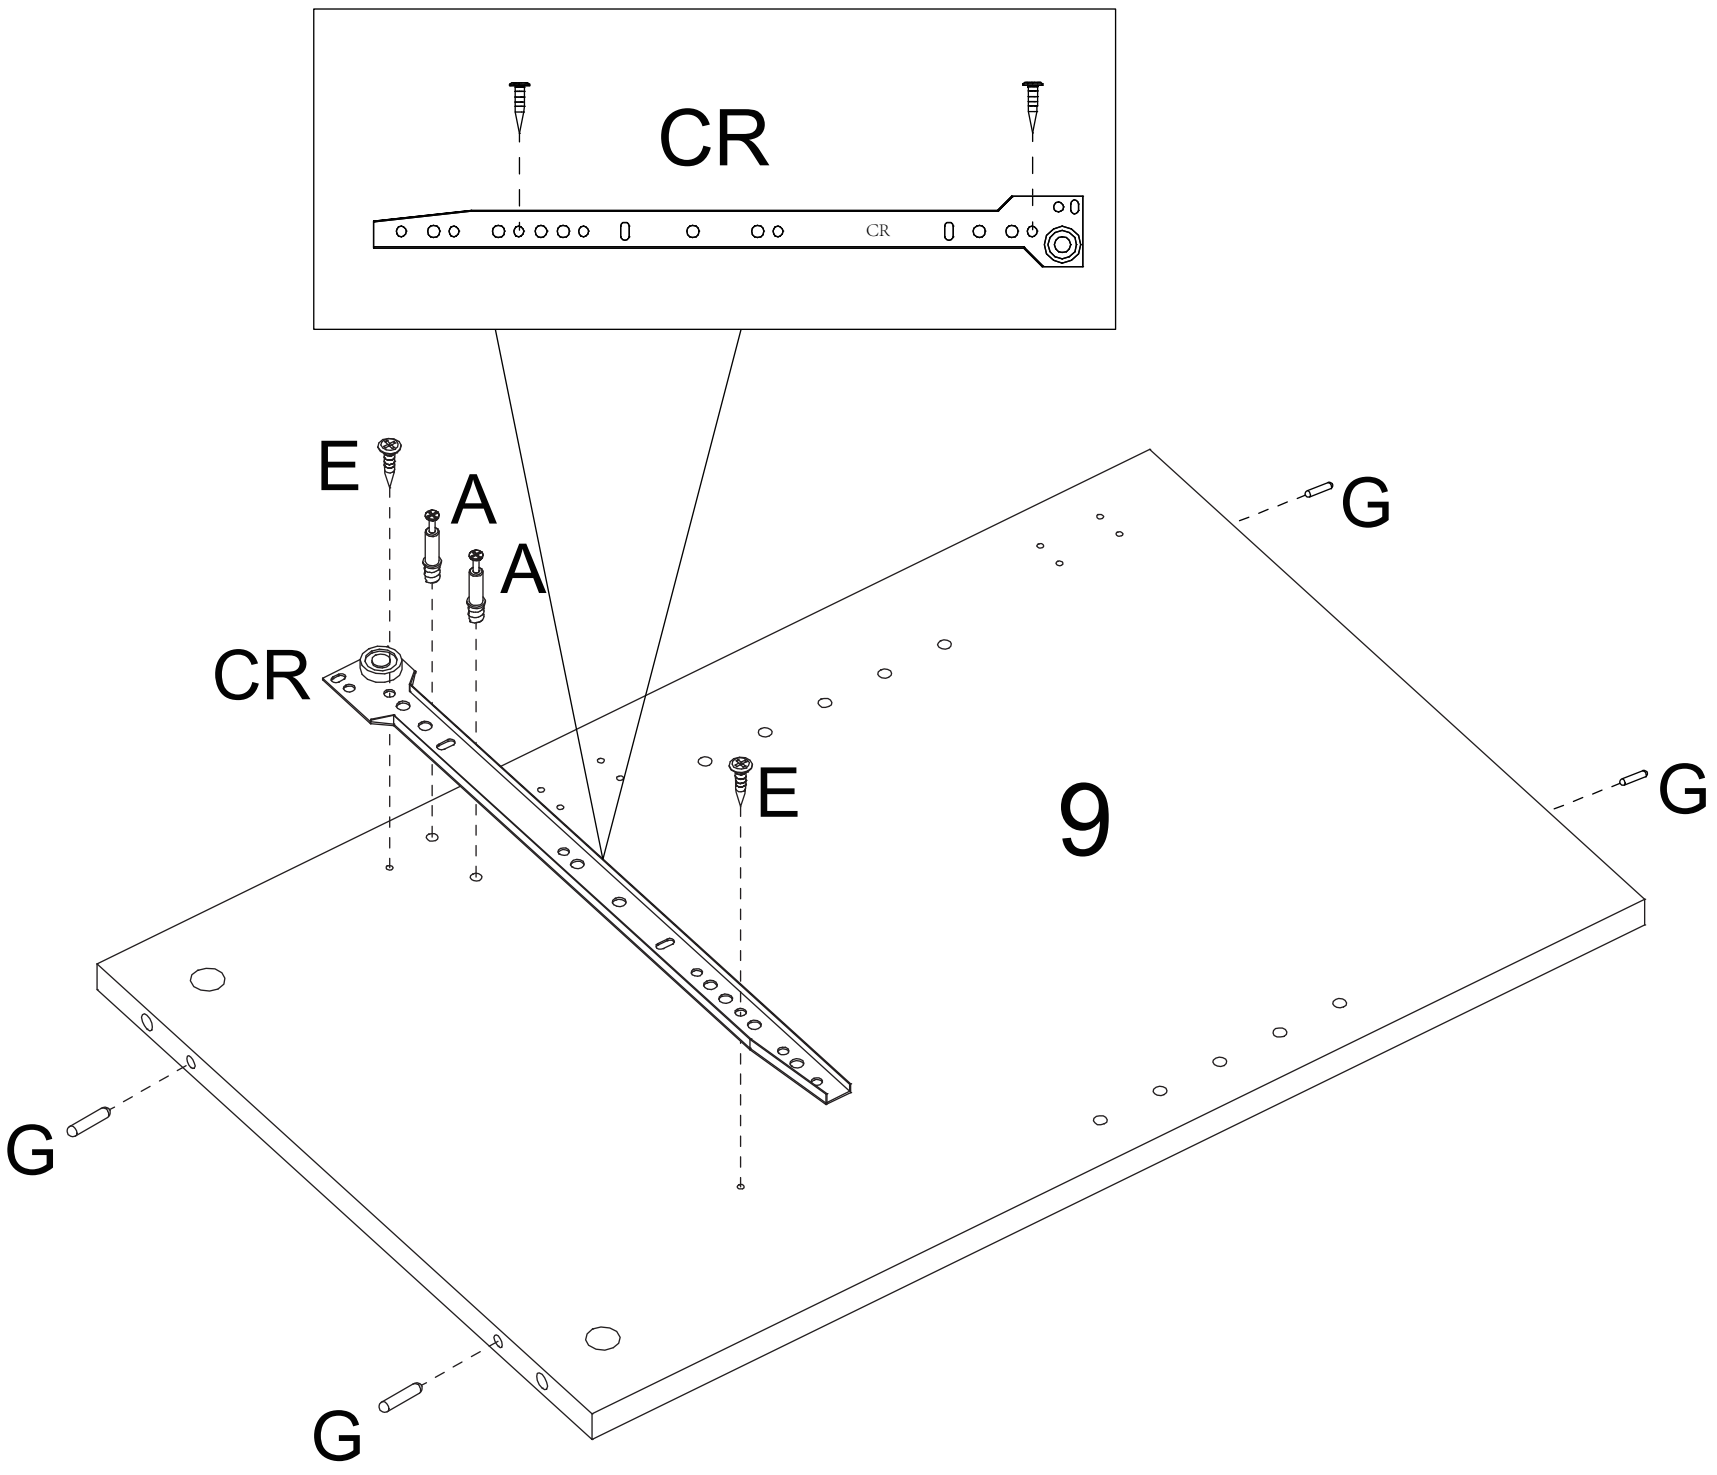



Drive Screw **A** into the white pre-embedded hole at the position shown in the diagram.

For the **CR** accessory, use Screw **E** and drive it into the corresponding small hole shown in the diagram.


Assembly Instructions

2

A	B M15	D M5X40
		
2 PCS	2 PCS	2 PCS




When part B is put into the hole,the notch above it is first aligned with part A,and then clockwise tighten part B.

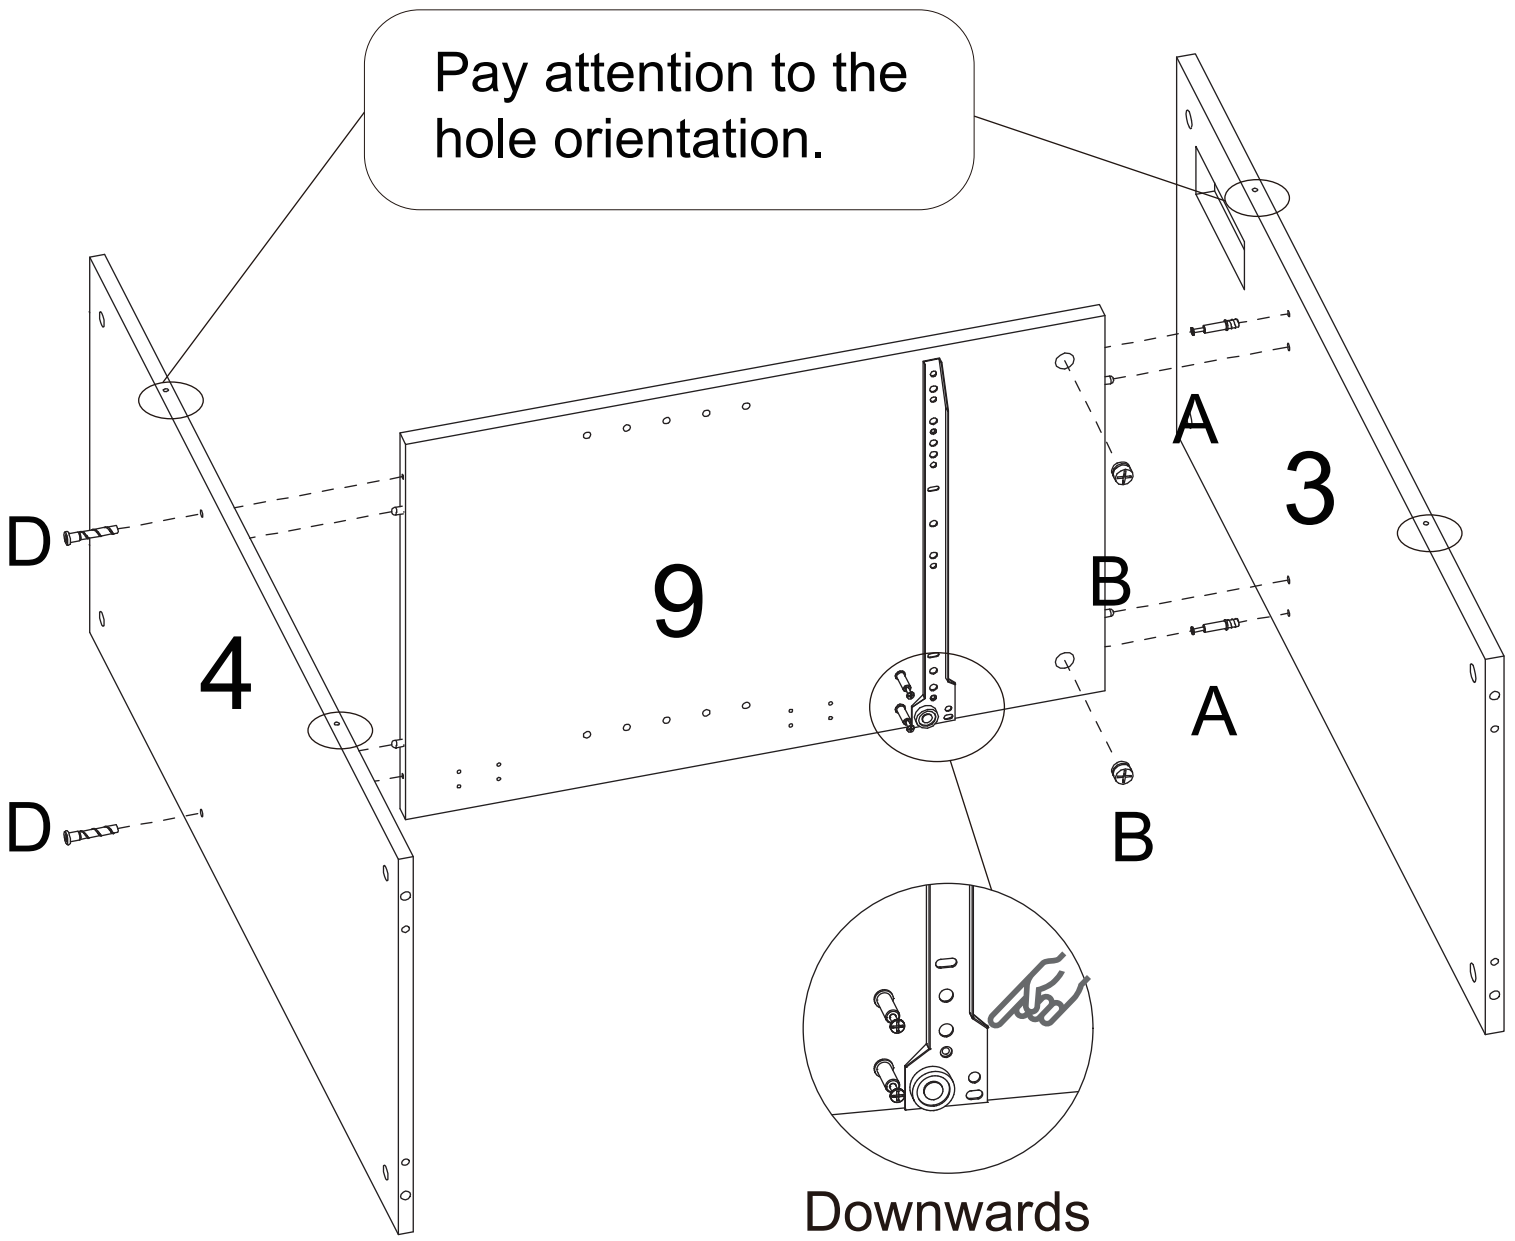


Assembly Instructions

3

G M6X30






8 PCS

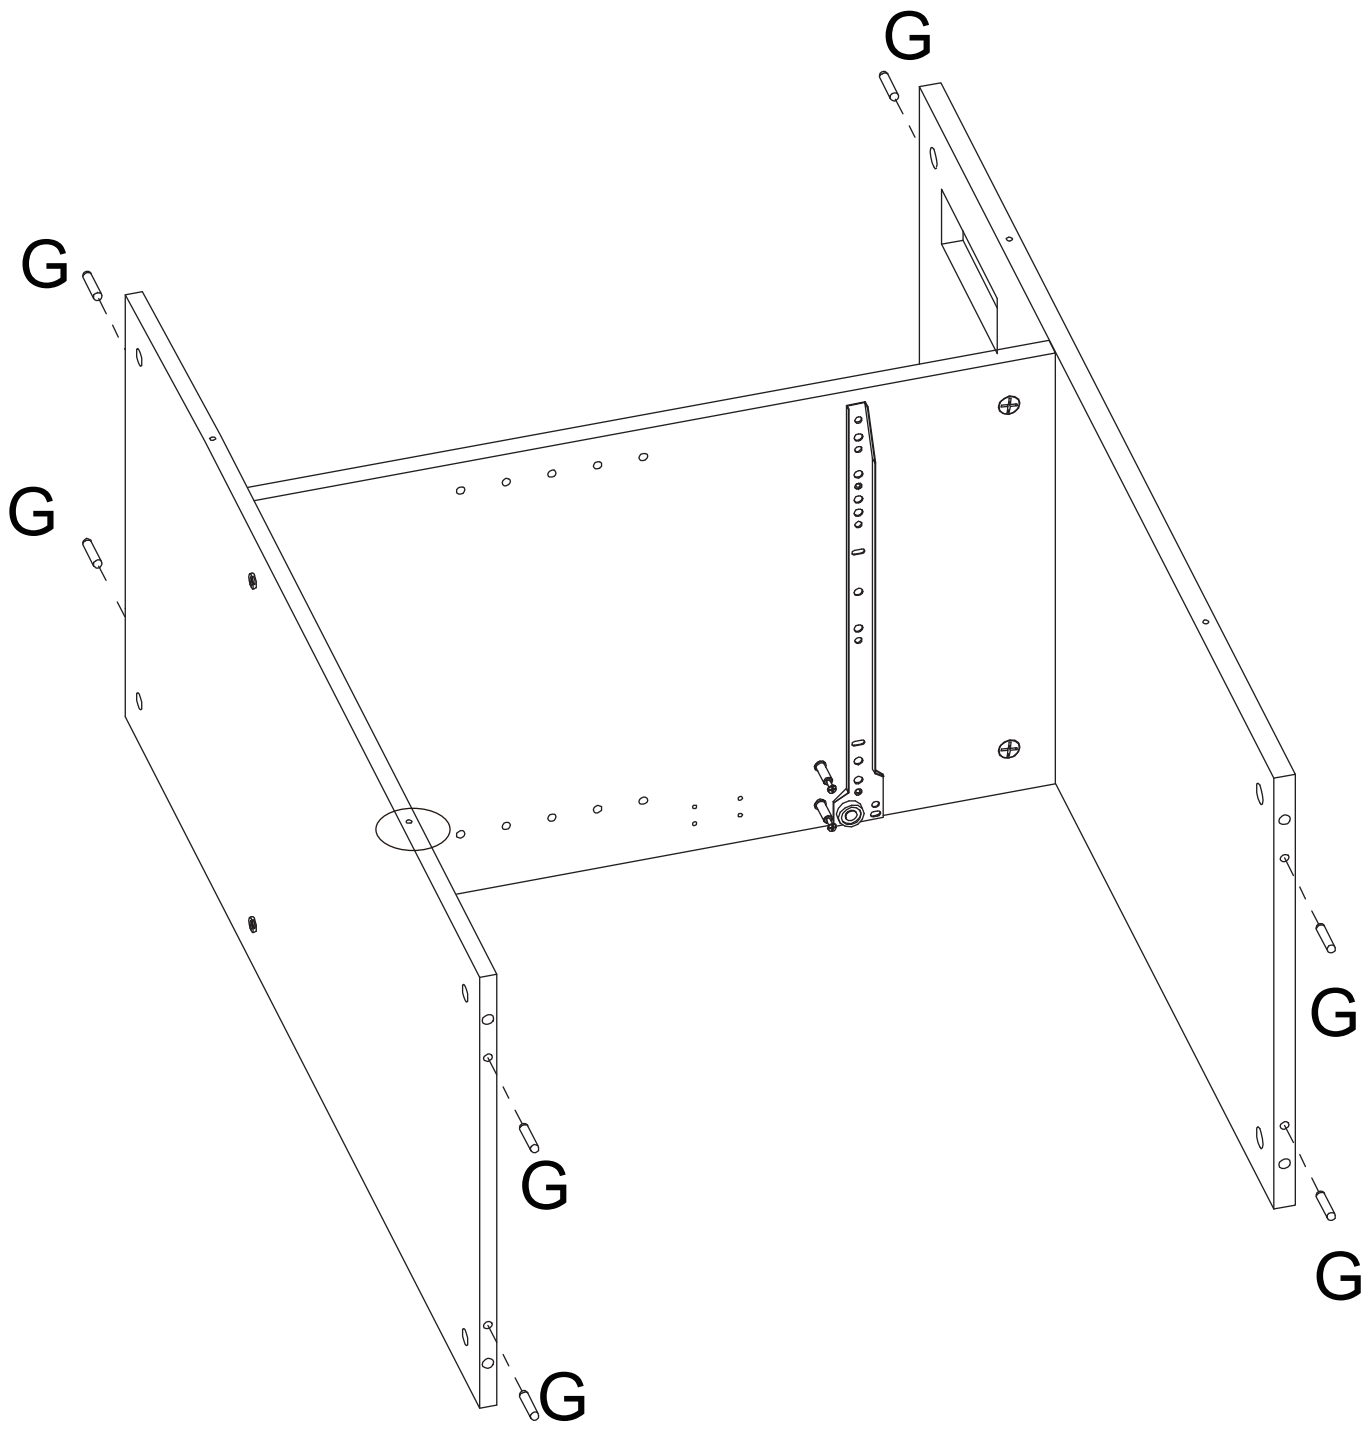



Assembly Instructions

4

A	G M6X30
	
14 PCS	6 PCS

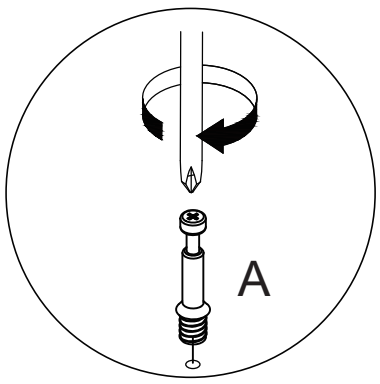

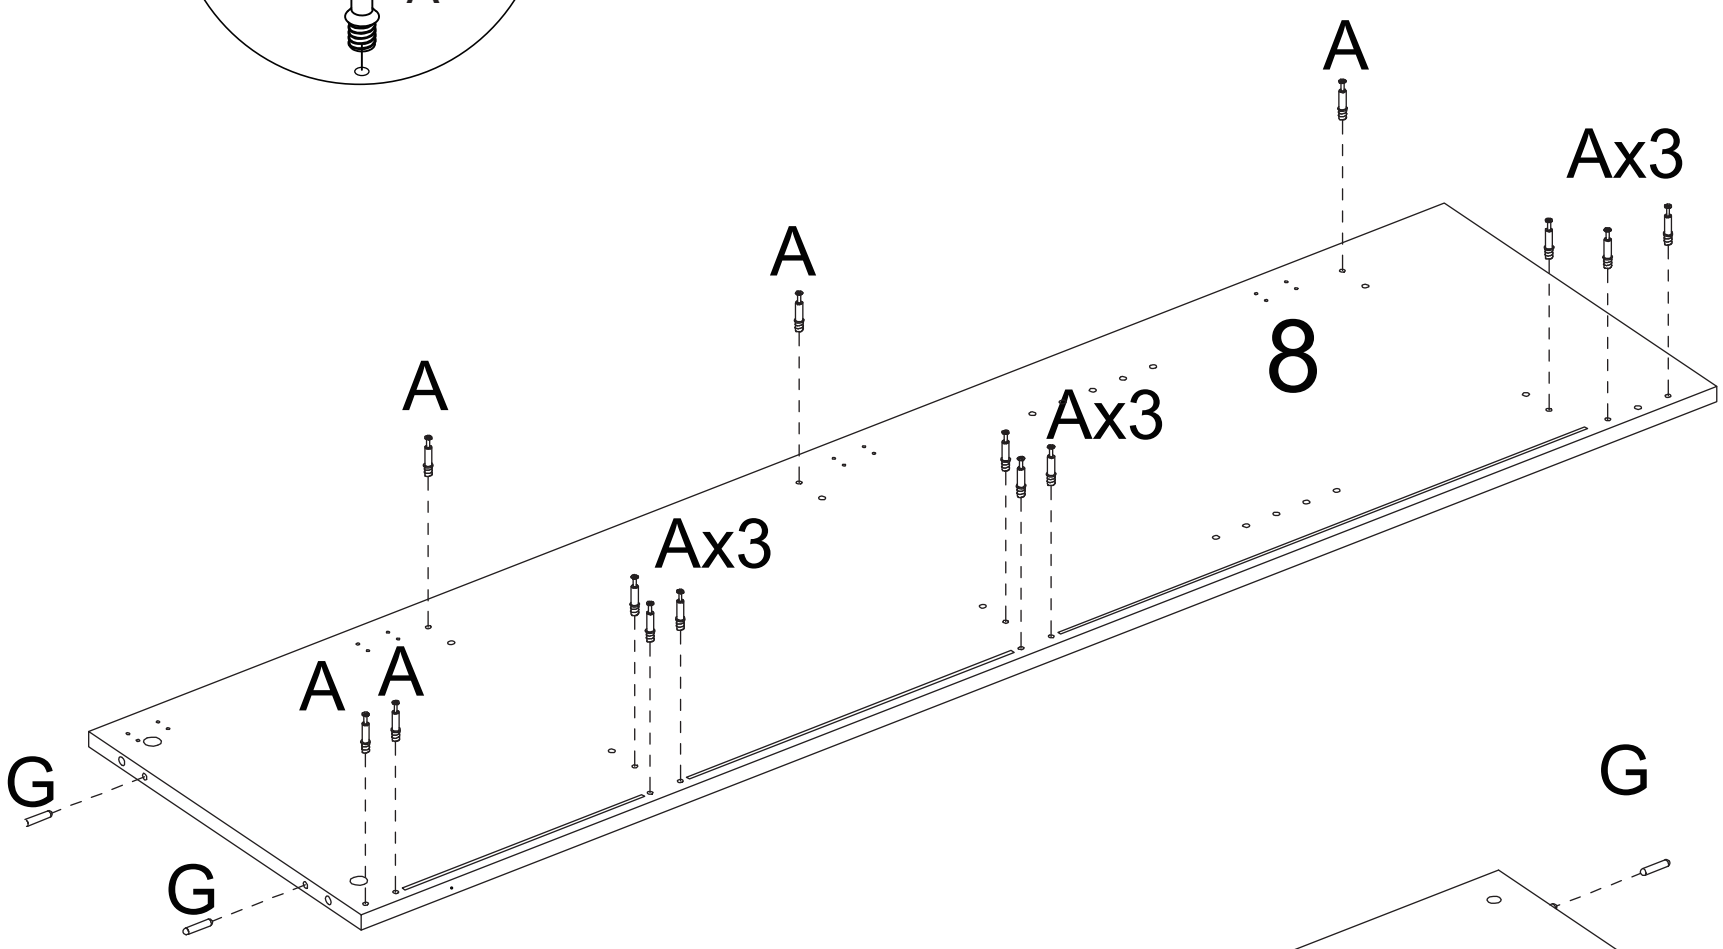

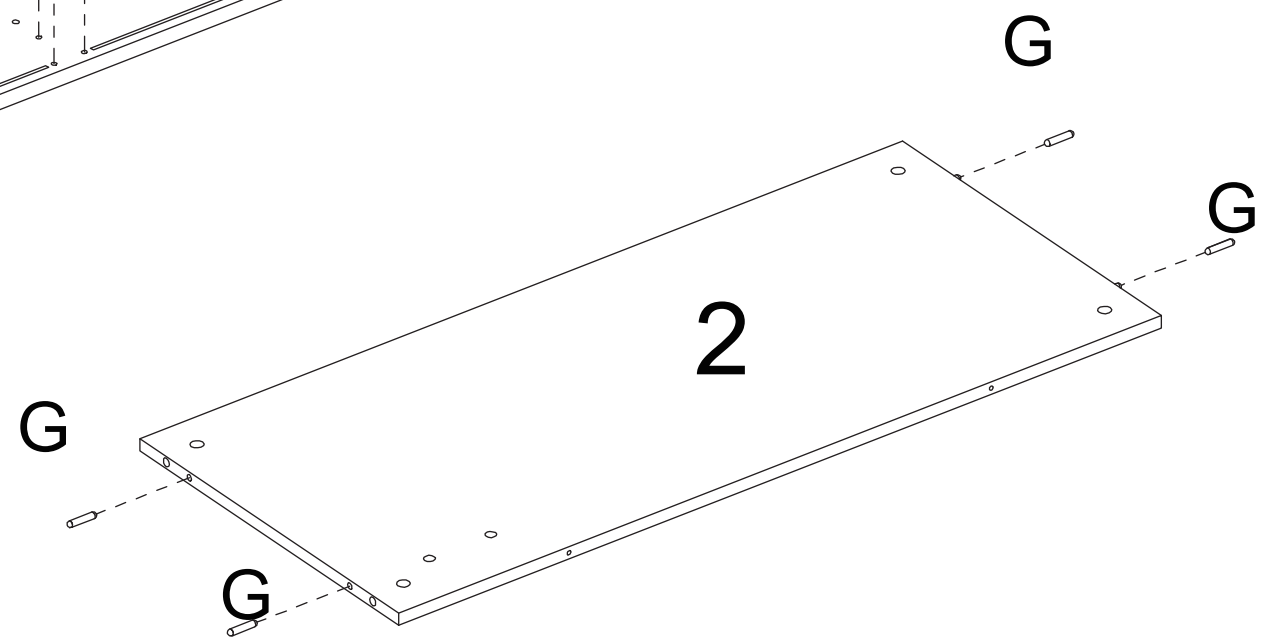


Assembly Instructions

5

B M15



6 PCS

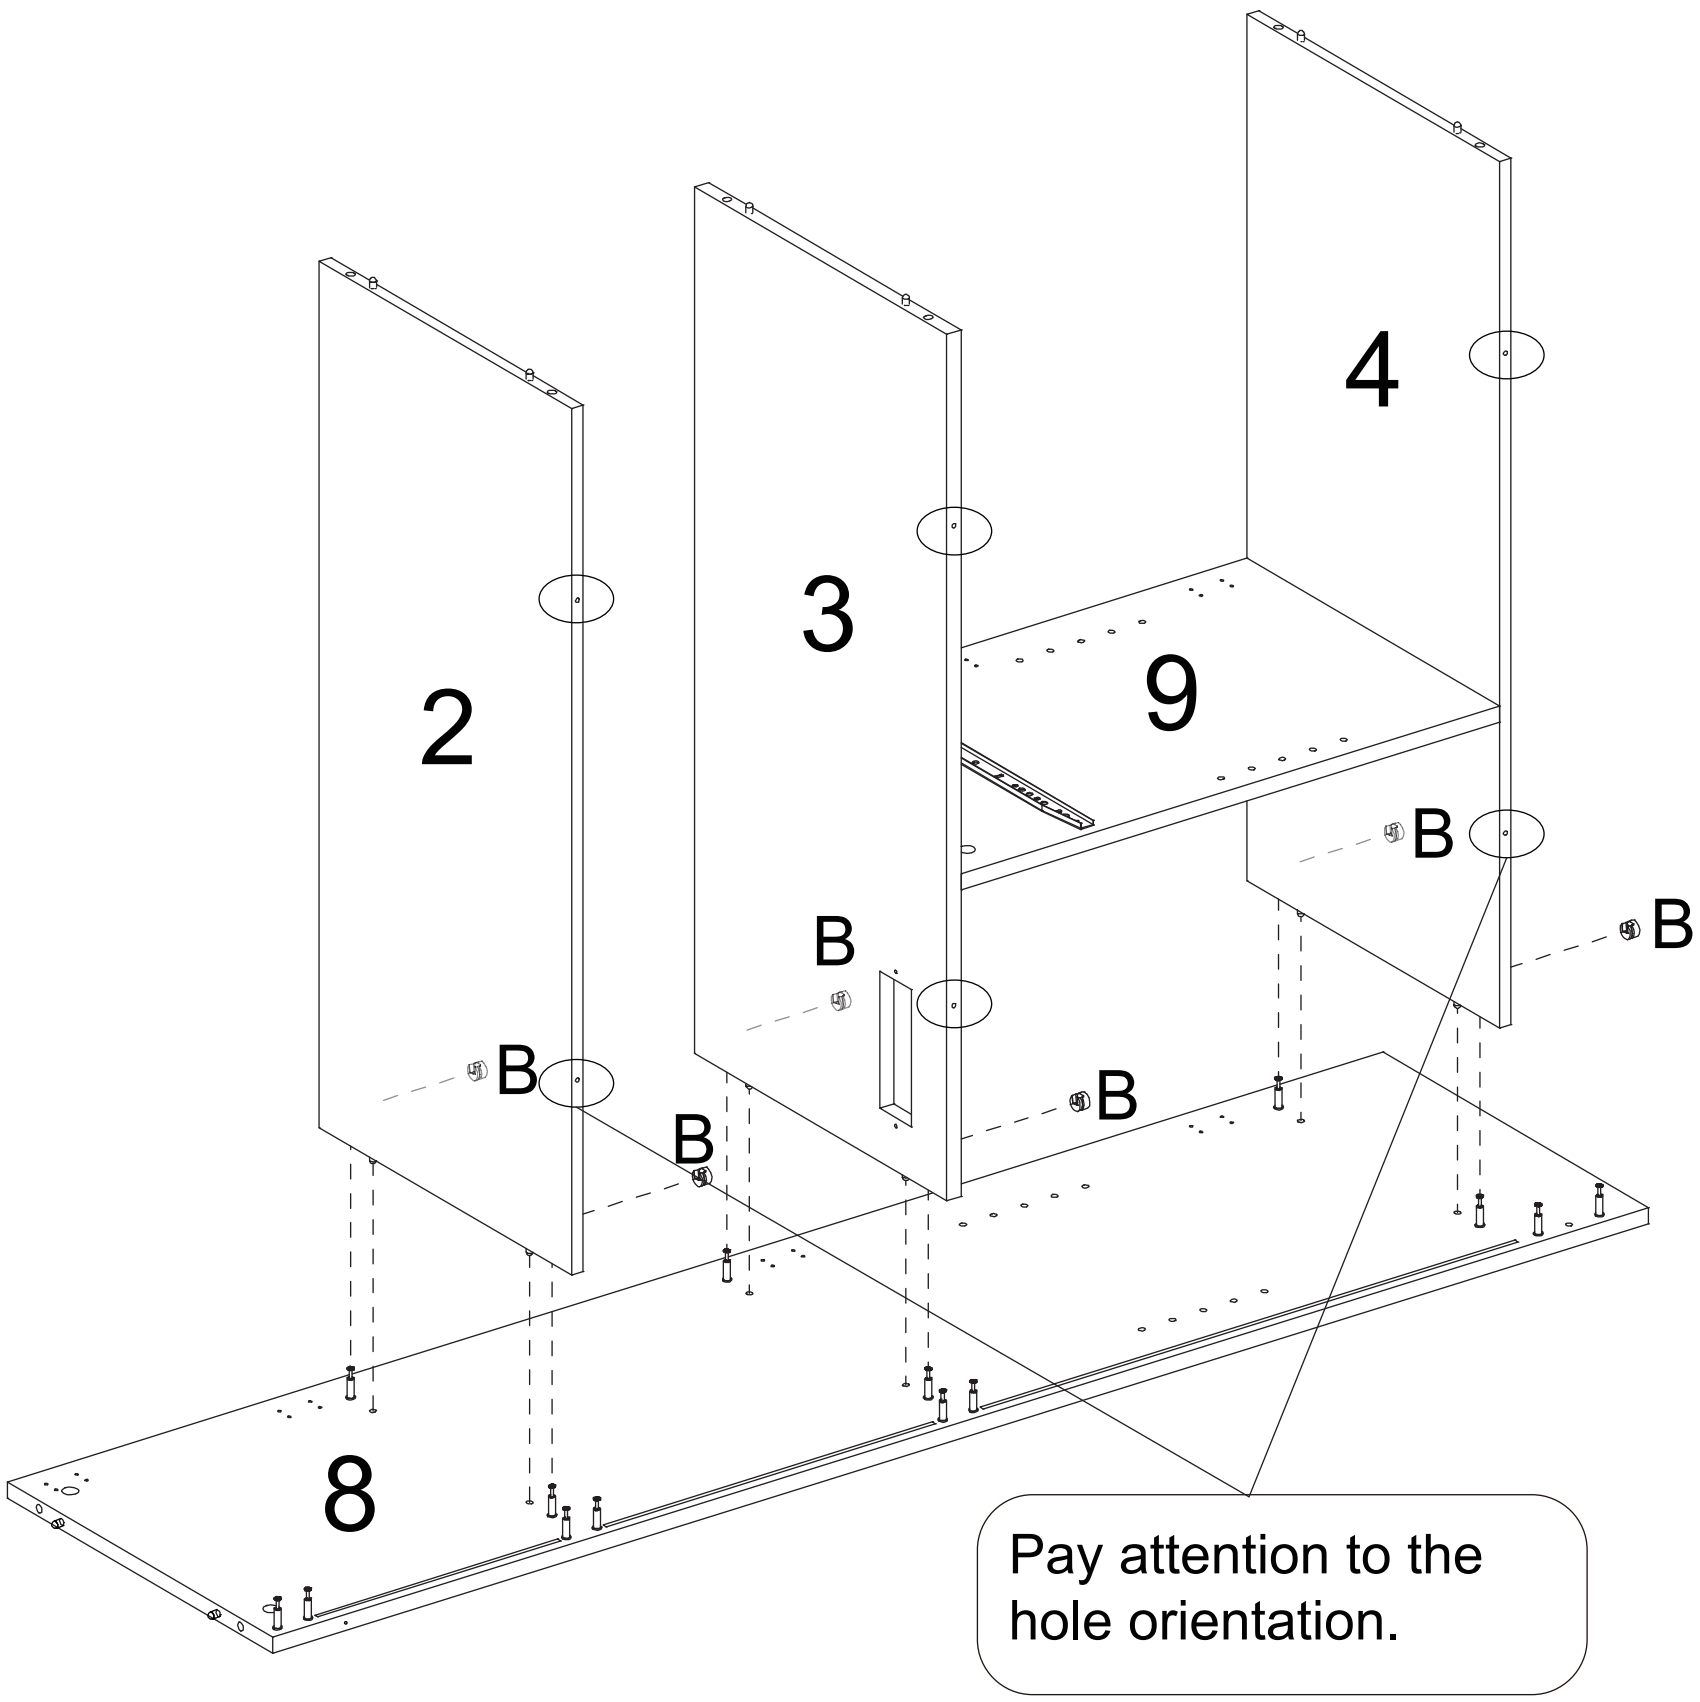


Pay attention to the hole orientation.


Assembly Instructions

6

G M6X30



2 PCS

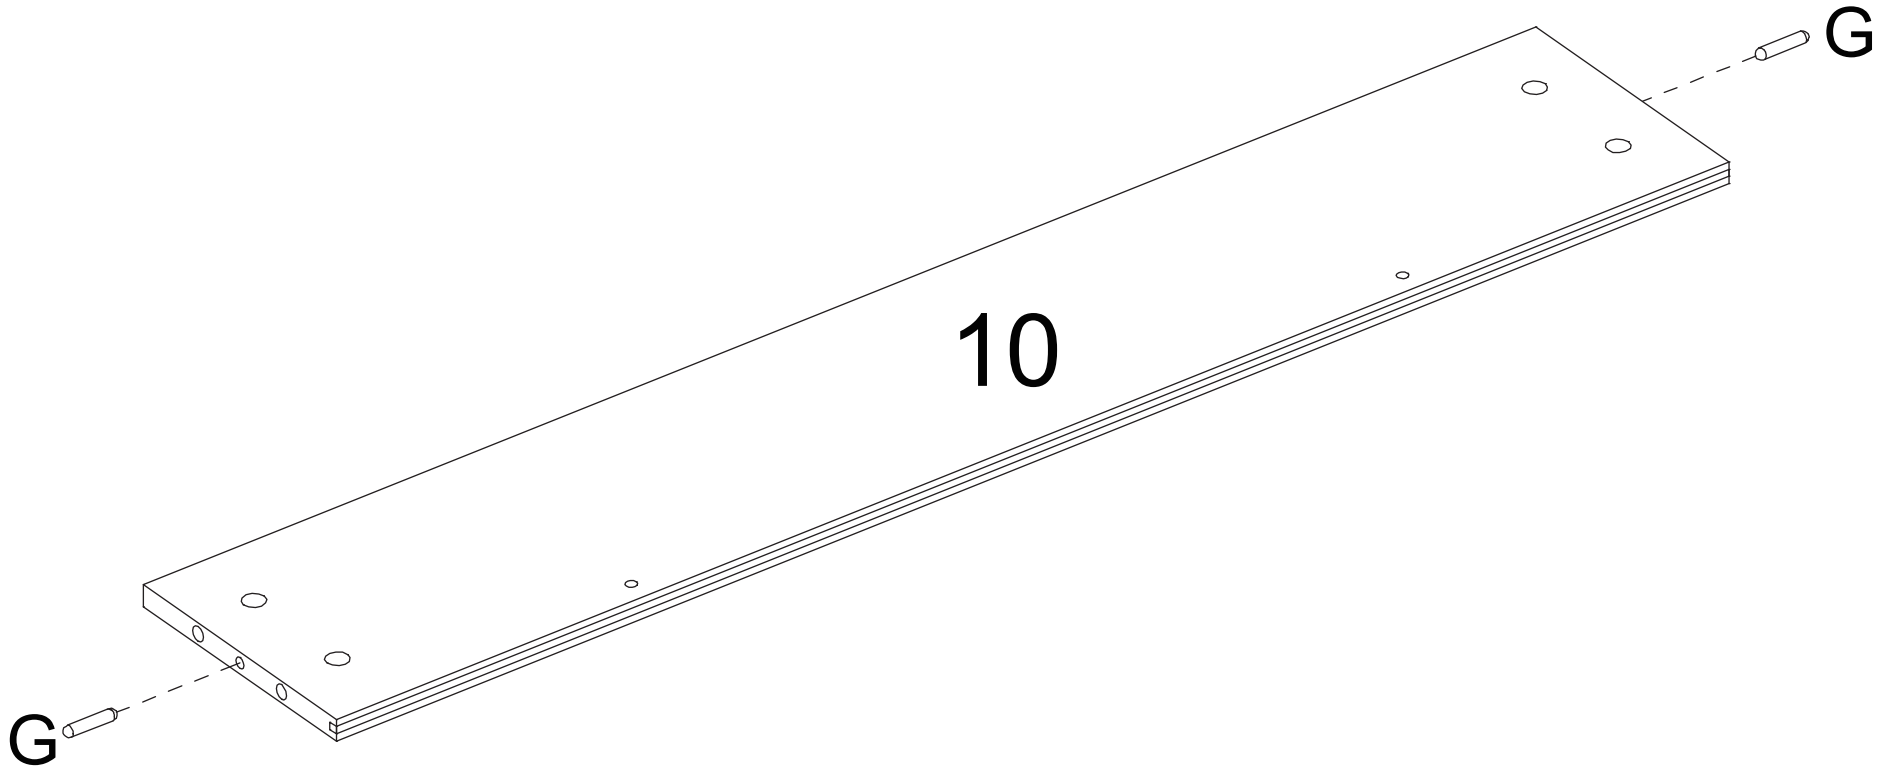


Assembly Instructions

7

E M4X12




3 PCS

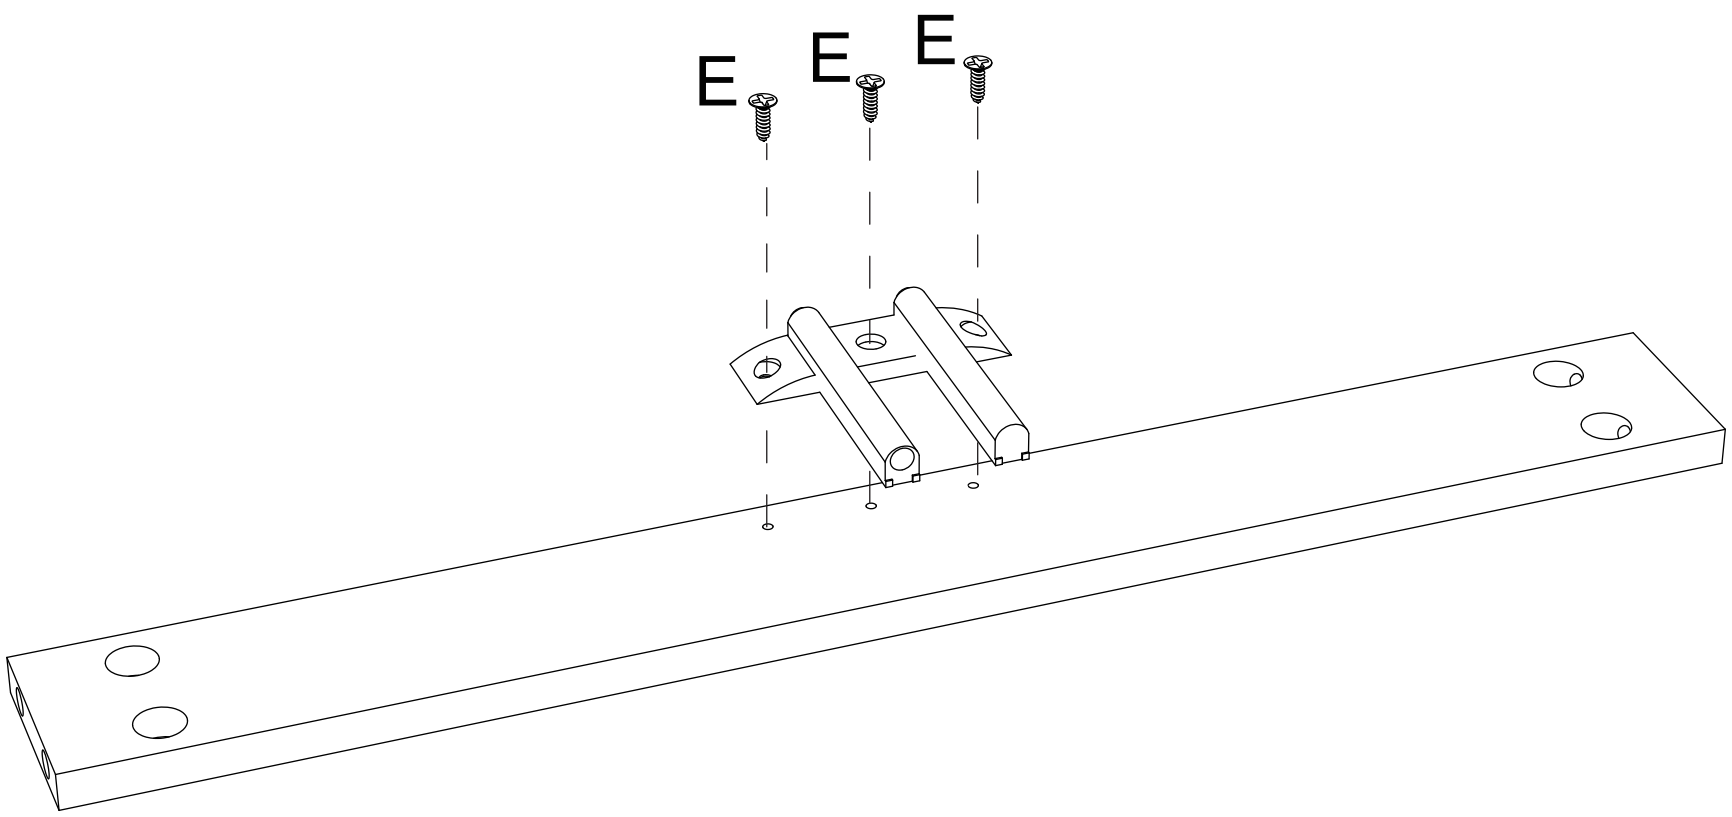


Assembly Instructions

8

B M15




10 PCS

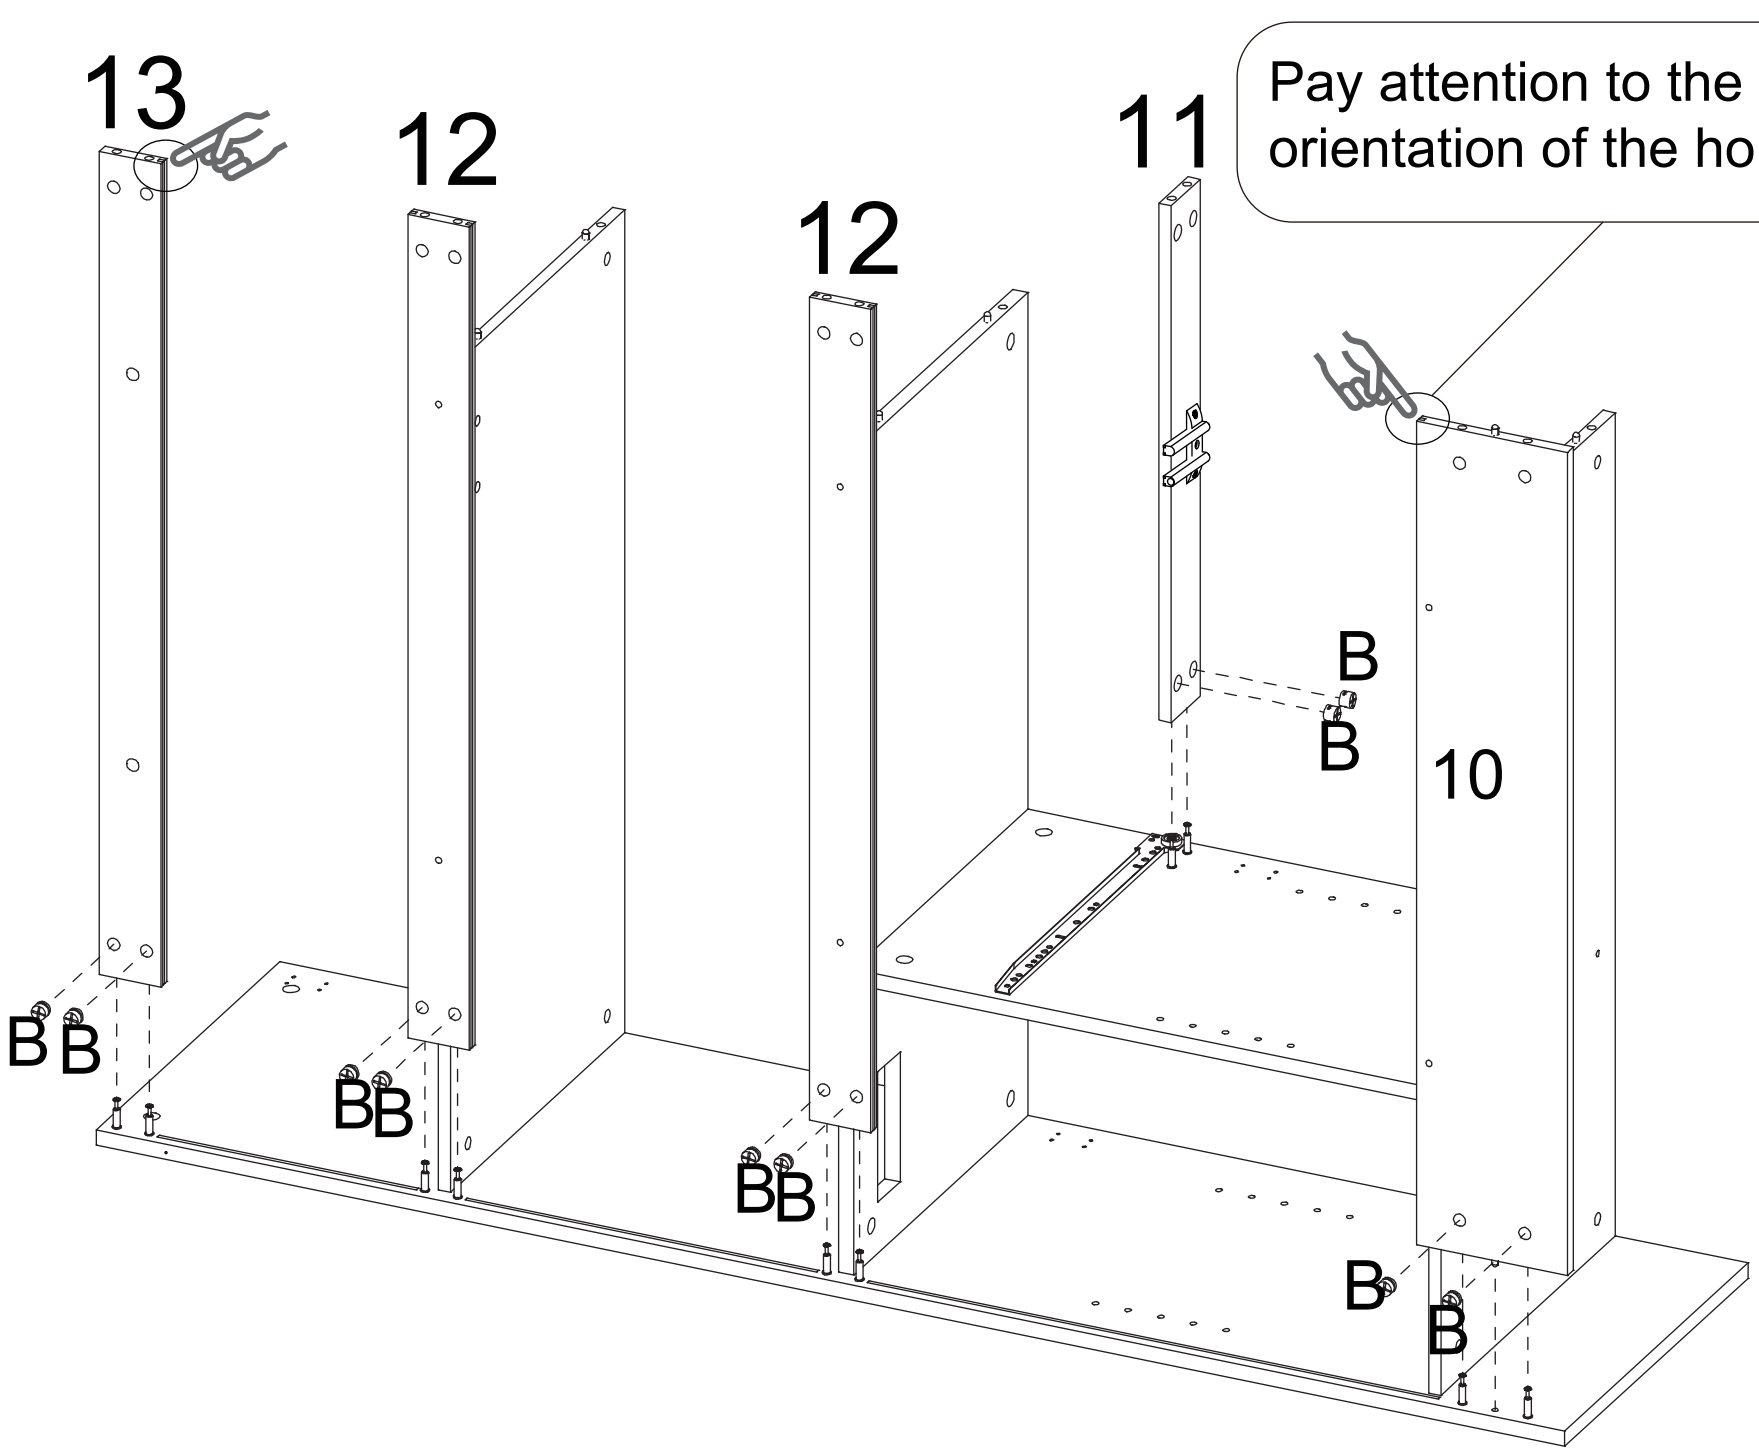

Assembly Instructions

9

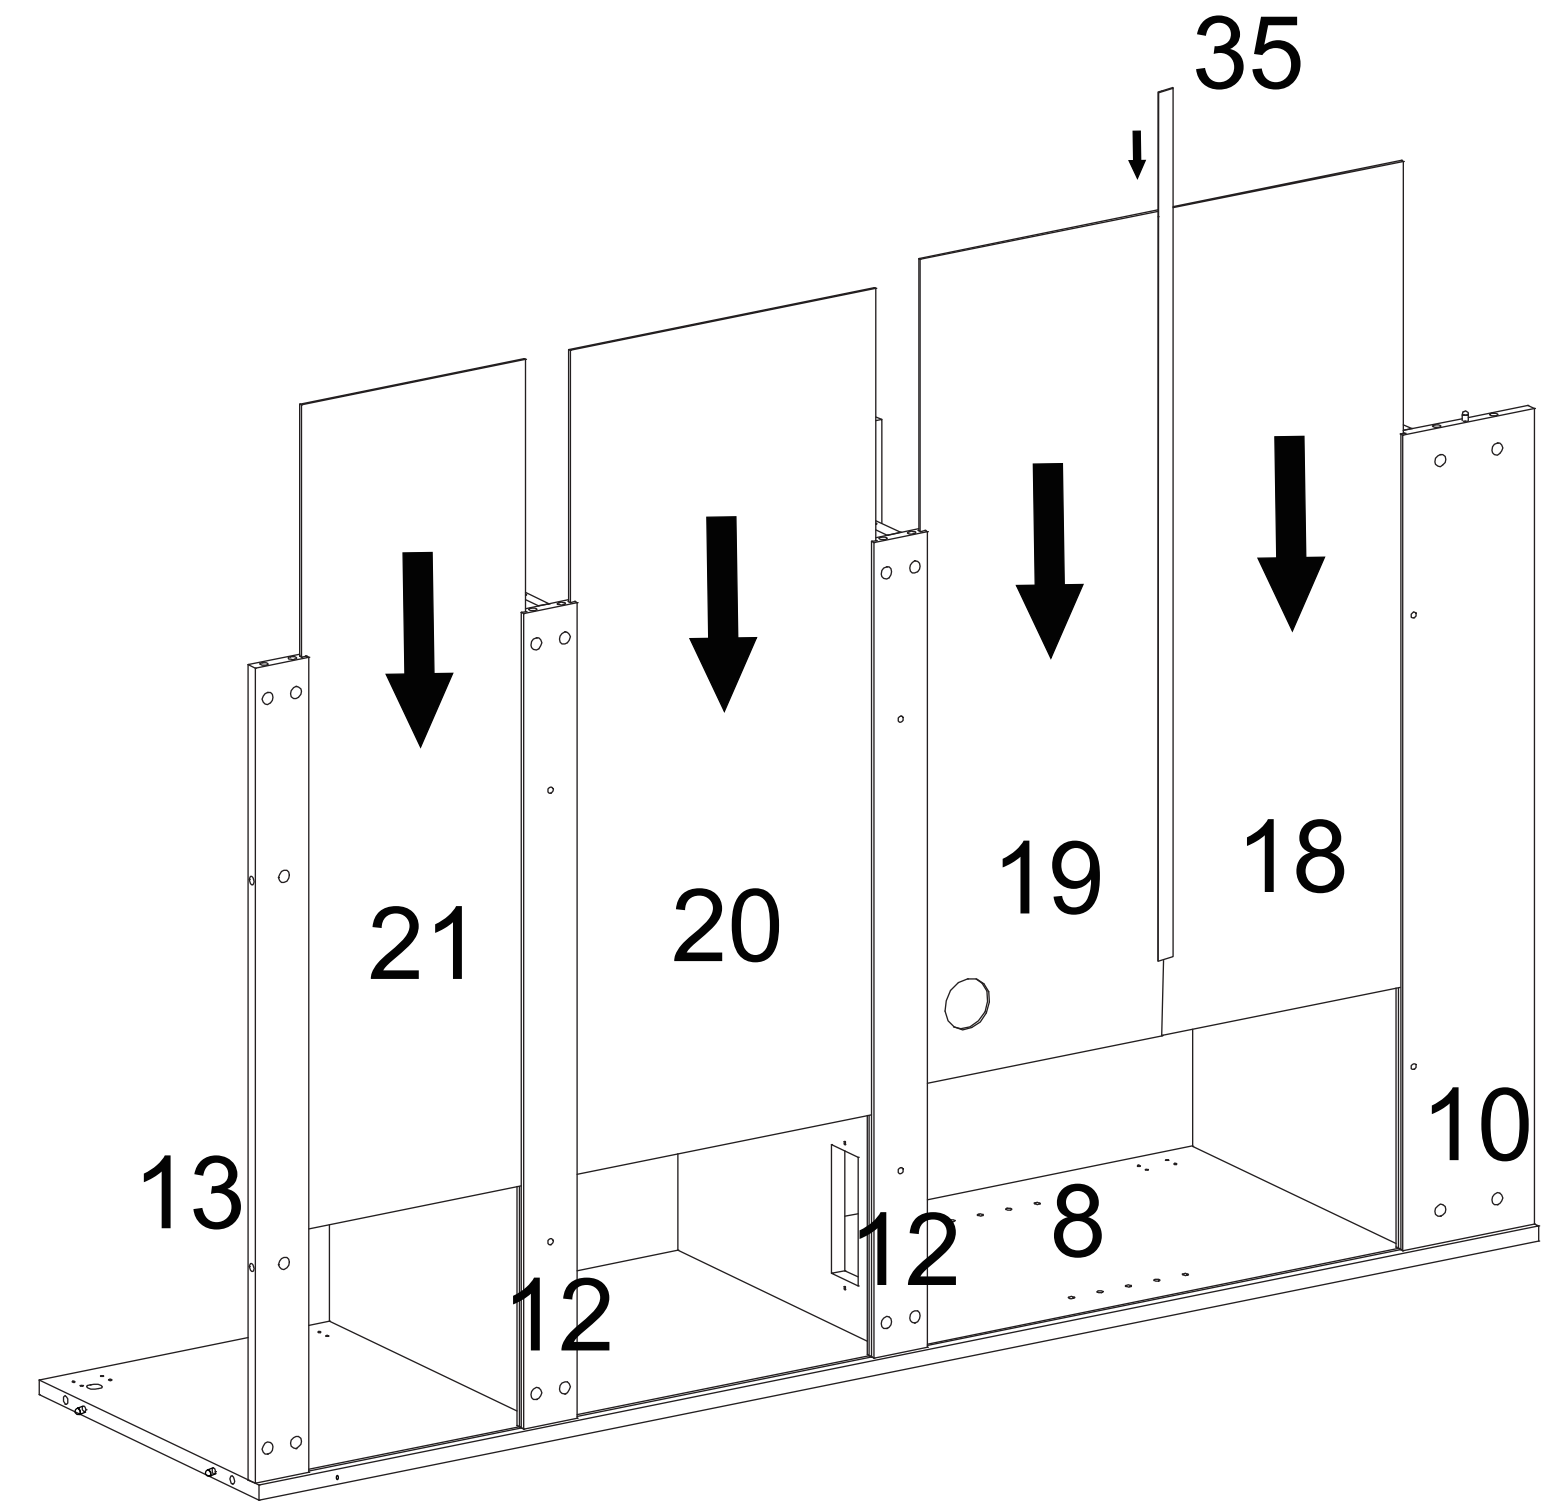


After 19#20#21#22# is completely inserted into 8#10#12#13#14# card slot, proceed to the next operation


Assembly Instructions

10

DM5X40




6 PCS

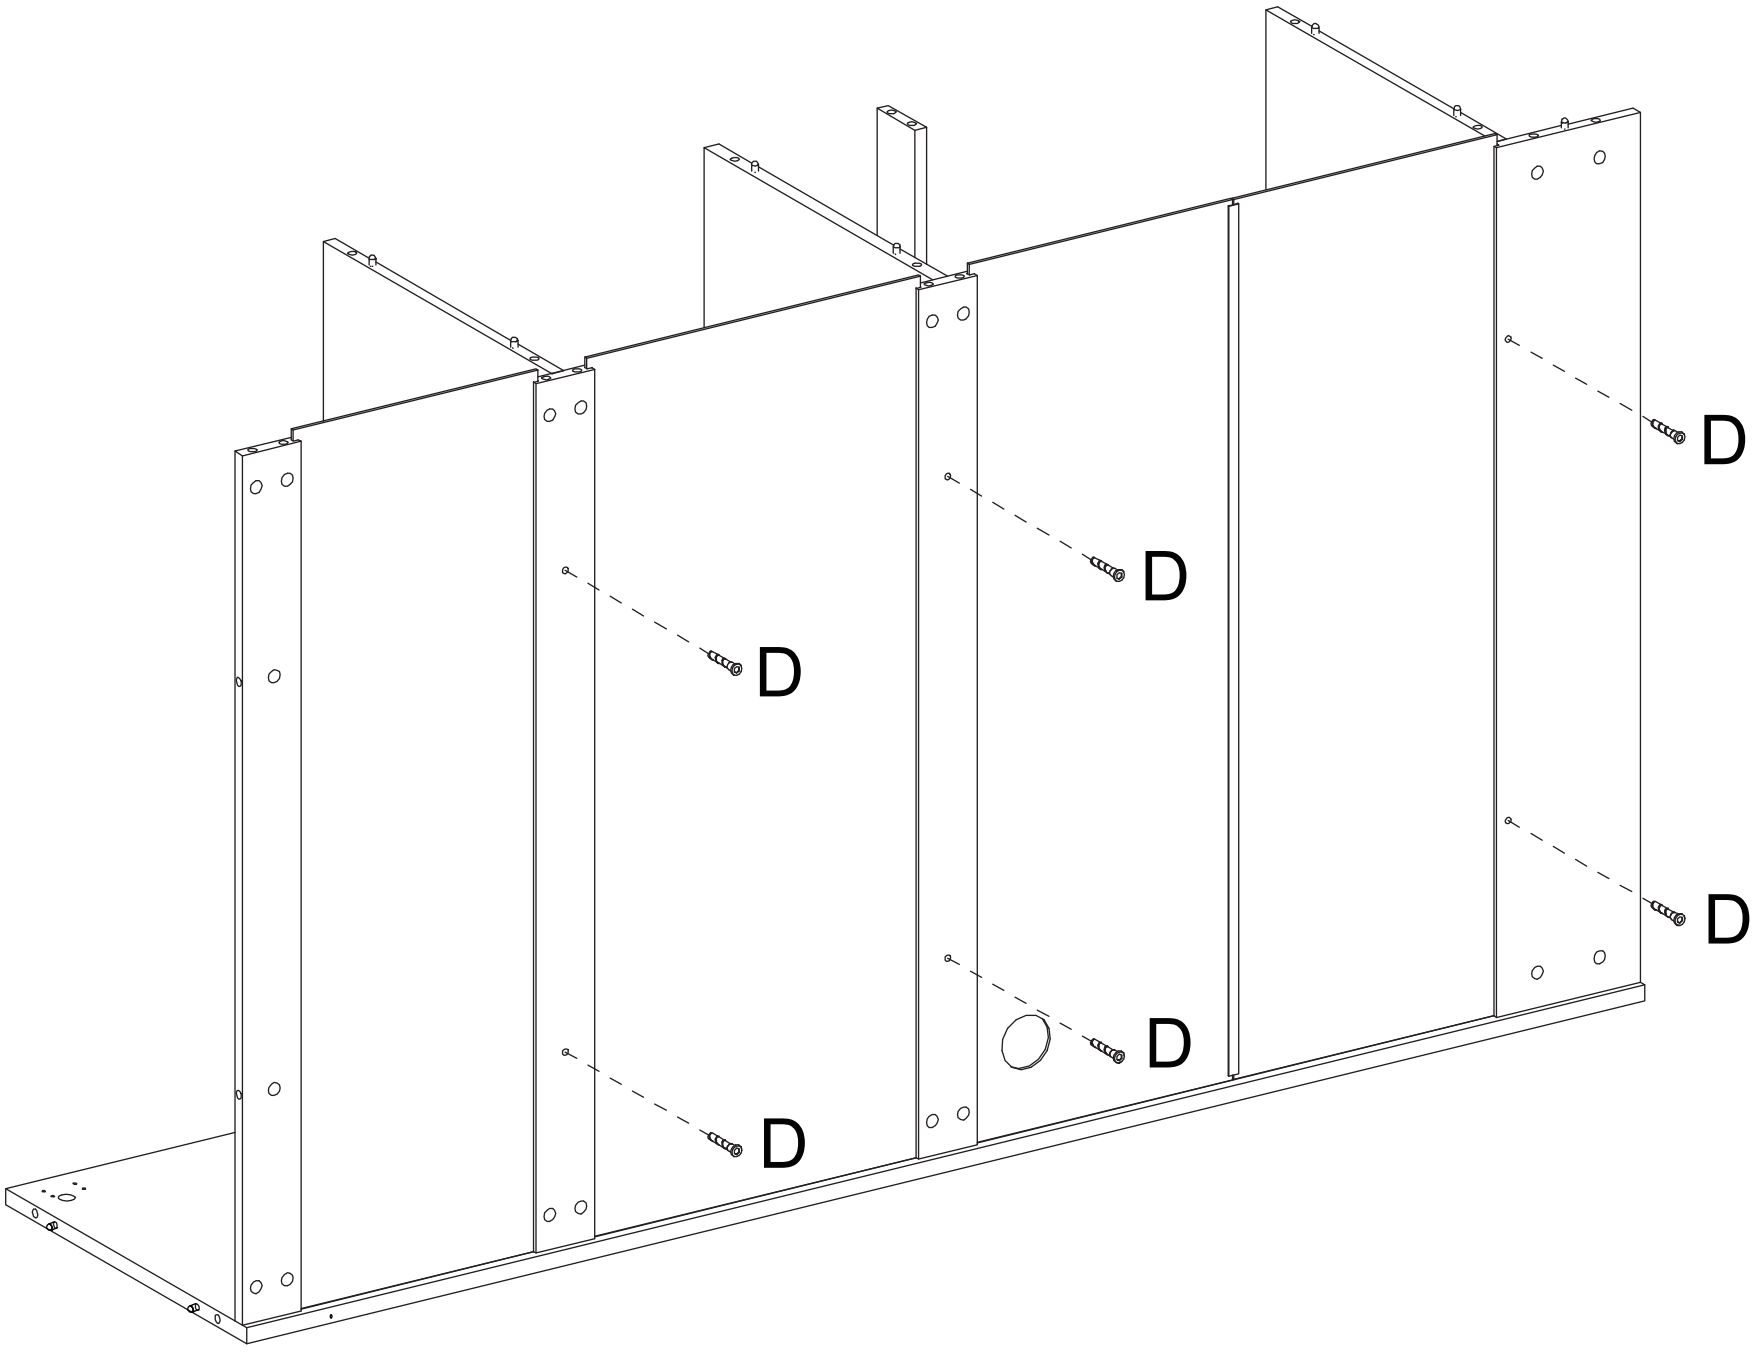

Assembly Instructions

11

A	E M4X12	G M6X30
16 PCS	2 PCS	2 PCS

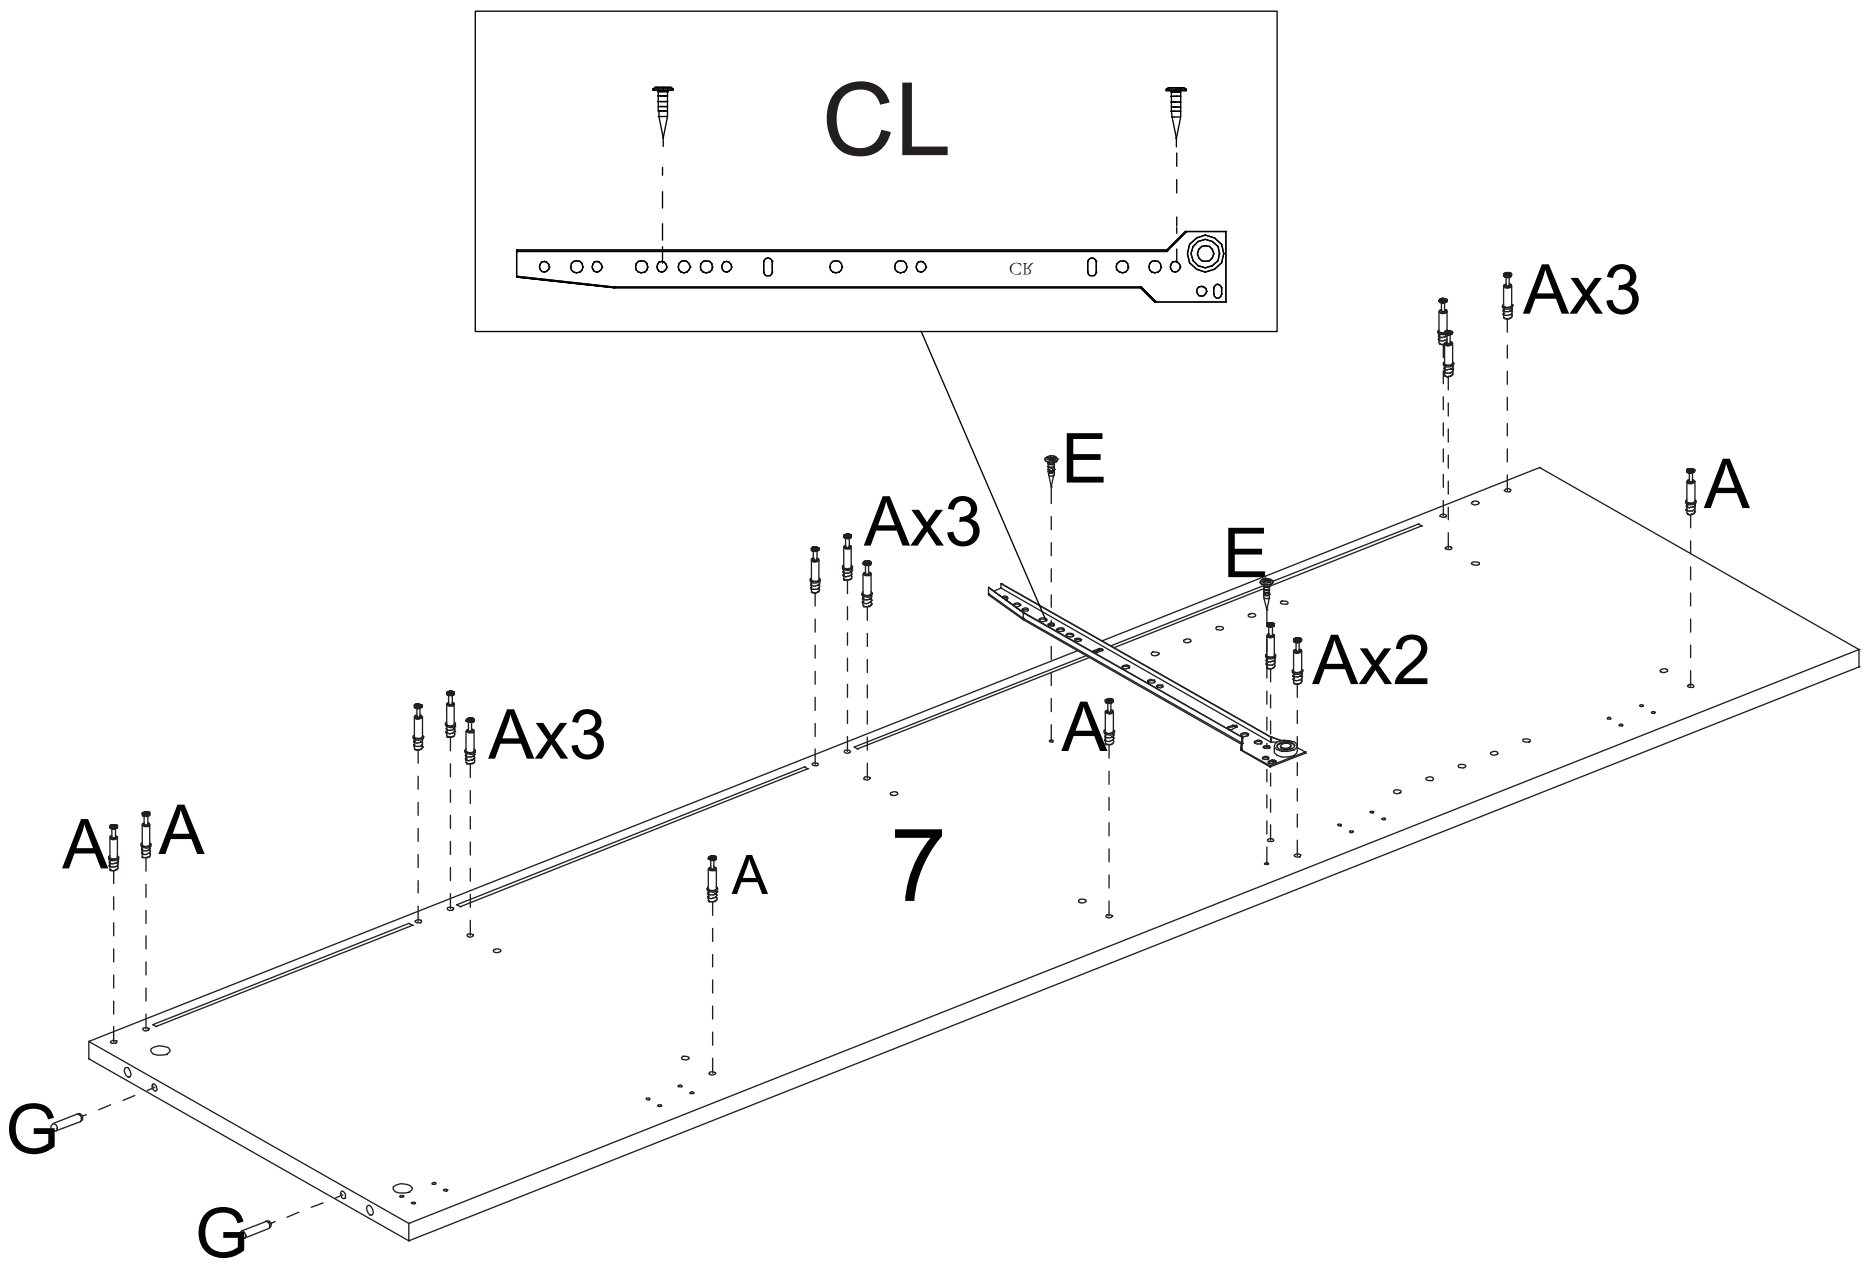


Assembly Instructions

12

B M15



16 PCS

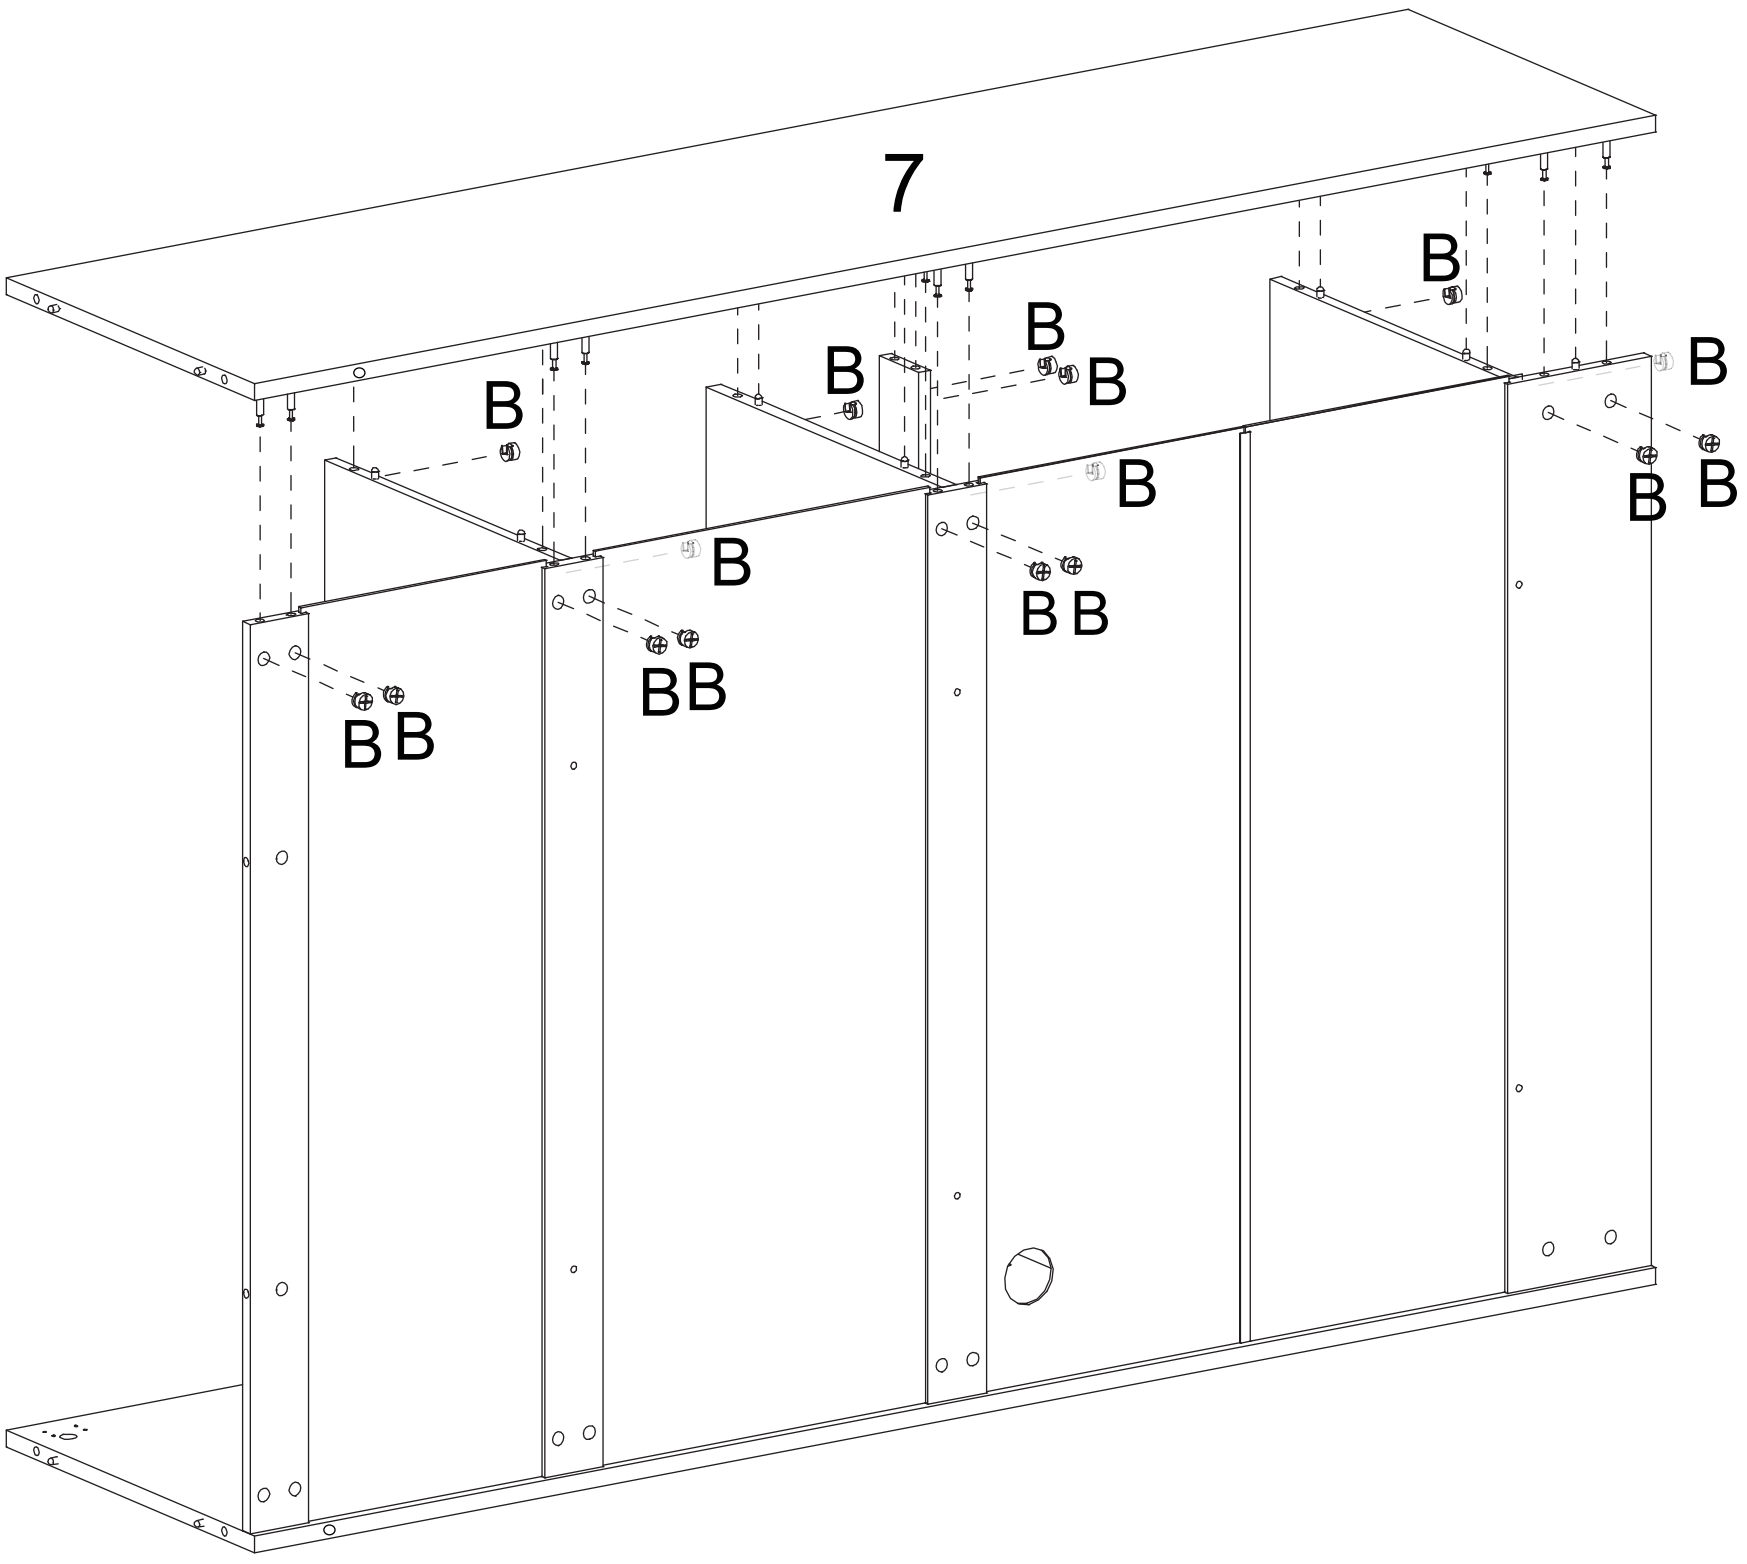


This step requires 2 people to operate together. Tighten the B screws only after all accessories are fully engaged.


Assembly Instructions

13

A




6 PCS

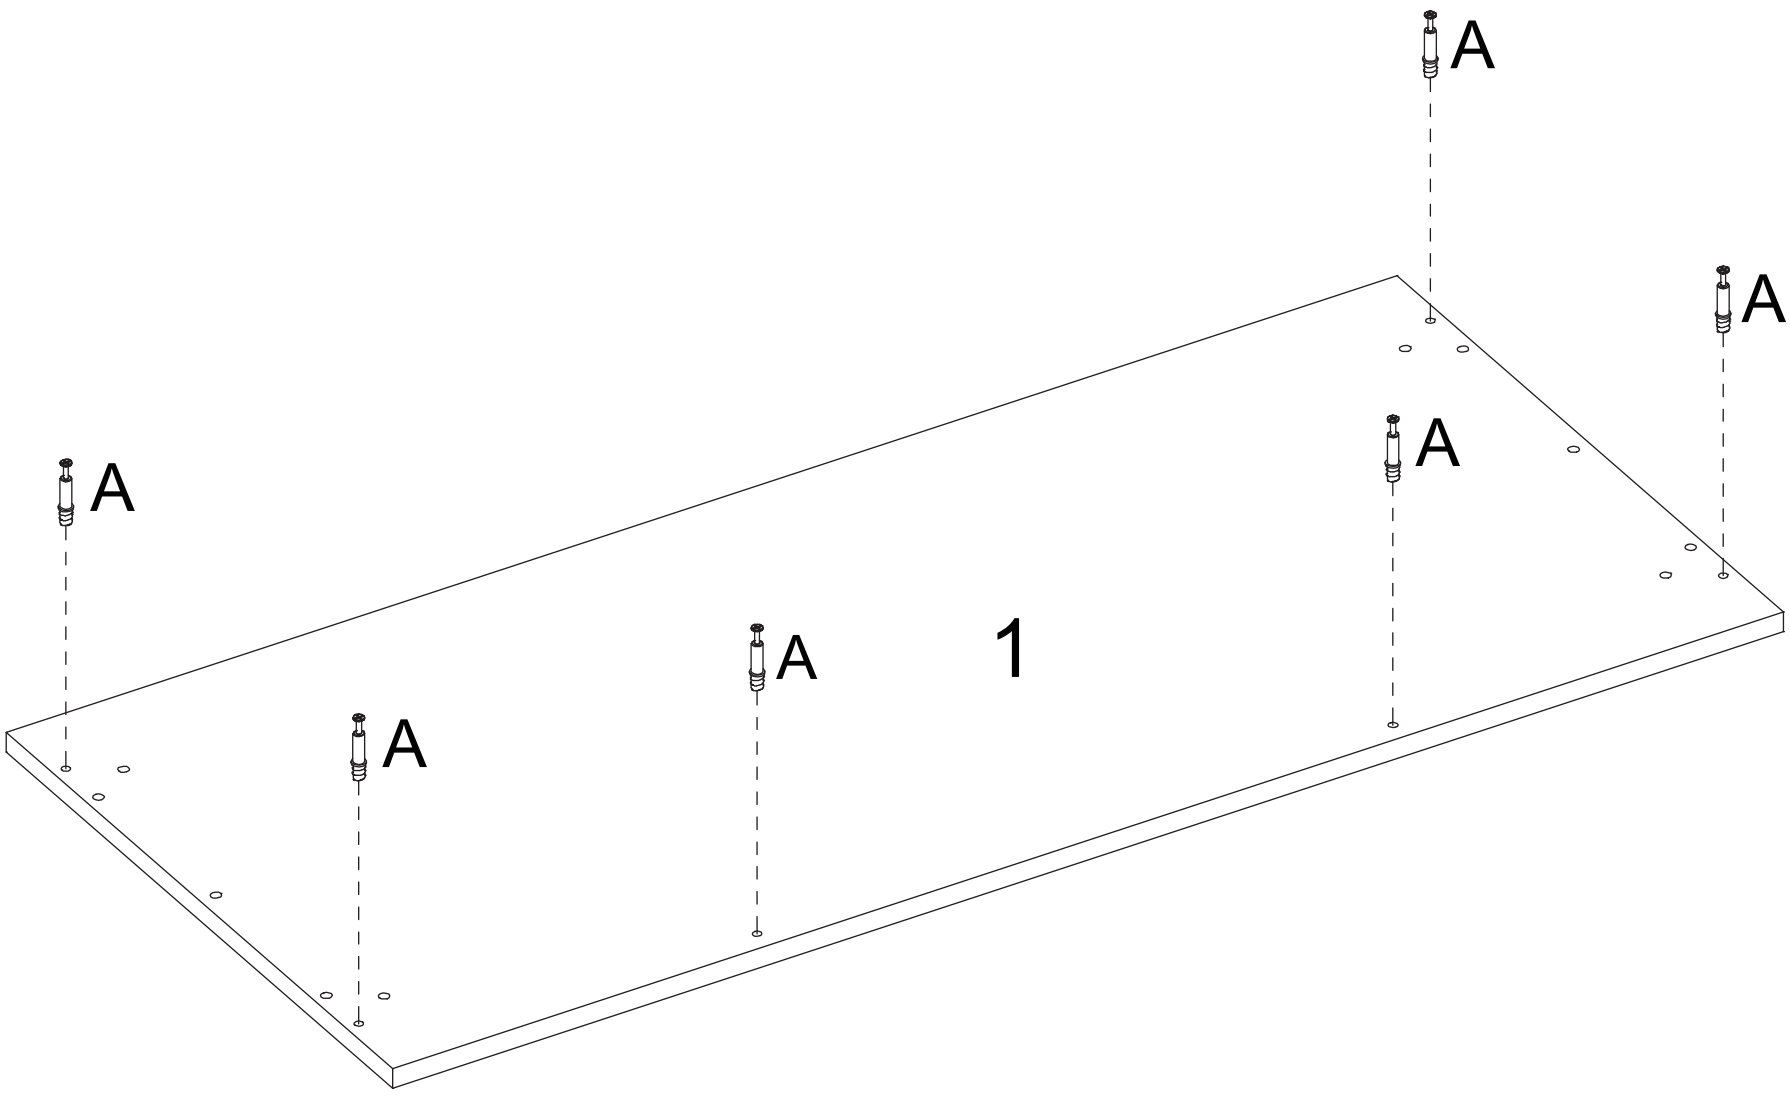


Assembly Instructions

14

G M6X30





6 PCS

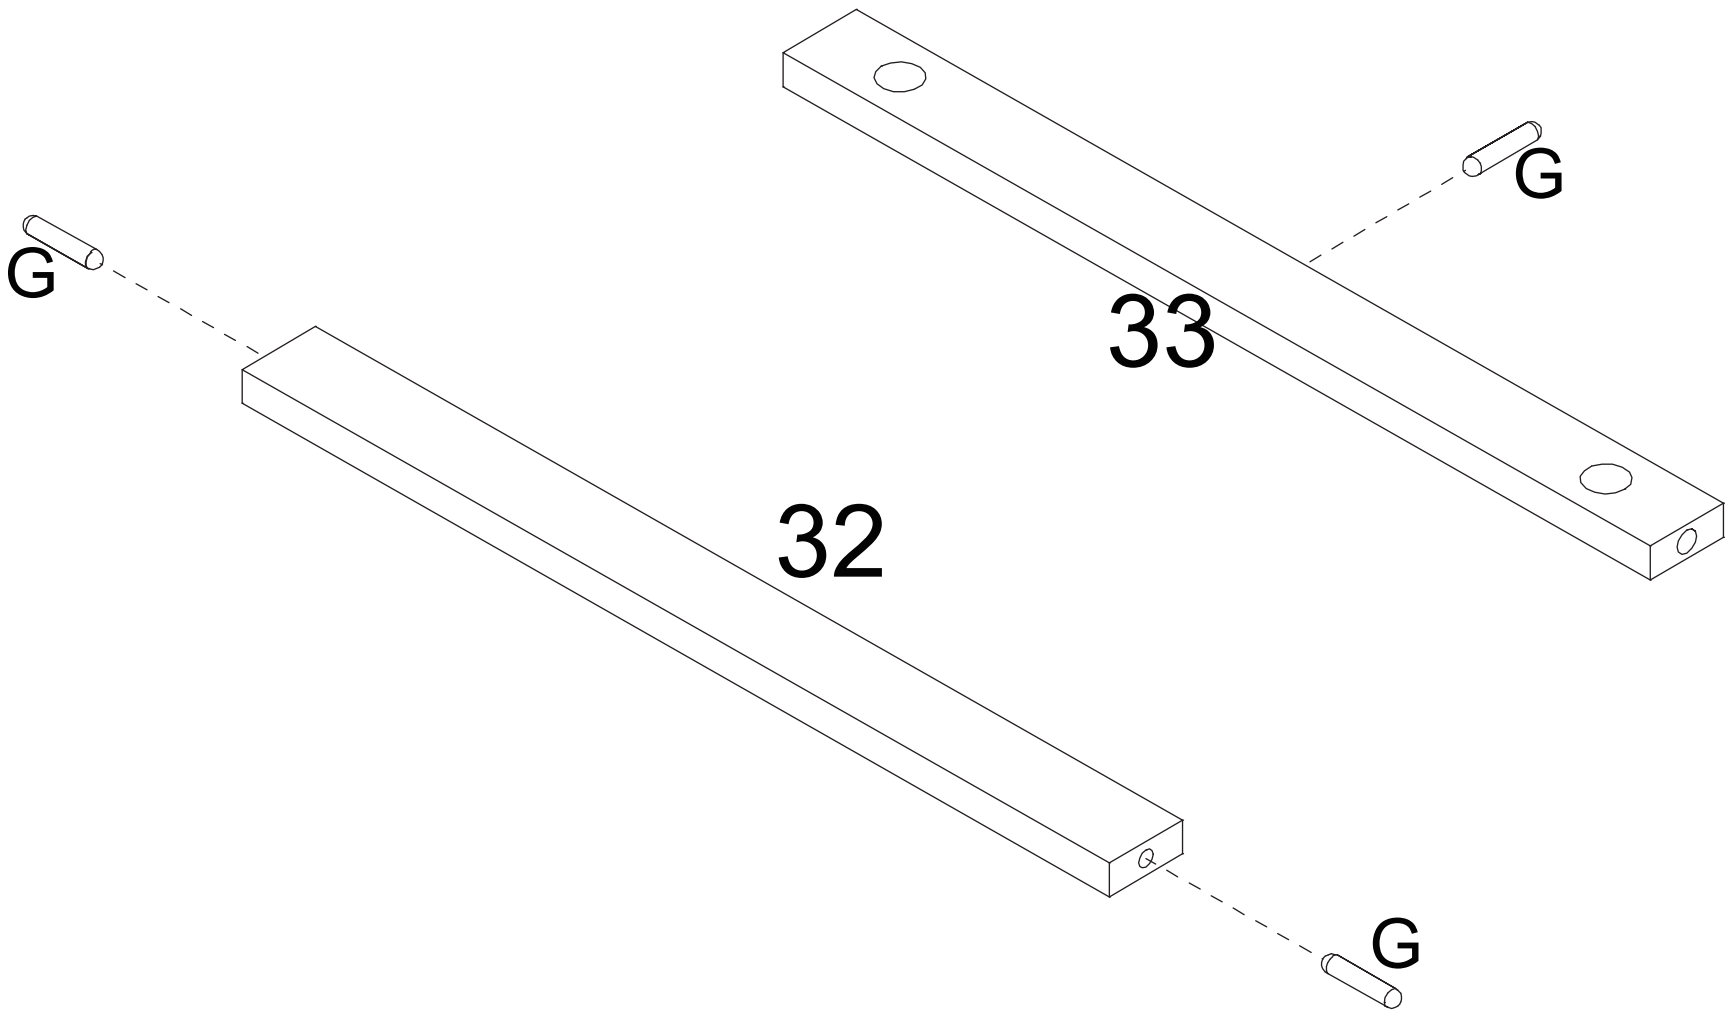


X2

Assembly Instructions



15


A	G M6X30
	
8 PCS	2 PCS

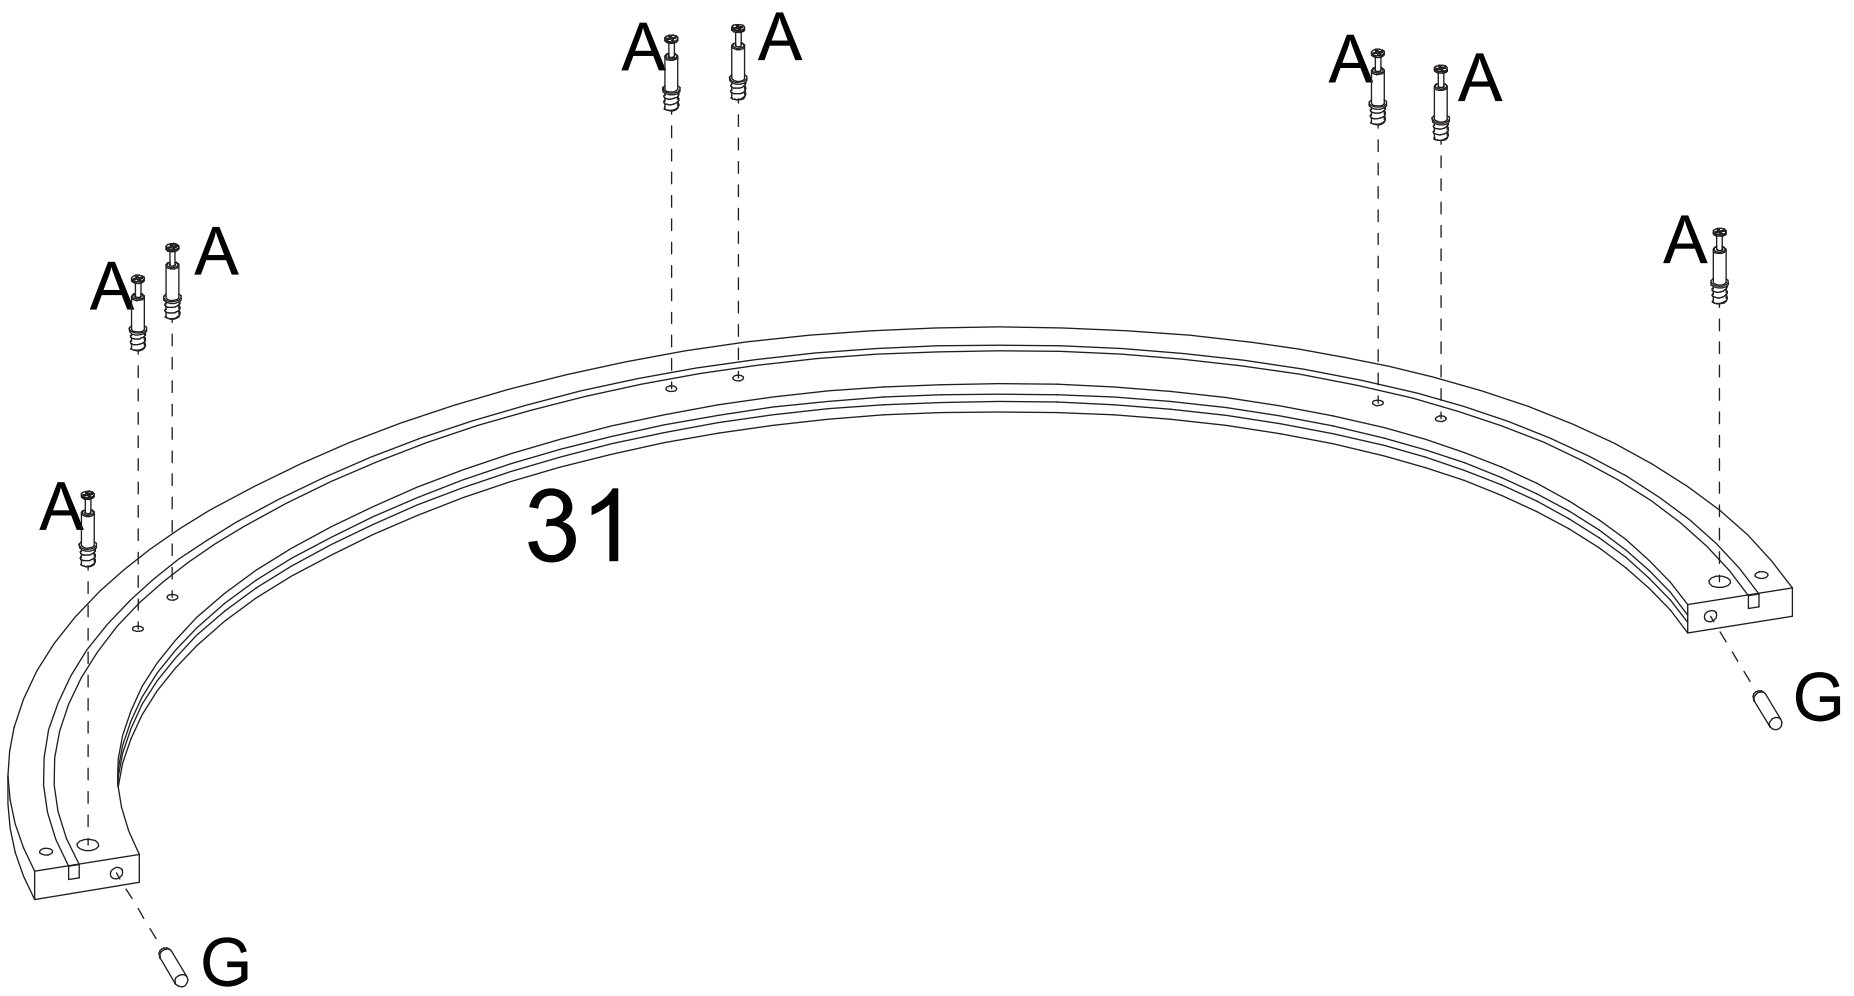

Assembly Instructions

16

A	G M6X30
	
8 PCS	2 PCS

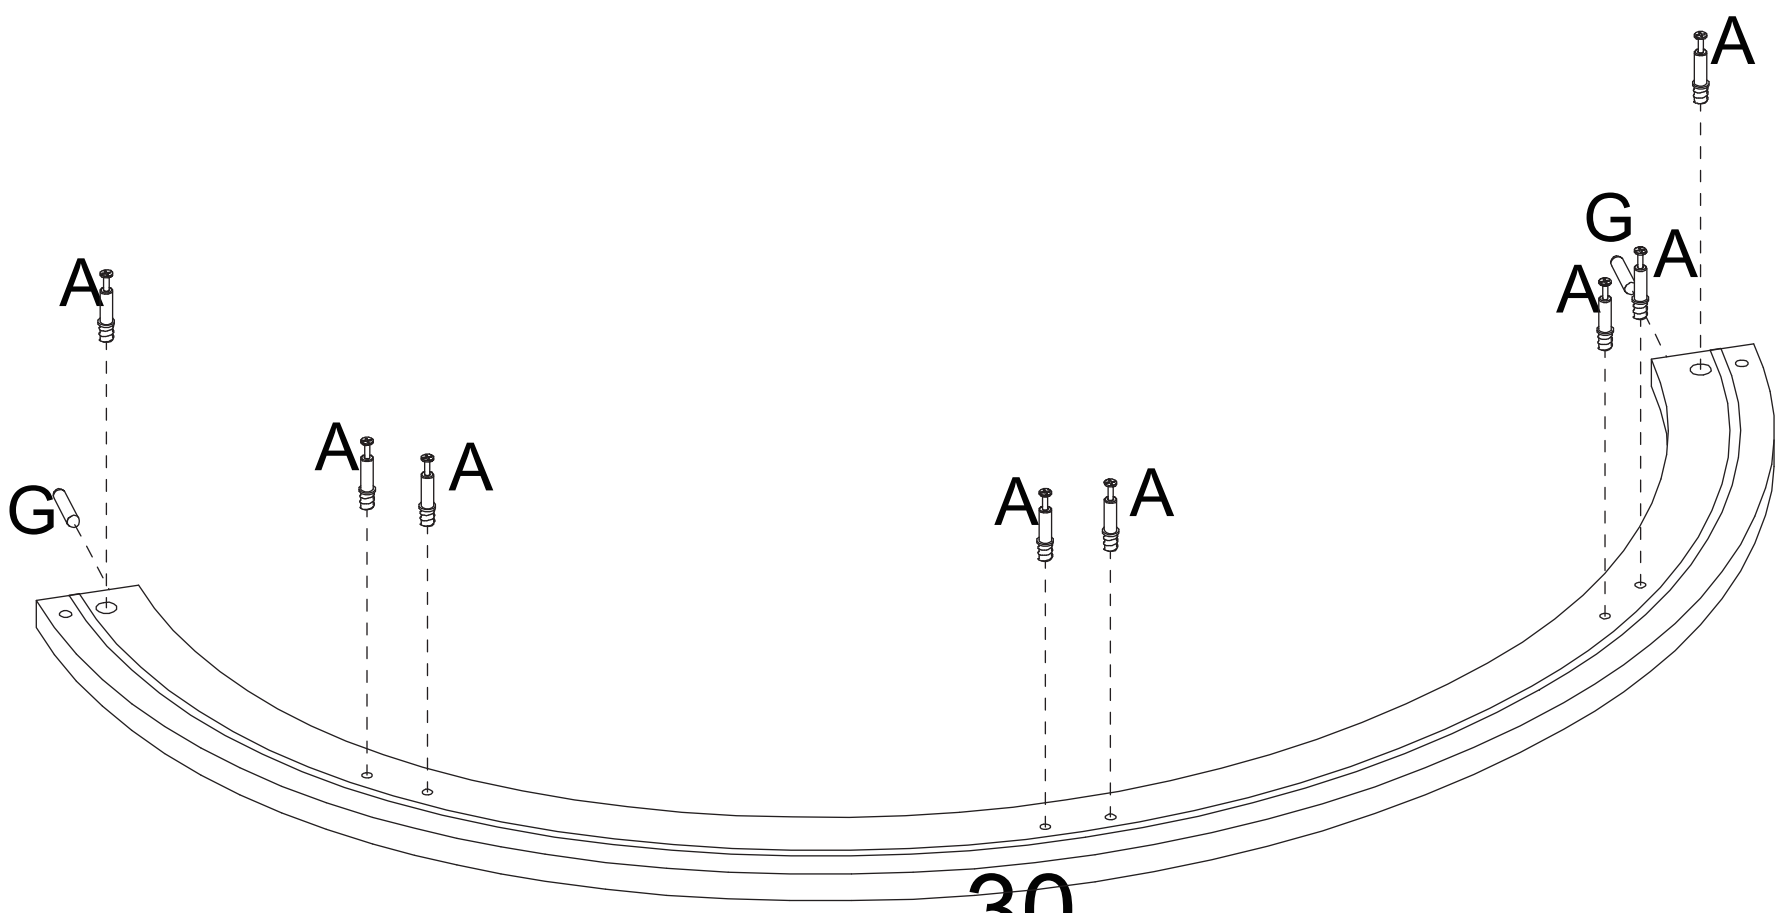

30


Assembly Instructions

17

B M15



8 PCS

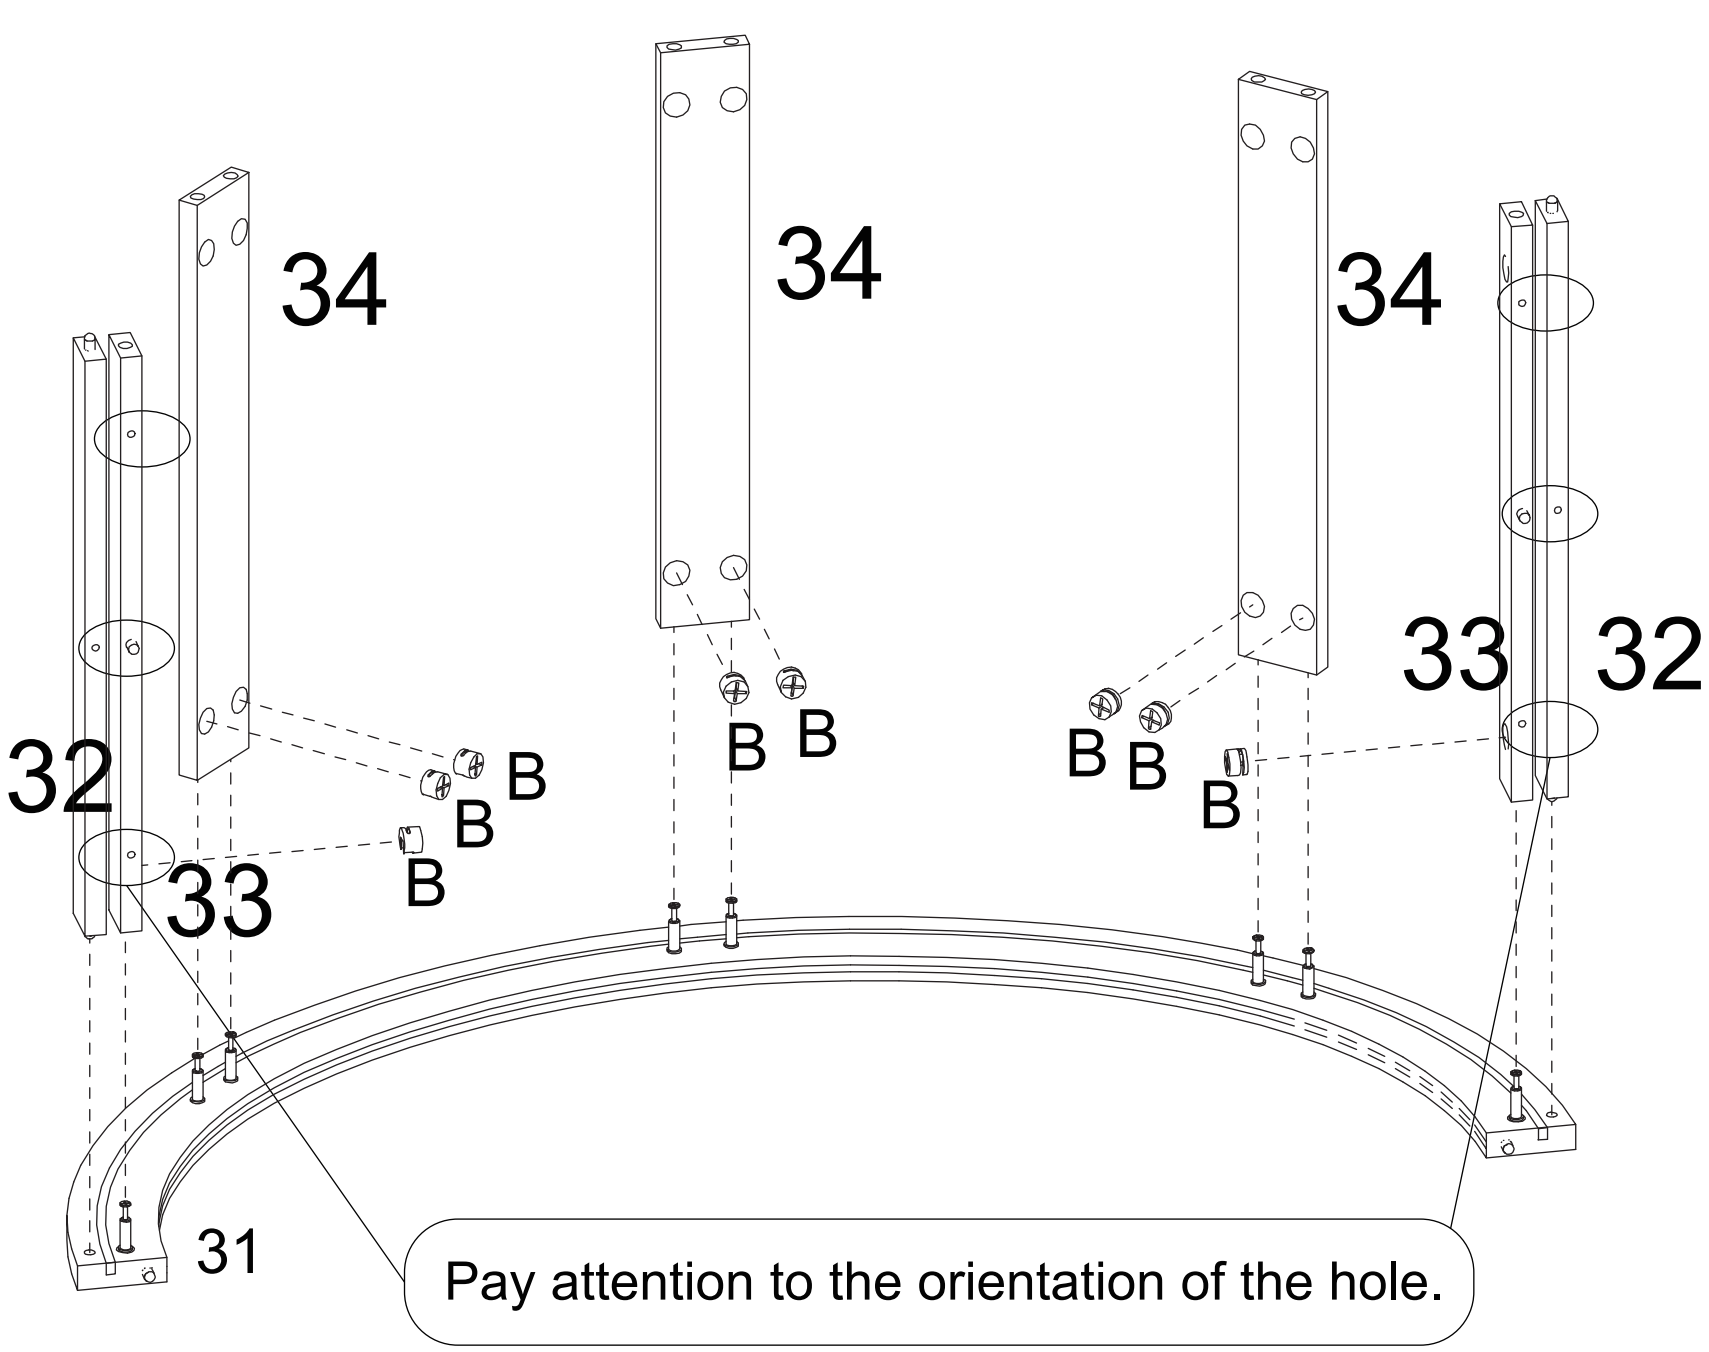


Assembly Instructions

18


B M15



8 PCS

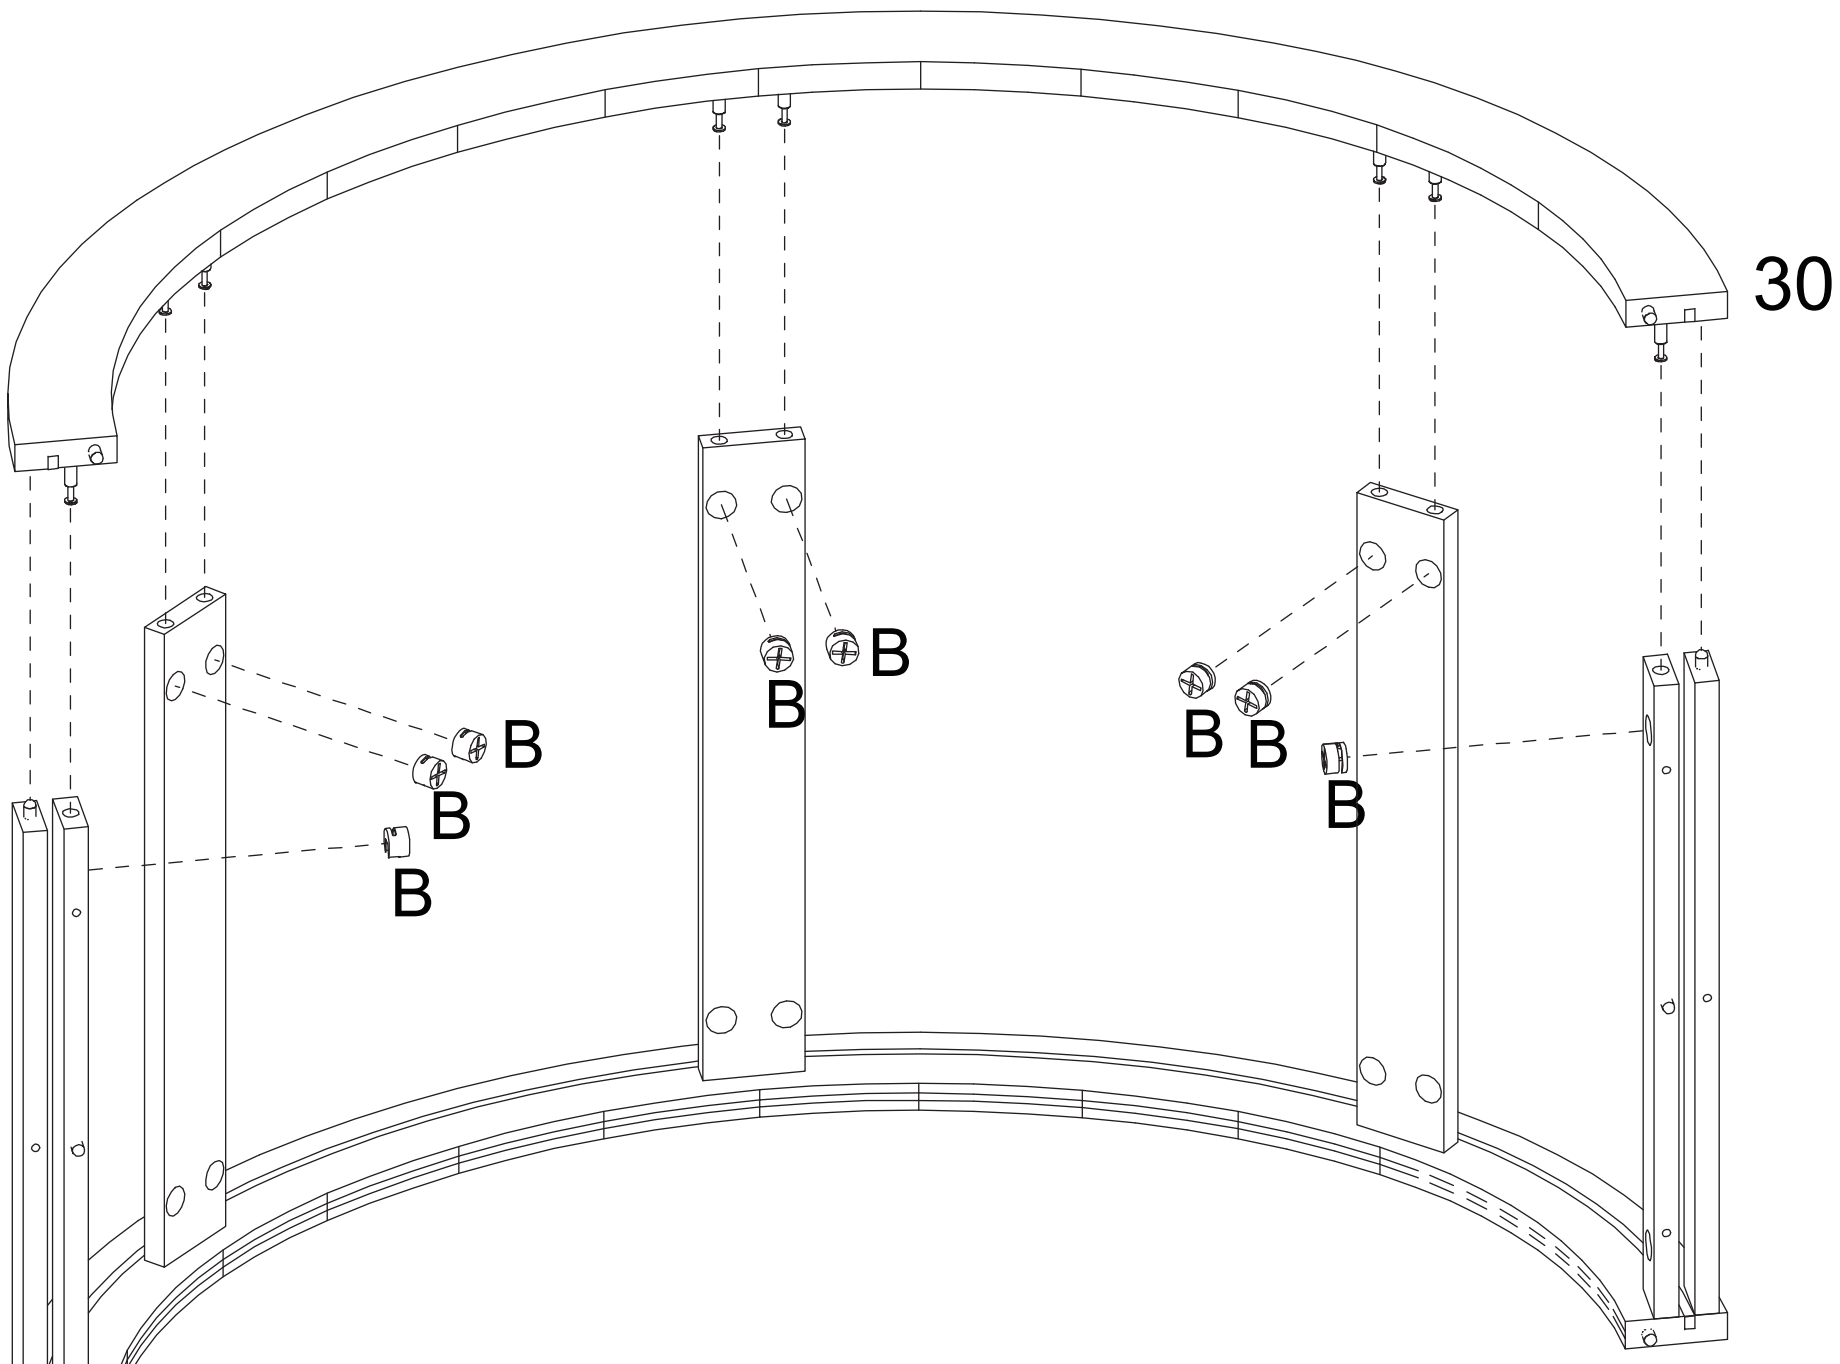


19

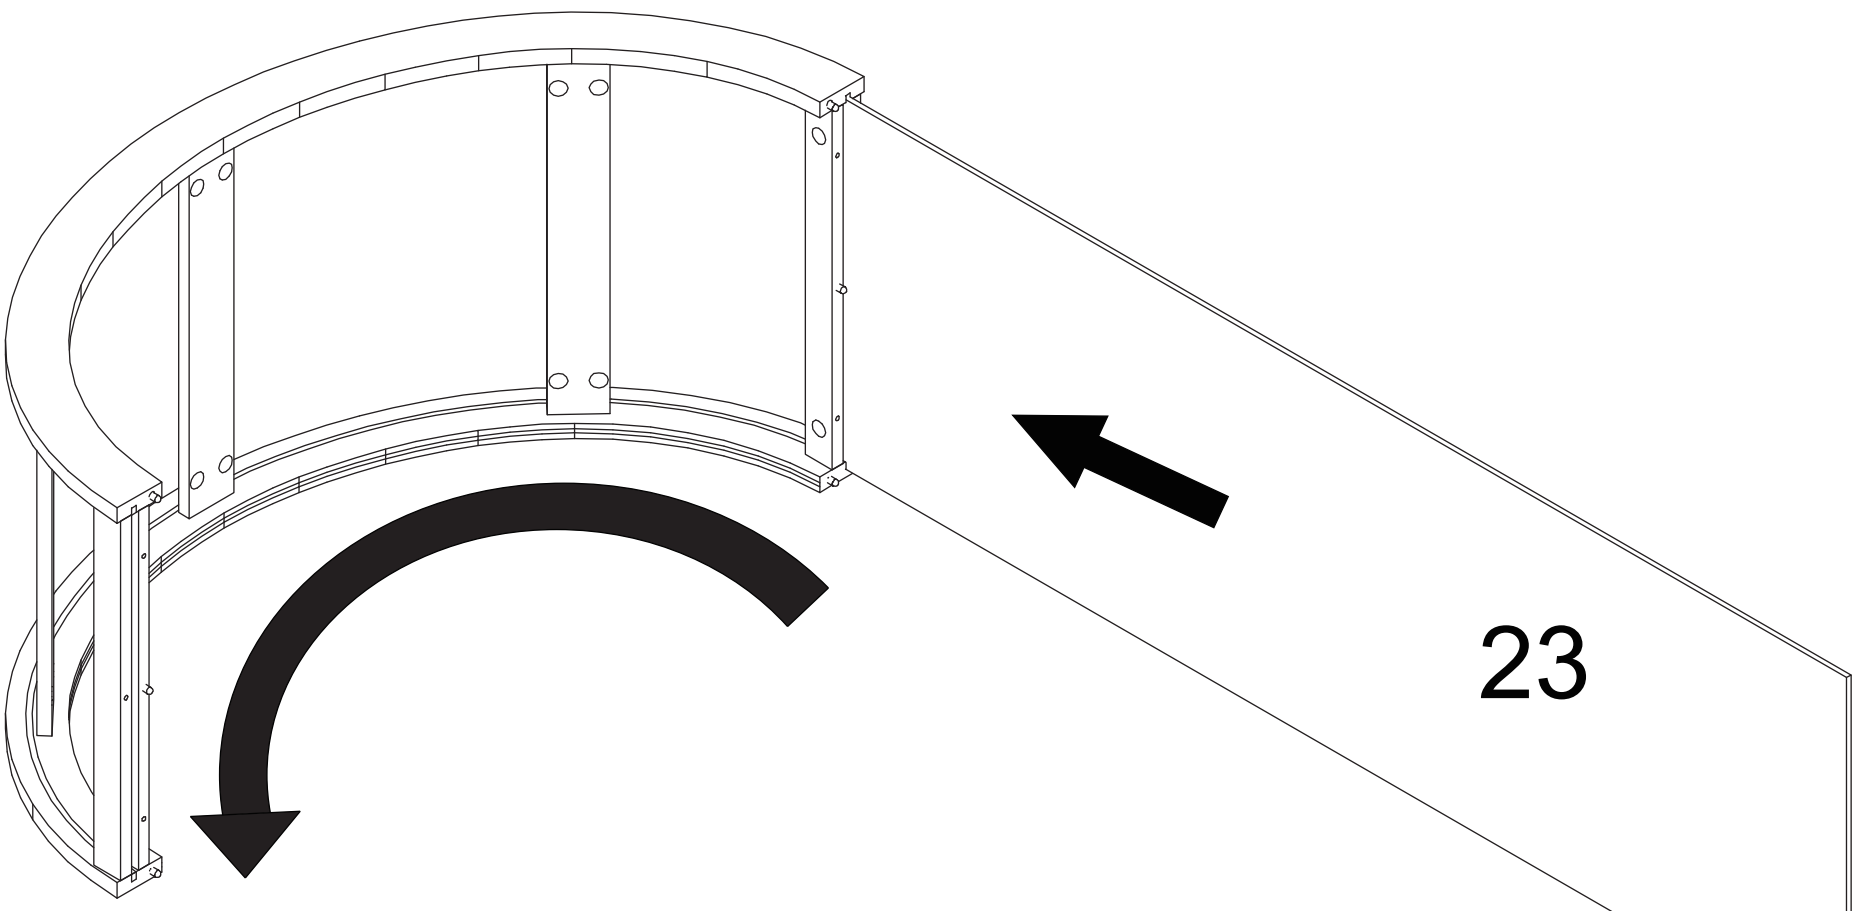

This operation is easier with 2 people: one pulls from the front and the other pushes from the bottom. **Do not use force during installation**.

Assembly Instructions


20

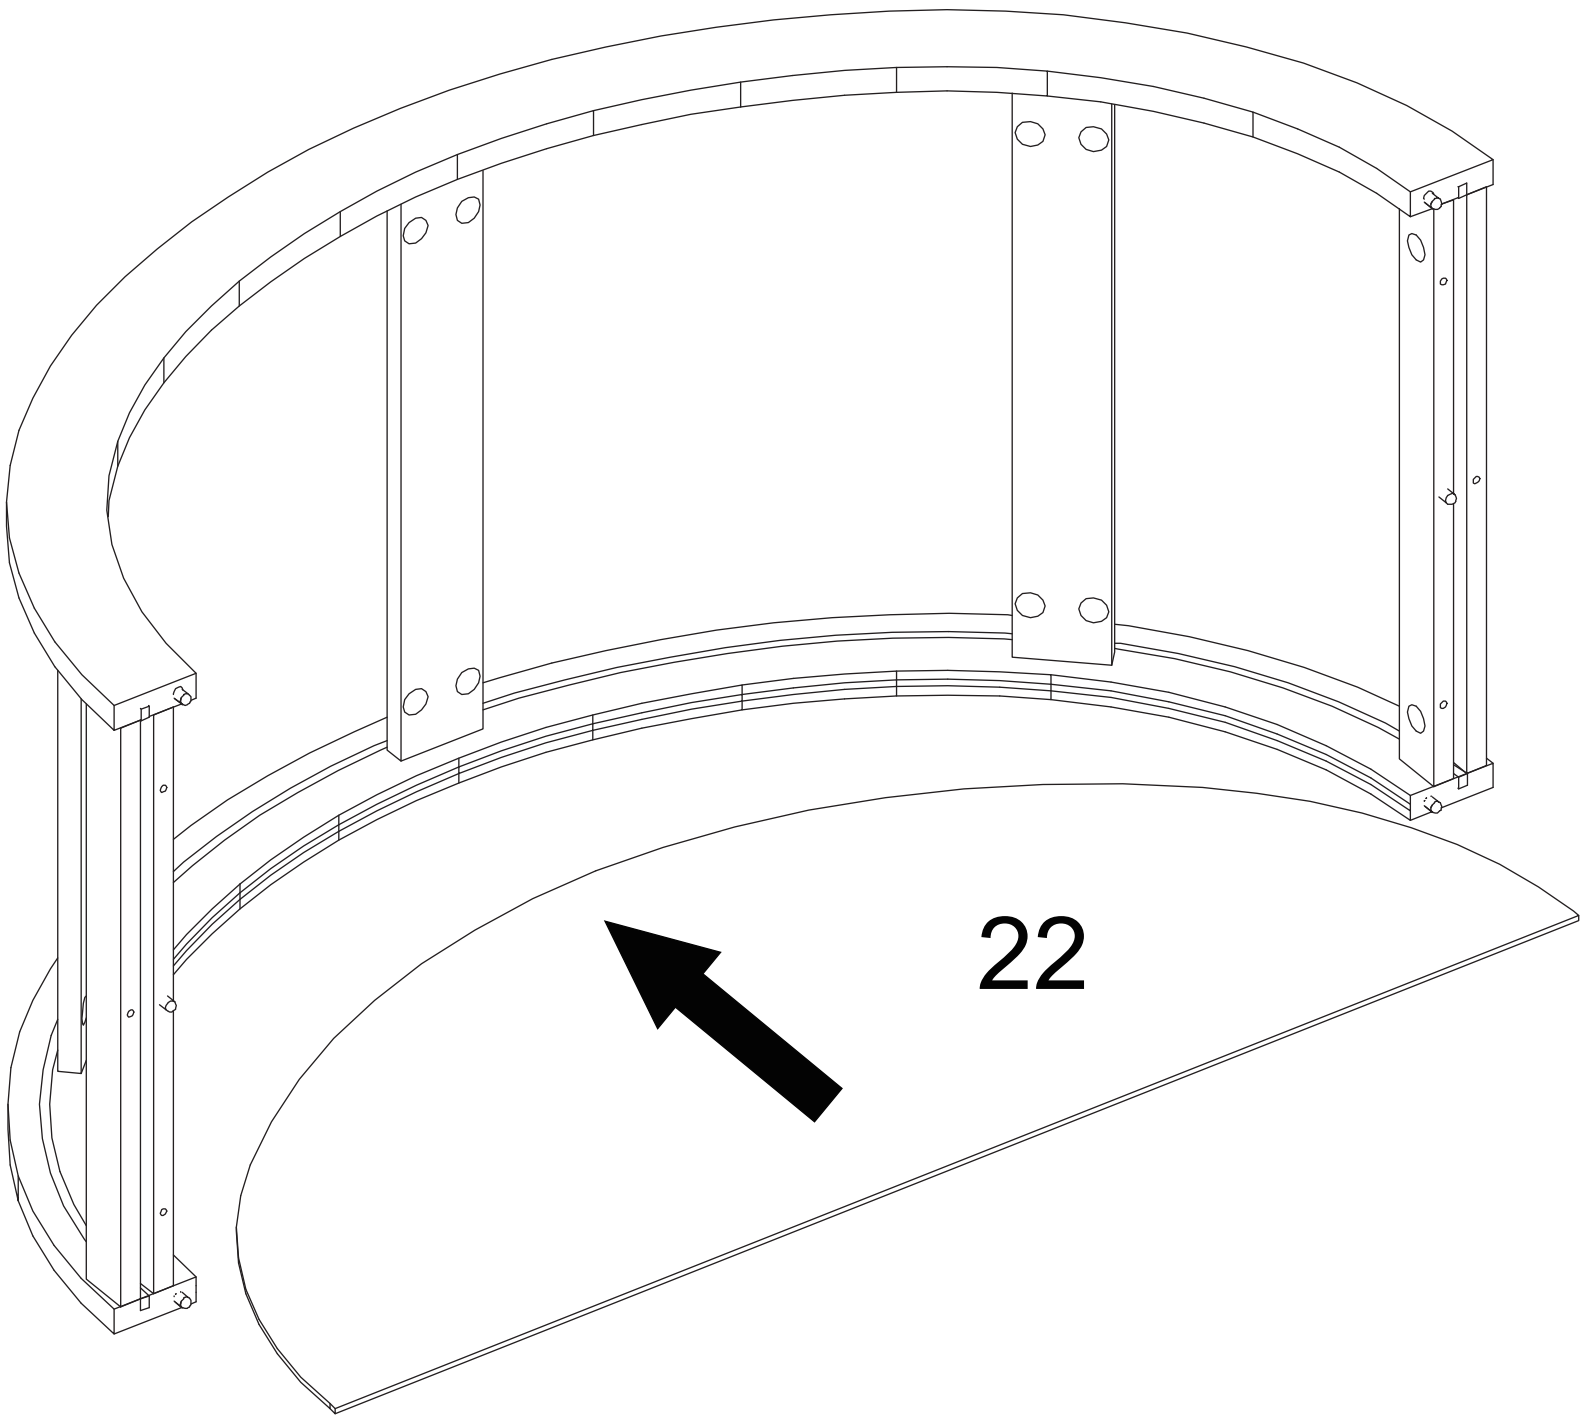


Assembly Instructions

21

D M5X40



6 PCS

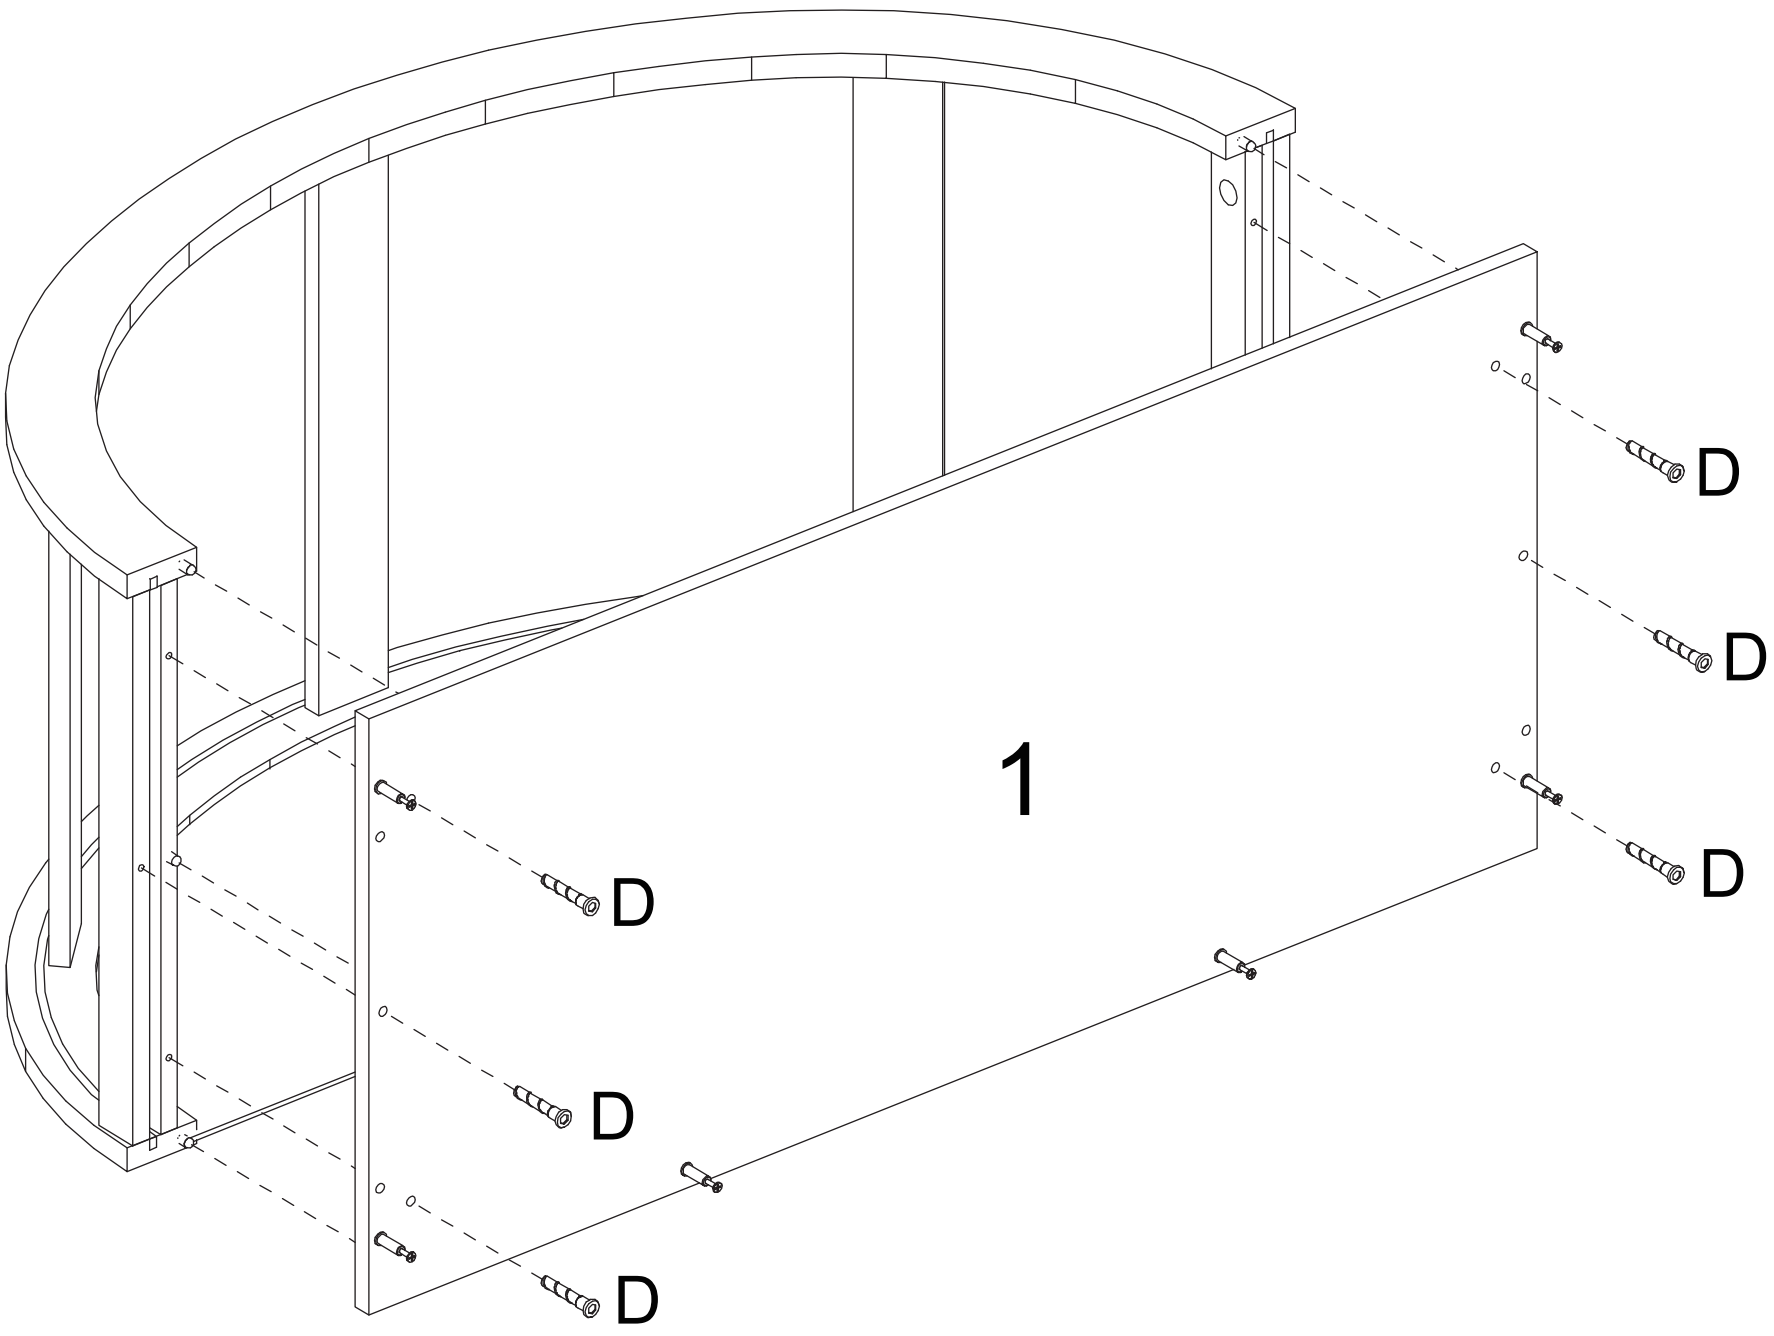

This operation is easier with 2 people working together:
First engage the accessories on one side and drive in the 3 D screws there;
Then adjust and engage the remaining accessories, and drive in the 3 D screws on the other side.


Assembly Instructions


22

B M15



6 PCS

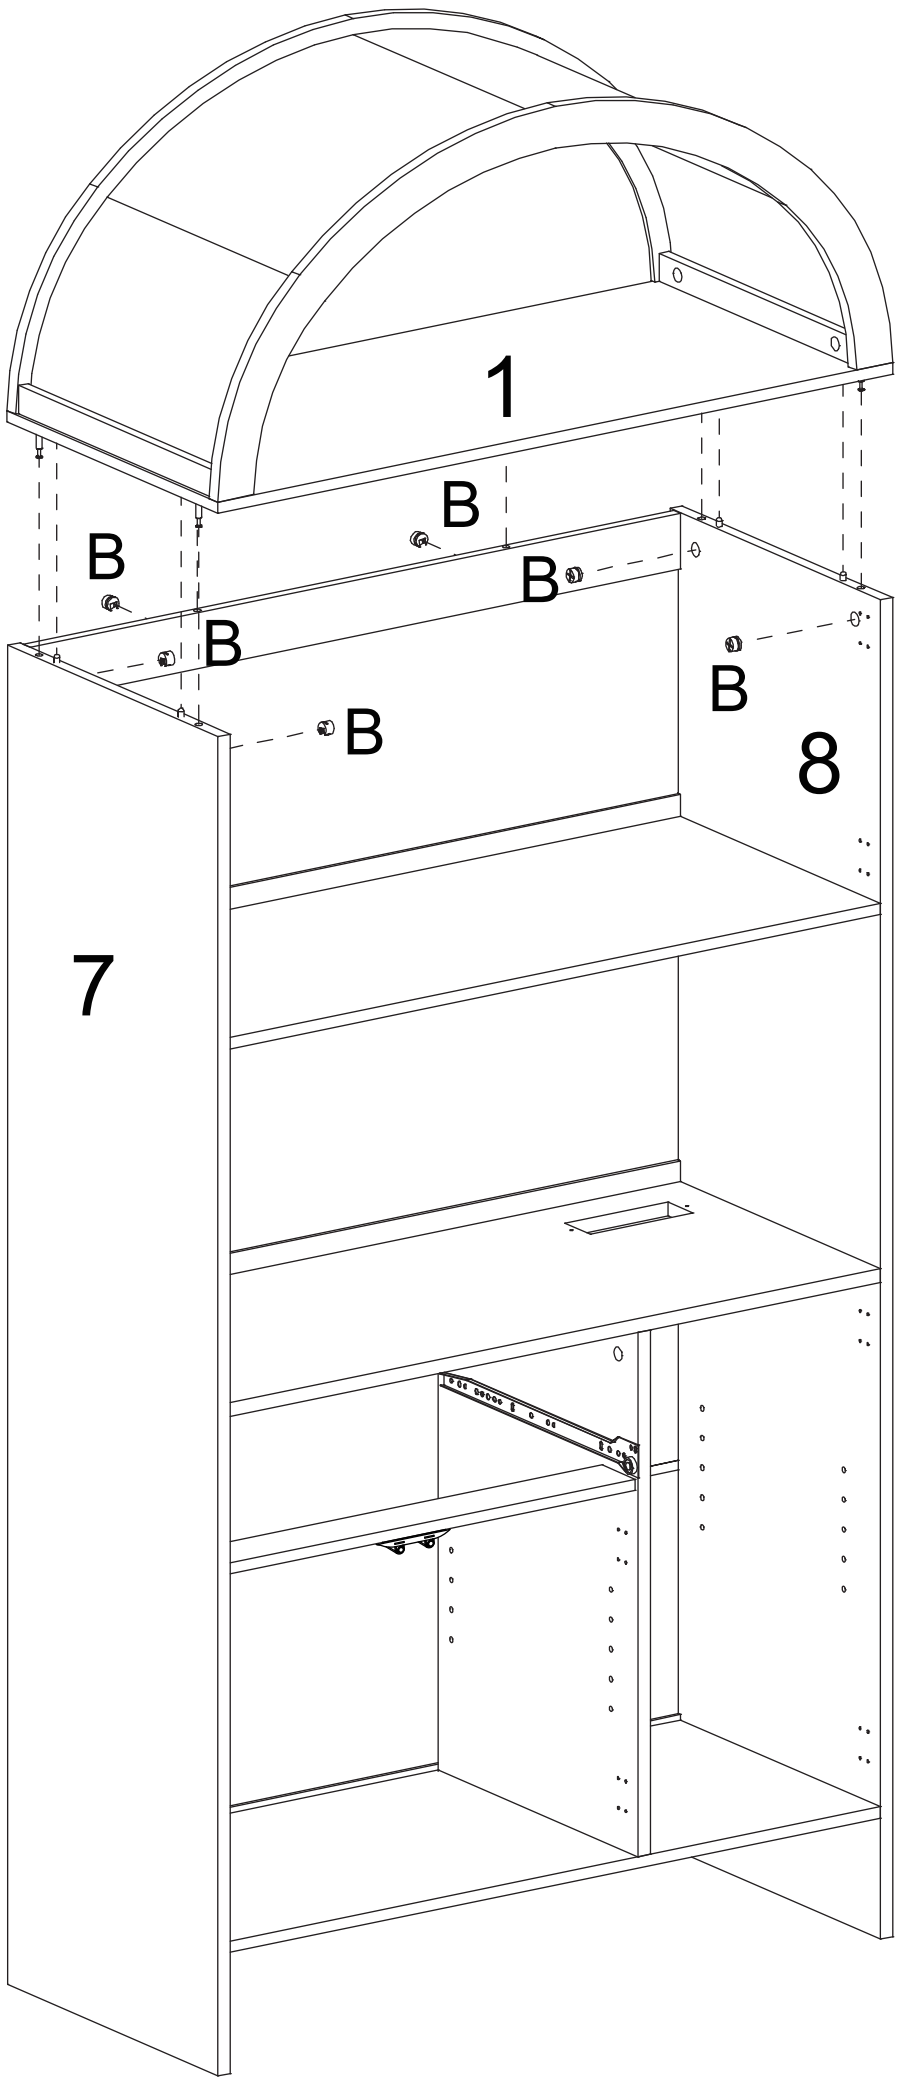

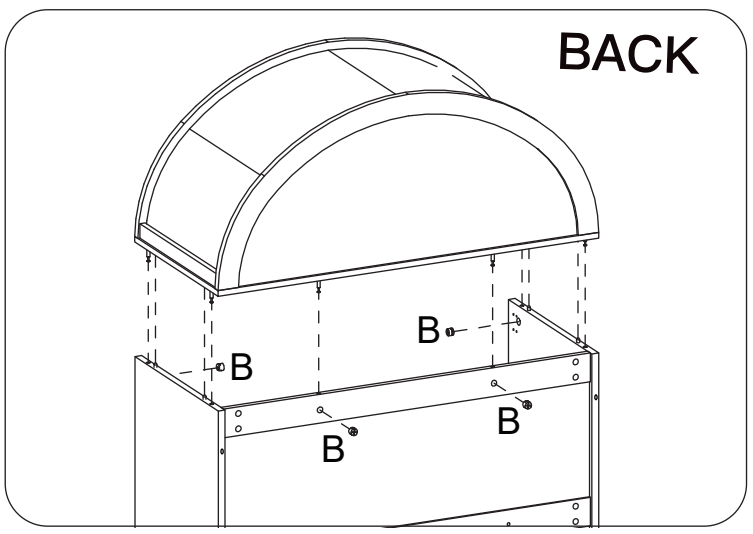


Assembly Instructions

23

E M4X12



2 PCS

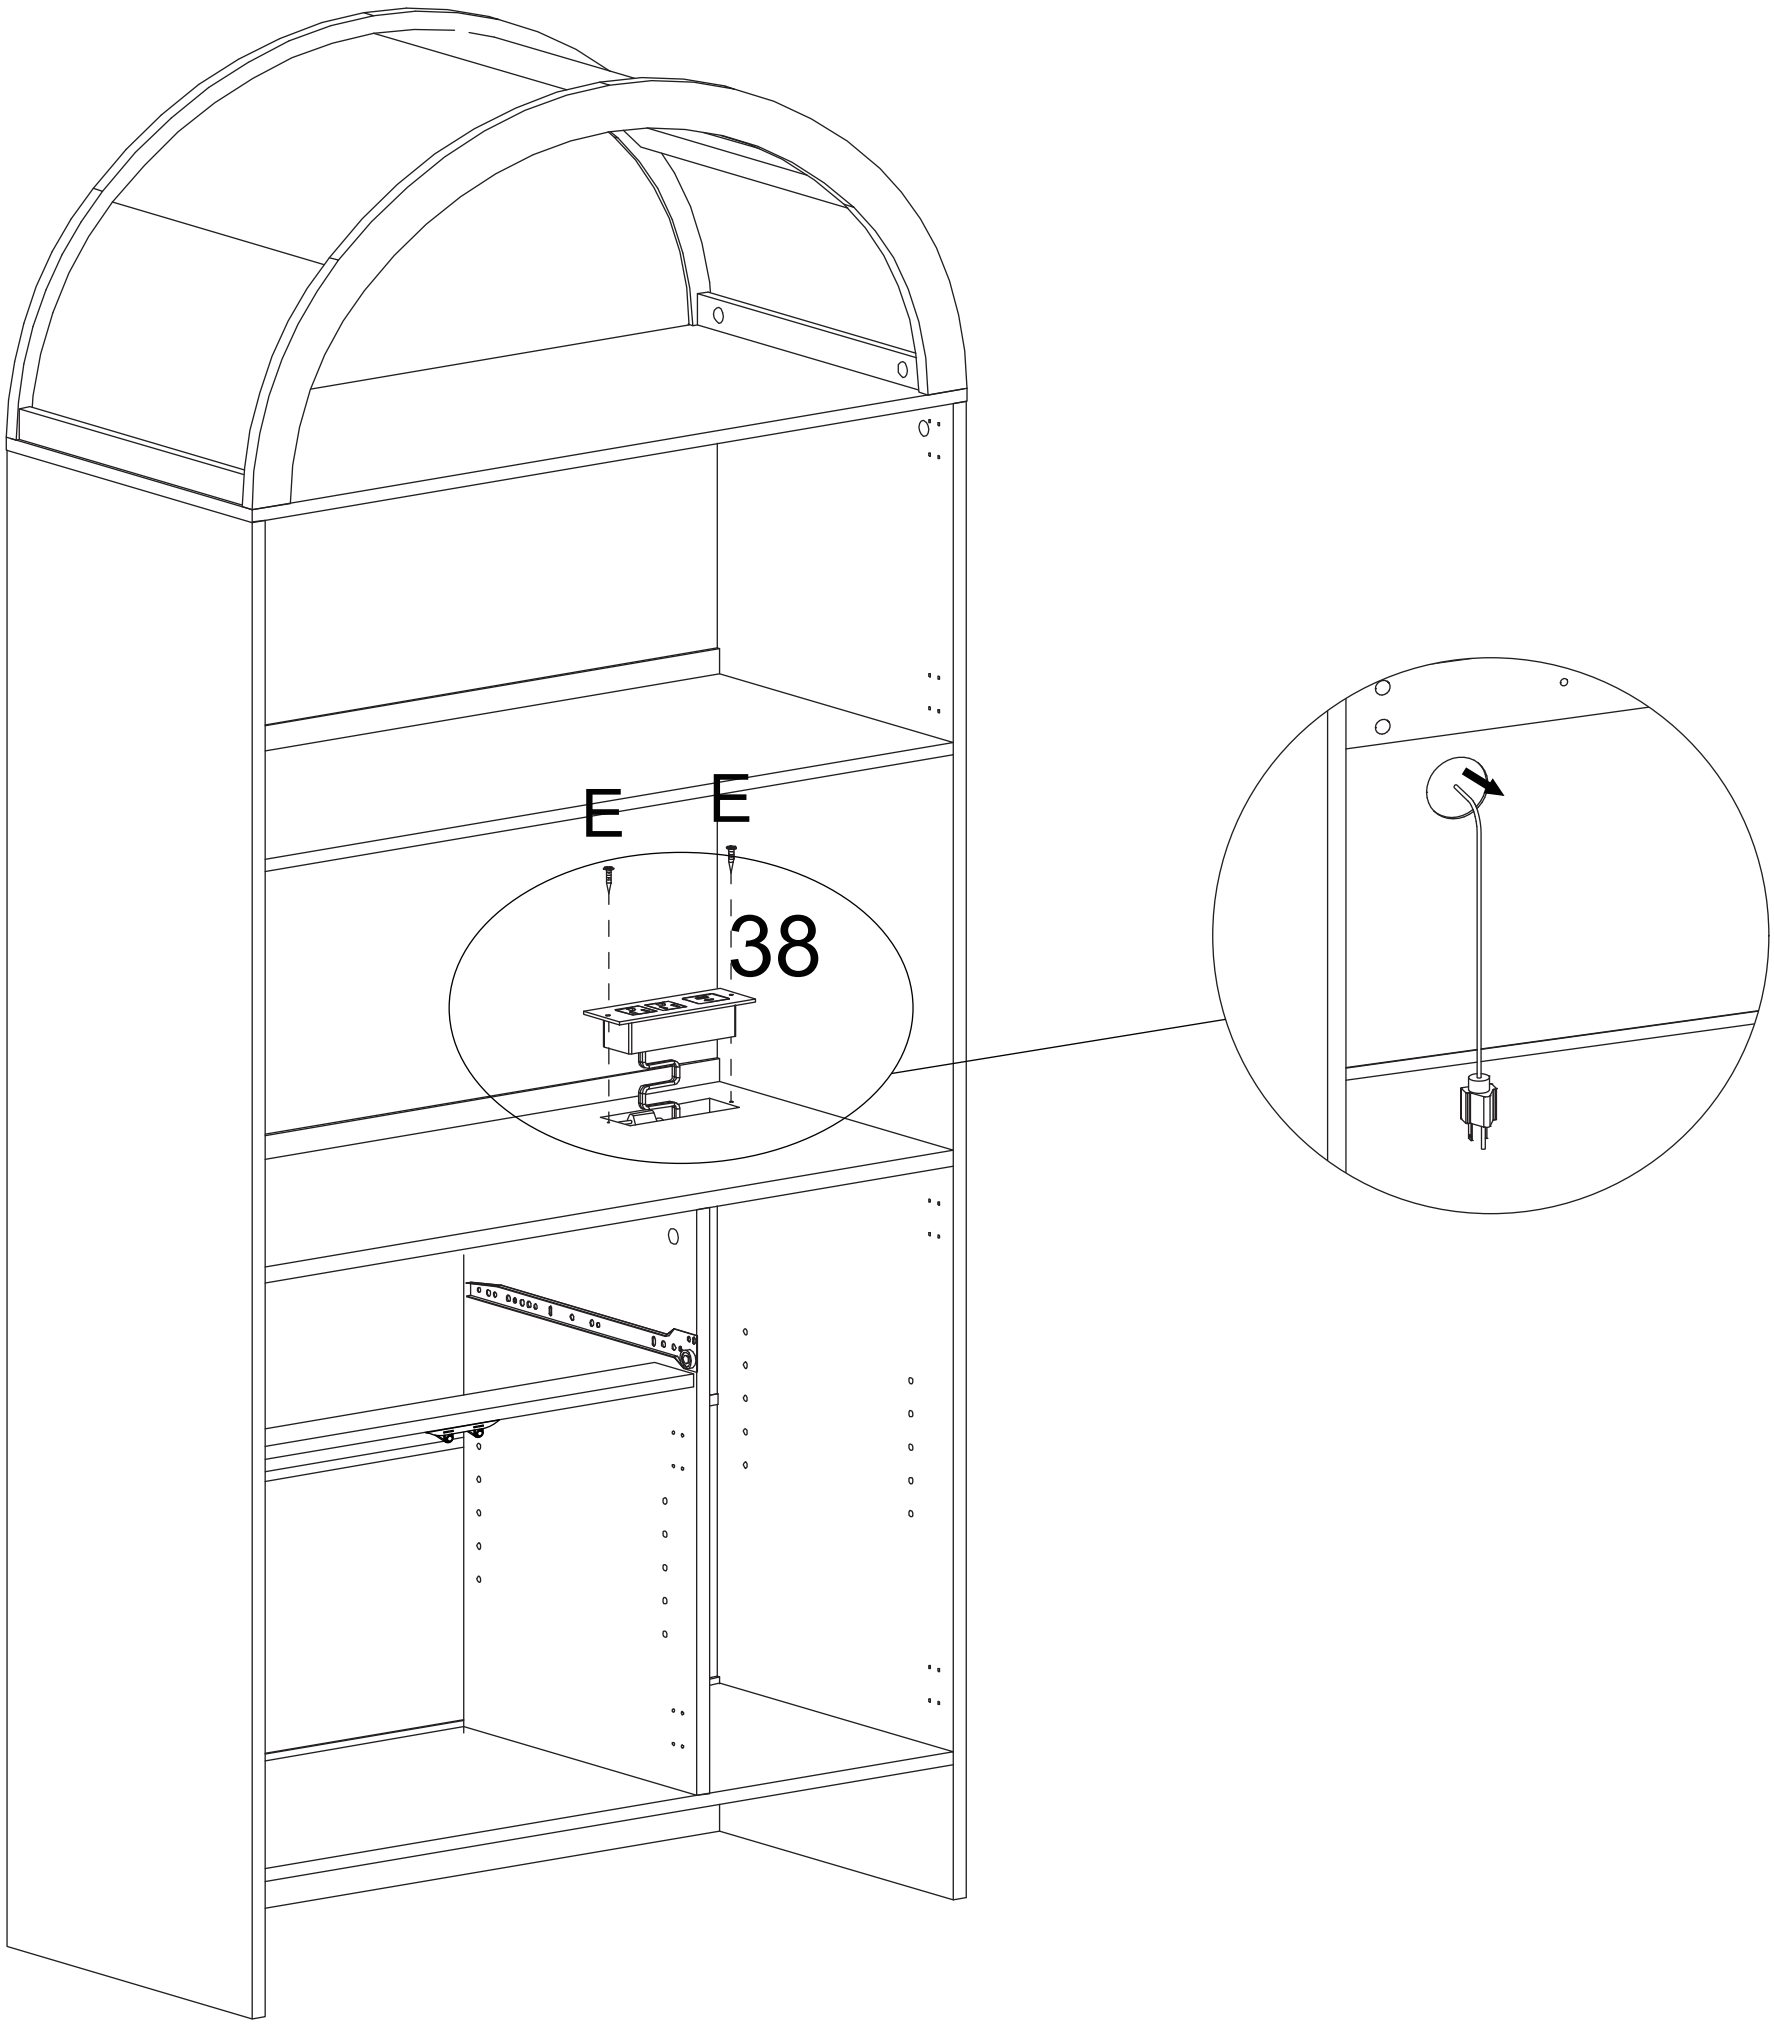


Assembly Instructions

24

C M6X10



2 PCS

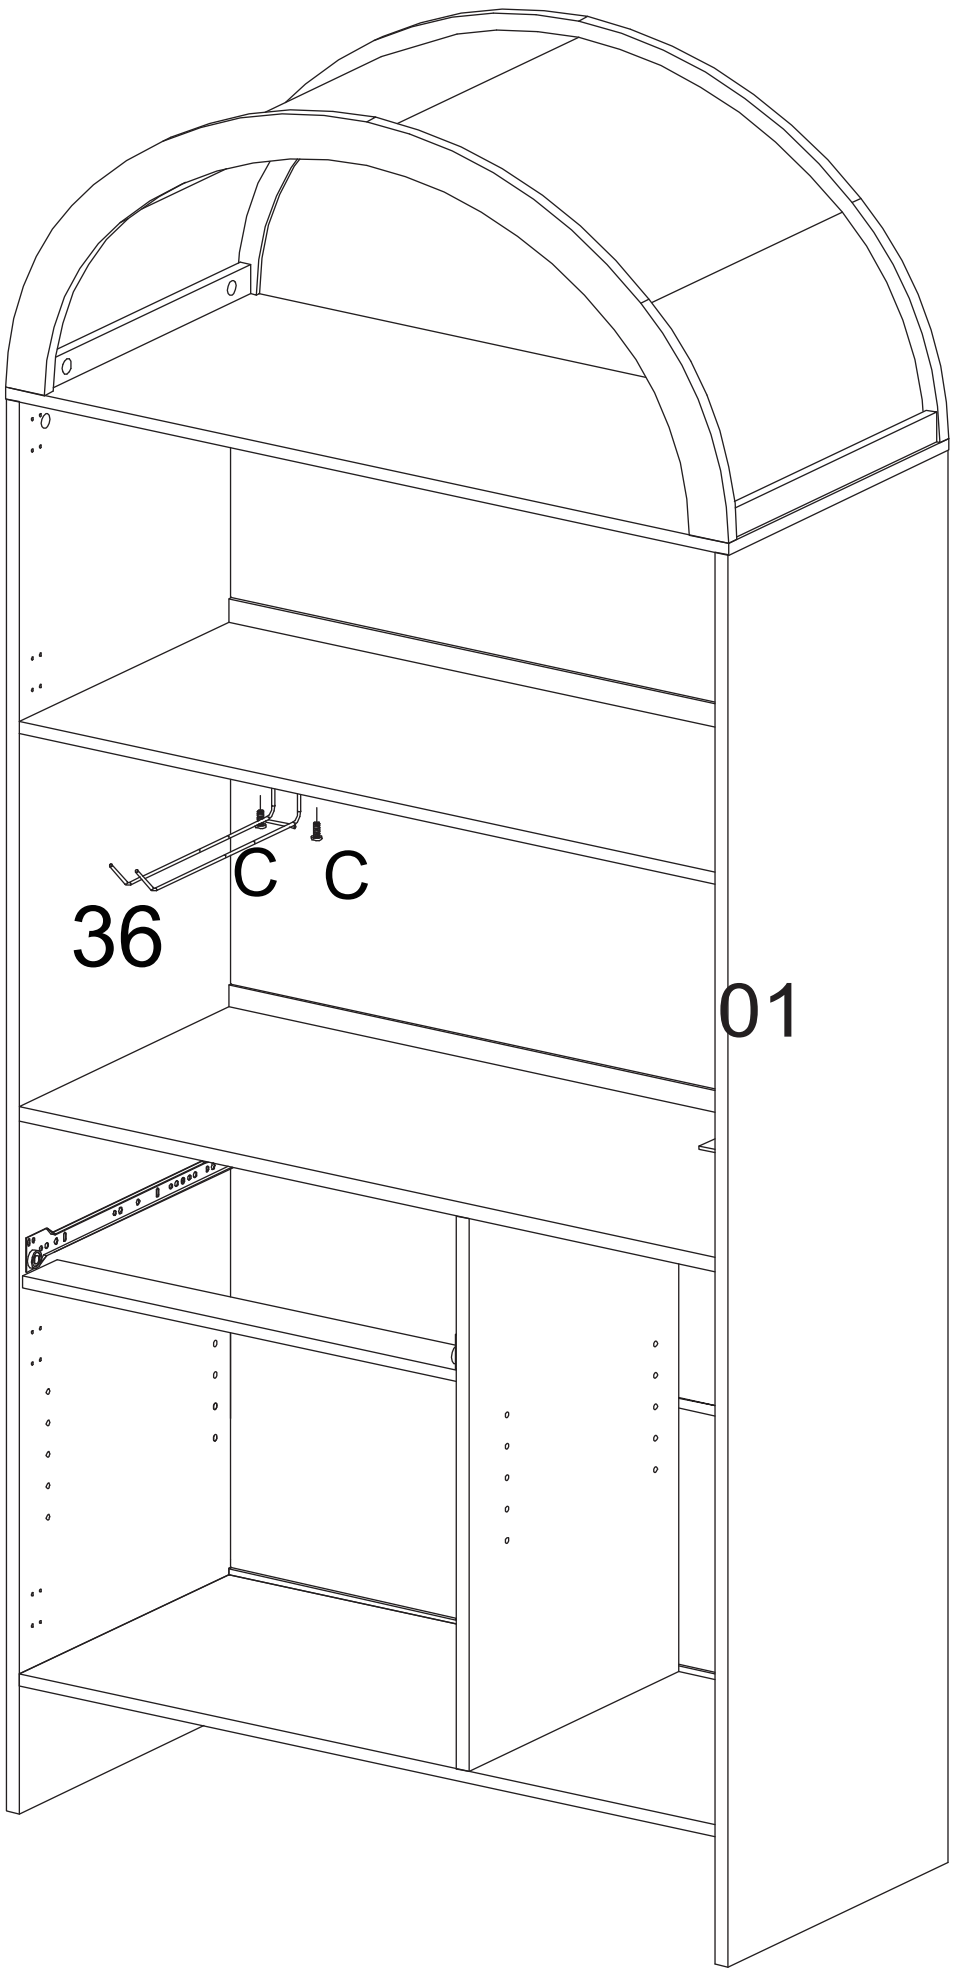


The cup holder accessory is optional. Please choose whether to install it based on your needs.


Assembly Instructions

25


H



8 PCS

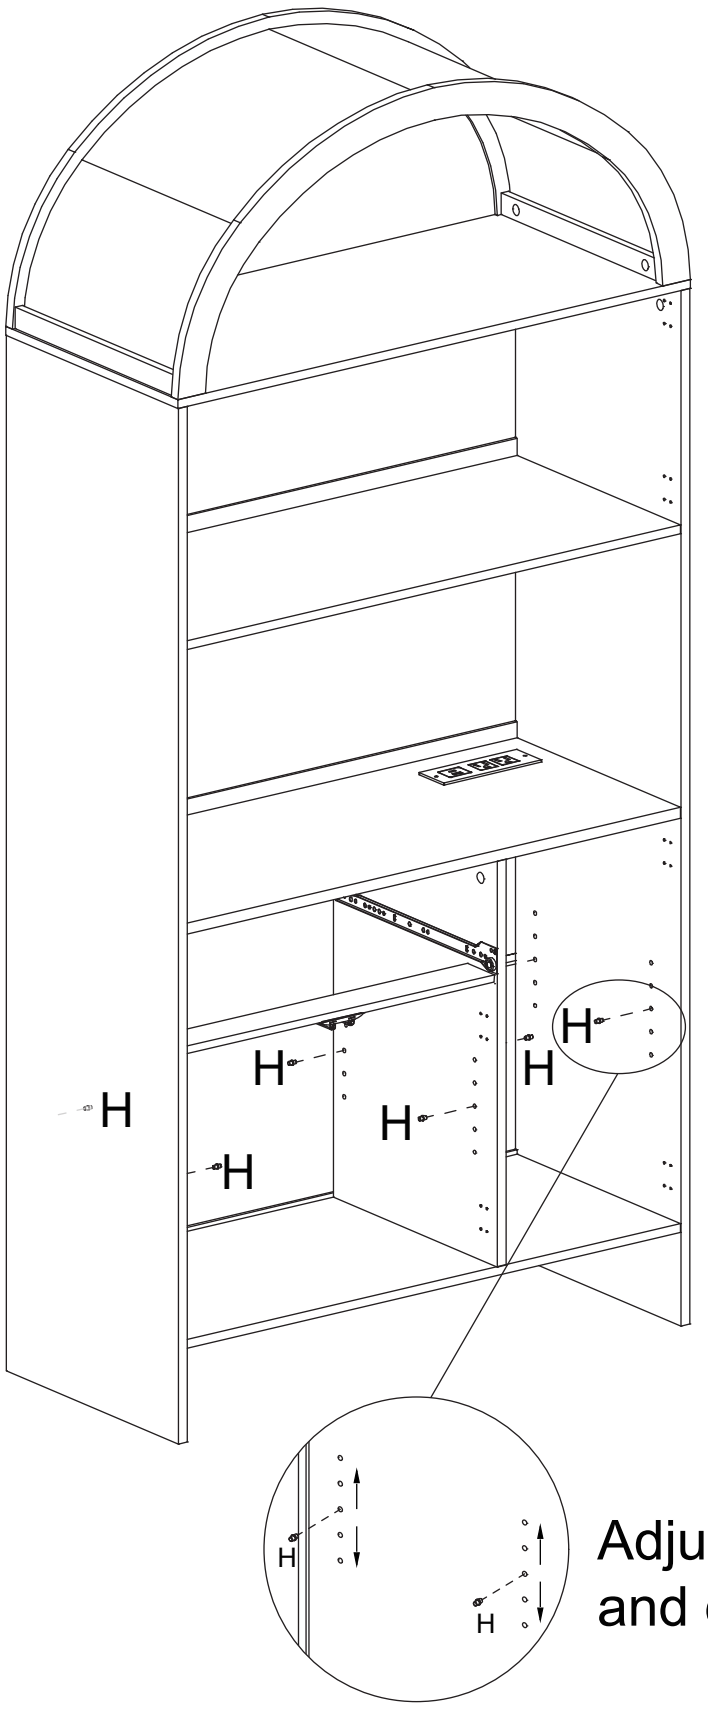



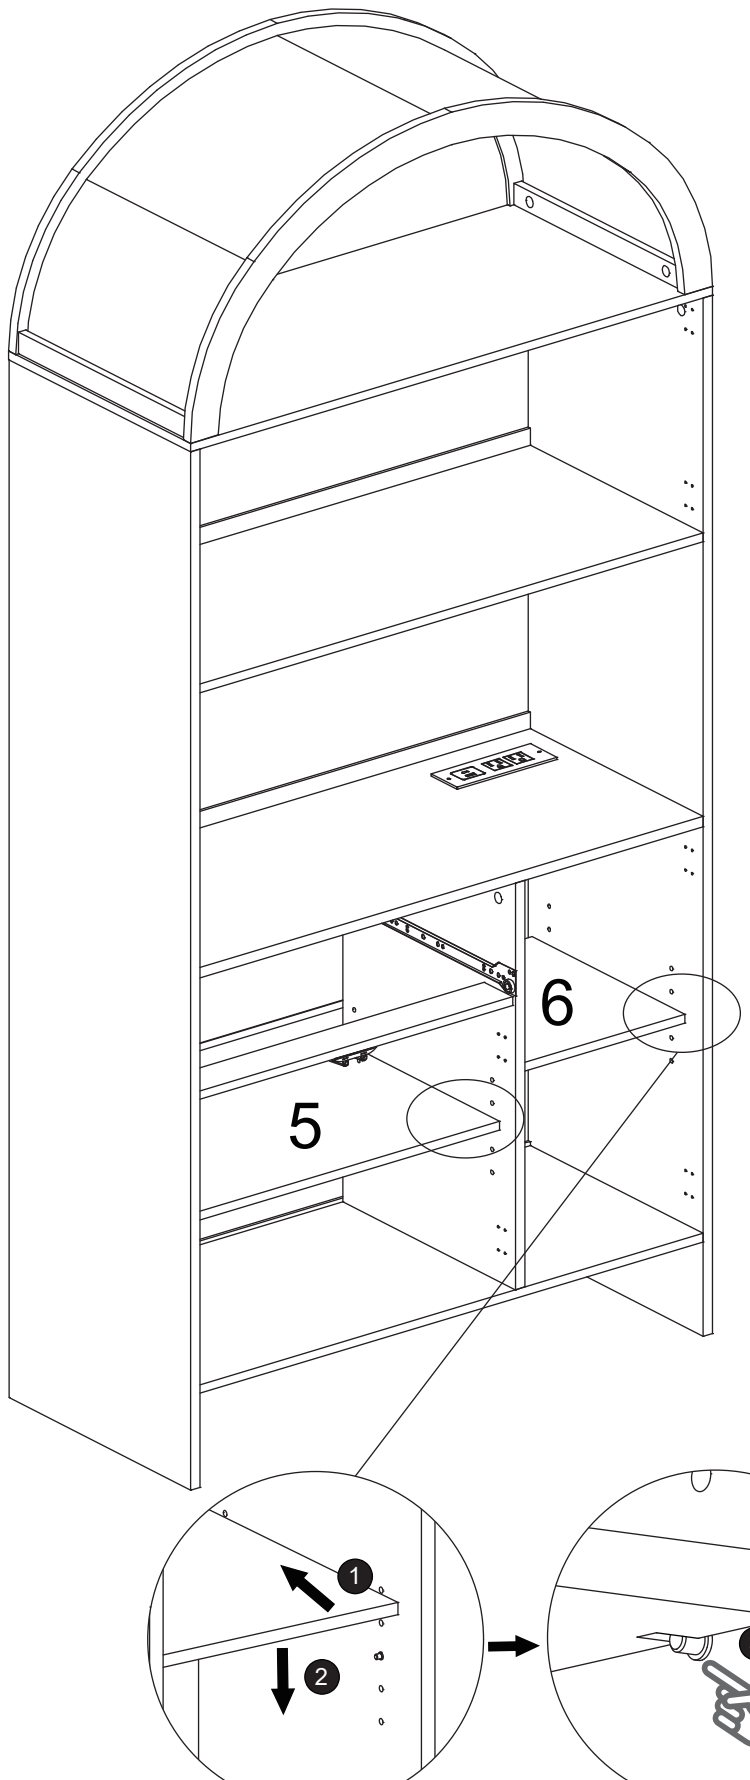


Adjustable up
and down


Assembly Instructions


26

N



2 PCS

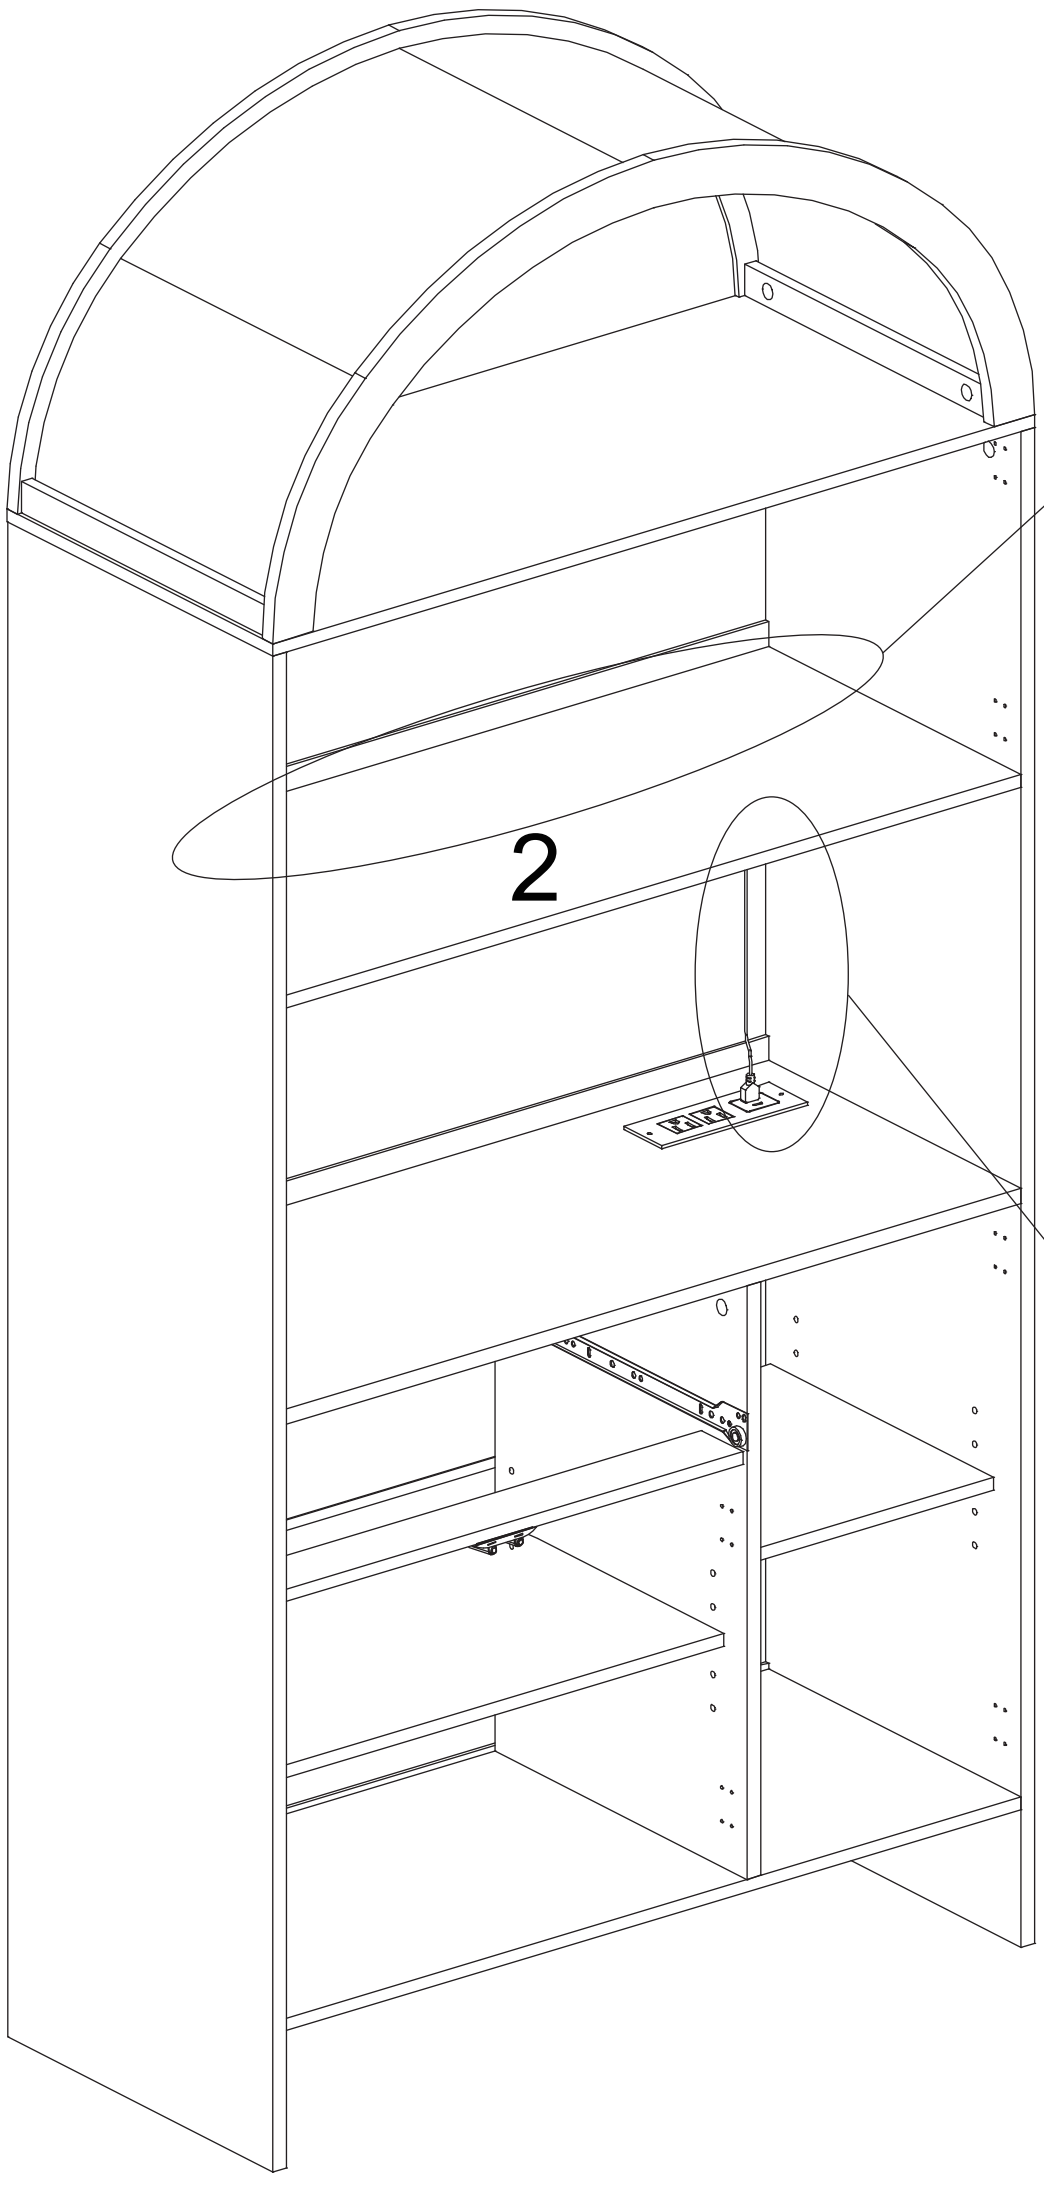




Rip the protective paper




Do not block the hole when installing the light strip.

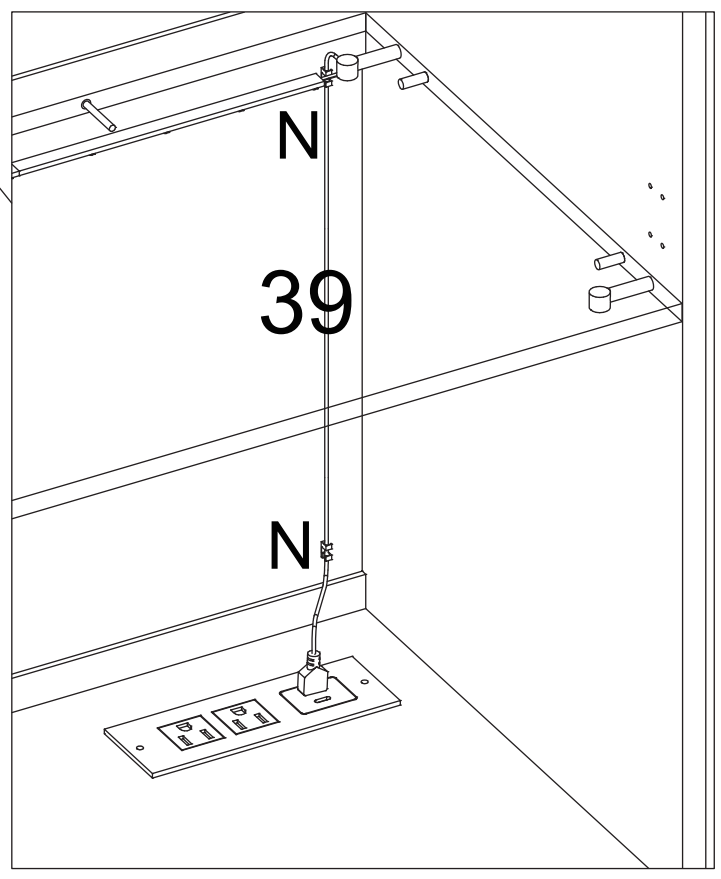


The light strip is installed under Panel 2.

Assembly Instructions



27


E M4X12	J
	
2 PCS	2 PCS

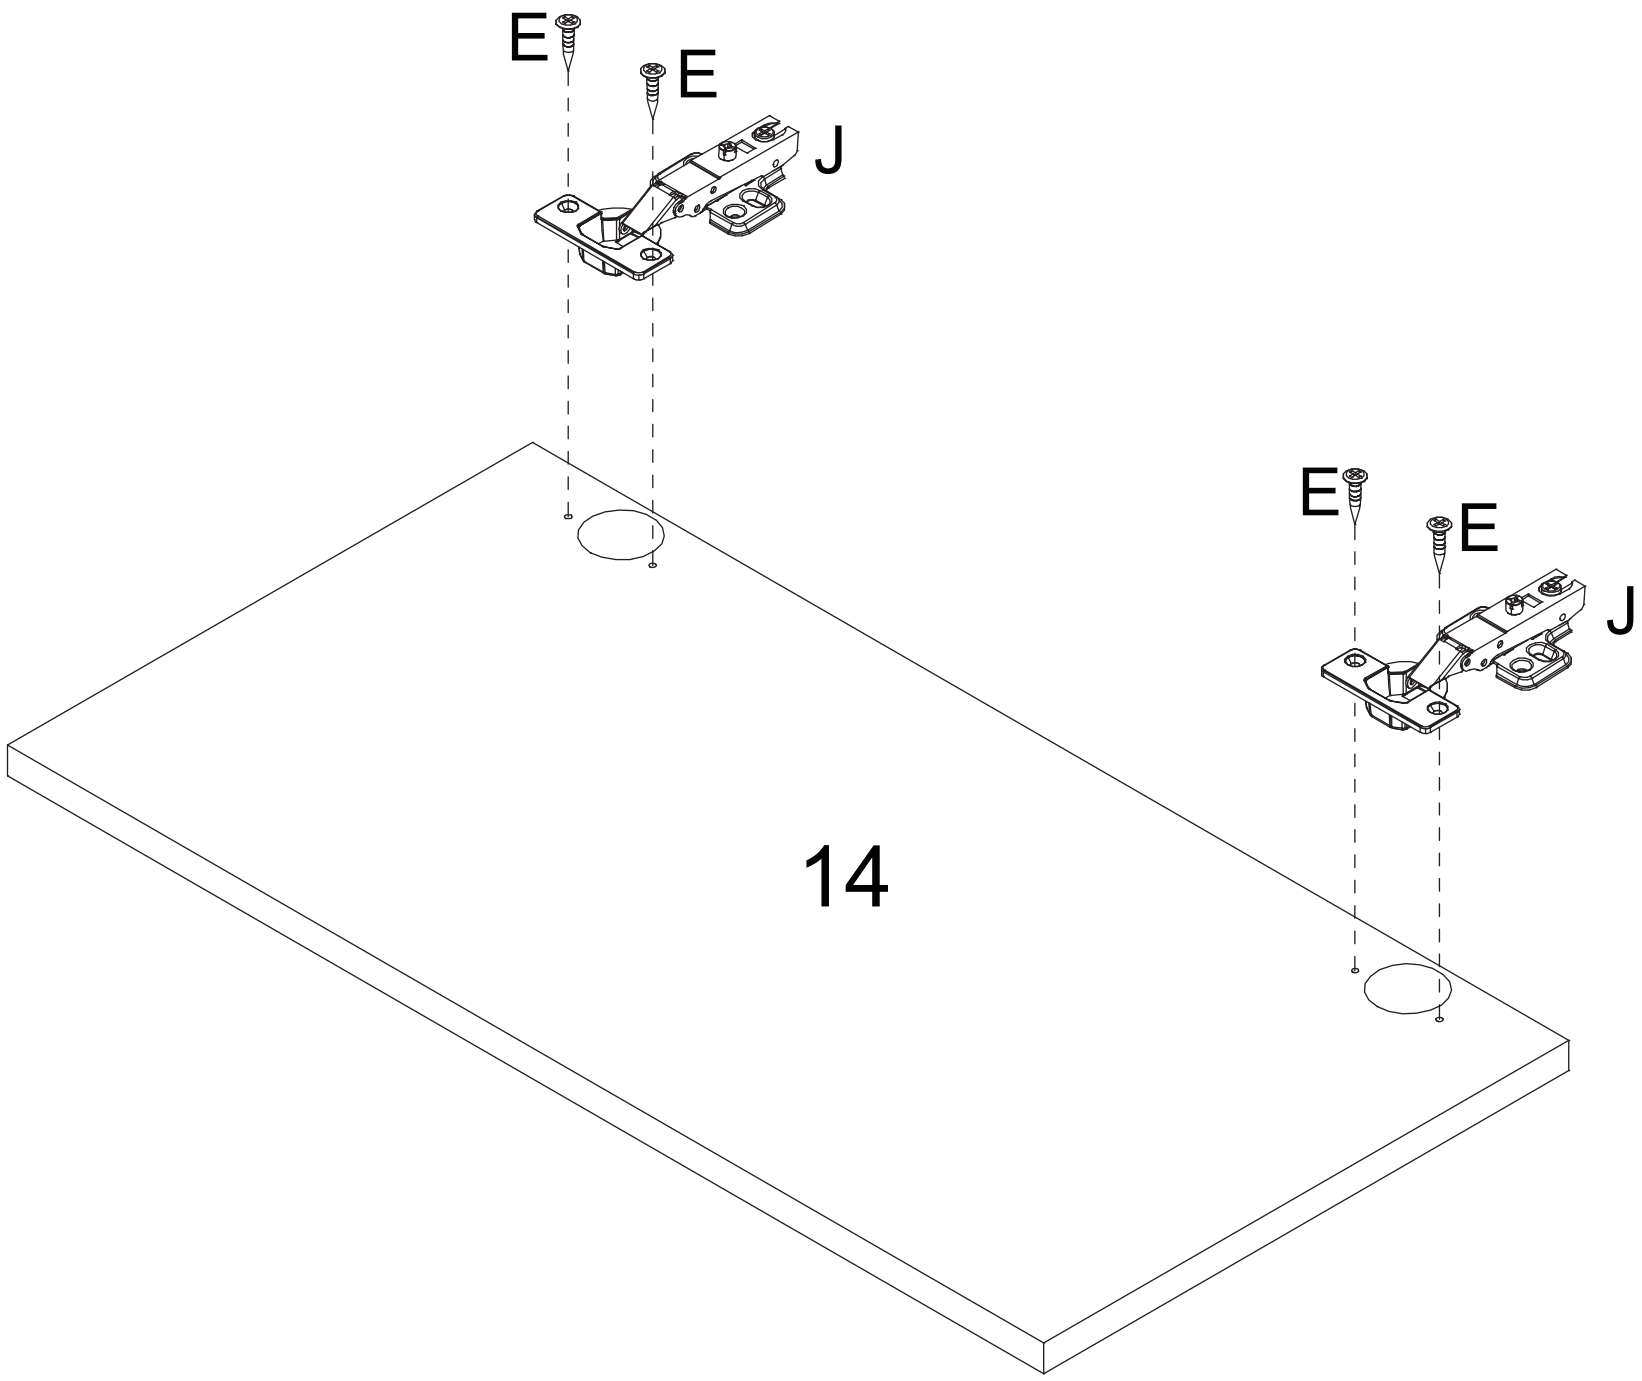

Assembly Instructions

28



E M4X12	J
	
8 PCS	4 PCS

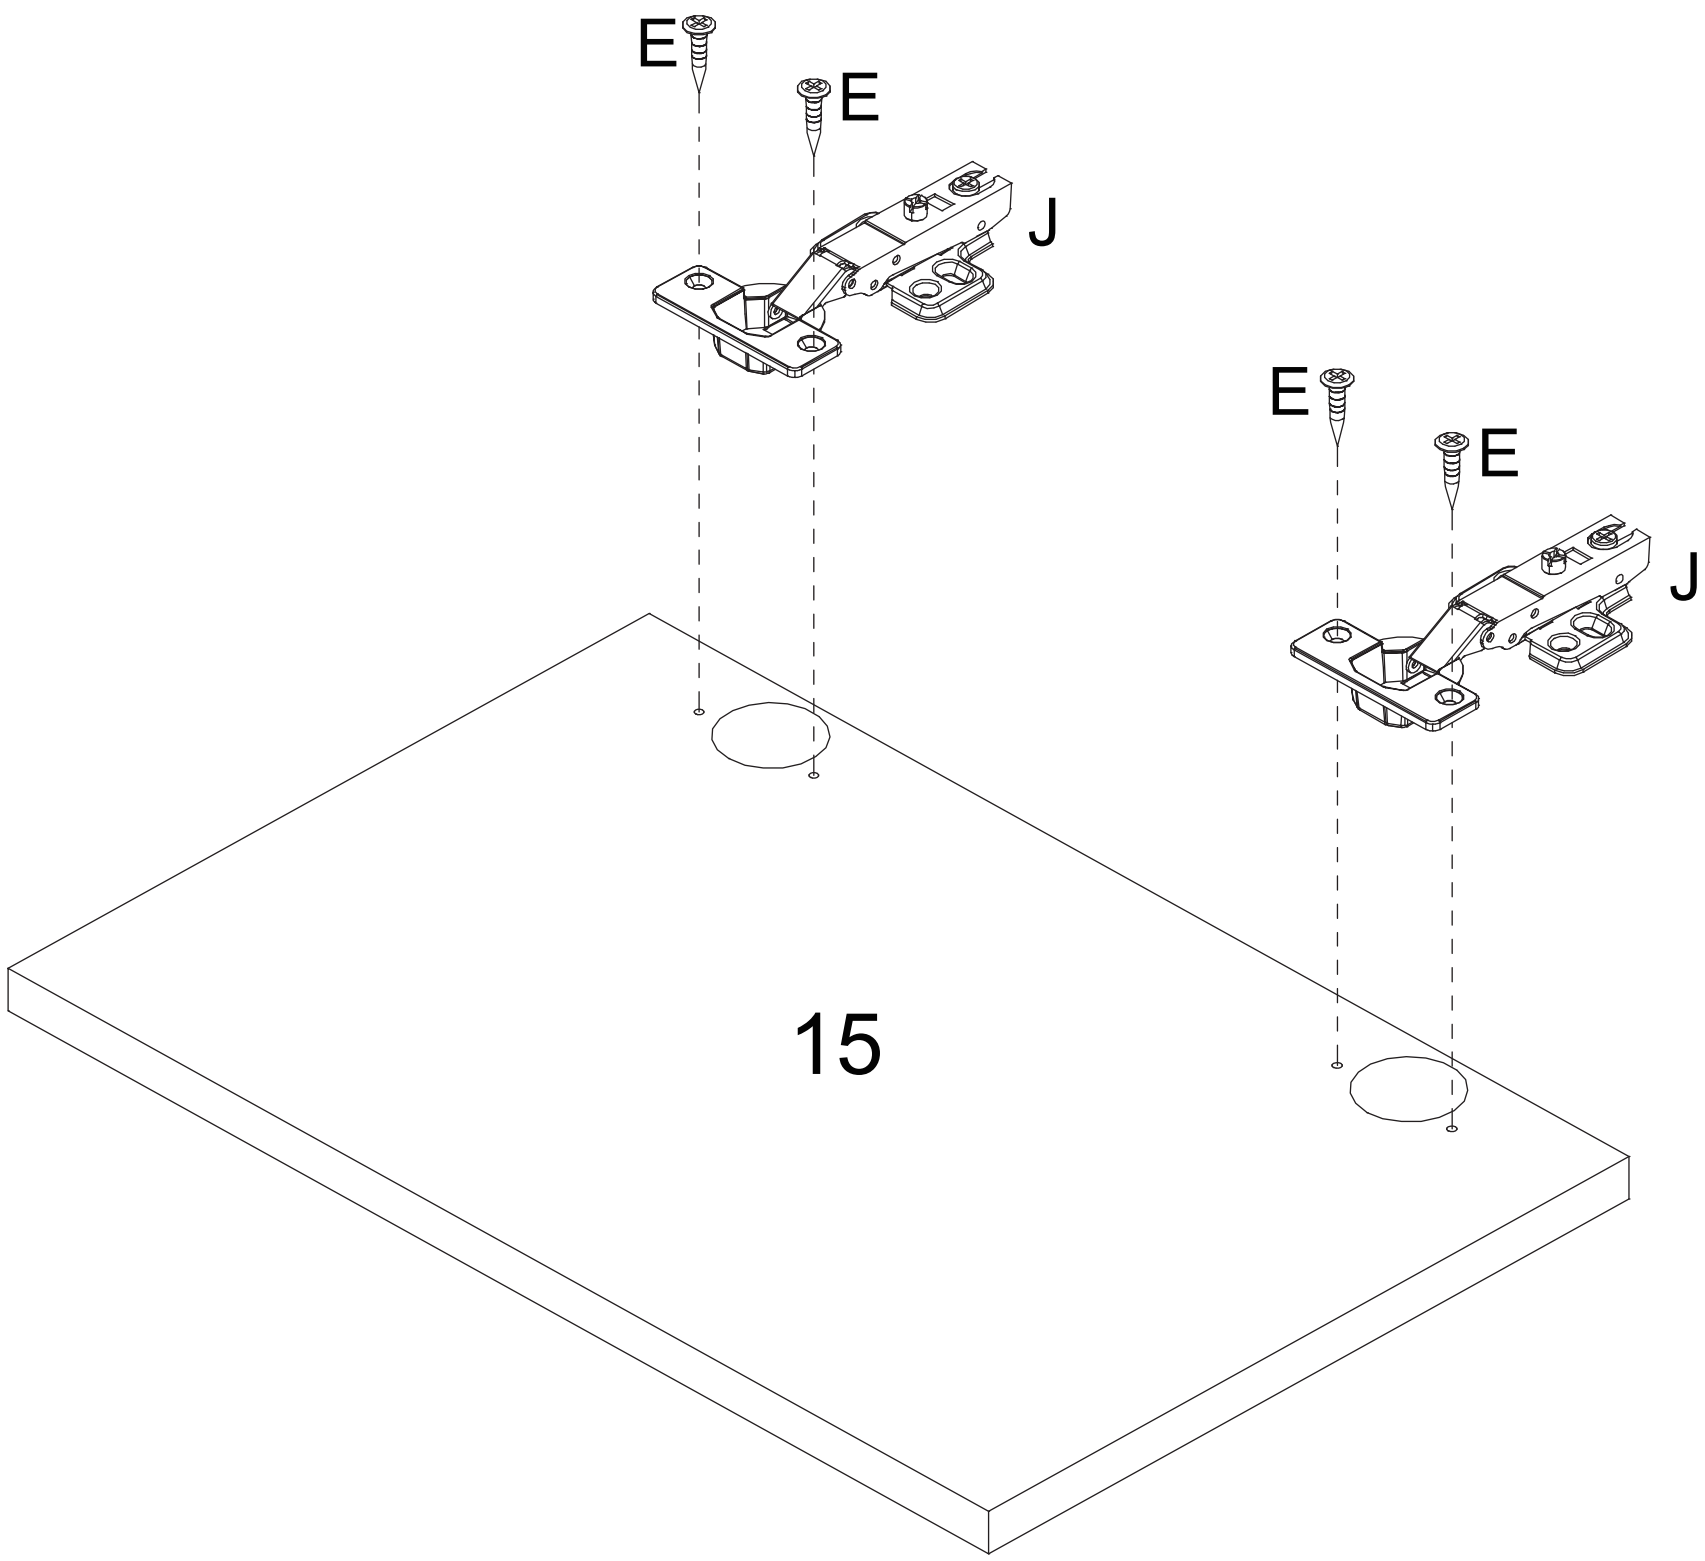


X2

Assembly Instructions



29


E M4X12	F M4X20	J	K
			
4 PCS	2 PCS	2 PCS	1 PCS

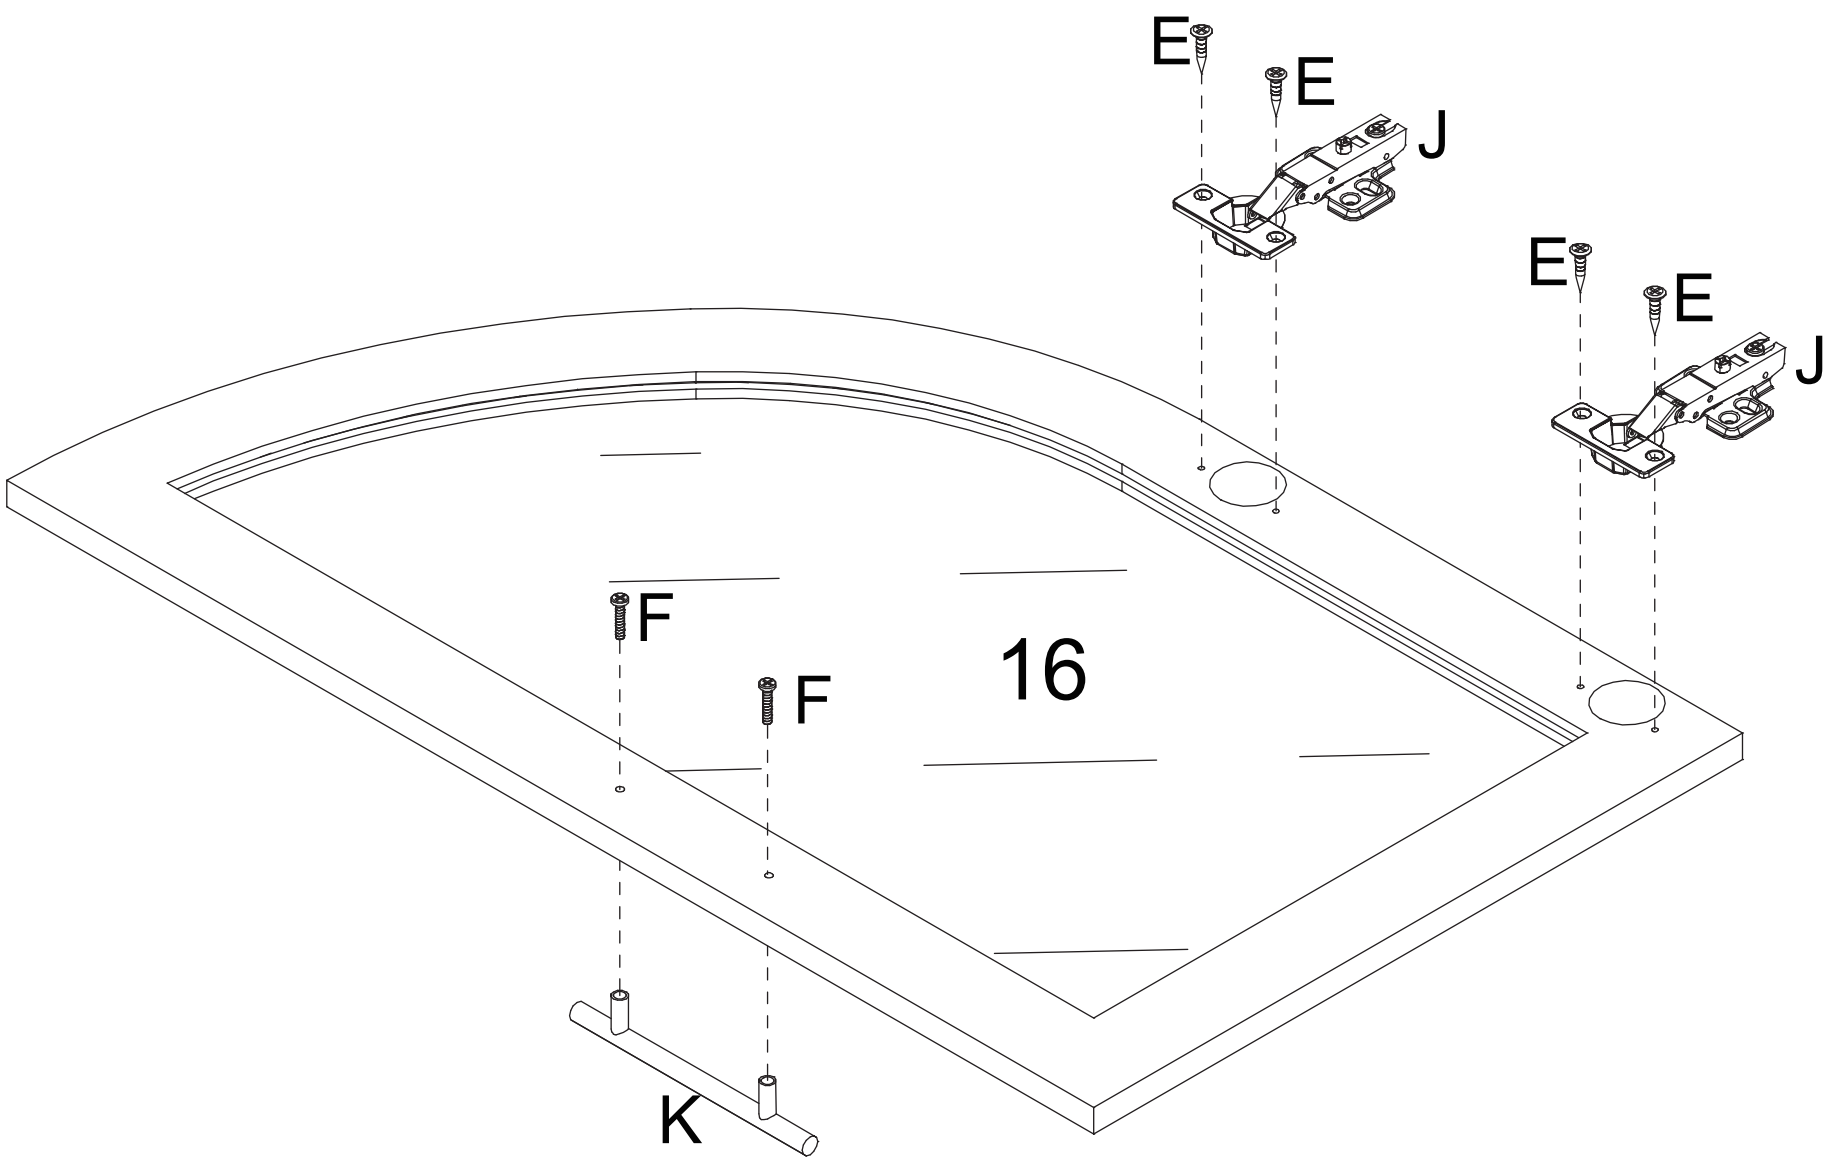

Assembly Instructions




30


E M4X12	F M4X20	J	K
			
4 PCS	2 PCS	2 PCS	1 PCS

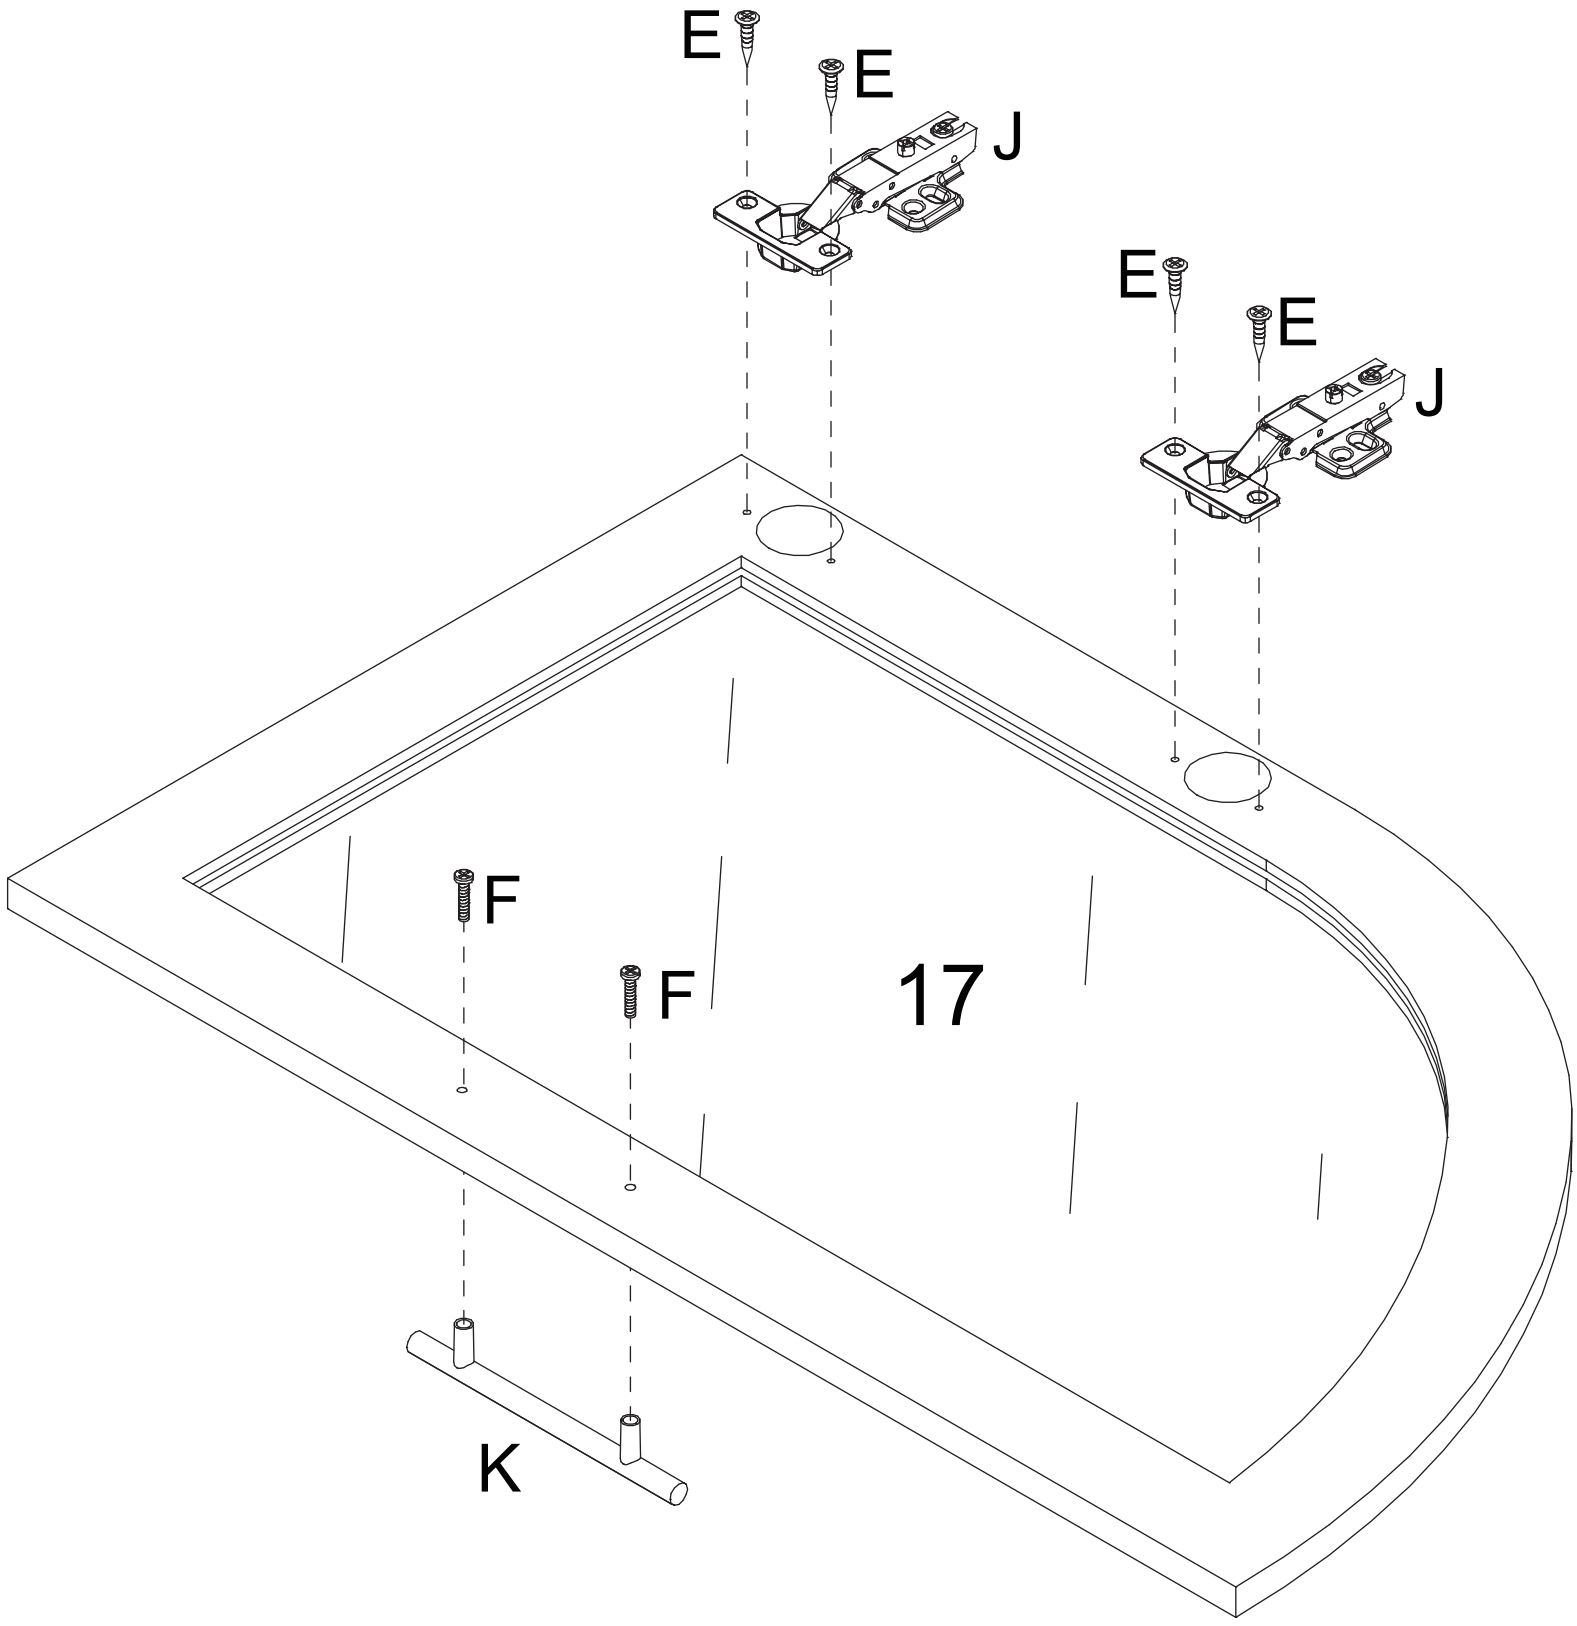



Assembly Instructions


31


A	B M15	D M5X40	E M4X12	G M6X30
				
6 PCS	6 PCS	6 PCS	4 PCS	2 PCS

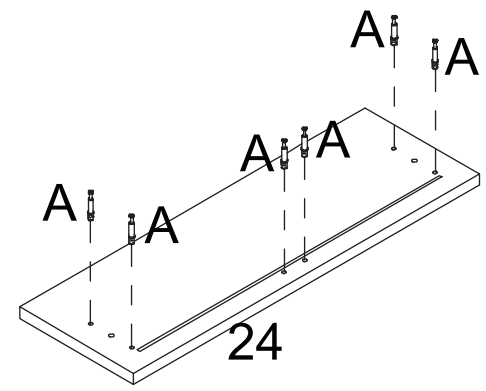


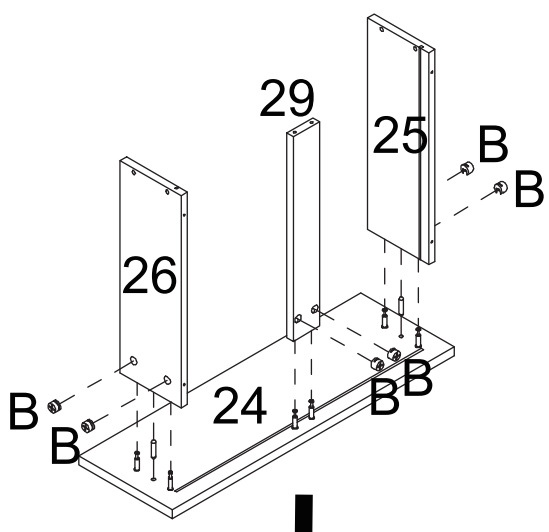


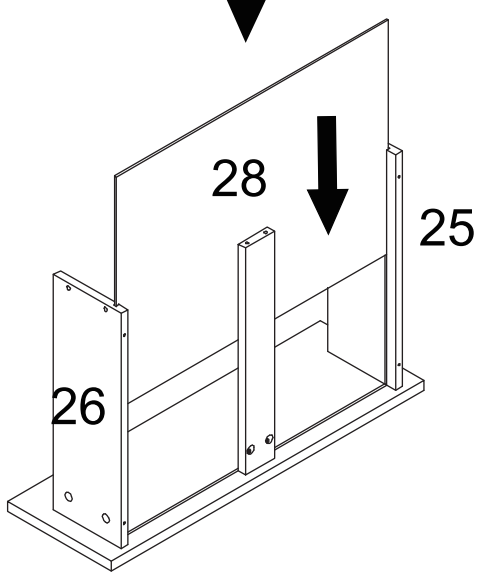


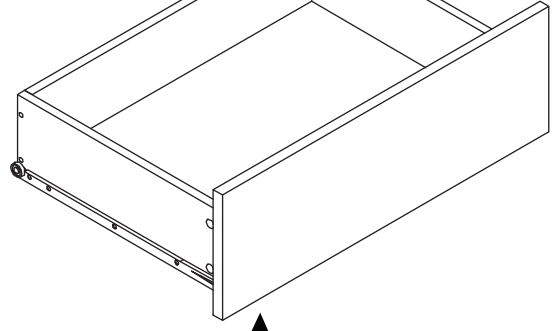


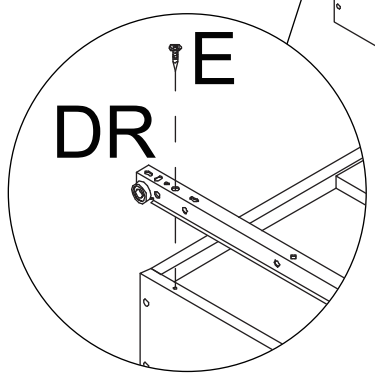

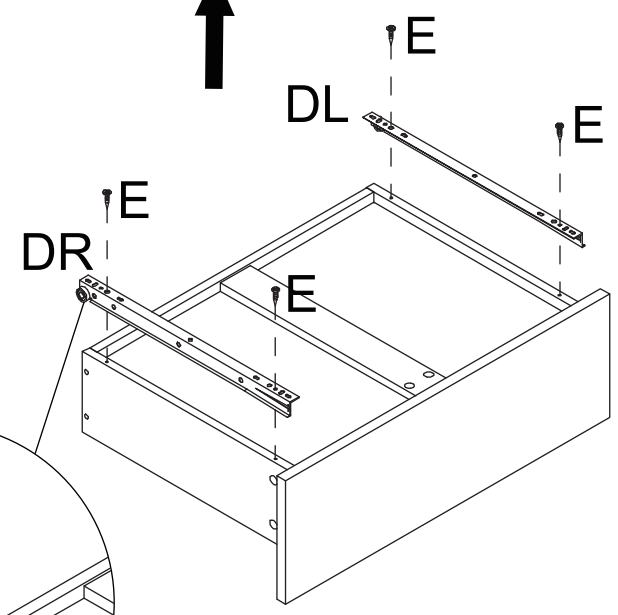

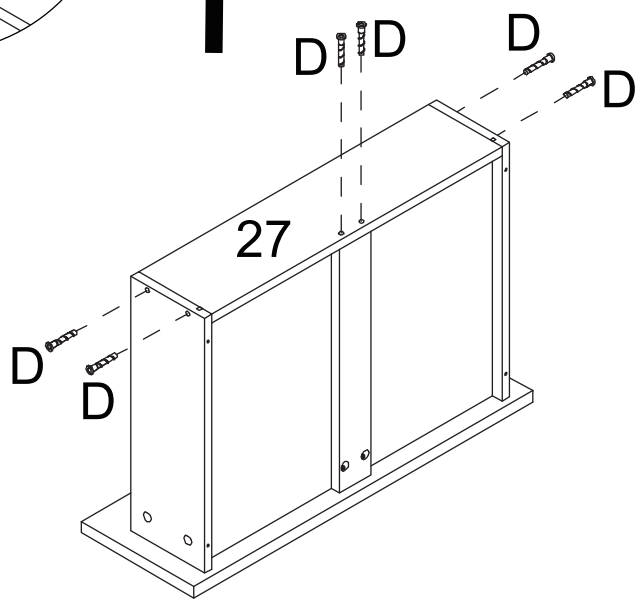

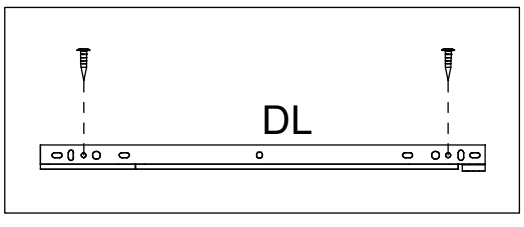

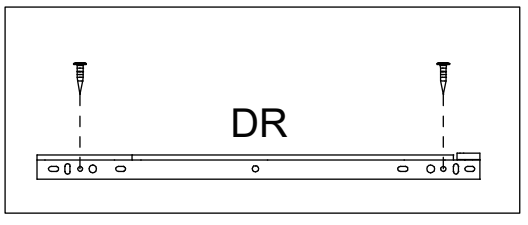


Assembly Instructions

32

E M4X12





40 PCS

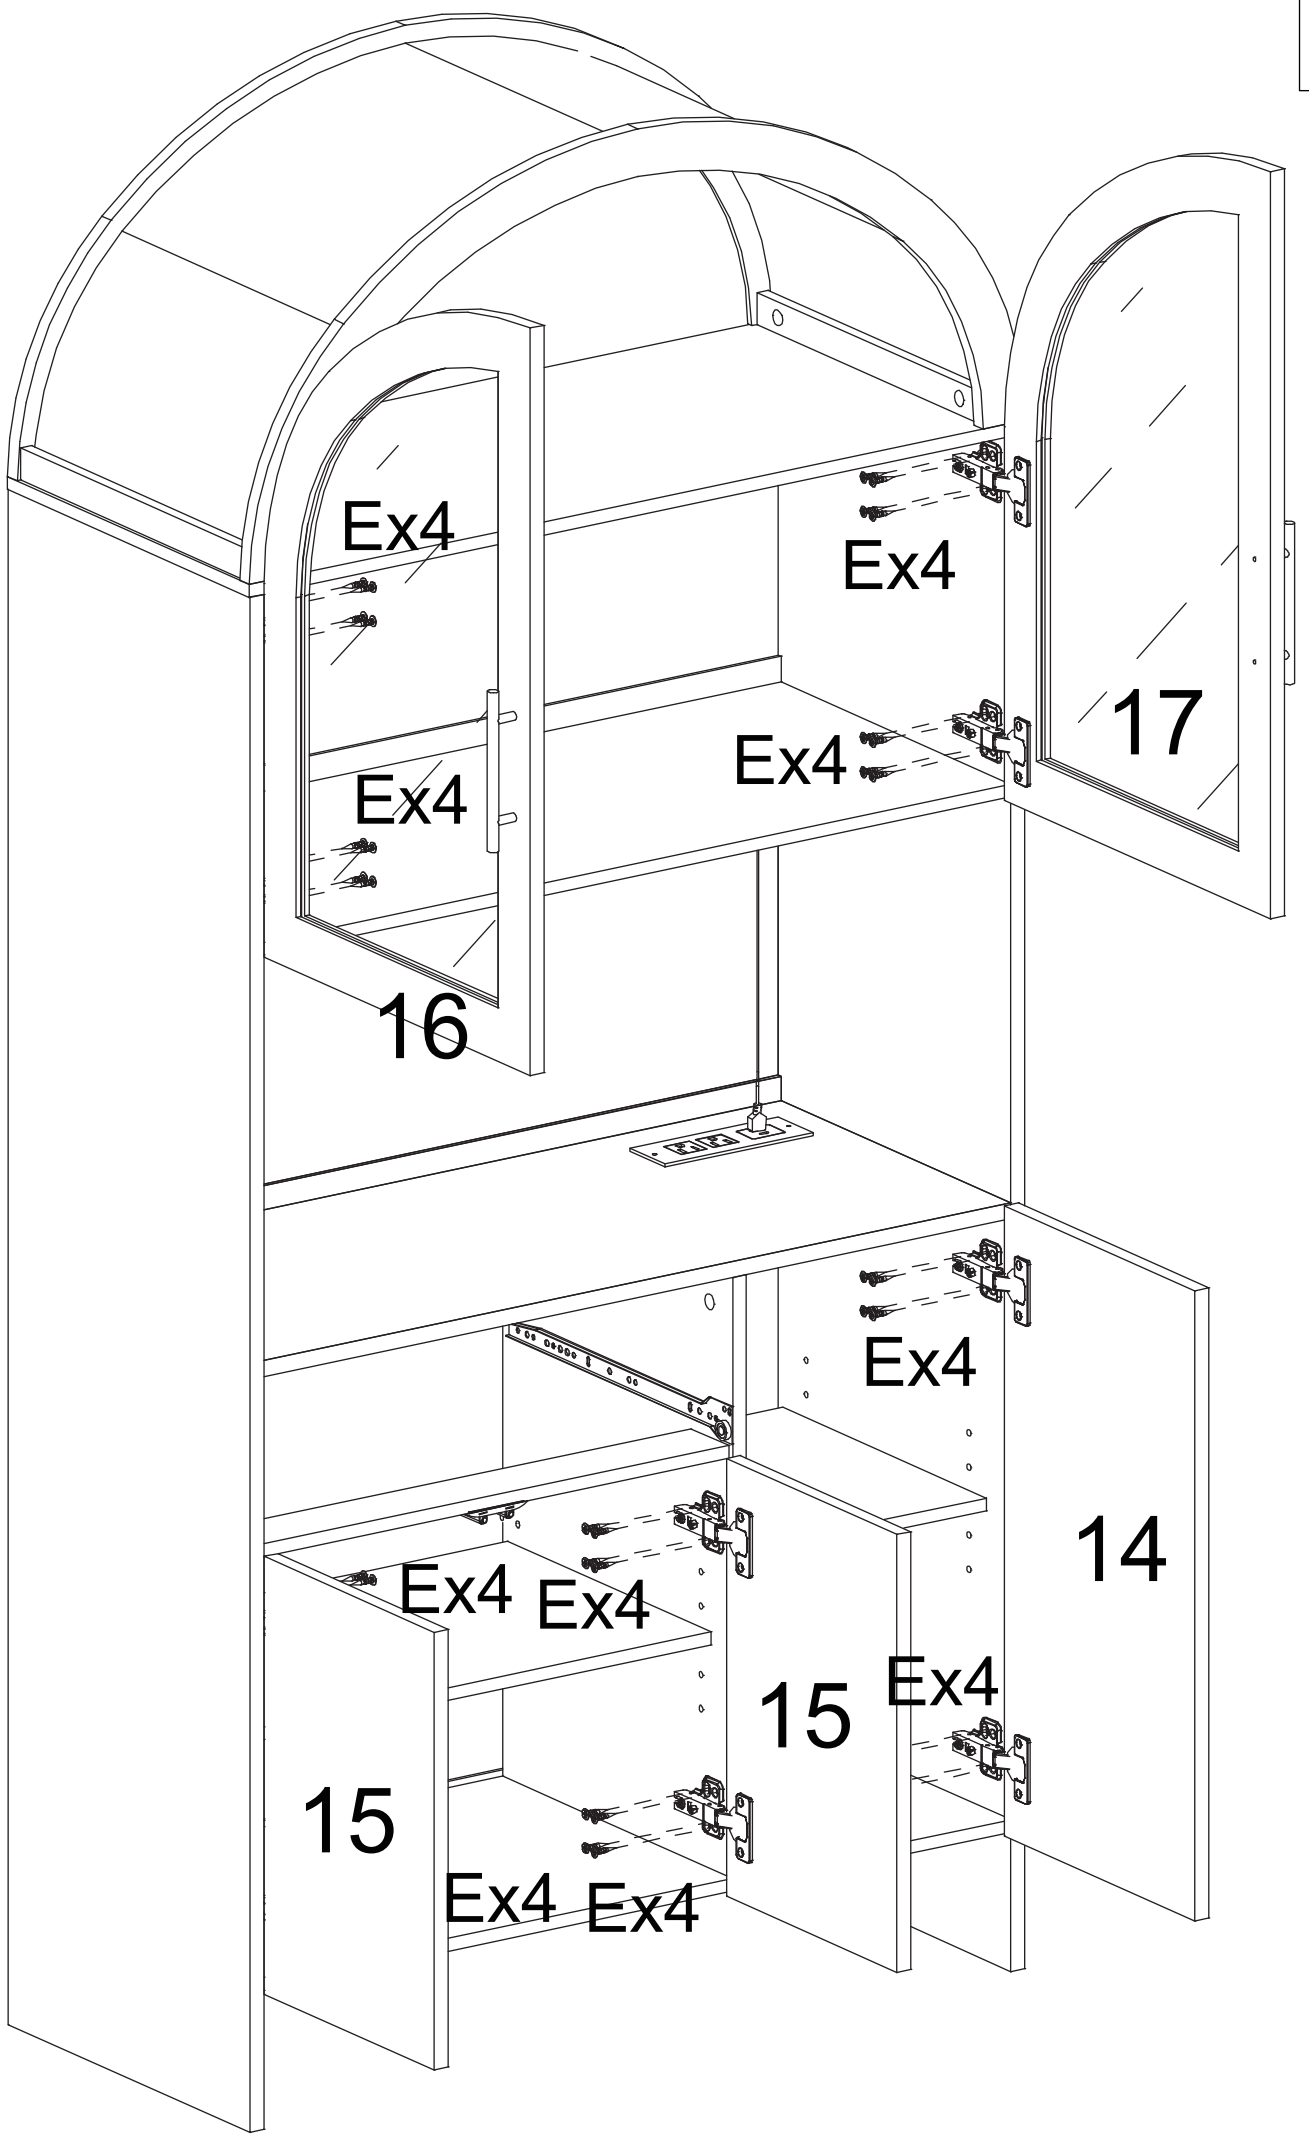


Assembly Instructions

33

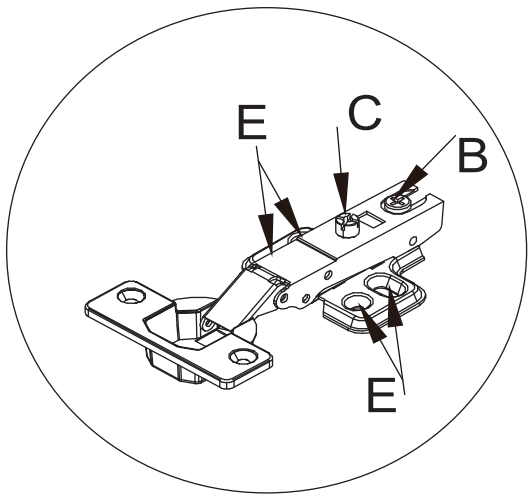


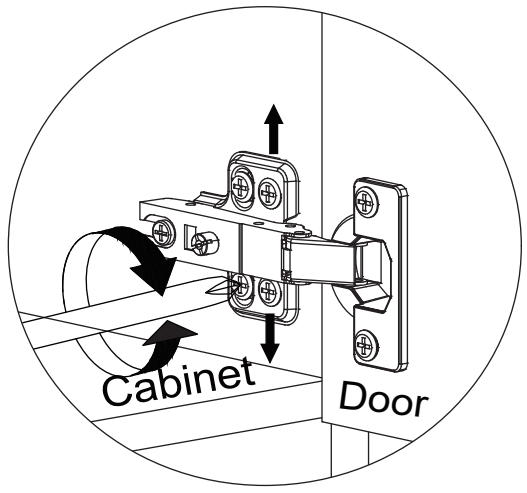

To adjust the vertical height.Loosen the four screws "E" on both hinges.Two of them are usually in slotted holes which allows you to adjust up or down by a few mm.Then tighten back up.

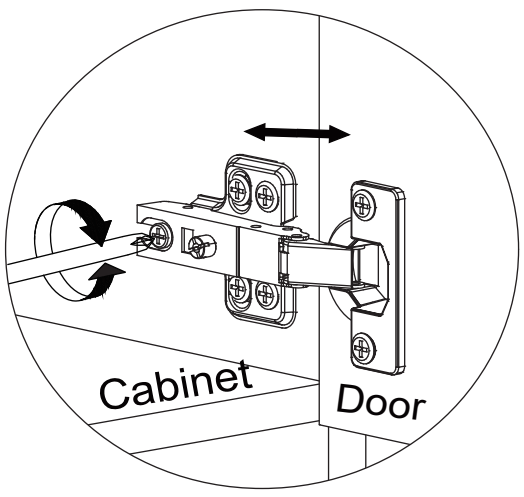

To adjust depth.Loosen screw "B" and adjust door, if the door cannot be adjusted, please loosen screw "C", then try again. Tighten screw "B" and "C".

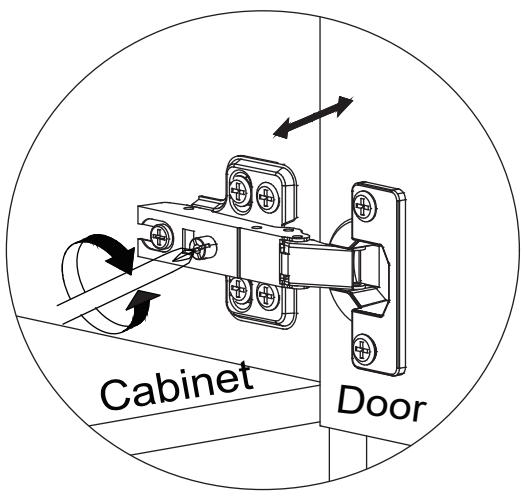



To adjust side ways.Turning the screw "C" on BOTH hinges on each door.


If the door is uneven (high or low), please adjust the hinges according to the instructions.
If the problem persists, please send photos of the product (including its appearance and hinge parts). We will provide you with more detailed and tar-geted guidance.

Assembly Instructions

34

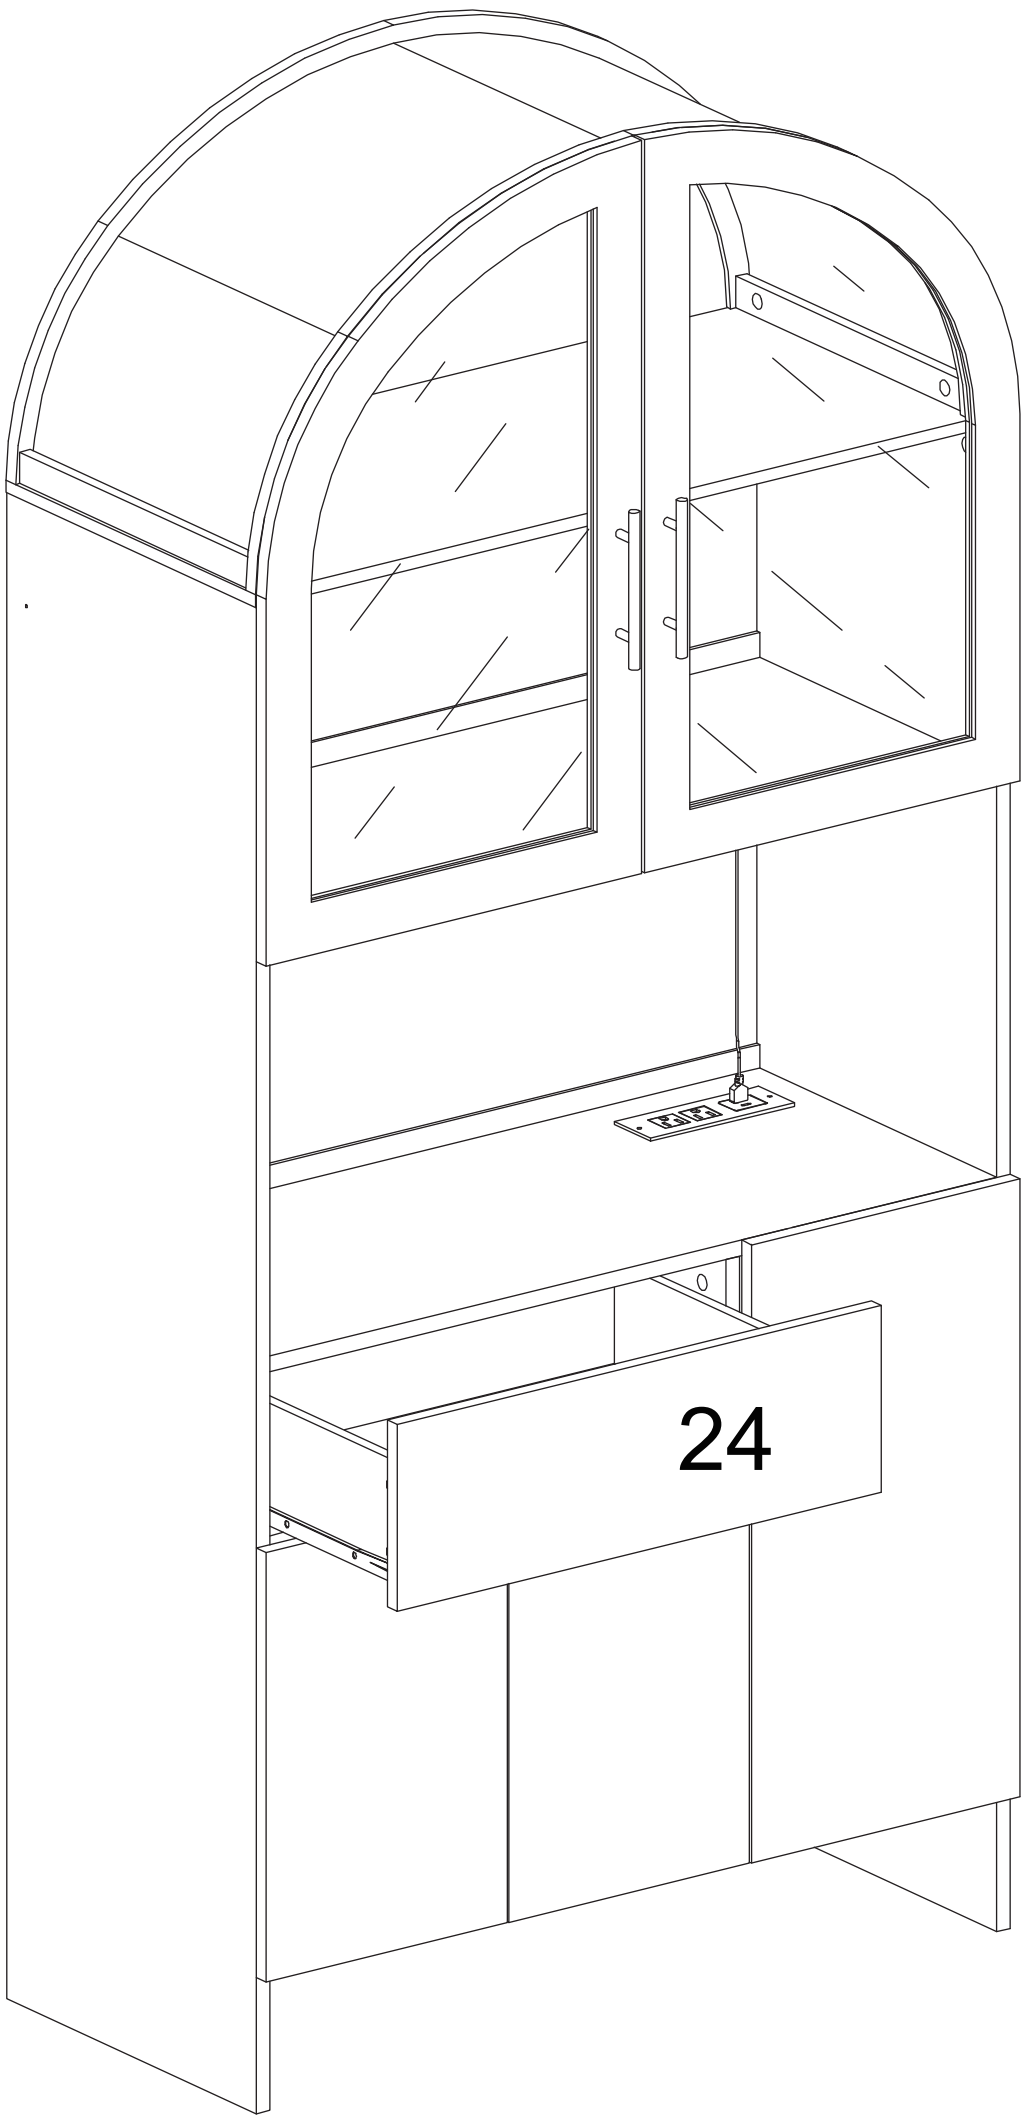

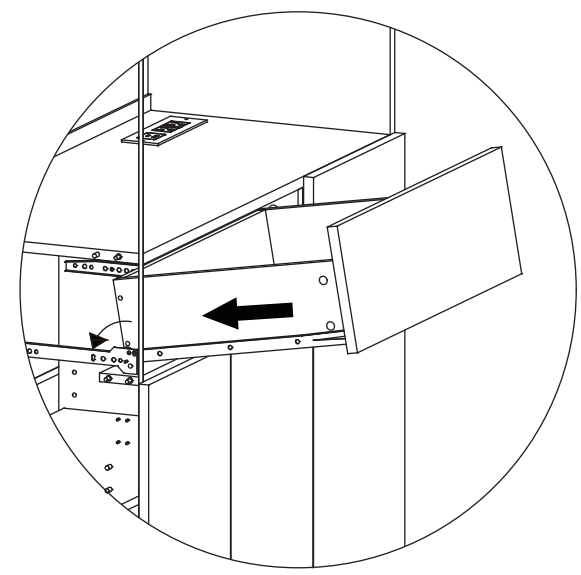

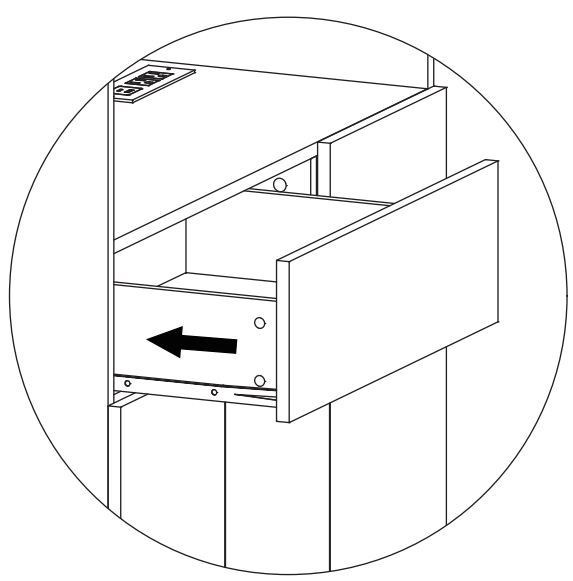

Assembly Instructions

35

P




X1



M3X12 X1


26 PCS

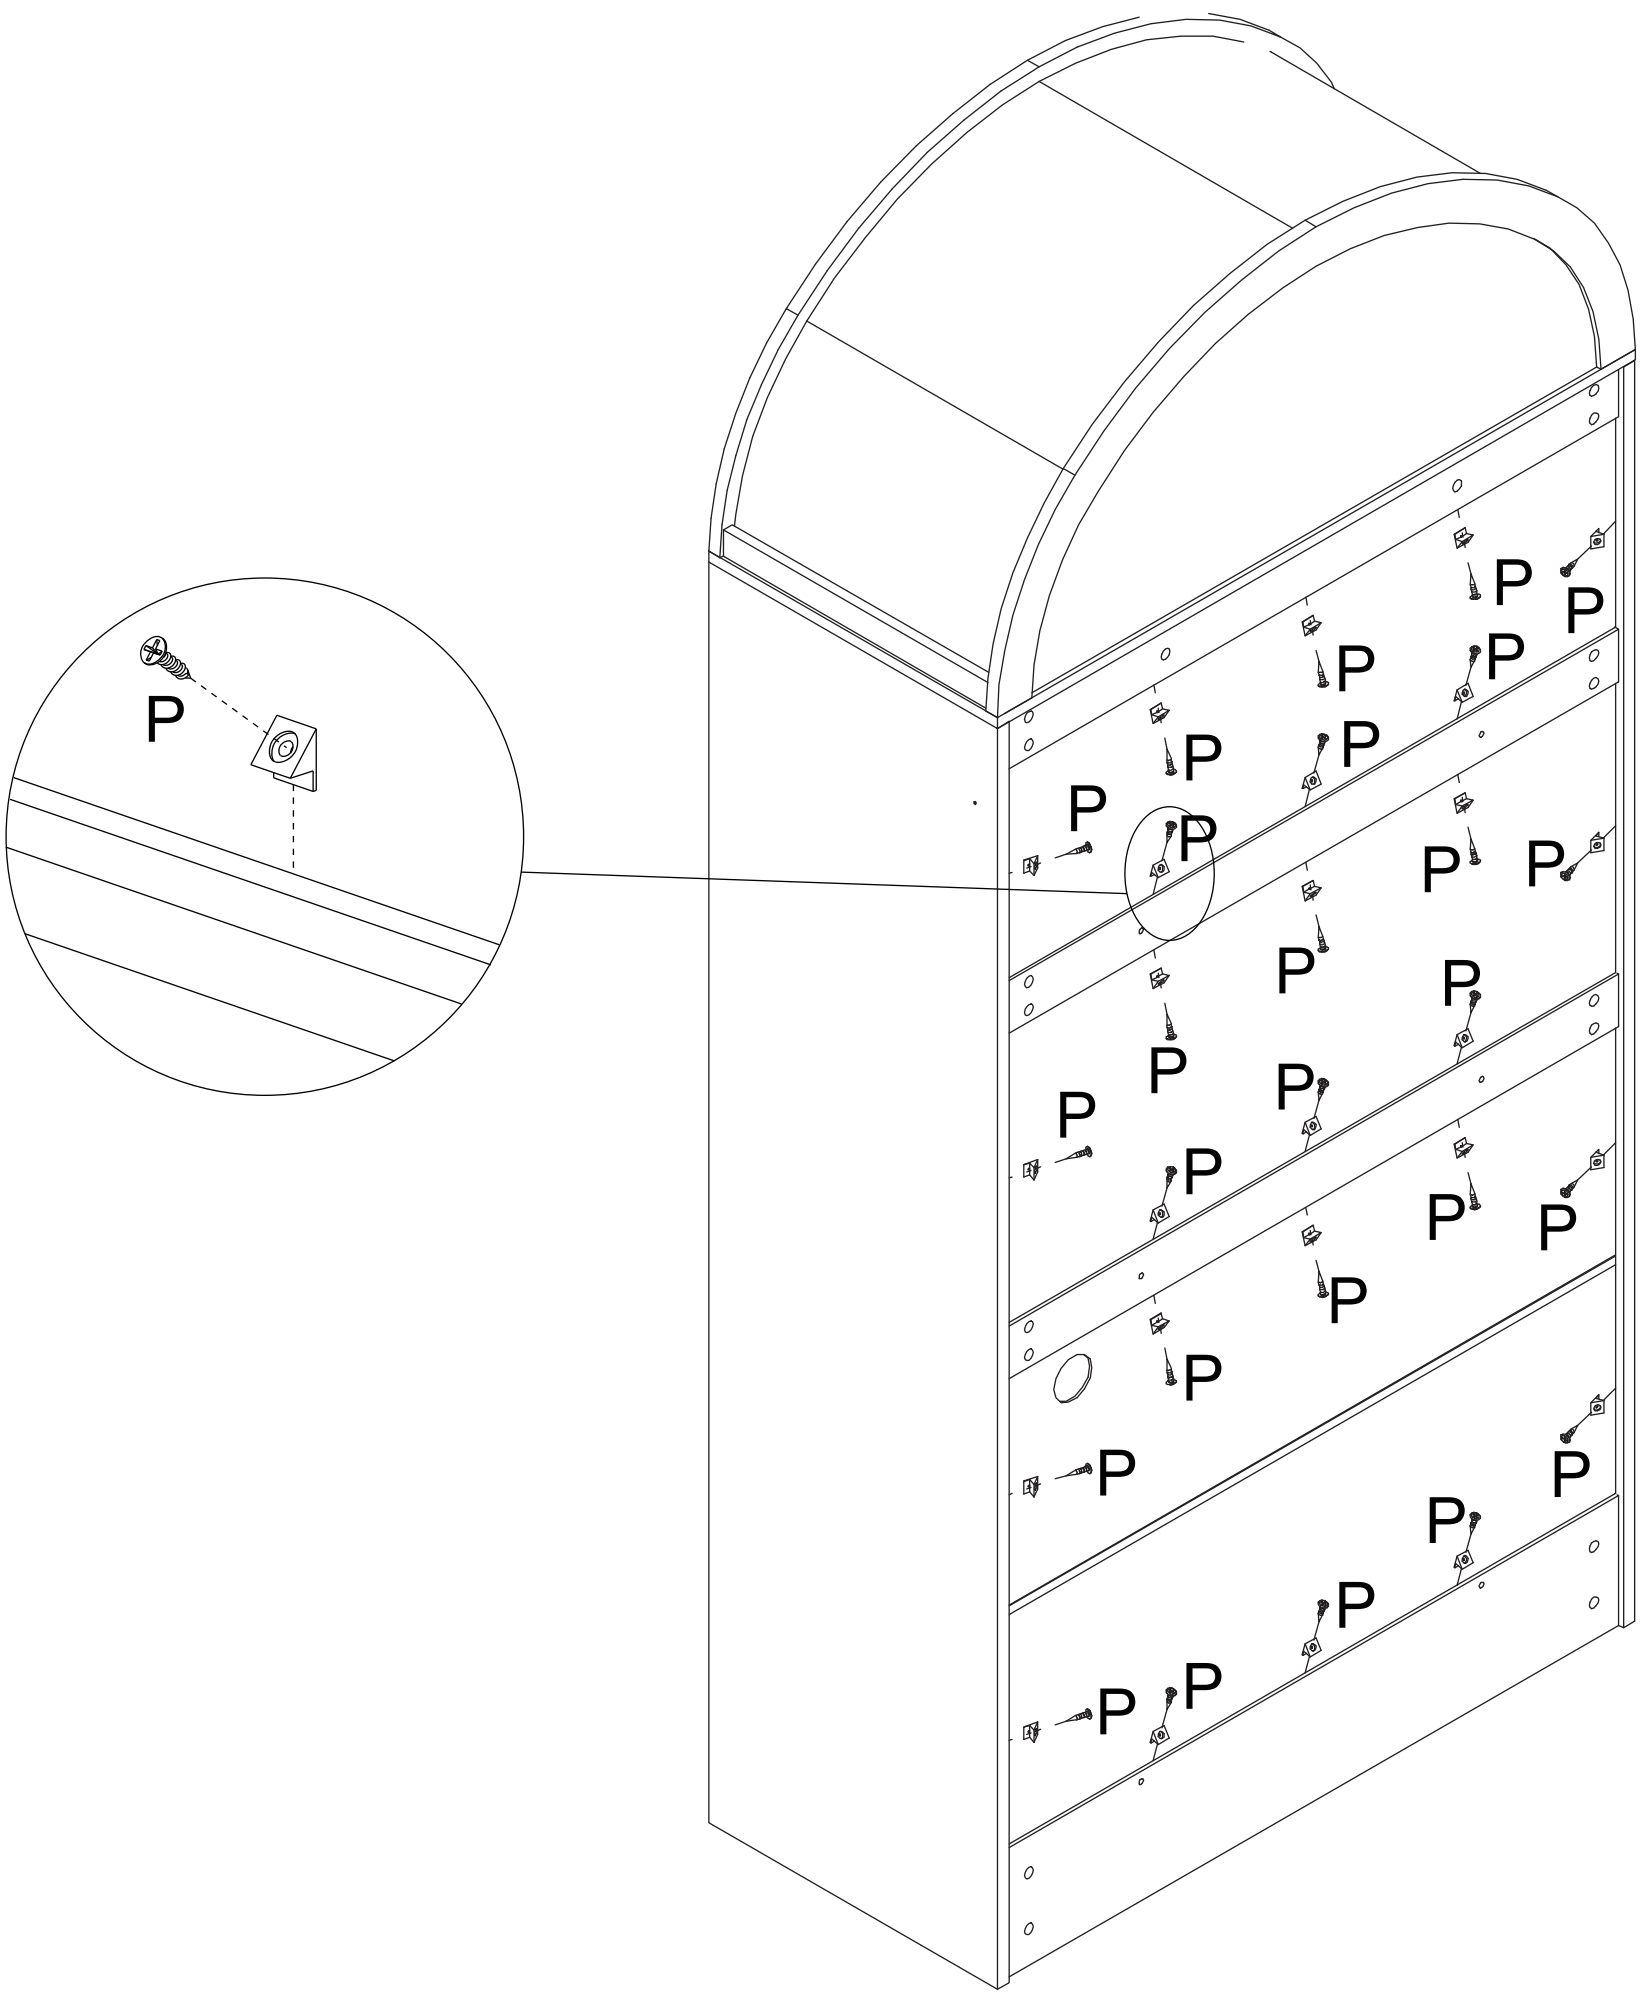
P
P
P


Assembly Instructions

36


1. Drill a hole in the solid wall (Wood wall or Concrete wall):
using a 0.41~0.43 inches (10.5~11mm) drill bit.

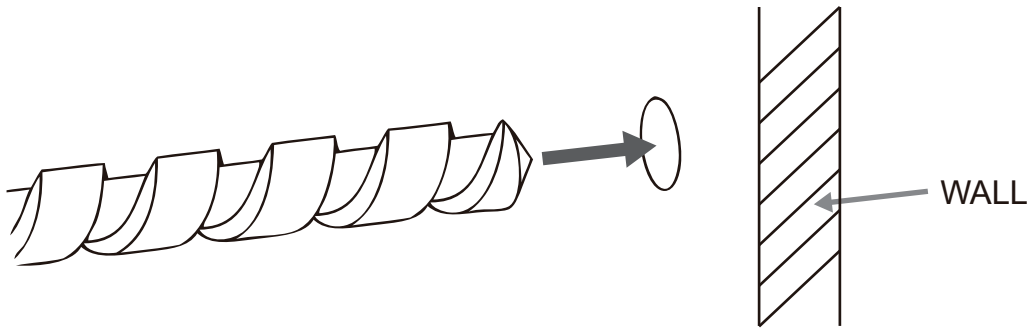


2.

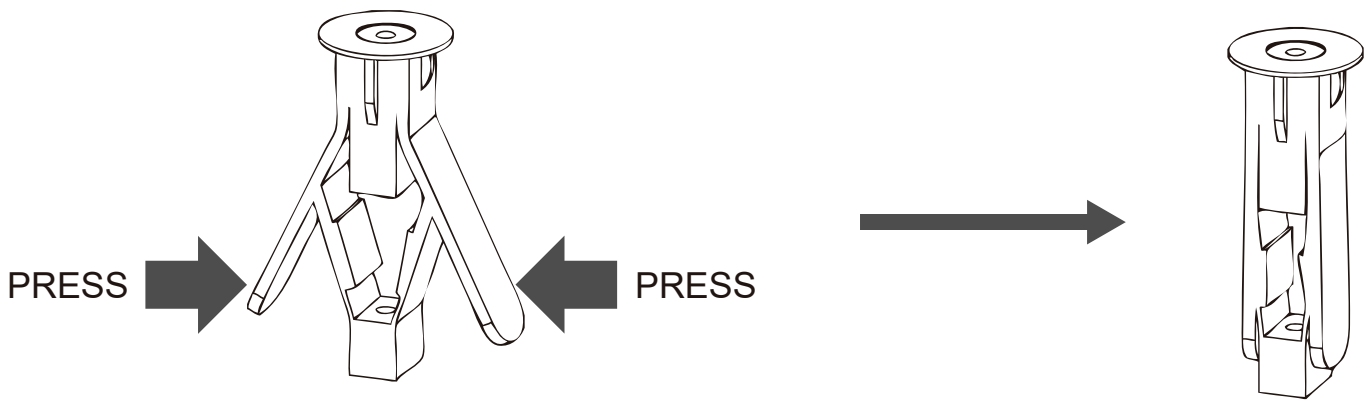

3.

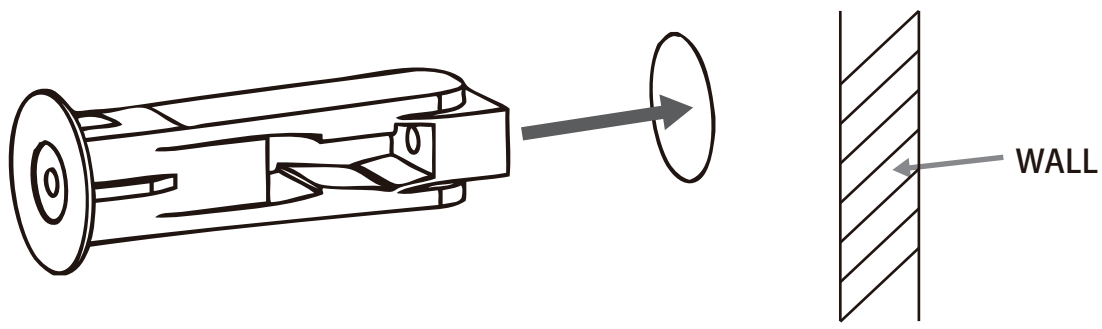


4.

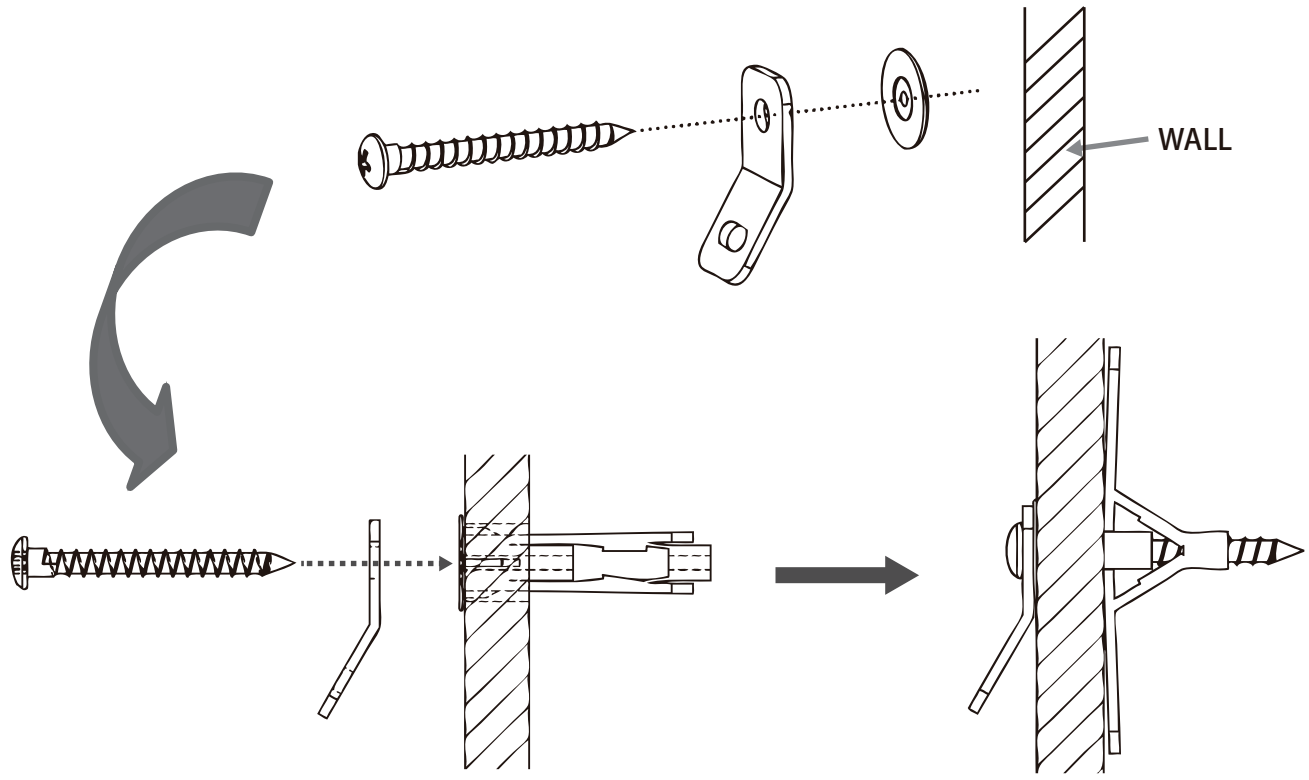


Assembly Instructions

37

5.

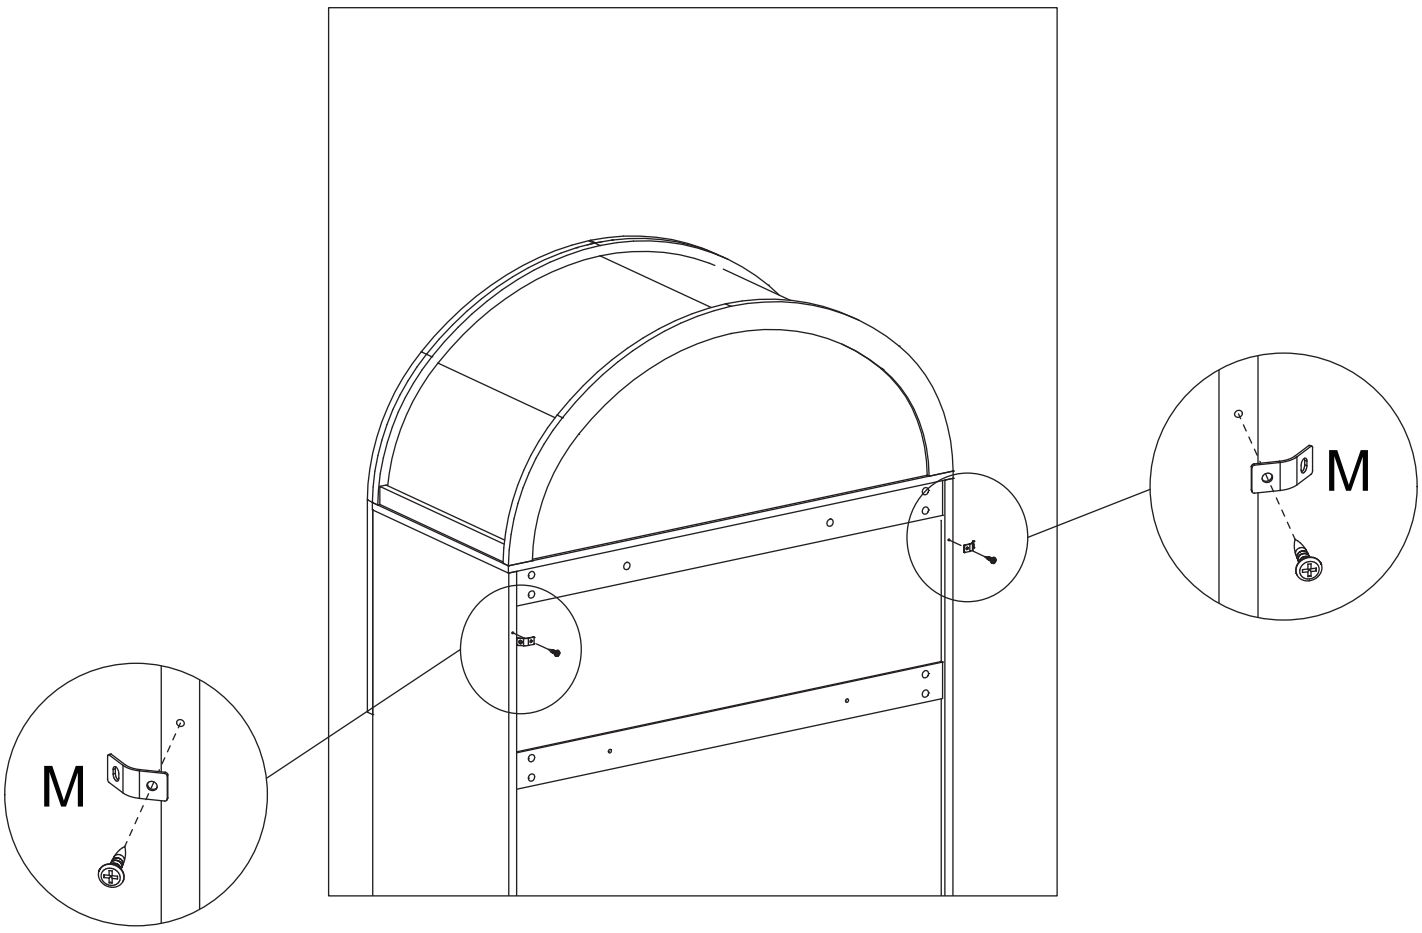

6.

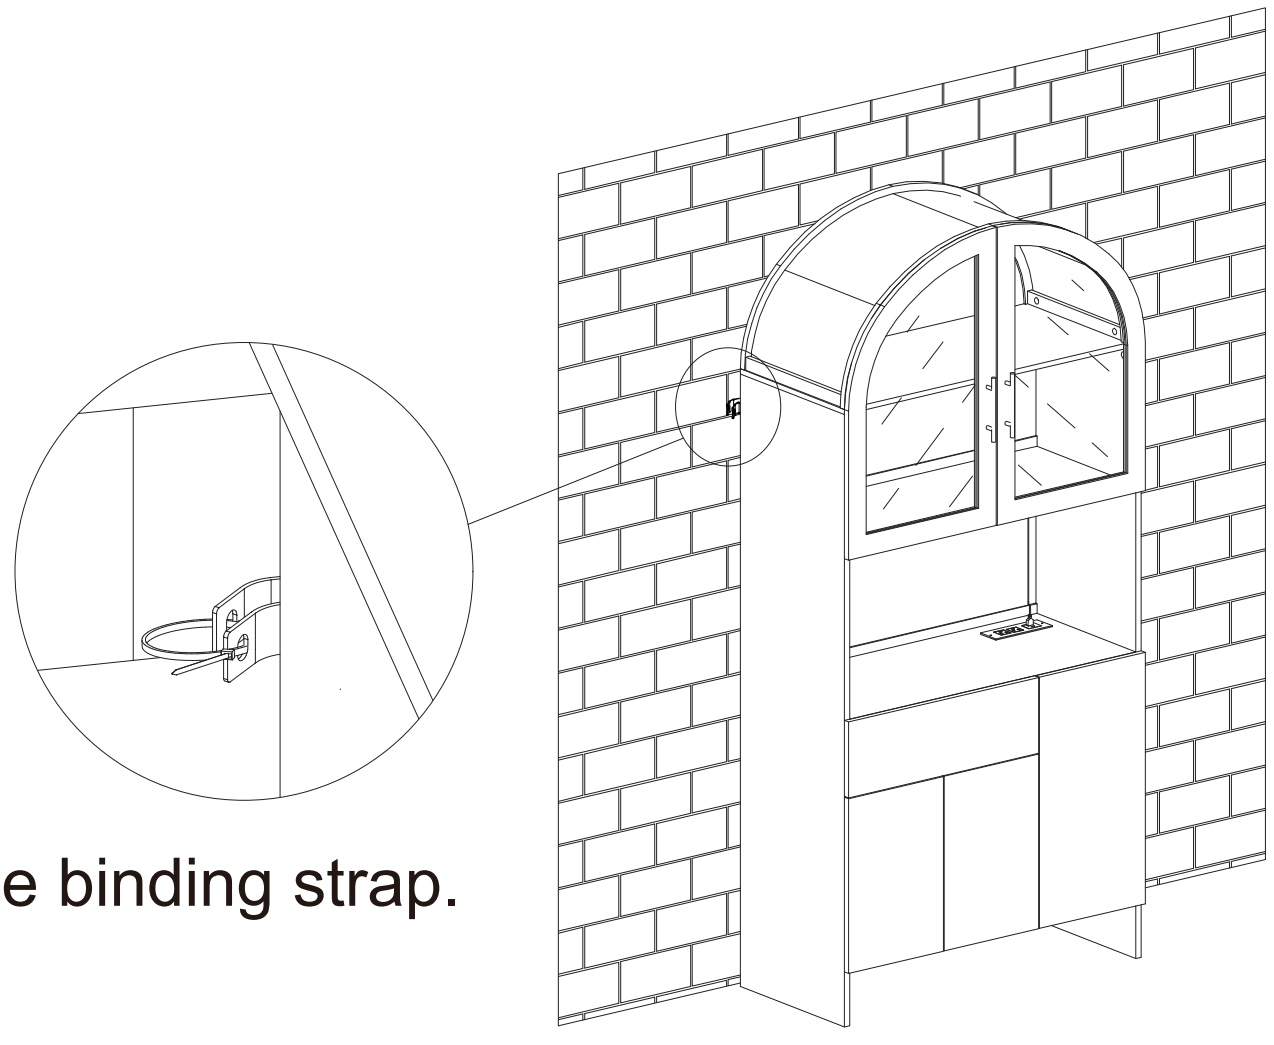

Tighten the binding strap.

Assembly Instructions

38



Drawer and right-side cabinet doors: Open by holding the edge of the door panel.

Two left-side cabinet doors: Open by pressing the corresponding position on the cabinet door (where the rebounder is located) from the front..