


IMPORTANT SAFETY INSTRUCTIONS

- To avoid injury or damage, mount only on a surface that is sturdy.
- To avoid electric shock, make sure electricity is turned off at the main circuit breaker panel. If you are replacing an existing fixture, turn off the following in order: fixture, wall switch, and main fuse or breaker box. Note: Some types of fuses must be unscrewed to shut the power off.



- Fixture can be mounted in up or down direction.
- **Unpack the Fixture:** Check the contents of the box. Box should contain all items below.

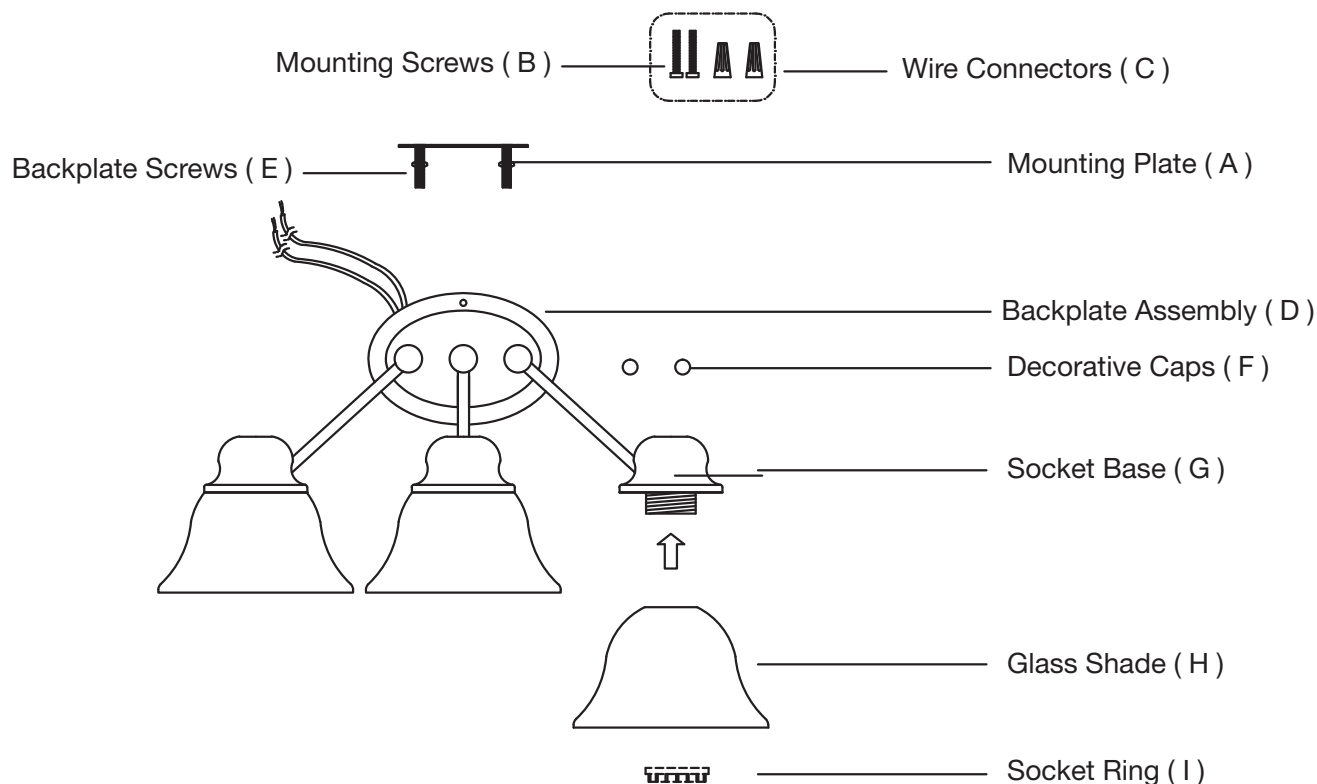

ASSEMBLY:

- 1 Secure Mounting Plate (A) to existing junction box using Mounting Screws (B) provided. Mounting Plate (A) should be positioned with Backplate Screws (E) pointing away from junction box.
- 2 Place Backplate Assembly (D) against the wall by inserting Backplate Screws (E) through the appropriate holes located on Backplate Assembly (D). Adjust Backplate Screws (E) and hex nuts until 1/4" of the threaded portion is visible. Remove Backplate Assembly (D) once Backplate Screws (E) have been adjusted.

- 3 Using the wire graph below, connect the appropriate wires with Wire Connectors (C) provided to the corresponding wires in the junction box.

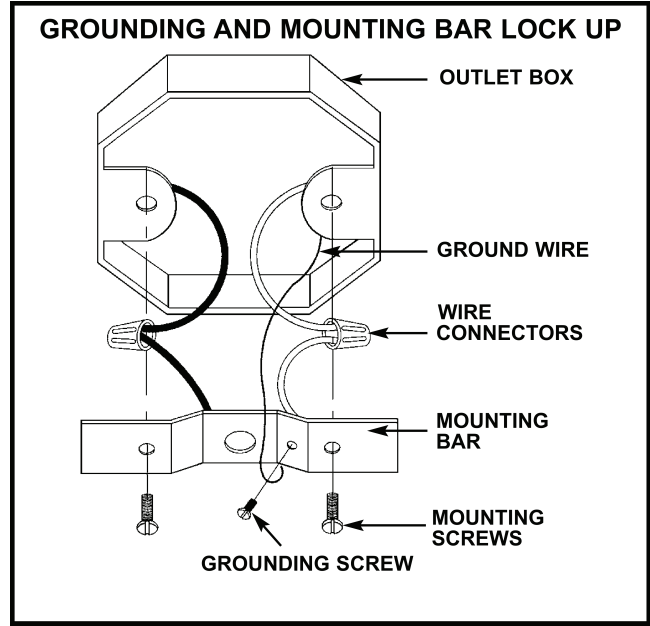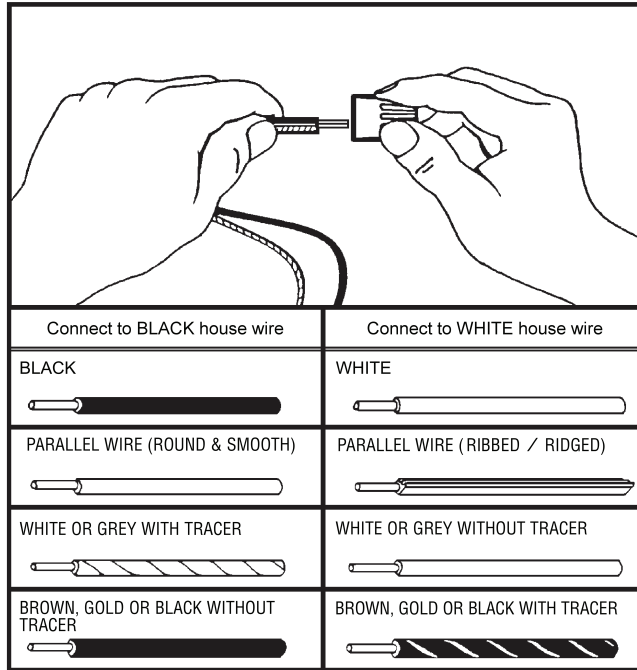

- 4 Secure Backplate Assembly (D) to Mounting Plate (A) using Decorative Caps (F).

- 5 Place Glass Shade (H) on Socket Base (G) and secure using Socket Rings (I).

- 6 Fasten bulb (not included) to Socket Base (G).

Enjoy your new fixture!