

WARNING (To reduce the risk of fire, electric shock, or injury to persons):


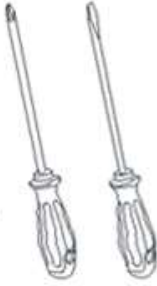



1. We suggest installation by a **licensed electrician**.
2. Please read the instruction carefully and save it as you may need it at later time.
3. Before you start, **NEVER** attempt any work without shutting off the electricity until the work is done. A). Go to the main fuse, or circuit breaker, box in your home. Place the main power switch in the “**OFF**” position. B). Place the wall switch in the “**OFF**” position.
4. Mounting surface should be clean, dry, flat, strong enough and 1/4” larger than the canopy on all side. Any gaps between the mounting surface and canopy exceeding 3/16” should be corrected as required.
5. Make sure that the ceiling or wall can stand the weight of the lamp before fixture.
6. Make sure the voltage you are using is **120V**. The maximum wattage is **60W** per bulb.
7. Keep the lamp away from acidic and basic objects in case of damaging the surface of the lamp.
8. When replacing bulb, you should turn off or unplug the lamp and you must wait until it is cool as bulbs get hot quickly.
9. The safety instructions appearing in this manual are not meant to cover all possible conditions that may occur. It must be understood that common sense, caution and care must be used with any electrical products.

IMAGE FOR FINISHED PRODUCT:

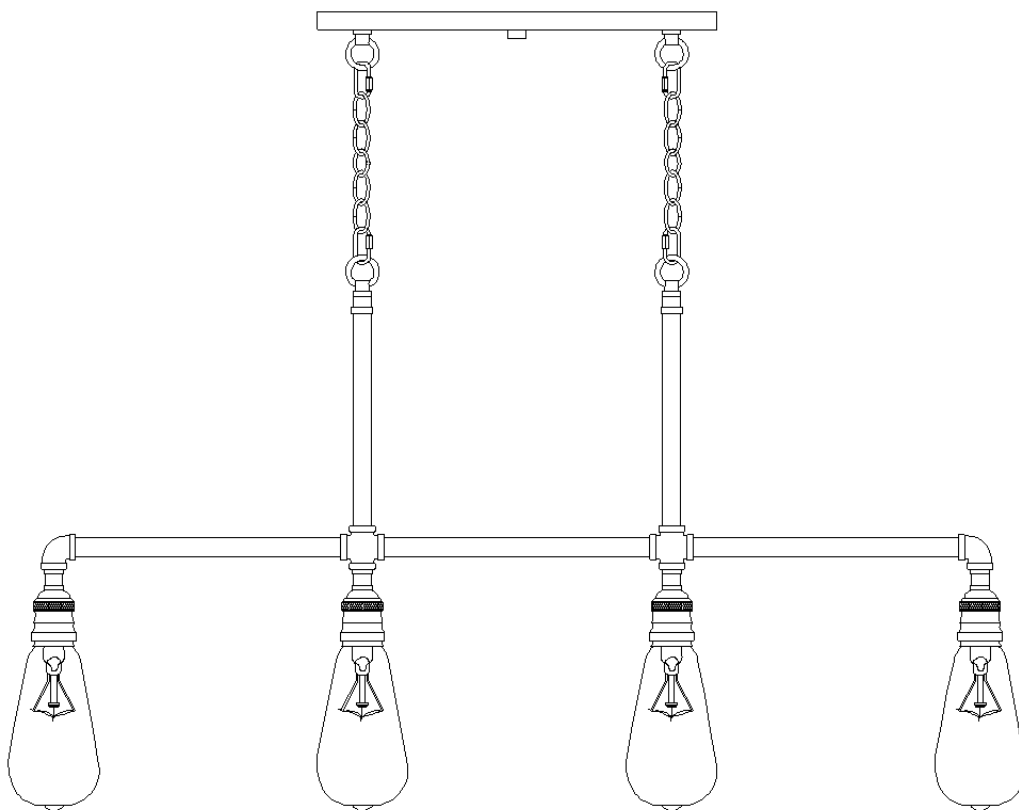

TOOLS REQUIRED (NOT INCLUDED):

Before doing assembly and installation please prepare the needed tools as below picture


				
Ladder	Phillips head, flat blade screwdriver	Electrical tape	Pliers	Wire cutter/Stripper

PARTS INCLUDING:

- (B) Single bar (1)
- (C) Green ground screw (1)
- (D) Nipple (1)
- (F) Canopy (1)
- (H) Hex nut (3)
- (I) Quick link (4)
- (J) Finial (1)
- (K) Chain (2)
- (L) Tube (2)
- (M) Fixture body (1)

ACCESSORIES ENCLOSED:


- (A) Plastic wire connector (3)
- (E) Mounting screw (2)

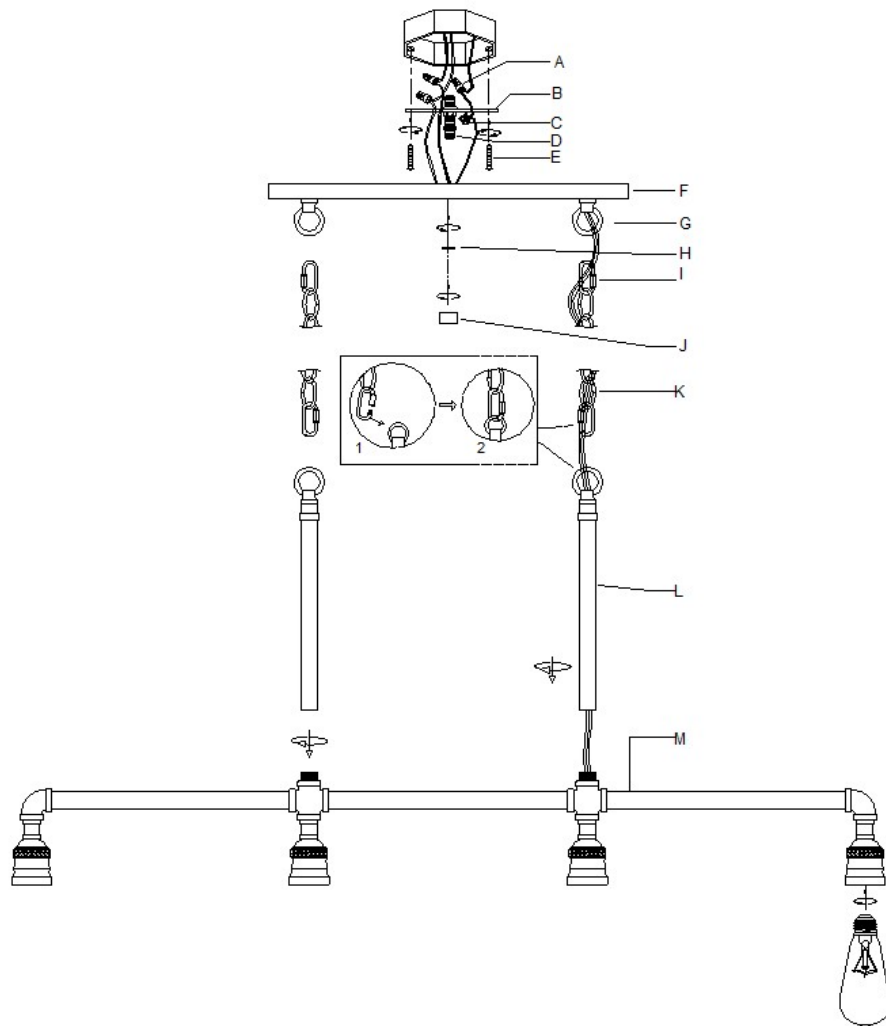

ASSEMBLY & INSTALLATION INSTRUCTIONS:

1. Carefully remove the fixture from the carton and check that all parts and accessories are included as shown in the above illustration .
2. Make assembly

If the group of parts are not already assembled:

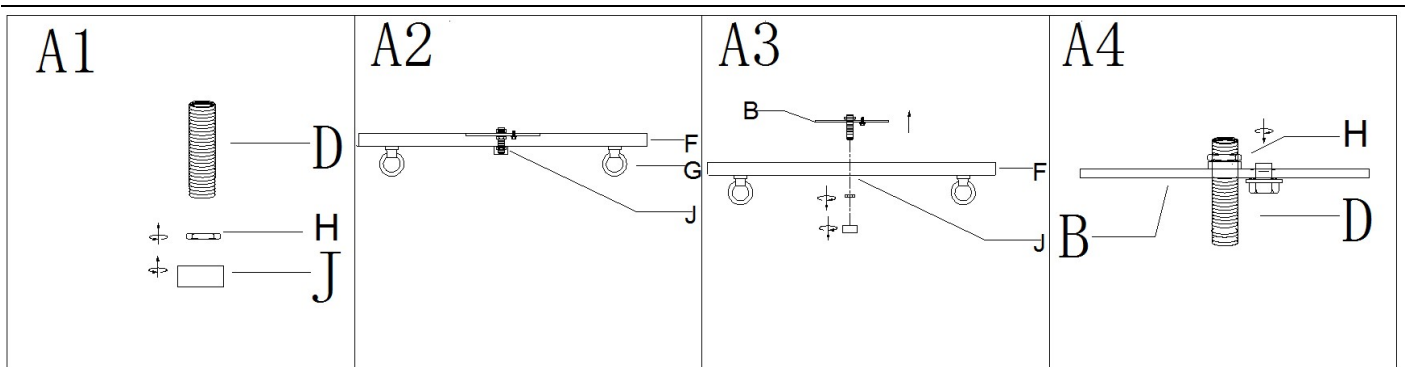

Step A1: Thread hex nut (H), finial (J) onto the nipple (D) until snug.

Step A2: 1) Insert nipple (D) into hole in canopy (F).

2) Thread single bar (B) over the nipple (D) to be level with the top of canopy (F) and then place and screw the hex nut (H) until snug. At this point, the side of single bar marked "GND" must face to the finial (J).

3) Unscrew finial (J) and hex nut (H) from canopy (F) then remove the single bar (B).


4) Attach hex nut (H) onto the nipple (D) to secure single bar (B) in place.

3. Turn off power

Before you start to make installation, NEVER attempt any work without shutting off the electricity until the work is done. A) Go to the main fuse, or circuit breaker, box in your home. Place the main power switch in the "OFF" position.

B) Place the wall switch in the "OFF" position.

4. Make installation

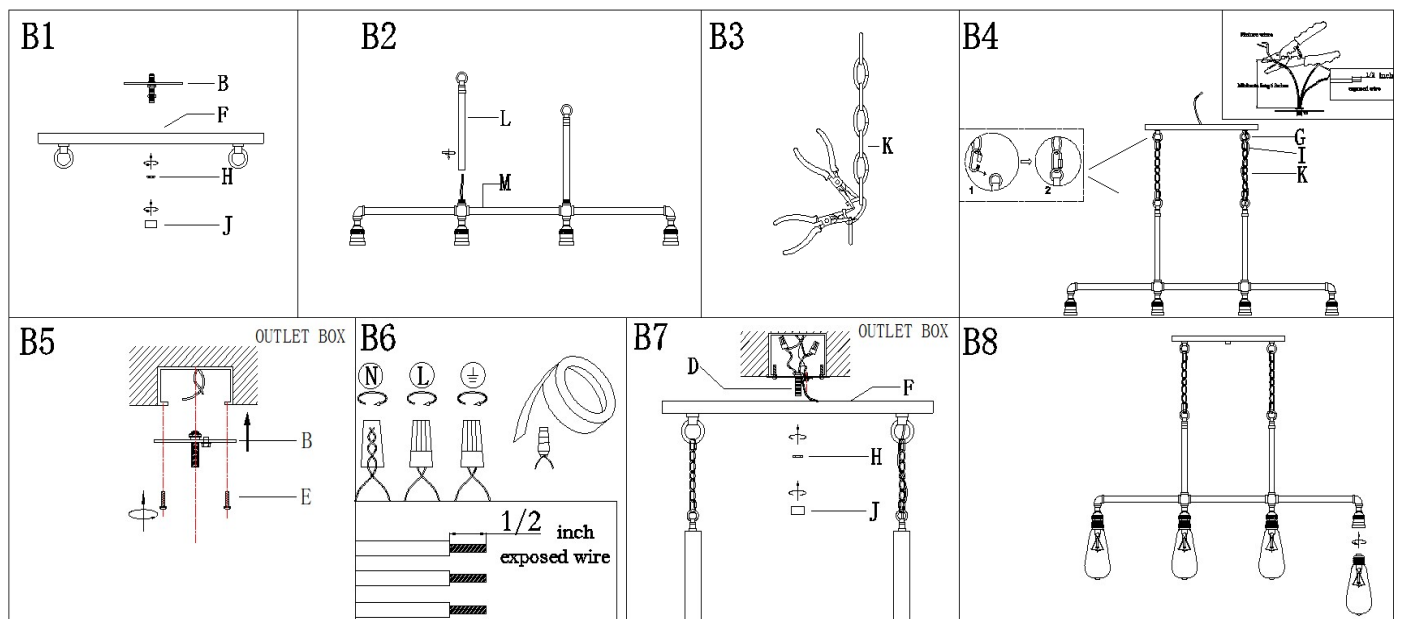

Step B1: Unscrew finial (J), hex nut (H) from canopy (F) then gently remove single bar group

Step B2: Slip tube (L) over the wires and thread tube (L) onto the fixture body (M).

Step B3: By measuring, determine the correct number of links needed for proper hanging height. Using the chain pliers, disconnect and discard the remaining chain.

Step B4: 1). Attach a quick link (I) to loop (G) on the top of tube (L) and to connect the end of chain (K).

2). Attach a quick link (I) to loop (G) on the bottom of canopy (F) and to connect the end of chain (K).


3). If needed, cut off the wires length of fixture. At this point, the remaining wire length measured from the top of single bar (A) is at least 6".

Step B5: Attach single bar (B) to outlet box with mounting screws (E)

Step B6: Make wire connections

Connect wires as below wires connecting shown. **TAKE NOTE OF YOUR WIRE COLOR OF FIXTURE ,NEVER CONNECT WIRE TO GROUND WIRE**


Connect ground wire according to below chart

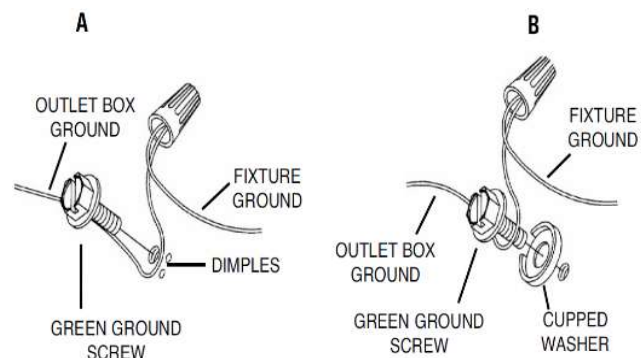

Connect wires according to below chart

Connect Black or Red Supply Wire to:	Connect White Supply Wire to:
Black	White
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear, Brown, Gold or Black without tracer	Clear, Brown, Gold or Black with tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor

*Note: When parallel wires (SPT I & SPT II) are used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth (see illus.)



Twist plastic wire connector until wires are tightly joined together,wrap each connector with approved electrical tape.Be sure that no wire strands are exposed and then carefully tuck all wires into the outlet box .

Step B7: Raise canopy (F) to ceiling and secure canopy (F) in place by tightening hex nut (H)and finial (J) onto nipple (D)

Step B8: Install bulb (Not included). Please do not exceed the maximum wattage capacity recommended on the socket.

4. Check everything installed proper, then you could turn on the light. Enjoy!

CLEANING

To clean, wipe fixture with a soft cloth. Do not use abrasive materials such as scouring pads or powders, steel wool or abrasive paper.

ORDERING PARTS

Keep this sheet for future reference, and in case you need to order replacement parts. All parts for this fixture can be ordered from place of purchase. Be sure to use exact wording from illustration when ordering parts.