


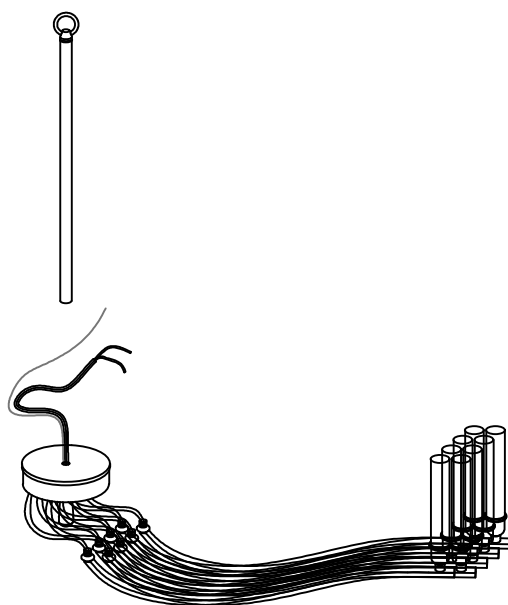


Parts

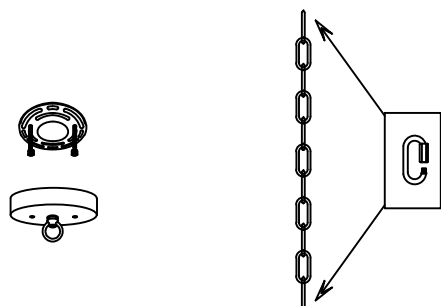


Steps 1

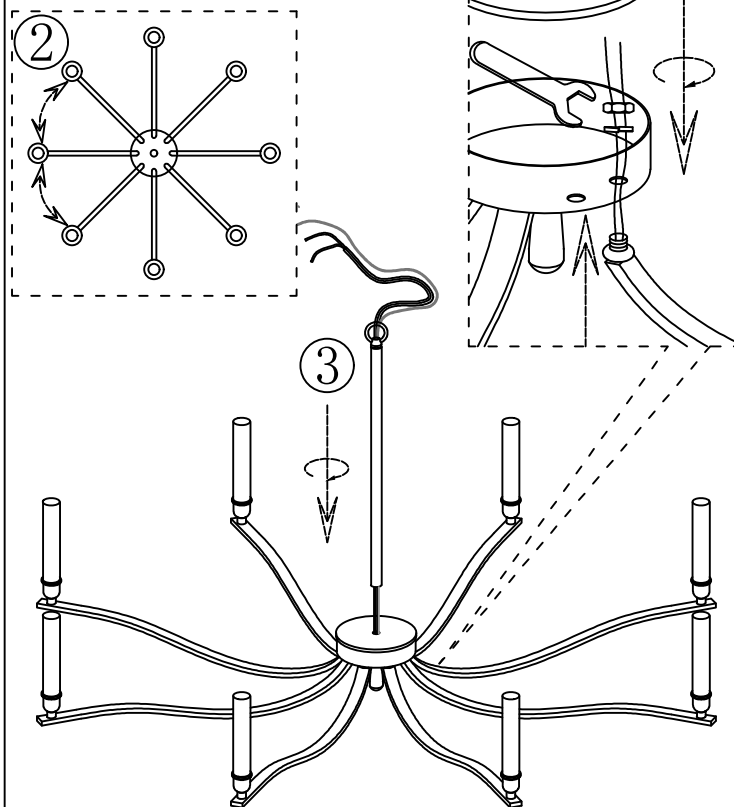

1. As shown in the figure, remove the cover plate, Install the 8 lamp arms onto the base plate and secure them with nuts, Then replace the cover plate.
2. Adjust the lamp arm to 8 equal parts as shown in the figure.
3. As shown in the figure, pass the main wire of the lamp body through the suspension rod, and then assemble them together.

Steps 2

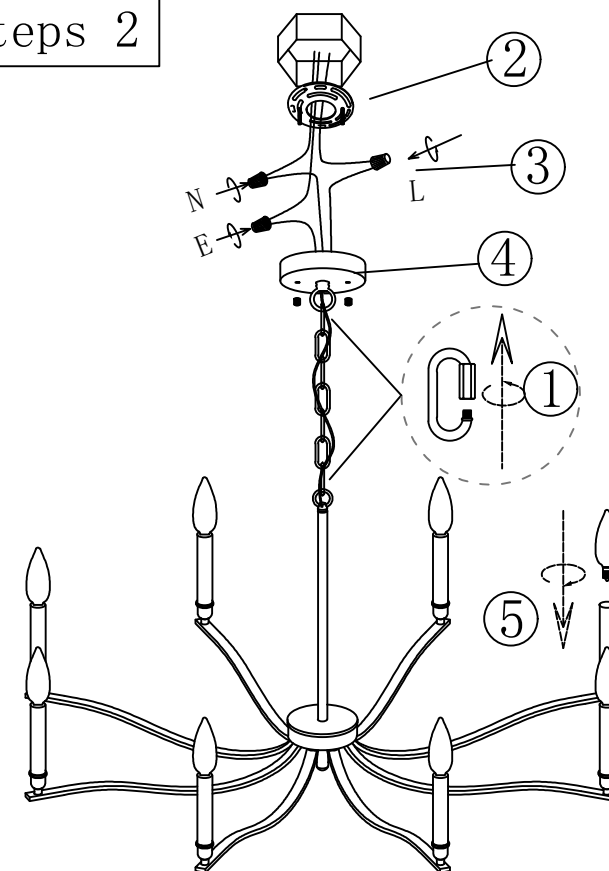

1. Unscrew the lock on the sling (as shown in the picture), connect the lamp with the sling through the lock, and then tighten the lock. Pass the power cord through the sling as shown. (Install the hanging rod according to the length of the hanging rod you need)
2. Assembled the mounting bracket to the ceiling junction box with the screw.
3. Connect the power cord out from the ceiling junction to lamp wires with the lead wire and wire nut. According wire color to connect. (black for "L", white for "N", copper wire for "Ground E")
4. Assemble the canopy to the mounting bracket by tightening the ball nuts.
5. Install the bulb. Bulbs need to be purchased separately.