


Features

- *ExoCrylic™*
- *Drop-in installation*
- *Pump with air switch and grounding-type plug-in cord*
- *Six individually adjustable ProFlex® hydro-massage jets*
- *Molded lumbar support and armrests for comfort*
- *Left or right drain*
- *Optional K-1283 removable apron*
- *Optional K-9696 whirlpool trim kit in additional finishes*
- *Tile flange on three sides for alcove installation [K-1157-L/-R]*
- *72" (1829 mm) x 36" (914 mm) x 20-1/8" (511 mm)*

WHIRLPOOL BATH

K-1157

ALSO K-1157-L, K-1157-R

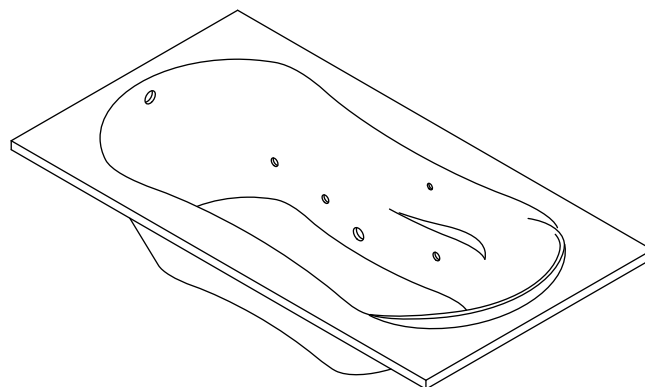

Codes/Standards Applicable

Specified model meets or exceeds the following:

- *ASME A112.19.7/CSA B45.10*
- *CSA B45.5/IAPMO Z124*
- *UL 1795*

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- 0: White
- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-1157	Whirlpool bath – drop-in (shown)	☐ 0	☐ Other_____
K-1157-L	Whirlpool bath – left drain, tile flange	☐ 0	☐ Other_____
K-1157-R	Whirlpool bath – right drain, tile flange	☐ 0	☐ Other_____
Recommended Accessories			
K-11677	Adjustable trip lever bath drain	☐ CP	☐ PB
Optional Accessories			
K-1283	Removable apron	☐ 0	☐ Other_____

Product Specification

The ExoCrylic whirlpool bath shall be 72" (1829 mm) in length, 36" (914 mm) in width, and 20-1/8" (511 mm) in height. Whirlpool shall be drop-in [K-1157] or tile flange on three sides for alcove installation with a left or right drain [K-1157-L/-R]. Whirlpool shall have six individually adjustable ProFlex hydro-massage jets, and pump with air switch and grounding-type plug-in cord. Whirlpool shall have molded lumbar support and armrests for comfort. Whirlpool shall feature optional K-1283 removable apron and K-9696 whirlpool trim kit in additional finishes. Whirlpool bath shall be Kohler Model K-1157-_____- or K-1157-_____-_____.

PROFLEX® 7236

Optional Accessories

K-9696 Jet trim kit (metal finishes)

☐ CP

☐ PB

☐ Other_____

Technical Information

Fixture*:			
Bathing well:			
Basin area, bottom	55" (1397 mm) x 21" (533 mm)		
Basin area, top	65" (1651 mm) x 26" (660 mm)		
Weight	66 lbs (29.9 kg)		
To overflow:			
Water depth	15" (381 mm)		
Capacity	72 gal (272.5 L)		
* Approximate measurements for comparison only.			
Drop-in cutout	70-1/2" (1791 mm) x 34-1/2" (876 mm)		
Pump:	V	Hz	A
1-speed	120	60	7.5

Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI):

Pump/control 120 V, 15 A, 60 Hz

Locate the outlet behind the whirlpool and within 24" (610 mm) of the pump.


Installation Notes

Install this product according to the installation guide.

Floor support under whirlpool must provide for a minimum of 38 lbs/square foot (188 kg/square meter) loading.

The apron must be installed before the finished floor and wall materials are installed.

No change in measurements if connected with drain illustrated. (K-11677)

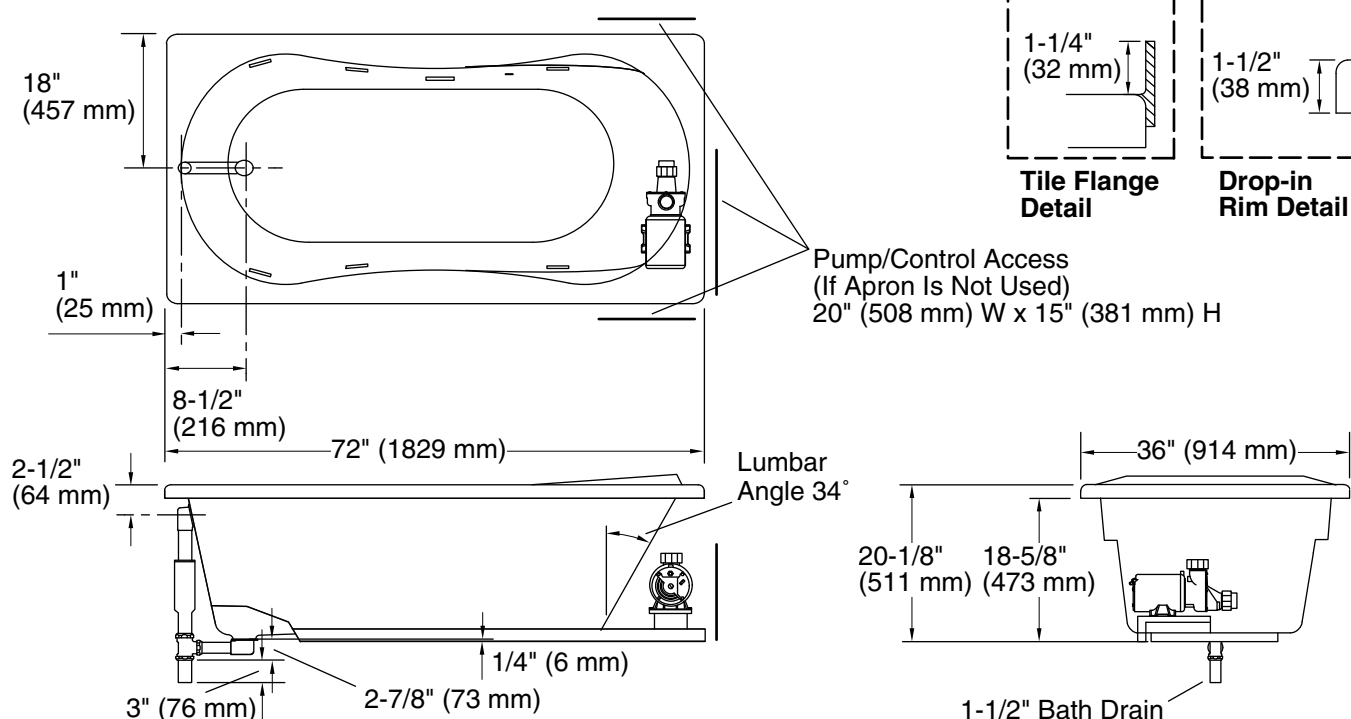

Product Diagram