

WARNING

- * Switch off the main electrical supply from the main fuse box / circuit breaker before installation.
- * Inspect item carefully before attempting to install.
- * If there is any damages or obvious defects, do not install.
- * Item may not be returned once it has been installed.

CARE AND MAINTENANCE


- * To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.
- * To clean the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.
- * Do not use any cleaners with chemical, solvents or harsh abrasives. Use only a dry soft cloth to dust or wipe carefully.

NOTICE& IMPORTANT SAFETY INSTRUCTIONS

- * Please make sure that you have all parts indicated before you begin assembly of this item
- * This item should be assembled on a soft surface to prevent scratching the finish during assembly
- * To reduce the risk of fire, electrical shock or injury to persons or property, please follow the guideline below for safe use and installation
- *The external flexible cable or cord of this luminaire cannot be replaced
If the cord is damaged, the luminaire shall be destroyed

Owner Manual

Product Dimensions: 22"DX 38-111"H

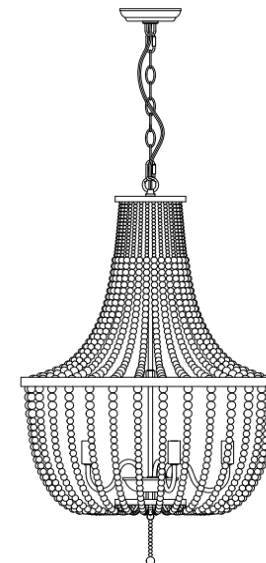

Part List and Hardware List

PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	Mounting Plate		1X	F	Fixture Loop		1X	L	Finial		1X
B	Canopy		1X	G1/G2/G3	Shade		1X	M	Wire Nut		3X
C	Hanging Loop		1X	H	Long Tube		2X	N	Mounting Screw		2X
D	Canopy Nut		1X	I	Wrench		1X	O	Bulb		5X
E	Chain		1X	J	Nut		1X	P	Silicone pad		1X
E1	Closablelink/cap		2X	K	Socket Assembly		1X				

PREPARATION

- * Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list.
- * If any part is missing or damaged, do not attempt to assemble the product.
- * Estimated Assembly Time: 20 minutes.
- * Tools Required for Assembly (not included): Screwdriver, Junction box
- * If you are having difficulty, our friendly Customer Care team is always here to help.

NOTE: PLEASE USE TYPE "A" BULB MAX 25-WATT OR LED BULB MAX 5-WATT, THERE ARE 1PCS LED 4-WATT BULB IN THE BOX

Step 1:

Unpack all parts from cartons carefully. **Don't spread the arms of the Socket Assembly(K) until the end of the Step 1.**

Insert the tube of the Socket Assembly(K) through the center Spider of Shade(G2), screw it with the Nut (J) by Wrench (I).



Screw one end of the Long Tube (H) into the Nut (J).

Place the Shade(G1) above the Long Tube (H), then Silicone pad (P), fix it with the Fixture Loop (F).

Align the bottom Nut (J) with the Spider of Shade(G3), fix it with the Finial (L) till tight.


Adjust the arms angle of the Socket Assembly (K) as diagram.

Screw the Chain(E) to the Hanging Loop(C) of the Metal Plate(A) and the Fixture Loop(F) with Closable Link (E1) as diagram.

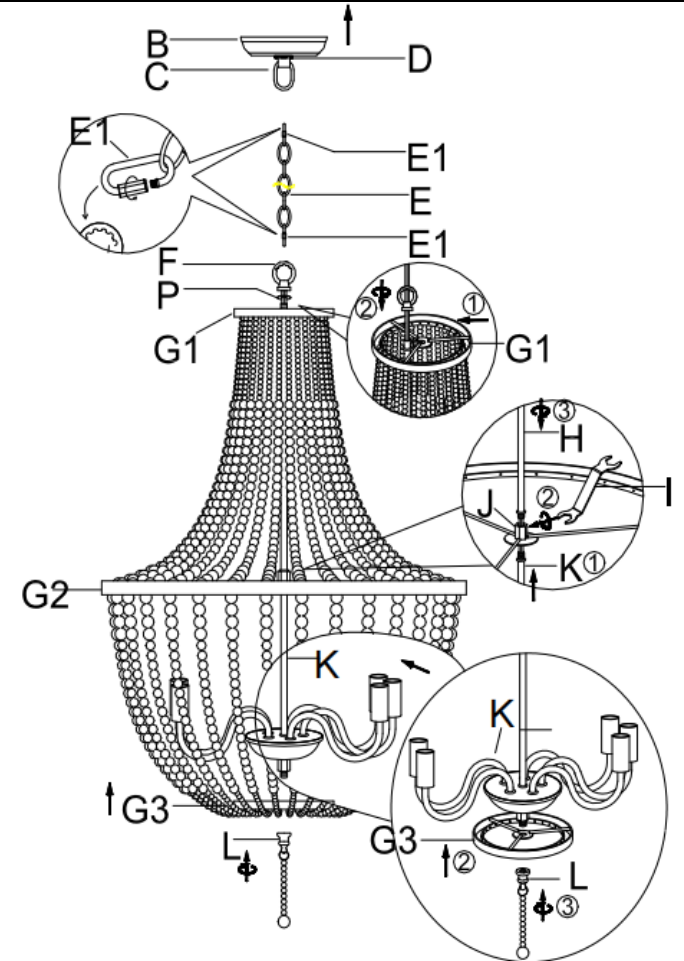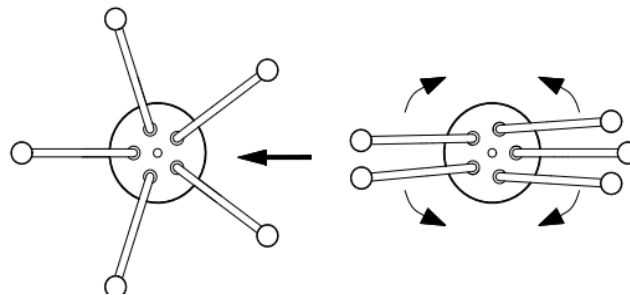



PREPARATION

- * Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list.
- * If any part is missing or damaged, do not attempt to assemble the product.
- * Estimated Assembly Time: 20 minutes.
- * Tools Required for Assembly (not included): Screwdriver, Junction box
- * If you are having difficulty, our friendly Customer Care team is always here to help.



Step 2:

Separate the Mounting Plate (A) from the Canopy (B) by unscrewing the Canopy Nut (D) anti-clockwise.



Step 3:


Make wire connections, with wire nut

Connect fixture neutral wire (ribbed) to the outlet box neutral wire (usually white) using a wire nut. Connect fixture hot wire (smooth with markings) to the outlet box hot wire (usually black) using a wire nut.

CAUTION: Do not reverse the hot and neutral connections

Grounding Instructions:

Wrap ground wire from outlet box around green ground screw(Q) on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire nut.

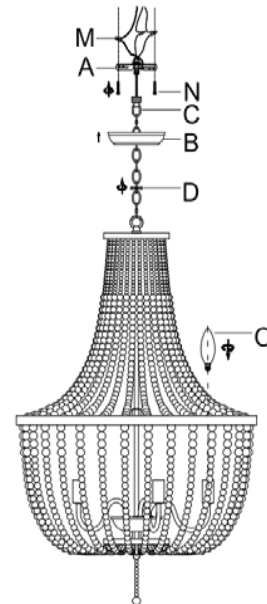

Step 4:

Fix the Mounting Plate (A) to the junction box with Mounting Screw (N). Attach the Canopy (B) to the junction box and fix it by turning the Canopy Nut (D) clockwise. Insert the bulb (O) into the Socket.