







Assembly Instructions



Note: Please help to read my instruction before you ready to assemble.

LOVESEAT CHAISE LOUNGE

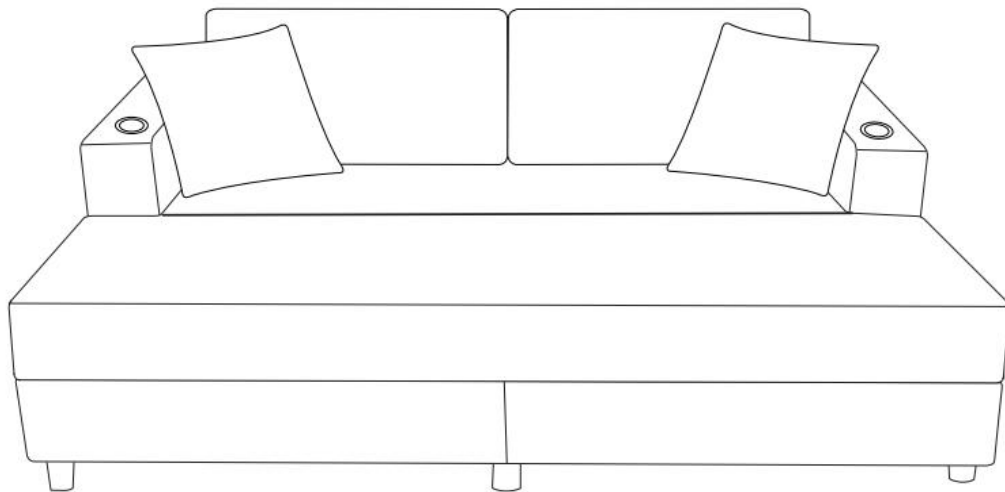


Part List

Label	Picture	Description	QTY (PCS)
A		Backrest Cover	1
B		Left Armrest	1
C		Right Armrest	1
D		Front Rail	2
E		Left Rail	1
F		Right Rail	1
G		Iron Back Frame	2
H		Link Pipe for Iron Back Frame	1
I		Metal Middle Leg Left Connecting Wooden Batten	1

J		Metal Middle Leg Right Connecting Wooden Batten	1
K		Back Middle Leg Connecting Wooden Batten	2
L		Back Bed Slat	1
M		Front Bed Slat	1
N		Seat Cushion Package	1
N1		Seat Cushion	1
O		Back Cushion	2
P		Pillow	2
Q		Metal Middle Leg	2
R		Plastic Leg	7

Hardware


①		Plastic Washer	8
②		Allen Wrench	1
③		Bolt (M8*60)	8
④		Bolt (M8*80)	1
⑤		Bolt (M8*20)	14
⑥		Screw (M4*30)	30
⑦		Flat Washer	28
⑧		Spring Washer	23
⑨		Iron Connecting Plate	1
⑩		Iron Connecting Plate	2
⑪		Screwdriver	1
⑫		Nut	5
⑬		Spanner	1
⑭		Electrical Cord	1

NOTICE:

- Please read the instruction from cover to cover in detail.Thanks.
- Installed by at least two adults
- To avoid damaging your furniture , Please don't assemble on flooring or carpet.
- Please assemble on a clean non-marring surface, example for packing foam.
- Saving all packaging until have finished.

Assembly Steps:


OVERVIEW

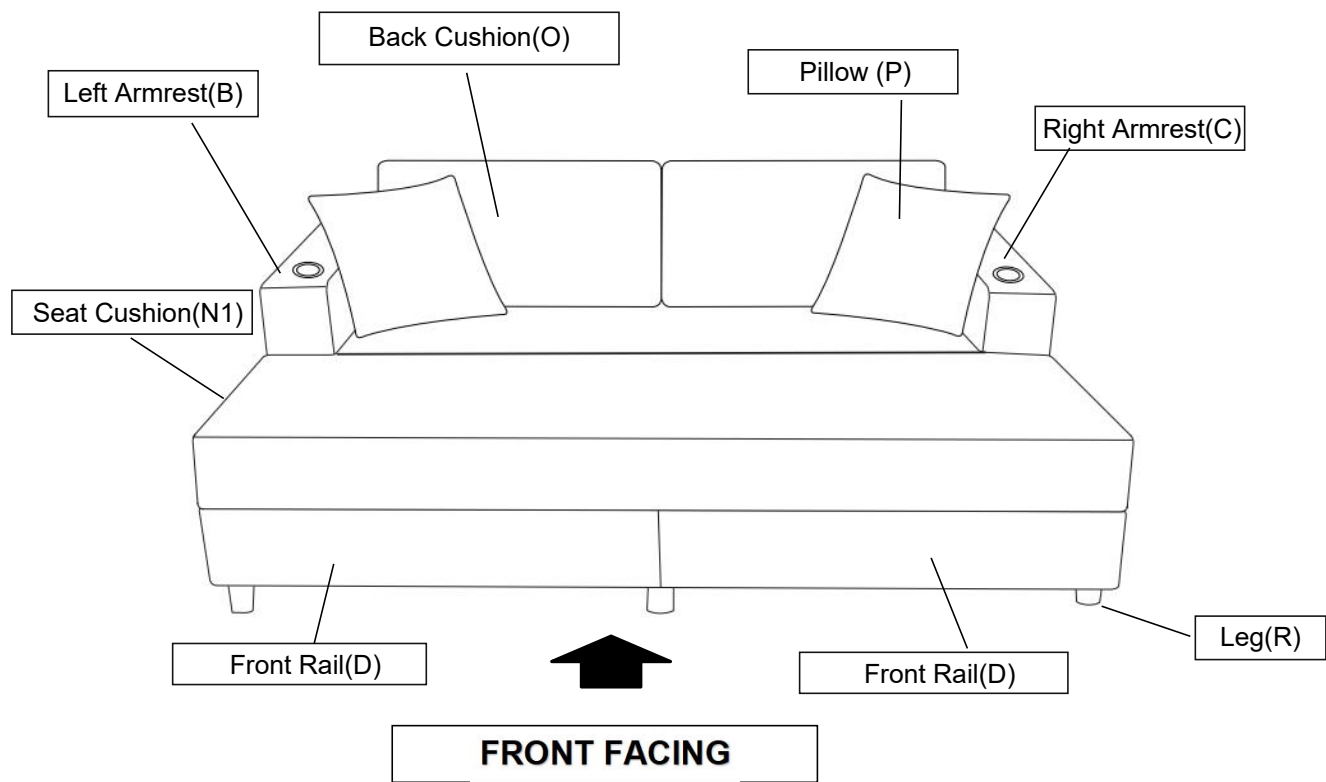


This LOVESEAT CHAISE LOUNGE has multiple parts and may require up to 30 minutes to assemble. To give you an overview of the LOVESEAT CHAISE LOUNGE parts, the above picture is to help you put the various parts into perspective. Please read through the instructions below to familiarise yourself with the parts and steps before assembly.

Note: It is recommended that you have an adult partner to assist during the entire assembly process.


Step 01

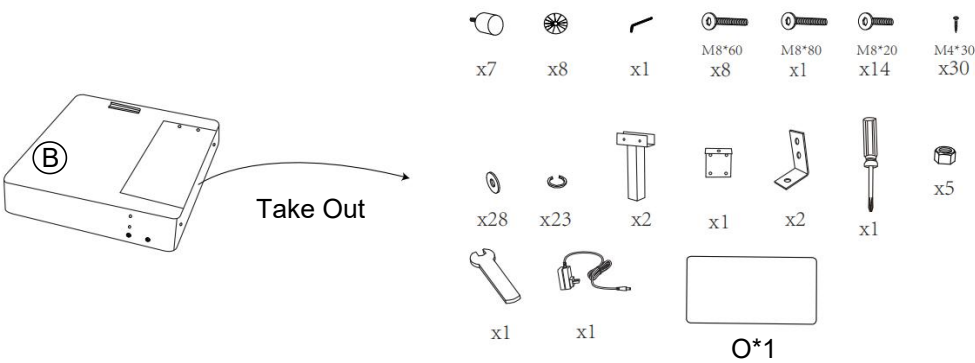


Step 02

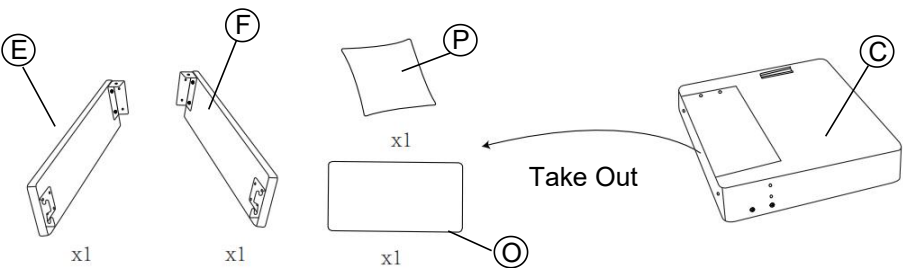


Step 03

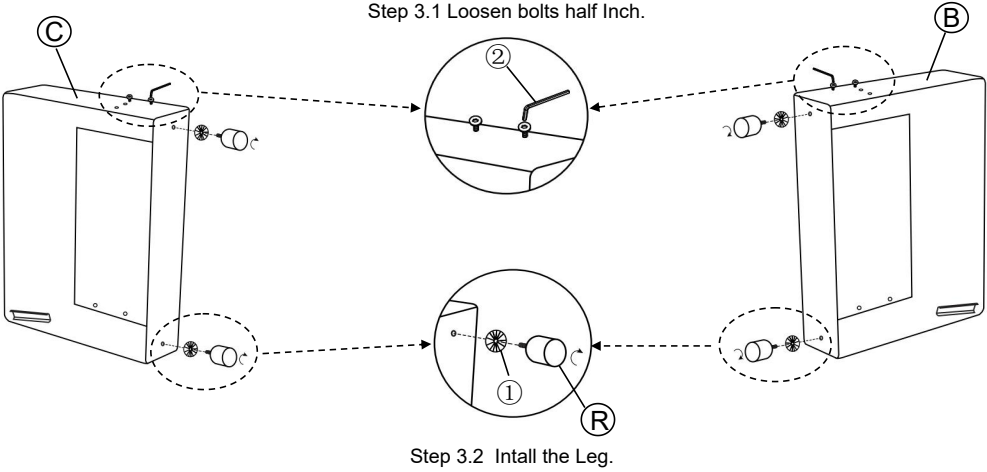


Step 04

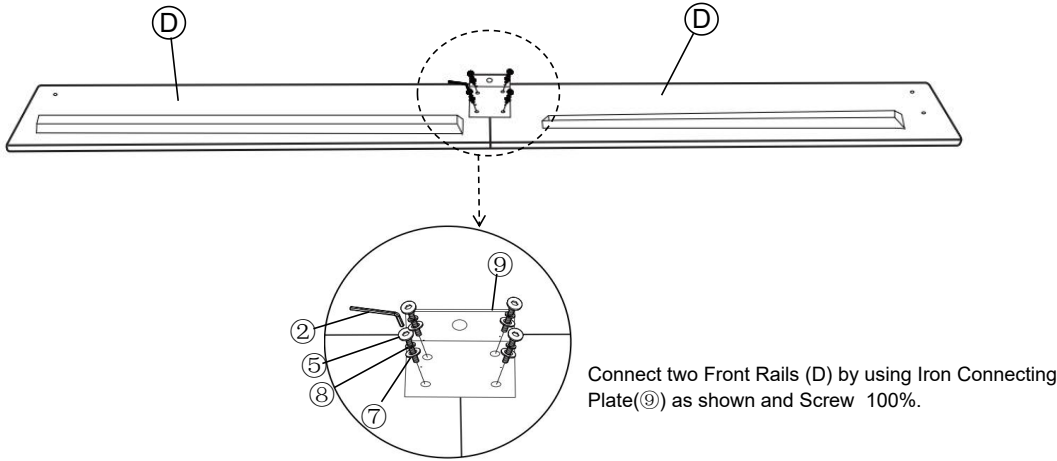


Step 05

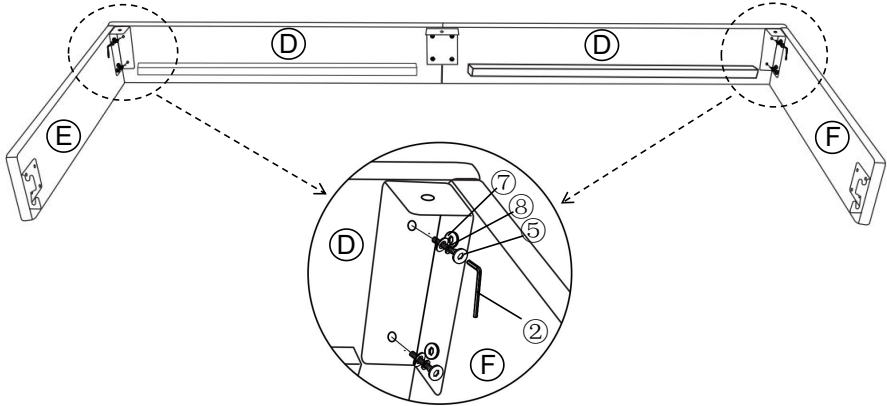


Step 06

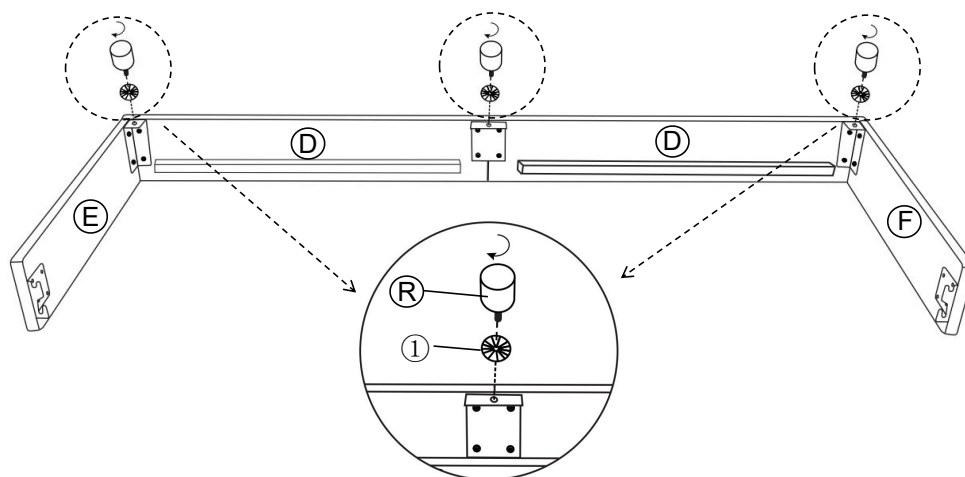


Step 07

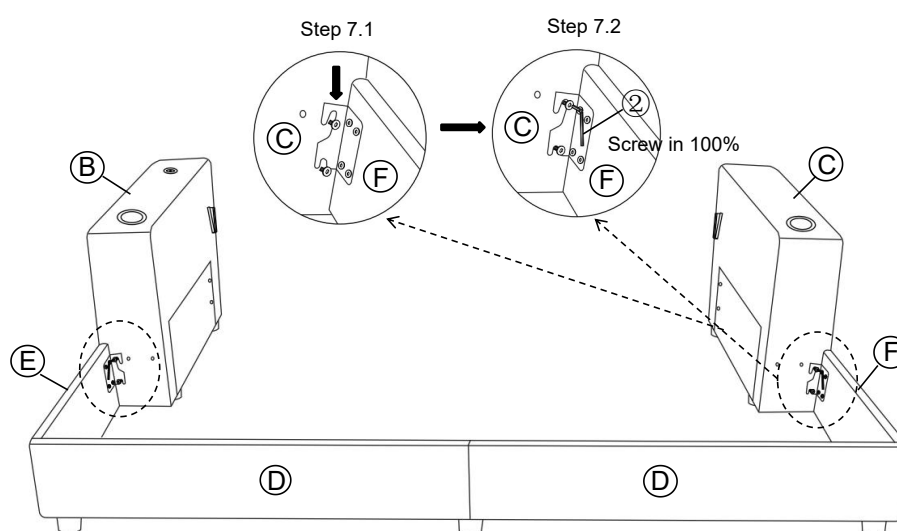


Step 08

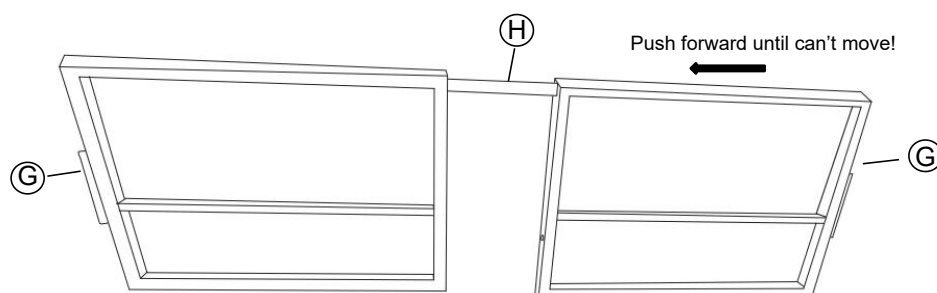

Step 09

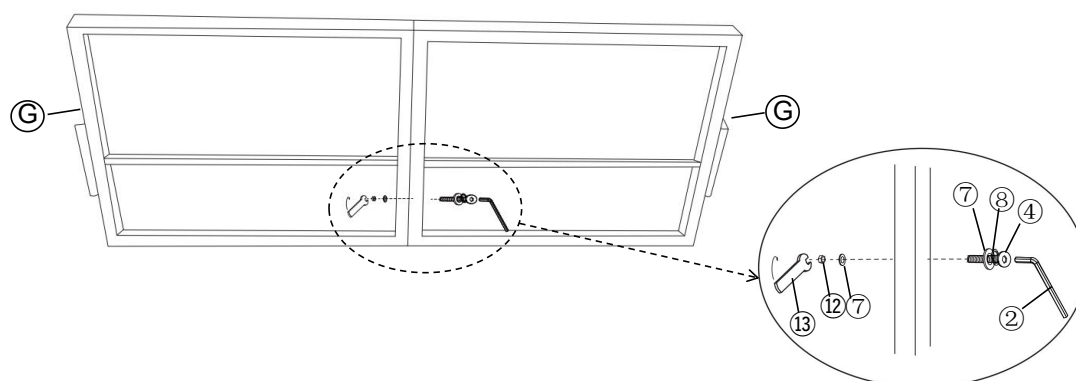


Step 10

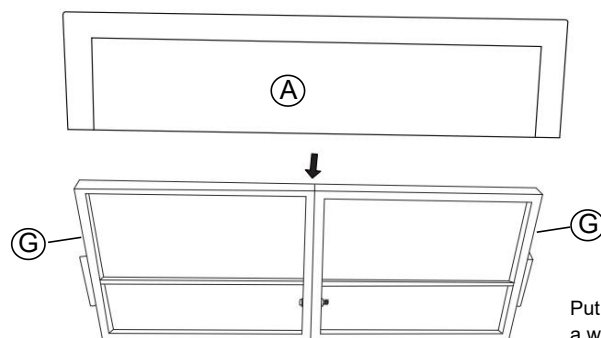


Put the Backrest Cover (A) on the iron frame to get a whole Backrest(A1).


Step 11

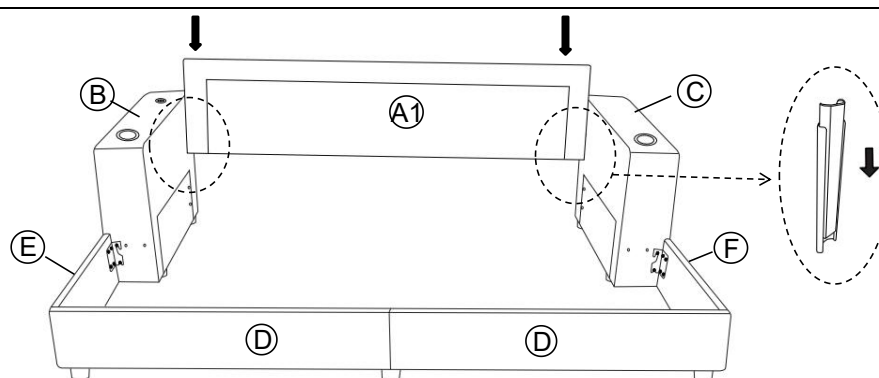


Step 12

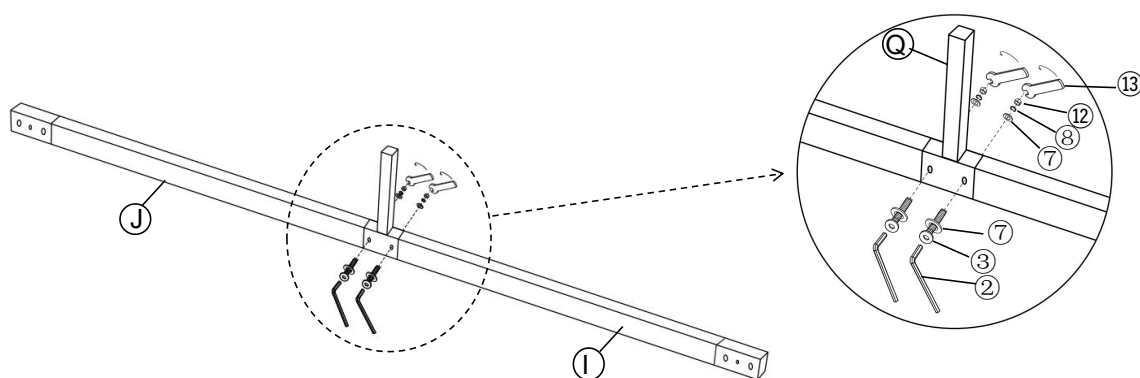


Step 13

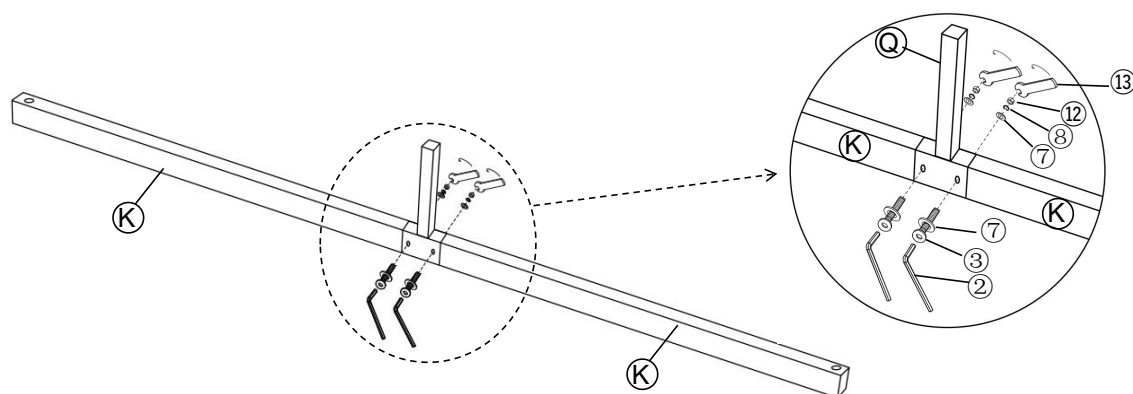


Step 14




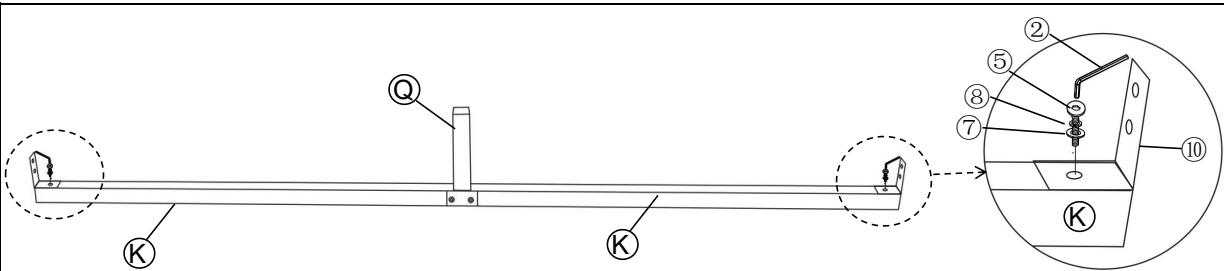


Step 15

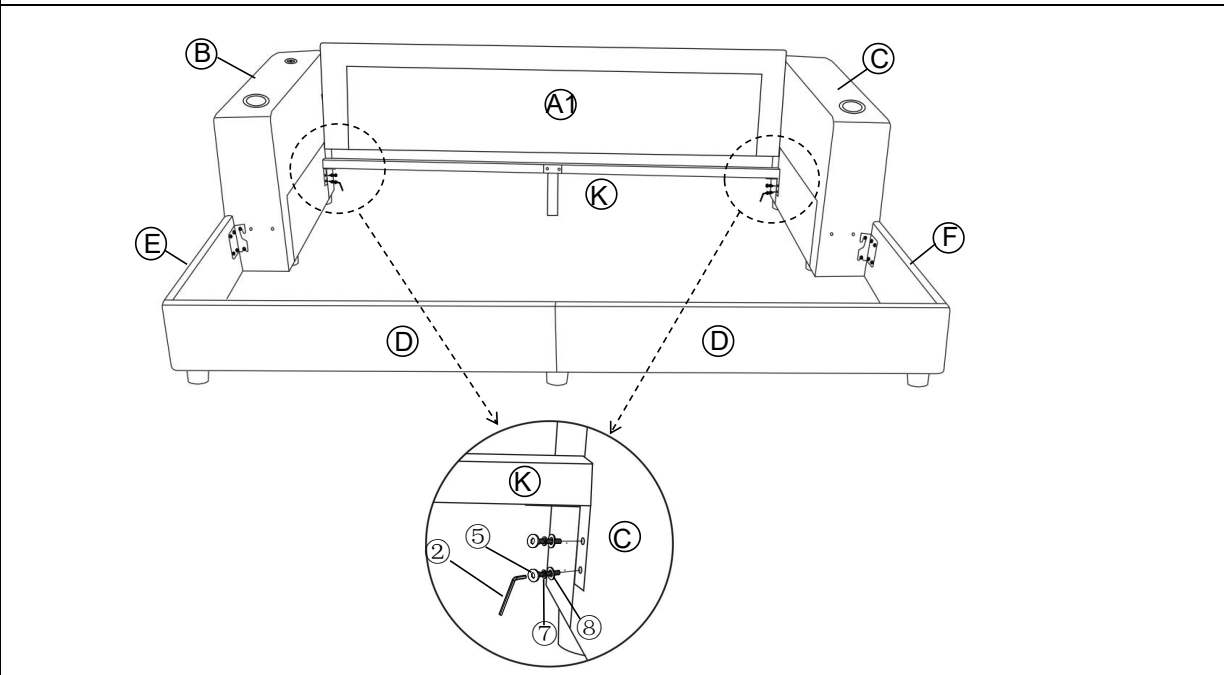


Step 16

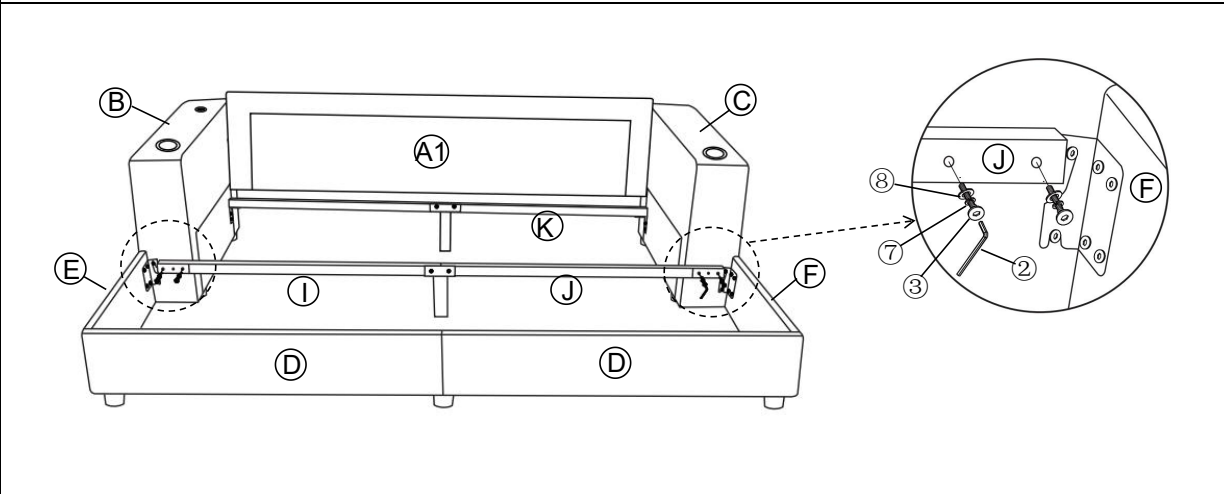


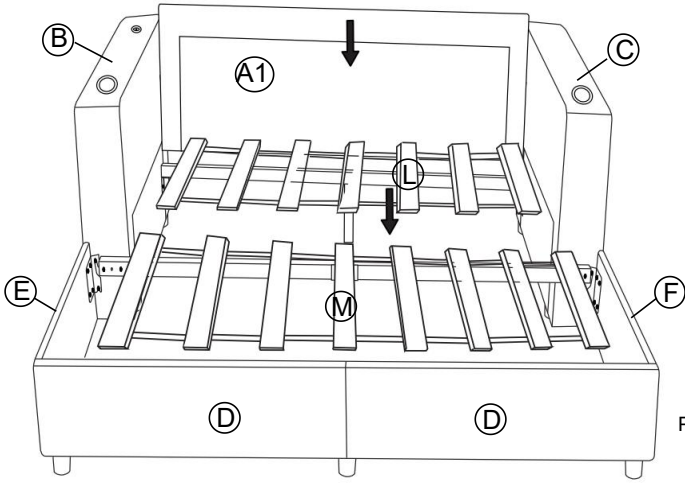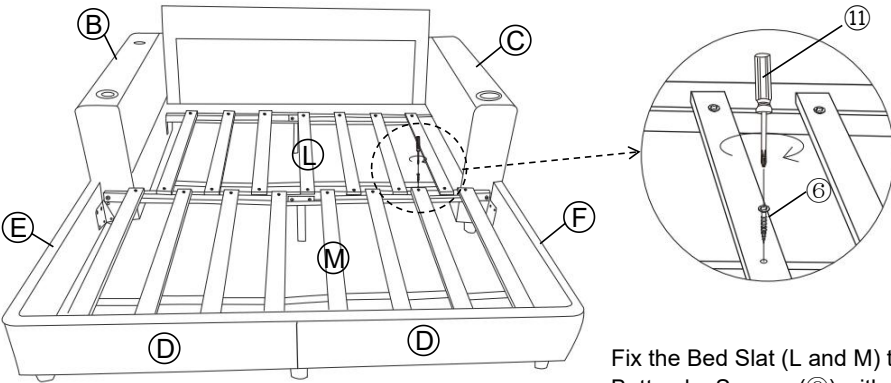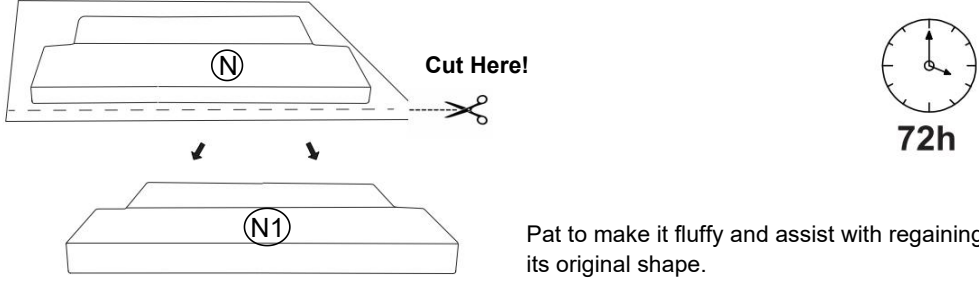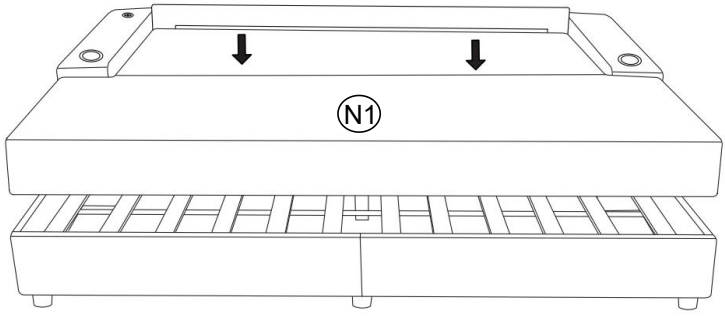Step 17	 Put the Bed Slat (L and M) on chaise.
Step 18	 Fix the Bed Slat (L and M) to Wooden Batten by Screws (⑥) with Screwdriver
Step 19	 Cut Here! 72h Pat to make it fluffy and assist with regaining its original shape.
Step 20	

Step 21

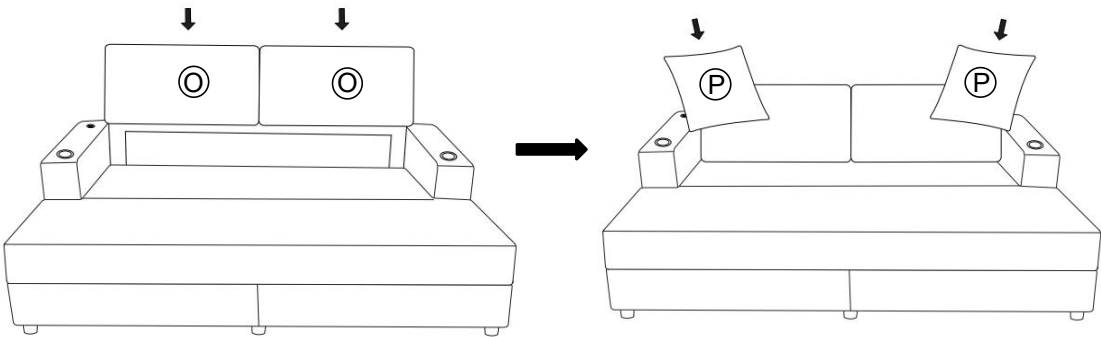

Step 22

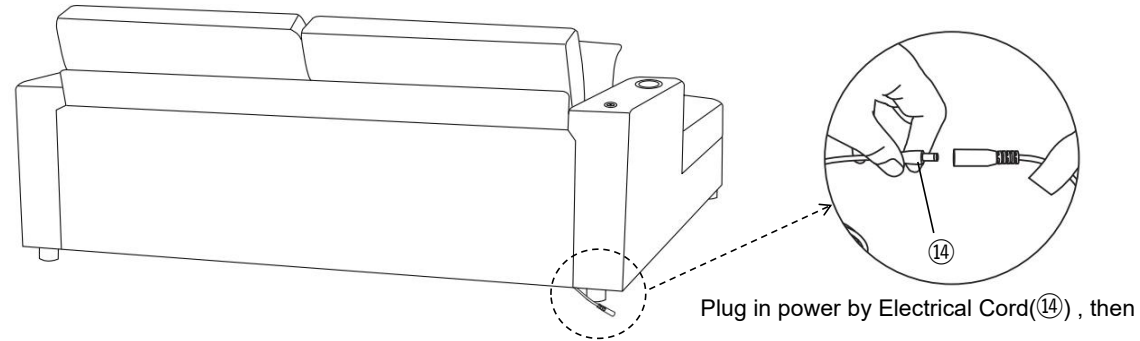

Step 23

