


INSTRUCTION MANUAL



MODEL:FM25CH


Voltage Range : 115V/60Hz

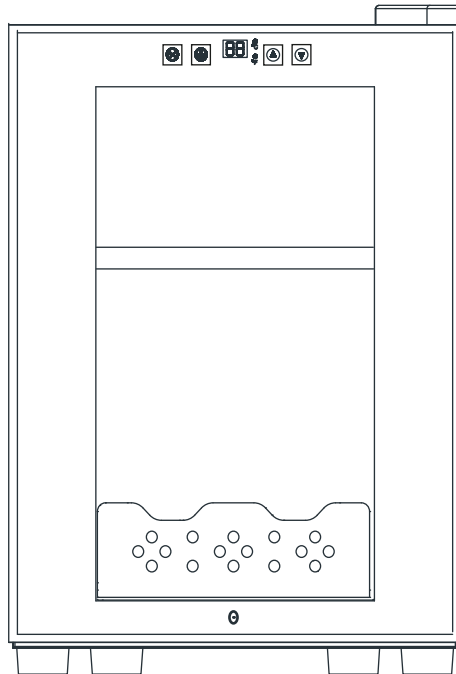

PLEASE READ AND FOLLOW ALL INSTRUCTIONS CAREFULLY BEFORE USE.

- FAILURE TO FOLLOW THESE INSTRUCTIONS COULD RESULT IN BODILY INJURY, AND/OR PROPERTY LOSS.
- RETAIN INSTRUCTION MANUAL FOR FUTURE USE.

STRUCTURE

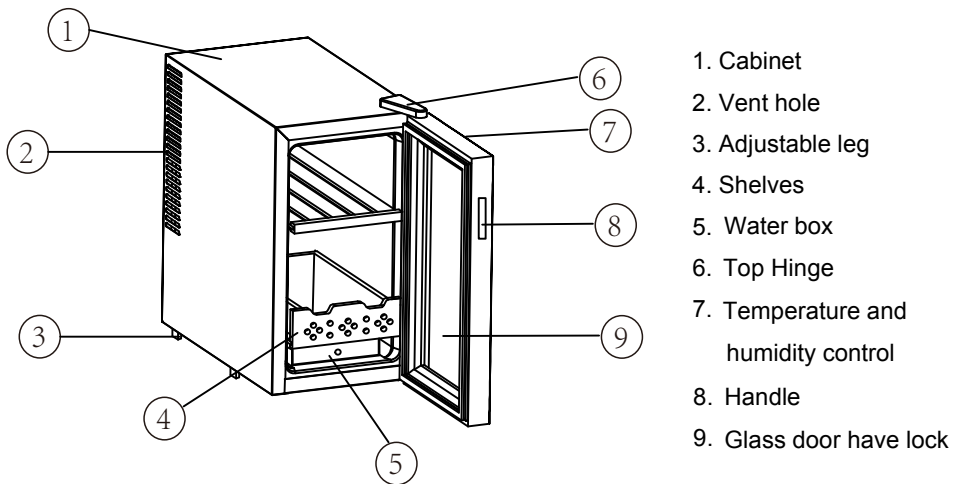

Product Feature

1. The appliance adopts semiconductor refrigeration technology, no vibration in the work, low power consumption and environmental protection.
2. The storage in the box is clear at a glance with glass door.
3. The air cooling system is used to realize the natural air circulation inside the humidor avoid the prevents temperature imbalance and local mildew.
4. Temperature and humidity touch control mode, interior temperatures 15-22°C(59°F-72°F) and Humidity range 60%-75%.
5. The condensed water can be automatically recovered and recycling.
6. The white sponge inside the water box is used for humidifying.

Install the cigar humidor

1. Place cigar humidor on a floor that is strong enough to support it when it is fully loaded. To level cigar humidor, adjust the leveling legs at the bottom. (The maximum adjustable height is 10mm)
2. Locating the unit in an indoor dry environment, and avoid locating in moist areas.

3. Locate the cigar humidor away from direct sunlight and sources of heat (stove, heater, radiator, etc.)
4. Plug the cigar humidor into an exclusive, properly installed-grounded wall outlet. Do not under any circumstances cut or remove the third (ground) prong from the power cord. Any questions concerning power and/or grounding should be directed toward a certified electrician or an authorized Products service center.
5. Place cigar after 2 hours power on.

SAFETY PRECAUTIONS

Please follow below instructions when use:

1. Please read carefully manual before use.
2. The appliance only be used indoor.
3. Make sure the voltage on the rating label is the same as the voltage used, select a three-hole socket with ground wire.
4. When you are not using or cleaning products, need remove the plug of the power cable first. Do not remove or insert the power plug with wet hands.
5. If the power cable is damaged or the product cannot run normally, send the product to the nearest service center for repair.
6. Except normal cleaning, the maintenance center designated by the supplier shall be responsible for product maintenance.
7. The product must be effectively grounded, the supplier is not responsible for any damage caused by non-benign grounding. If in doubt, please contact a qualified electrician.
8. Please do not allow children to climb on any part of the appliance, lest the appliance topple over.
9. Do not store or use gasoline or any other flammable vapors and liquids in the vicinity of this or any other appliance. The fumes can create a fire hazard or explosion.
10. Please do not put any water containers or pour water on the top of the appliance.
11. If the appliance is not used for a long time, please unplug it.
12. Do not hit the glass door.

Moving cigar humidor

Unplug the power cord, remove all items.

Tape the door shut.

It is recommended to use original product packaging when transported to distant place.

Warning:



1. If the supply cord is damaged, it must be replaced by the manufacturer or service agent or similarly qualified person in order to avoid hazard.
2. Please screw off the door before throwing it away.
3. Please keep the appliance away from any flammable substances.
4. To avoid a hazard due to the instability of the appliance, it must be fixed according to the instructions.
5. Do not use electrical appliances inside the food storage compartments of the appliance.
6. This appliance is not intended for use by persons (including children) with reduced physical,
7. Children should be supervised to ensure that they do not play with the appliance.
8. This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.
9. Keep ventilation openings, in the appliance enclosure or in the built-in structure, clear of obstruction.




The symbol is a warning symbol for risk of fire/flammable material.

WARNING: When positioning the appliance, ensure the supply cord is not trapped or damaged.

WARNING: Do not locate multiple portable socket-outlets or portable power supplies at the rear of the appliance.

OPERATING YOUR CIGAR HUMIDOR

Temperature settings

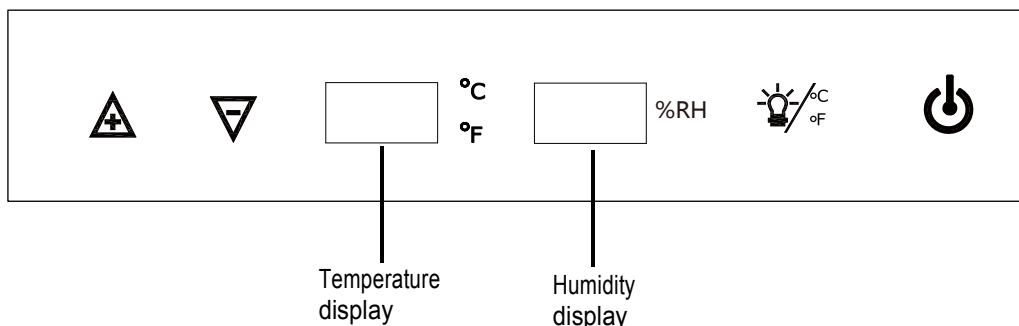

	Press this button to turn on the appliance, and press 3 seconds to turn off the appliance. Left LED shown temperature, Right LED shown humidity. Press this button, Left LED flashing and shown original set temperature, enter the temperature setting state; Press again, Right LED flashing and shown original set humidity, enter the humidity setting state LED will display the actual temperature and humidity after 5 seconds if no operation.
	Turns the interior light on or off . Toggles the temperature display between Celsius and Fahrenheit for press 3 seconds.
	Press this button to adjusts the temperature and humidity in 1 degree decrements, and will display the actual temperature and humidity after 5 seconds if no operation.
	Press this button to adjusts the temperature and humidity in 1 degree increments, and will display the actual temperature and humidity after 5 seconds if no operation.

NOTE:

That's normal which temperature deviation is $\pm 4^{\circ}\text{F}$ and humidity deviation is $\pm 5\%\text{RH}$.

It is recommended install the cigar humidifier in a place where the ambient temperature is between $50-77^{\circ}\text{F}$, the performance may be affected if the temperature exceeds this range.

Replacement of lighting

The light is LED, if not light, please contact professional or send to the nearest repair center for repair

Cleaning your Cigar humidor

1. Normally, clean and maintain the cigar humidor every six months.
2. Turn off the power, unplug the appliance, and remove all items including shelves. Wash the inside surfaces with a neutral detergent, then dry with a clean and soft cloth.
3. Do not rinse the cigar humidor with water.
4. Do not use hot water, gasoline, acid detergent, benzene, acid to clean the cigar humidor. Pay attention to the regular maintenance of the door sealing, do not damage the door seal. Check whether the power cable is damaged after cleaning.
5. After the power supply is plugged in and the power cable plug is inserted in place, check whether the power cable plug is abnormally hot.

TROUBLE SHOOTING

1. Cannot refrigerate

- Check power supply is normal or not.
- Check the power plug is plugged in properly.
- Is the power cable intact.

2. Poor refrigeration effect

- The temperature set too high.
- The ambient temperature too high or the ambient ventilation poor.
- The door is opened too often.

3. Noise or unusual sound

- The cigar humidor is not level.
- Anything else on the top of cigar humidor.
- Foreign matter enter the inside fan.

The following are not machine faults

- Dew condensation on the surface of glass door:

When the environment humidity is bigger, the moisture in the air touches the glass door of the cigar humidor, dew condensation on the surface of glass door. You can adjust the temperature increments to reduce dew condensation. The lower inner temperature will produce dew condensation, please use dry cloth to wipe the glass surface condensation.

- Dew condensation on the inner wall:


When the environment humidity is bigger, open the door too often or too long, will cause dew condensation on the inner wall. Especially the refrigeration system, the condensation water will flow and enter the water box from the drain hole.



Warning

- Do not block the cigar humidor drain
- It is necessary to check the water box at the bottom of inside the cigar humidor, filled 2/3 filtered water or mineral water, period of changing water is once every half month.
- It is recommended to replace the white sponge inside the water box every two months.

ELECTRIC PRINCIPLE DIAGRAM

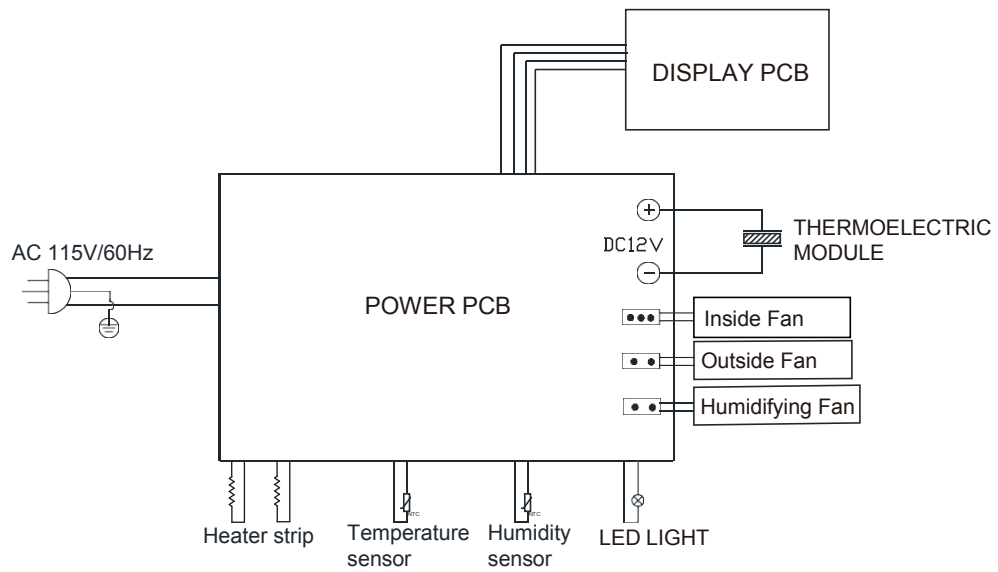

MADE IN CHINA