


ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING: BE SURE TO SHUT OFF POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE INSTALLING OR SERVICING THIS FIXTURE.

**NOTE: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THESE INSTRUCTIONS.**

Parts:

Parts Number (5603MM)



Mounting Strap (A)



Mounting Screw (B)



Wire Nut (C)



Nipple (D)



Green Grounding Screw (E)



Hex Nut (F)




Washer (G)



Rubber Pad (H)



End Cap (I)


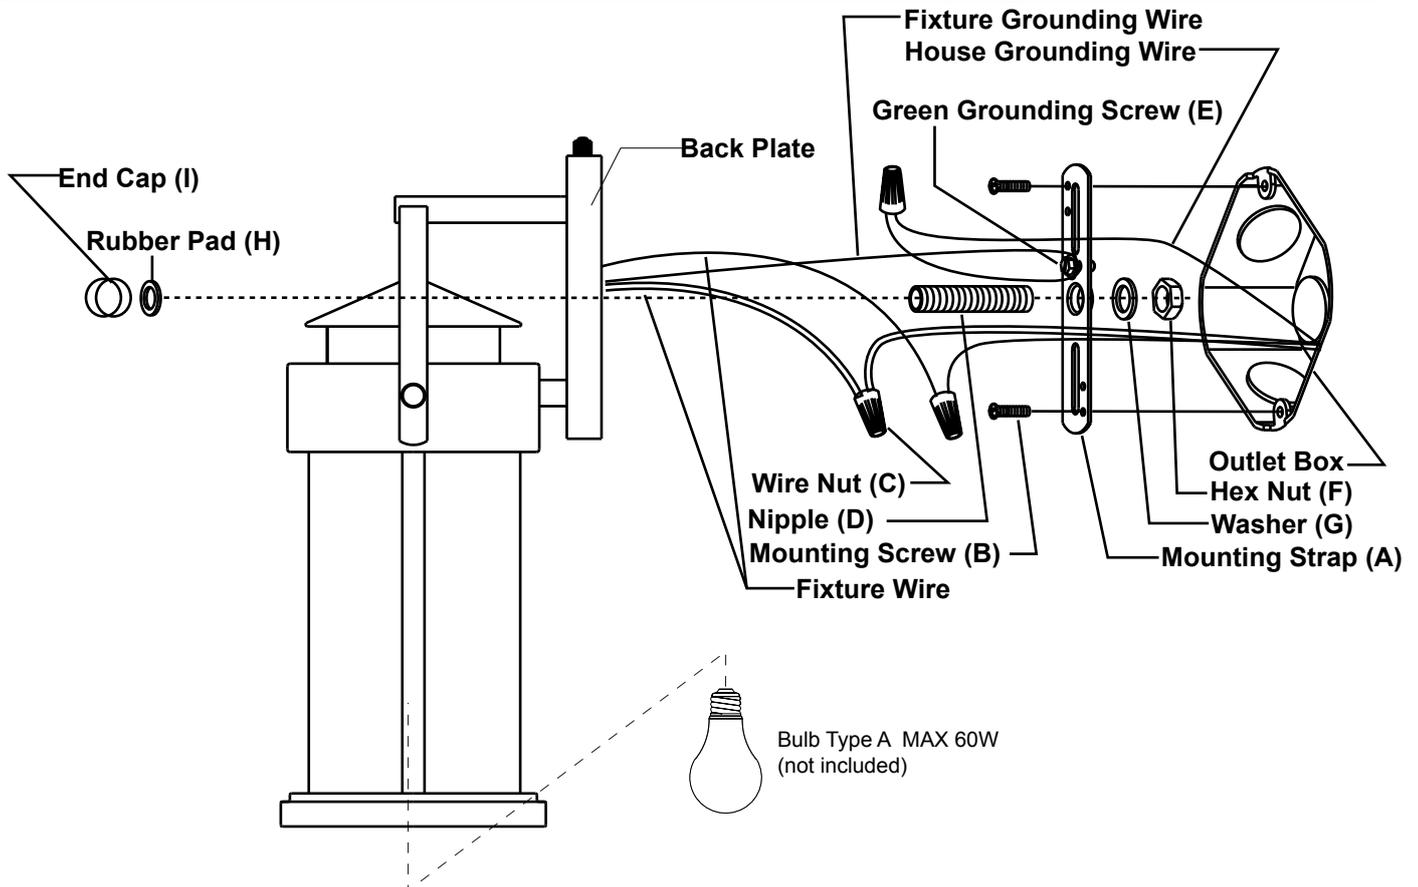


IMPORTANT:

The sensor has an excellent photocell function to enable the light to turn on at dusk and off at dawn automatically.


1. Attach the nipple to the mounting strap, then secure it with a washer and hex nut.
 2. Attach the mounting strap to the outlet box by using two mounting screws.
 3. Pull out the outlet wires and house grounding wire from the outlet box. Make wire connections using the wire nuts:
 - The black wire from the fixture to the black wire from the power source.
 - The white wire from the fixture to the white wire from the power source.
 - Attach the fixture grounding wire to the mounting strap with the green grounding screw. Then connect it to the house grounding wire with a wire nut.
 Carefully put the wires back into the outlet box.
 4. Attach the fixture to the mounting strap by inserting the nipple, then secure it with the rubber pad and end cap.
- CAUTION: With silicone caulking compound, caulk completely around where the back plate meets with the wall surface to prevent water from seeping into the outlet box.**
5. Install a bulb (not included). See relamping label on socket area or packaging for maximum allowed wattage.
 6. Turn on the power at the main fuse or circuit breaker box.

Operation the Unit Without Photocell

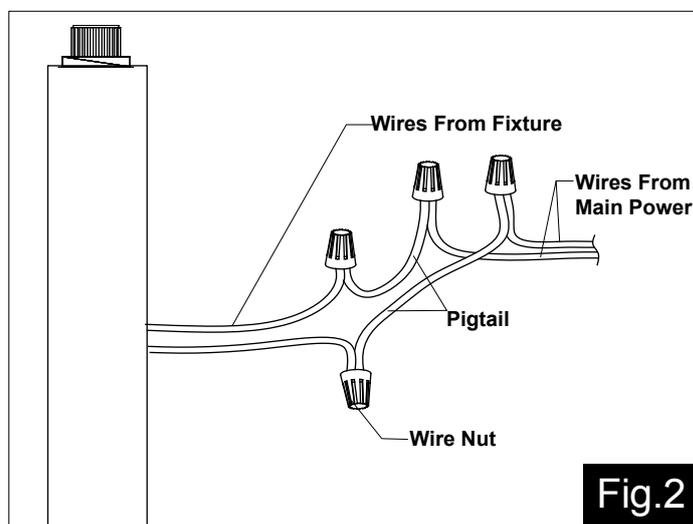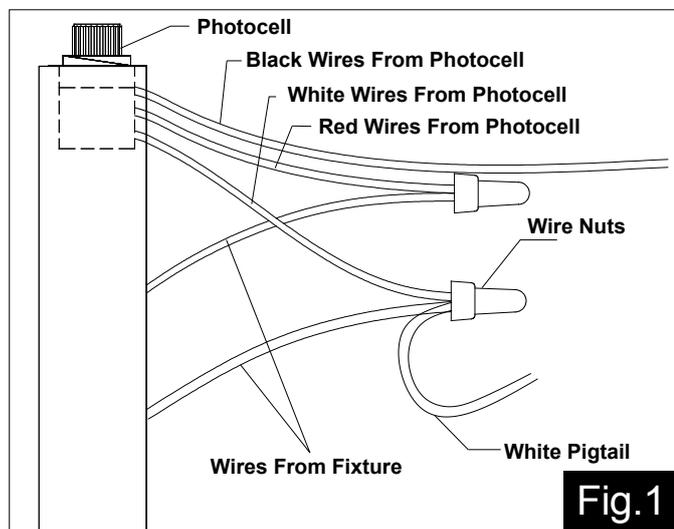

1. Turn off the power at the fuse or circuit box before starting installation.
2. Loosen the wire nuts connected with the wires from photocell. (See Fig.1)

Note: Do not move the photocell to prevent water from seeping into the outlet box.
3. Take a white pigtail and black pigtail and make wire connections using wire nuts: (See Fig.2)
 - a. The black wire from the fixture to one end of the black pigtail.
 - b. The white wire from the fixture to one end of the white pigtail.
 - c. The other end of the black pigtail to the black wire from the power source.
 - d. The other end of the white pigtail to the white wire from the power source.
 Put all wires back into the back plate of the fixture.

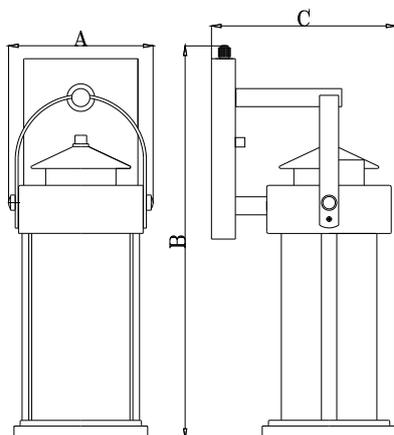

A: 8"
 B: 19-3/4"
 C: 9"