

ARC FLOOR LAMP

USER MANUAL

Hello

Sincerely thank you for your business and support. I hope that the lamp you purchased is everything you expected, your satisfaction is my primary goal. If you have any questions or suggestions, please do not hesitate to contact

We want you to love your purchase! If you're having any issues please contact us immediately and we'll make sure we fix it right away.

If you're not loving it, no worries! We make returns and exchanges easy.

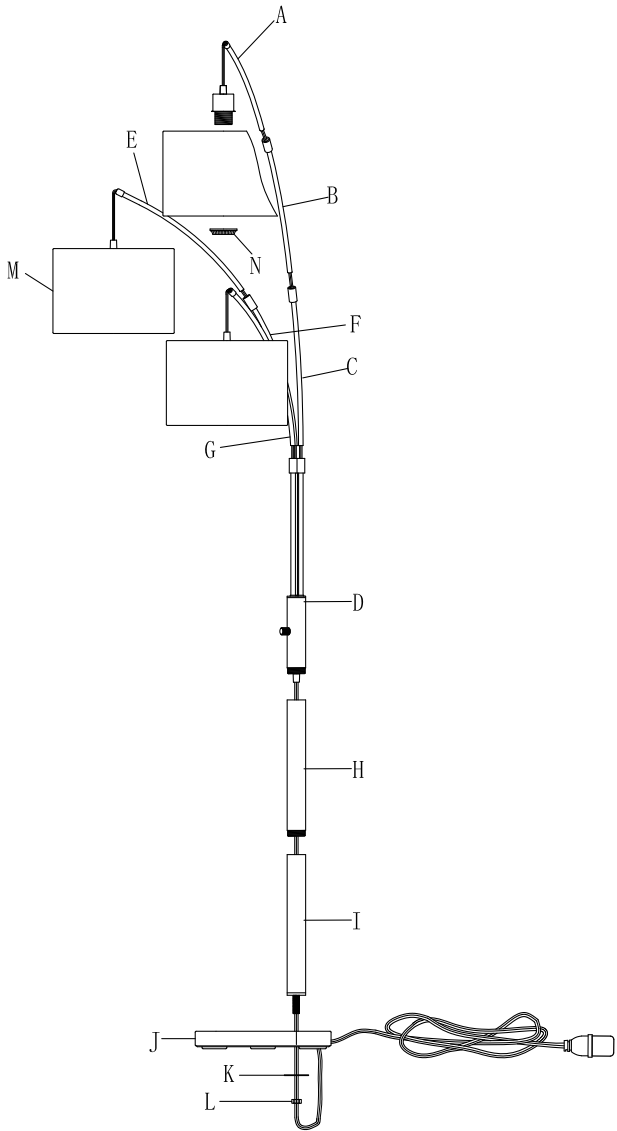
Thanks again for your shopping. Wish you all the best.







PARAMETER

Light source	E26 LED Bulb(included)
Voltage	110V-120V/60HZ
Materials	Metal
Product dimensions	H81 inches
	(H 2030mm)
Power cord length	5.95Ft (1.8M)

SAFETY INSTRUCTIONS

- Please read the instruction manual before using the lamp.
- To ensure a long lifespan, please do not put it near heat, corrosive or damp places.
- The floor lamp should be put at places, where is no shock, momentum or fire. Do not let it fall from a high position and avoid a crash.
- Before cleaning, make sure that the lamp is disconnected from the power supply.
- Before using the lamp, please check if the lamp is damaged during transport. If the lamp has shown any damage, do not use or install the lamp.
- Please do not disassemble or repair the lamp yourself.



NO.	TYPE	QTY
O	 The lamp has been attached to the body	12PCS
P		1PCS
Q		1PCS
M4		1PCS
M5		1PCS
M6		1PCS

Step 1

Please take out all of the lamp parts from the package, carefully pull out excess Power Cord from Base (J).

Tighten tube(A) into tube(B)using screw (O) and wrench(P).

Tighten tube (B) into tube (C) using screw(O) and wrench (P).

Tighten tube(C) into tube(D)using screw (O) and wrench(P).

Tighten tube (E) into tube (F) using screw(O) and wrench (P).

Tighten tube (F) into tube (D) using screw(O) and wrench (P).

Tighten tube (G) into tube (D) using screw(O) and wrench (P).

Step 2

Tighten the Tube (H) to Tube (D).

Tighten the Tube (I) to Tube (H).

Step 3

Tighten the tube (I) to base (J) and screw nut(L) using wrench (Q) to tighten.

Step 4

Assemble the shade(M) with the instrution.

Take down the socket ring(N), Put the Shade (M) into socket (R) , then tighten Shade (M) by Ring (N).

Install BULB See relampinglabelat socket area or packaging for maximum allowed wattage 60W .

Step 5

Please check that lampshade towards the same direction as base,if not, you could adjust the base so that the direction is consistent.

Your lamp is now completely assembled.

