

CHANDELIER LIGHT (CHAIN)

Assembly Instructions



CAUTION

- Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.
- Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

TOOLS REQUIRED



Ladder



Safety glasses



Electrical tape




Phillips screwdriver




Flat blade screwdriver




Pliers




Wire strippers

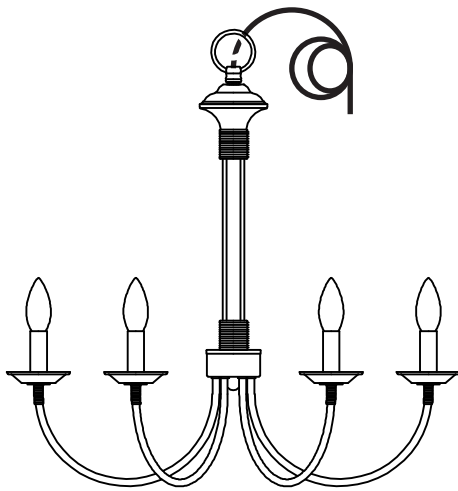

Fixture




Chain




Canopy




Screw Collar Ring



Mounting Unit



Mounting Screws



Wire Nuts


***PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE**

CHANDELIER LIGHT (CHAIN)

Assembly Instructions


STEP 1

Attach the end of the **chain** to the **loop on the fixture**.

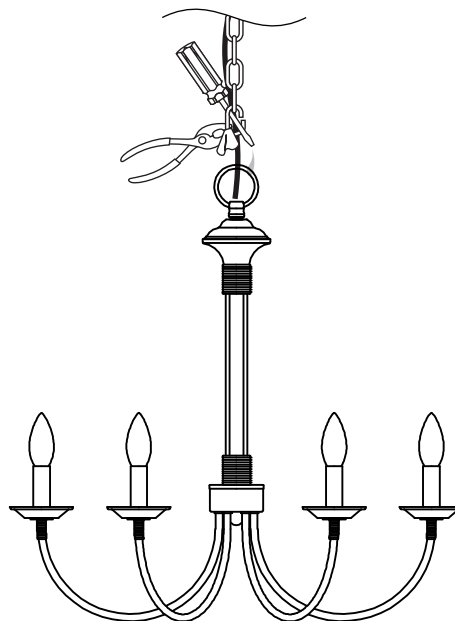


STEP 2

Use the **mounting screws** to attach the **mounting unit** to the junction box

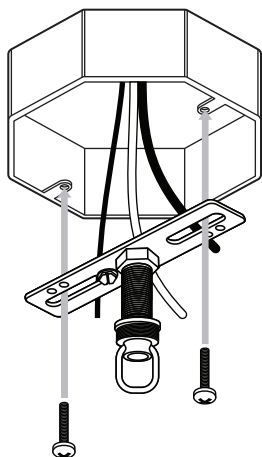

STEP 3

Pass the **chain** and the branchwires through the **screw collar ring** and **canopy**. Feed the branchwires through the pipe nipple on the **mounting unit** and attach the end of the **chain** to the **mounting unit**.

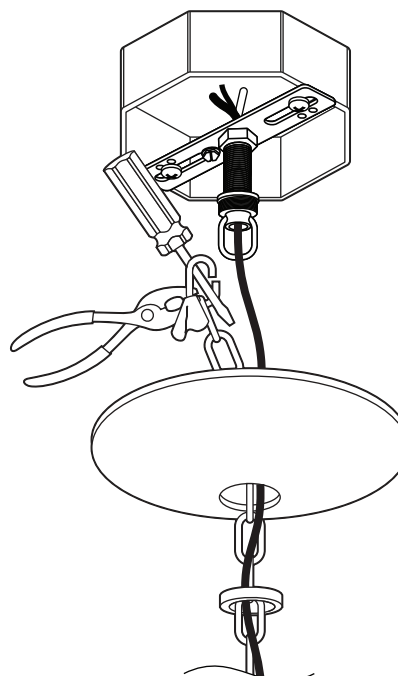

CHANDELIER LIGHT (CHAIN)

Assembly Instructions

STEP 4



Make the electrical connection from the junction box to the **fixture**. Connect the ground wire to the **mounting unit** using the preinstalled green ground screw. Then, connect the positive, negative and ground wires with the supplied **wire nuts**. Secure with electrical tape

Connect Clear, Brown, Gold or Black Parallel Wire without tracer (round & smooth) or Black Fixture Wire to:

Black or Red Supply Wire or Insulated Wire (other than green) with copper conductor.


Connect Clear, Brown, Gold or Black *Parallel Wire with tracer (square & ridged) or White Fixture Wire to:

White Supply Wire or Insulated Wire (other than green) with silver conductor

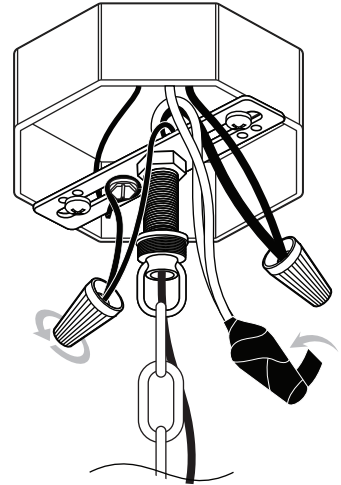

STEP 5

Secure the **canopy** to the **mounting unit** with the **screw collar ring**.

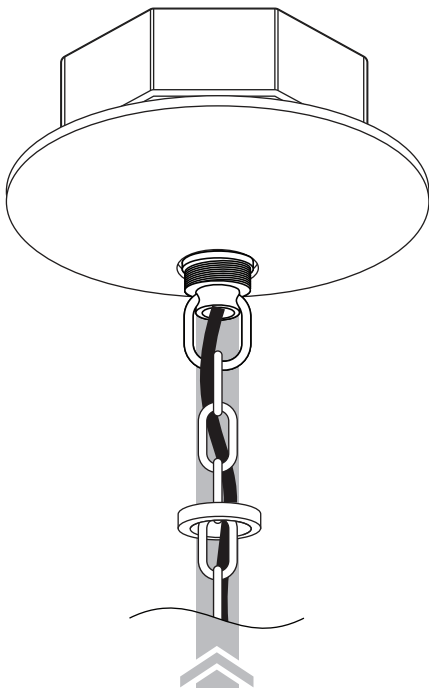

STEP 6

Install bulbs (not included)
E12*5(60W)

