

Installation Instruction

CAUTION:

- Before installing the light fixture, please make sure the power to the circuit is turned off at the main fuse box.

IMPORTANT SATETY INSTRUCTIONS:

- These instructions are provided for your safety. It is very important that they are read carefully and completely before beginning the assembly and installation of the light fixture.
- We strongly recommend that a professional electrician install all direct wire fixtures.

PRE-ASSEMBLY:

- Remove all parts and hardware from the box along with any plastic protective packaging.
- Do not discard any conctects until after assembly is complete to avoid accidentally discarding small parts or hardware.
- For your safety, it is strongly recommended that two people install the light fixture.

WARNING:

- To reduce the risk of fire, electrical shock or personal injury, always turn off light fixture and allow it to cool prior before replacing the light bulb.
- Do not touch bulb when light fixture is turned on.
- Do not look directly at a lit bulb.
- Keep flammable materials away from lit nulp.

TOOLS REQUIRED (NOT INCLUDED):

- The following installation tools are for reference only.



Step Ladder



Phillips Head, Flat Blade Screwdrivers



Plier



Wire Cutter/Stripper



Electrical Tape

CARE INSTRUCTIONS:

- Wipe clean with a soft, dry cloth or static duster.
- Avoid the use of harsh chemicals or abrasive cleaners as they may cause damage the light fixture's finish.

NOTE:

- Please tum off the power switch before installation.
- It is better to have a helper to hold the lamp when it is installed.




Lamp holder (A)



Ground wire (B)



Metal Base (C)

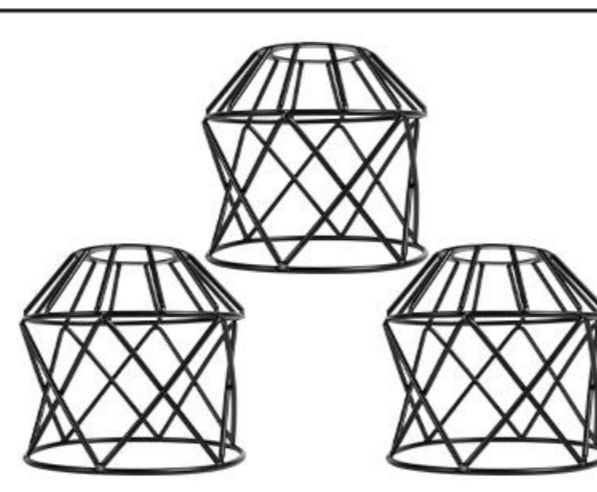

Lampshade (D)



Insulated(E)



Wire nut(F)



Screw (G)

1



Remove the screw from the wood

2




Attach the wood to the metal base

3





Connect the lampshade with plastic ring

4

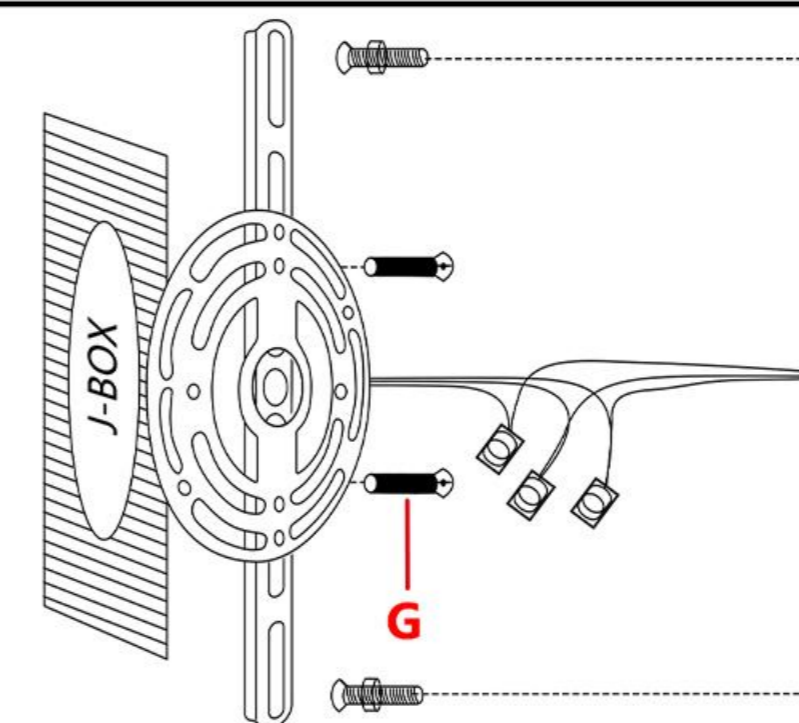

Tighten the mounting plate onto the outlet box.

5

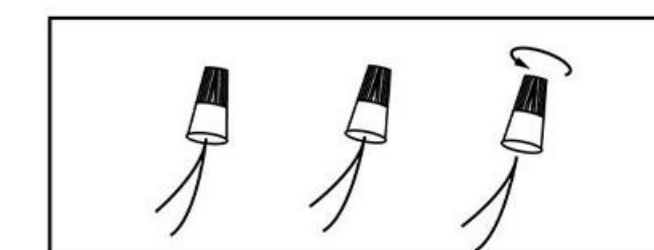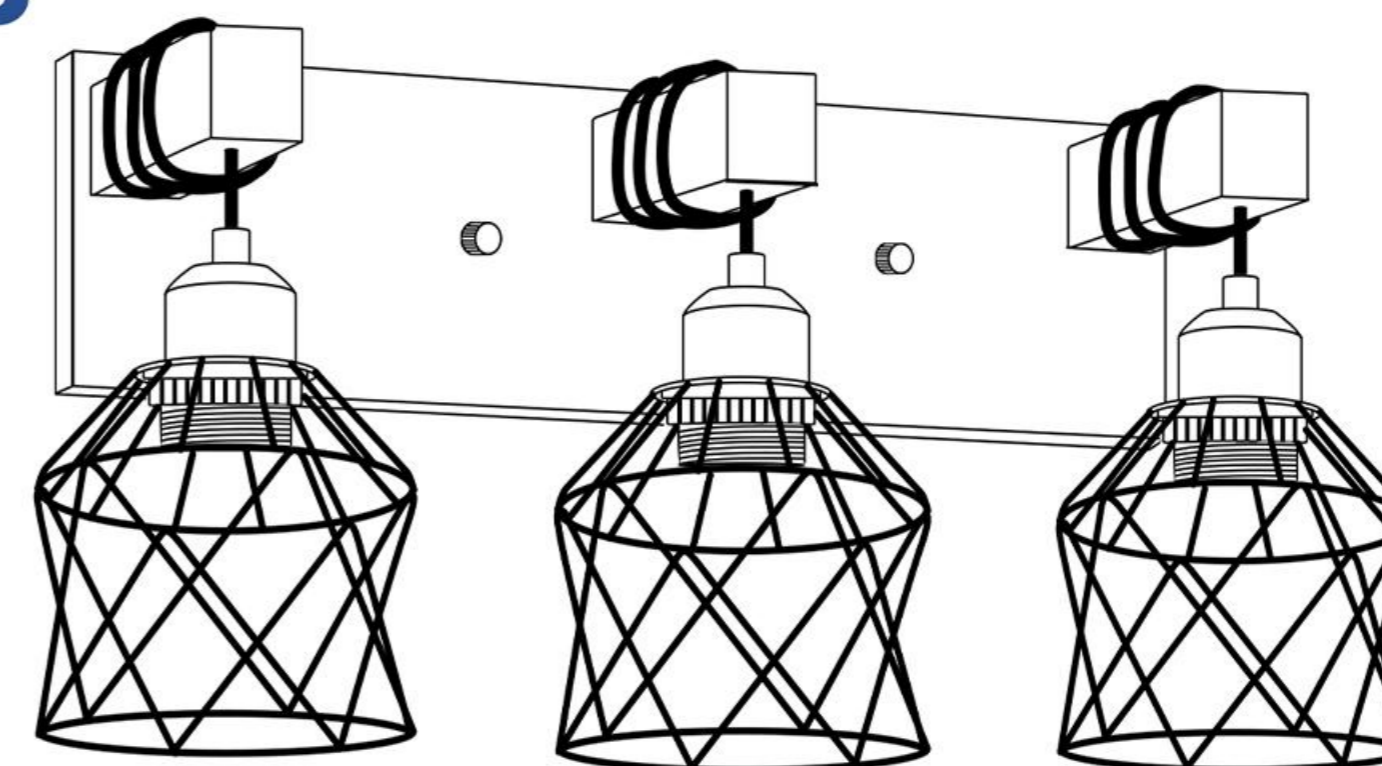

Step ①: A. Attach the white wire from the house and 3 white wires from the light fixture.

B. Twist on wire nut(provided). Repeat the process to connect the black wires.

C. Heat the black shrink tube (provided) to contract it.

Step ②: Attach the bare wire fromn the house to the bare wire from the light fixture, then twist on a wire nut(provided).

NOTE: If there is not ground wire in your house, attach ground wire to green grounding screw marked GND.

WARNING: It is imperative that the outlet box in your home be property grounded.

Step ③: Gently tuck the wires into the junction box through the center of mounting bracket . Push the white and black wires apart so they won't touch each other.