

## Riff® | K-23830

Pull-down kitchen sink faucet with three-function sprayhead

### Features

- Three-function pull-down sprayhead with touch control allows you to switch between aerated stream, Sweep® spray, and Boost technology
- Sweep® spray provides a wide, powerful blade of water that sweeps your dishes and sink clean
- Boost technology increases the flow rate by 30% with the press of a button. Use Boost with stream for faster filling or with Sweep® spray for more powerful cleaning
- DockNetik® secure docking system locks sprayhead into place when not in use
- ProMotion® technology allows the pull-down sprayhead to swivel for more comfortable use
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- High-arch spout offers vertical clearance for tall cookware and pitchers
- Single lever handle makes adjusting water temperature easy with one hand
- 1.5 gpm (5.7 lpm) maximum flow rate at 60 psi (4.14 bar)
- Temperature memory allows faucet to be turned on and off at the temperature set during prior usage
- KOHLER® ceramic disc valves exceed industry longevity standards for a lifetime of durable performance



### Sustainability



### Available Colors/Finishes

*Color tiles intended for reference only.*

- |     |                               |
|-----|-------------------------------|
| CP  | Polished Chrome               |
| VS  | Vibrant Stainless             |
| BL  | Matte Black                   |
| 2MB | Vibrant Brushed Moderne Brass |



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.  
For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.  
8-06-2026 17:05 - US-CA

THE BOLD LOOK  
OF **KOHLER**®

## Codes/Standards

*ADA, CSA B651 compliant when installed to the specific requirements of these regulations.*

ADA CSA B651

ASME A112.18.1/CSA B125.1  
NSF/ANSI/CAN 372  
NSF/ANSI/CAN 61  
DOE - Energy Policy Act 1992  
California Energy Commission (CEC)  
NSF/ANSI/CAN 61|NSF/ANSI/CAN 372  
ADA  
ICC/ANSI A117.1  
CSA B651

## Recommended Products/Accessories

K-77687 Single replacement filter cartridge  
K-77688 Two-pack replacement filter cartridges  
K-77685 Single-cartridge water filtration system  
K-77686 Double-cartridge water filtration system

## Warranty

*See website for detailed warranty information.*

KOHLER® Faucet Lifetime Limited Warranty

## Technical Information

*All product dimensions are nominal.*

### Handle

Handle Style/Type: Lever

### Spout

Spout Reach: 8-7/8" (225 mm)

### Flow Rate

Faucet Flow Rate: 1.5 gpm (5.7 l/min)


## Valves

Included Valves: Ceramic disc, Thermostatic,  
Volume Control

## Material

- Premium metal construction for durability and reliability
- KOHLER finishes resist corrosion and tarnishing



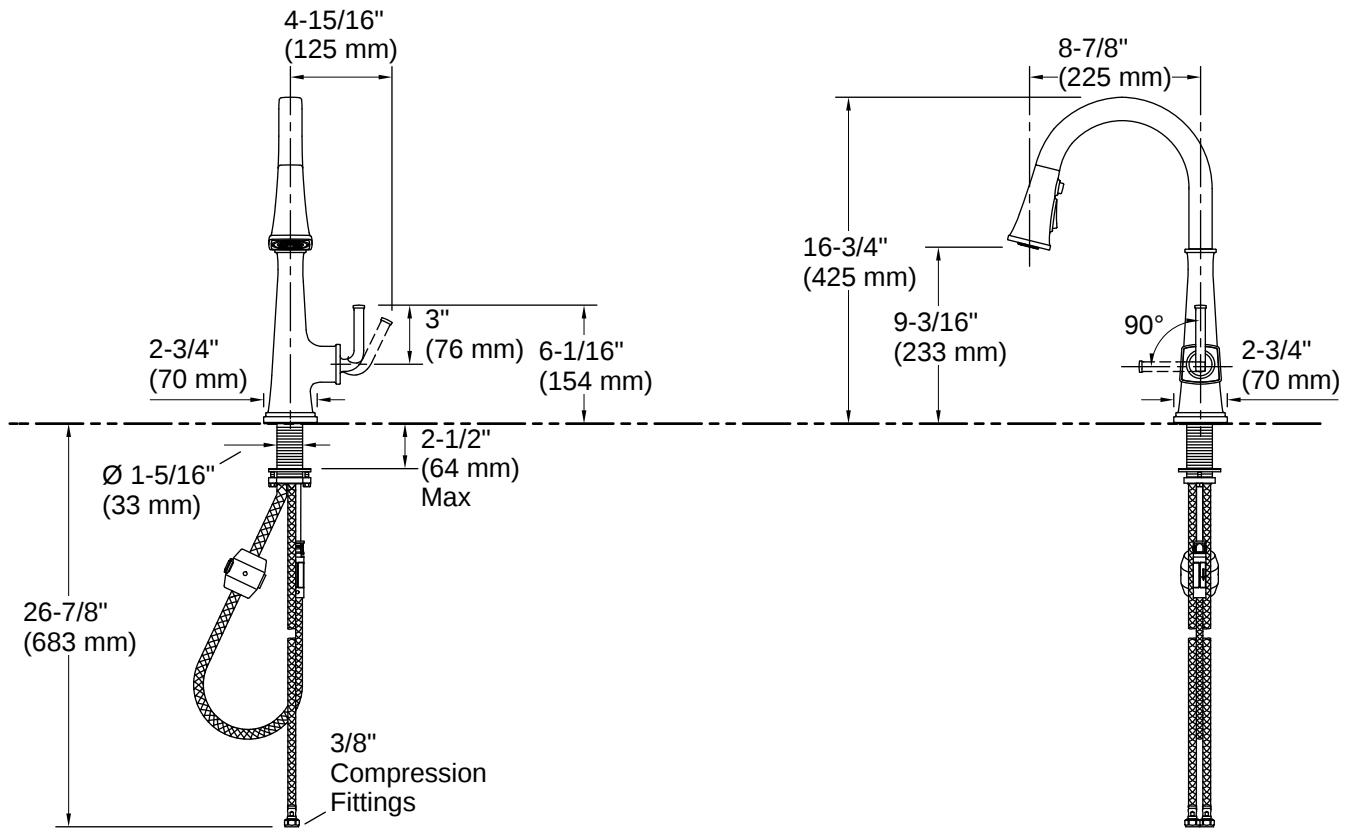

## Installation

- Single-hole installation (three-hole escutcheon sold separately)
- Flexible supply lines simplify installation

## Installation Notes

*Install this product according to the installation instructions.*

ADA complaint for faucet handles only.

ADA compliant for faucet handles only

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.

8-06-2026 17:05 - US-CA