

Color Temp & CRI	Finish	Watt	LED Lumens	Delivered Lumens	Title 24
3000K 90	AL Brushed Aluminum	23W	1200	600	Yes
3000K 90	BK Black	23W	1200	600	Yes
3000K 90	WT White	23W	1200	600	Yes

- For 277V special order, add an "F" before the finish

DESCRIPTION

Signature minimalism, Verve mounts well vertically or horizontally as an elongated sconce with up and down illumination. A seamless exterior makes for a clean design. Verve features a silk-screened diffuser with a white ceramic glaze and a light engine that is factory sealed for maximum protection against the harshest elements.

FEATURES

- Up & down light
- Conversion plate for 4" junction box included
- Silk-screened diffuser with a white ceramic glaze
- Seamless exterior makes for a clean design
- ACLED driverless technology
- 5 year warranty

SPECIFICATIONS


Color Temp:	3000K
Input:	120 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100 - 10%
Rated Life:	54000 Hours
Mounting:	Can be mounted on wall in all orientations, Can be mounted on ceiling or wall in all orientations
Standards:	ETL, cETL, IP65, Title 24: 2016 Wet Location Listed
Construction:	Aluminum hardware with glass diffuser



FINISHES



LINE DRAWING

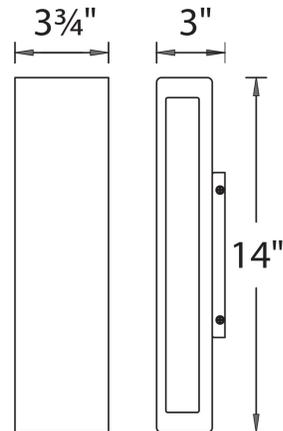

Outdoor Wall Sconce 3000K

Color Temp & CRI		Finish		Watt	LED Lumens	Delivered Lumens	Title 24
3000K	90	AL	Brushed Aluminum	46W	2450	1215	Yes
3000K	90	BK	Black	46W	2450	1215	Yes
3000K	90	WT	White	46W	2450	1215	Yes

- For 277V special order, add an "F" before the finish:

DESCRIPTION

Signature minimalism, Verve mounts well vertically or horizontally as an elongated sconce with up and down illumination. A seamless exterior makes for a clean design. Verve features a silk-screened diffuser with a white ceramic glaze and a light engine that is factory sealed for maximum protection against the harshest elements.

FEATURES

- Up & down light
- Conversion plate for 4" junction box included
- Silk-screened diffuser with a white ceramic glaze
- Seamless exterior makes for a clean design
- ACLED driverless technology
- 5 year warranty

SPECIFICATIONS

Color Temp:	3000K
Input:	120 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100 - 10%
Rated Life:	54000 Hours
Mounting:	Can be mounted on wall in all orientations, Can be mounted on ceiling or wall in all orientations
Standards:	ETL, cETL, IP65, Title 24: 2016 Wet Location Listed
Construction:	Aluminum hardware with glass diffuser

FINISHES



LINE DRAWING

