



Kernen® by Studio McGee | K-32261-PE01

18" pendant

Features

- Designed in collaboration with Studio McGee
- Flared milk glass shade perfectly diffuses the light to add an elegant warmth to your room
- Requires bulb with medium (E26) base; type A19, A21, or G25 bulb recommended (sold separately)
- Suitable for damp locations, per UL 1598
- Includes installation hardware
- Coordinates with other products in the Kernen collection
- Fixture is dimmable when paired with dimmer switch and compatible bulbs



Available Colors/Finishes

Color tiles intended for reference only.

- | | |
|---|---------------------------|
|  | SNL Polished Nickel |
|  | BNL Brushed Nickel |
|  | CPL Polished Chrome |
|  | BLL Matte Black |
|  | 2GL Brushed Moderne Brass |



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

8-04-2026 06:00 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

UL 1598
CSA C22.2 No. 250.0

Technical Information

All product dimensions are nominal.

Number of Lights:	1
Lighting Type:	Socket-based
Socket Type:	E-26 Medium
Number of Shades:	1
Hanging Type:	Downrod
Height:	18-13/16" (478 mm) - 72-13/16" (1850 mm)

Material

- Premium metal and glass construction
- Manufactured with quality materials and complemented with a meticulous finishing process
- Durable finishes engineered to last and designed to coordinate with KOHLER faucet finishes

Required Electrical Service

One circuit required.

120 V, 0.833 A, 60 Hz


Warranty

See website for detailed warranty information.

KOHLER® Indoor Lighting Fixtures Limited Warranty



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
8-04-2026 06:00 - US-CA

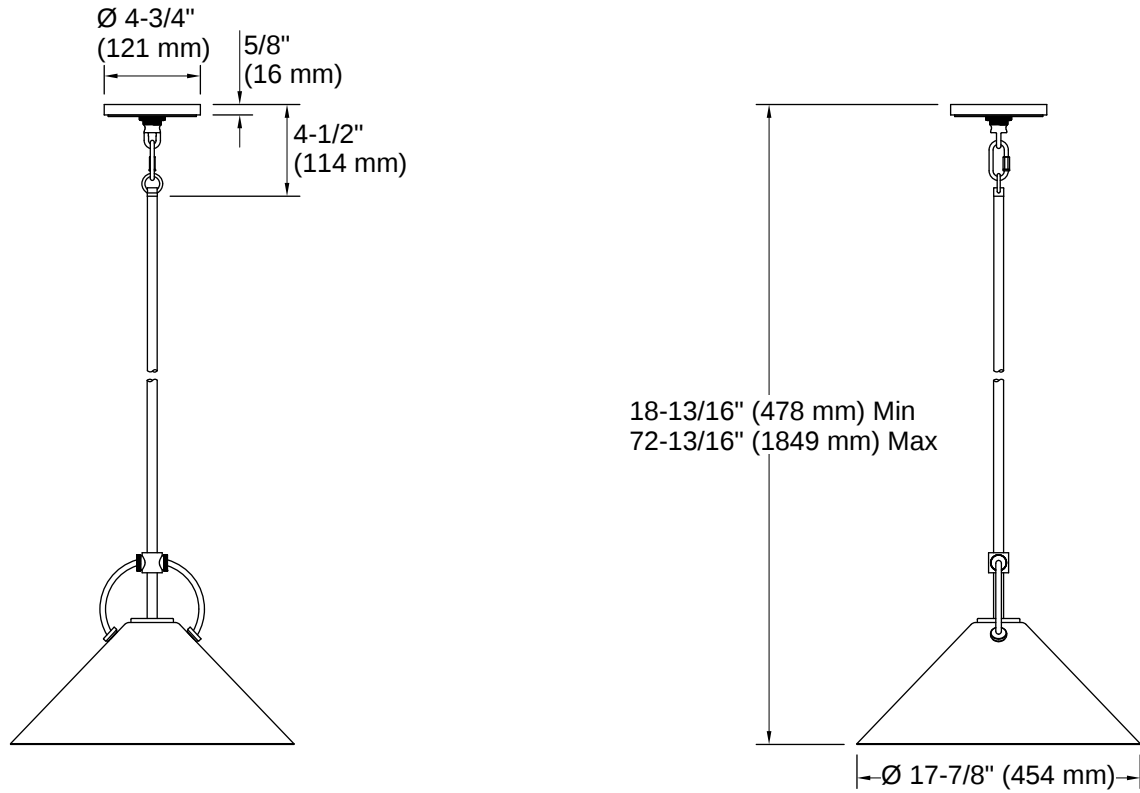

Installation Notes

Install this product according to the installation instructions.

