
outline drawing:




model:

Technical data: Power supply voltage 110-120V, bulb type E12Max40Wx20PCS (not included)

## CAUTION

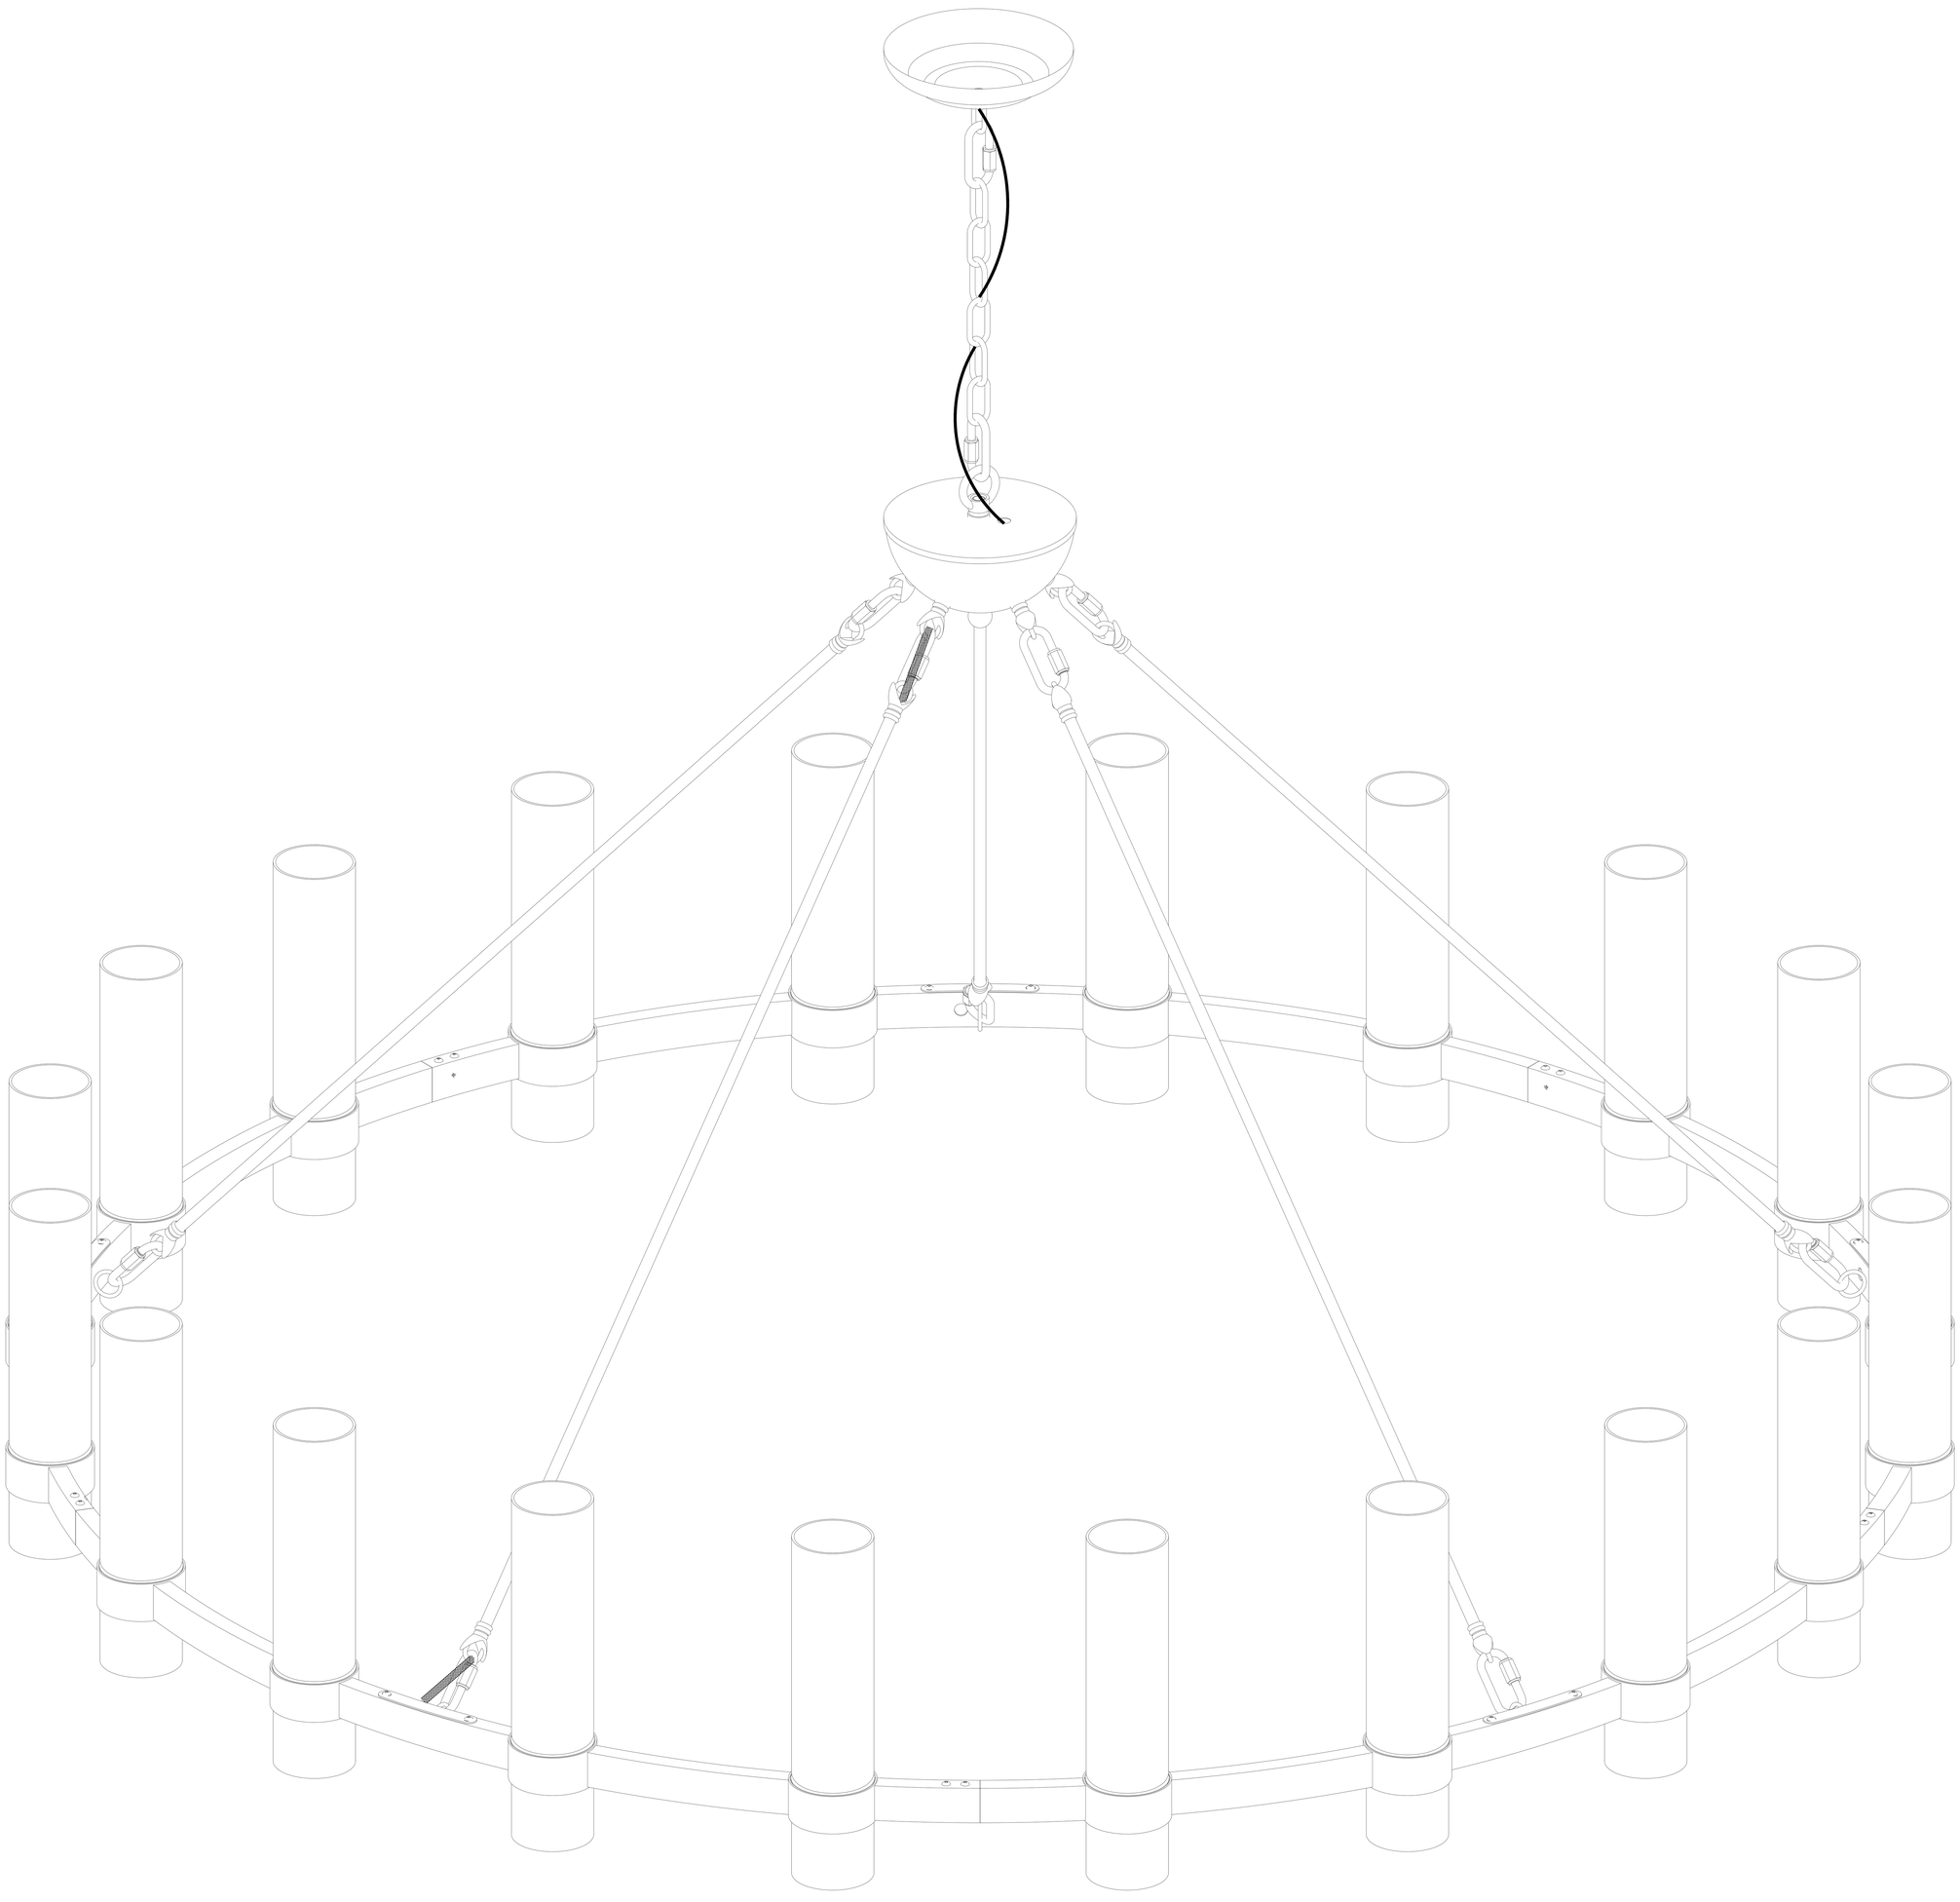


- Before installing the lighting fixtures, please check the insulation of the wires for any cuts, wear, or possible damage during transportation。If the wires are defective, do not attempt installation 。
- In some countries, electrical installation work can only be carried out by authorized electrical contractors。Please contact the local power department for advice。

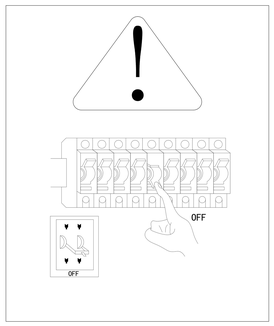



**IMPORTANT** Before starting the installation work, please make sure to cut off the power supply to the circuit。

**IMPORTANT** Keep children away from the installation process 。

Required tools (not included):


Ladder


Phillips screwdriver


pincers


Required tools (including):


expension screws



glove



The hardware kit provides:


sling chain


carabiner



Installation board


mounting screw


Hanging plate screws



ring



CONNECTORS



tray



Semi circular body


Tie rod


cable tie


Gecko rubber stopper


Self tapping screws

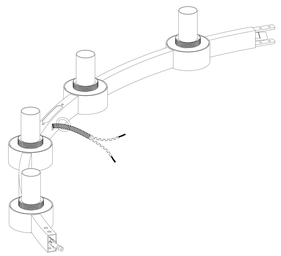
lamp body



Long glass-20PCS


Short glass-20PCS


Pingmu-20PCS

- The components displayed on each lamp may vary slightly


## Step 1

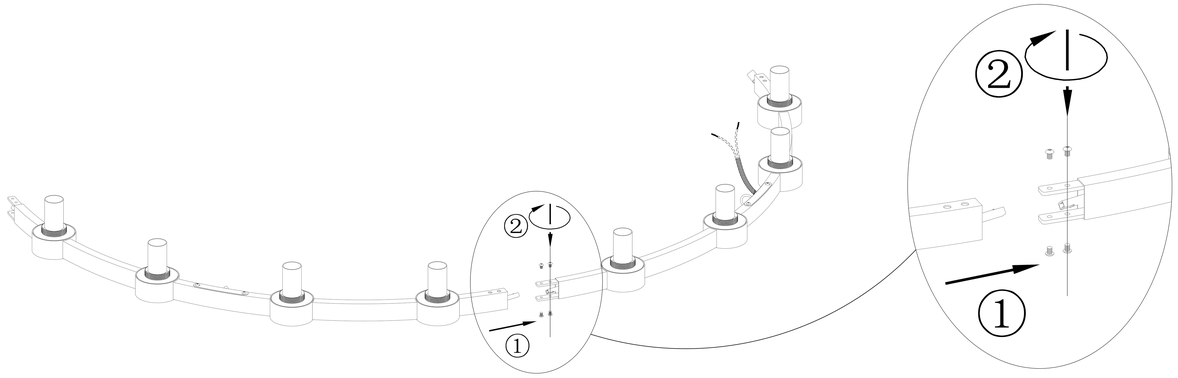


① Connect the cable connectors in series together。

② Connect all the rings together and use a Phillips screwdriver to tighten the screws at each connection point。


## Step 2

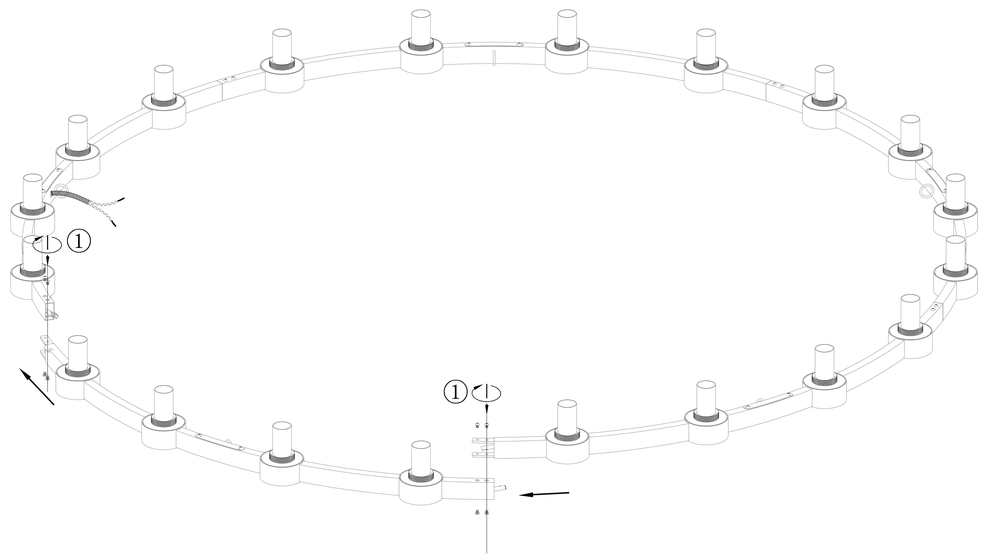


① This step refers to step 1 。




## Step 3

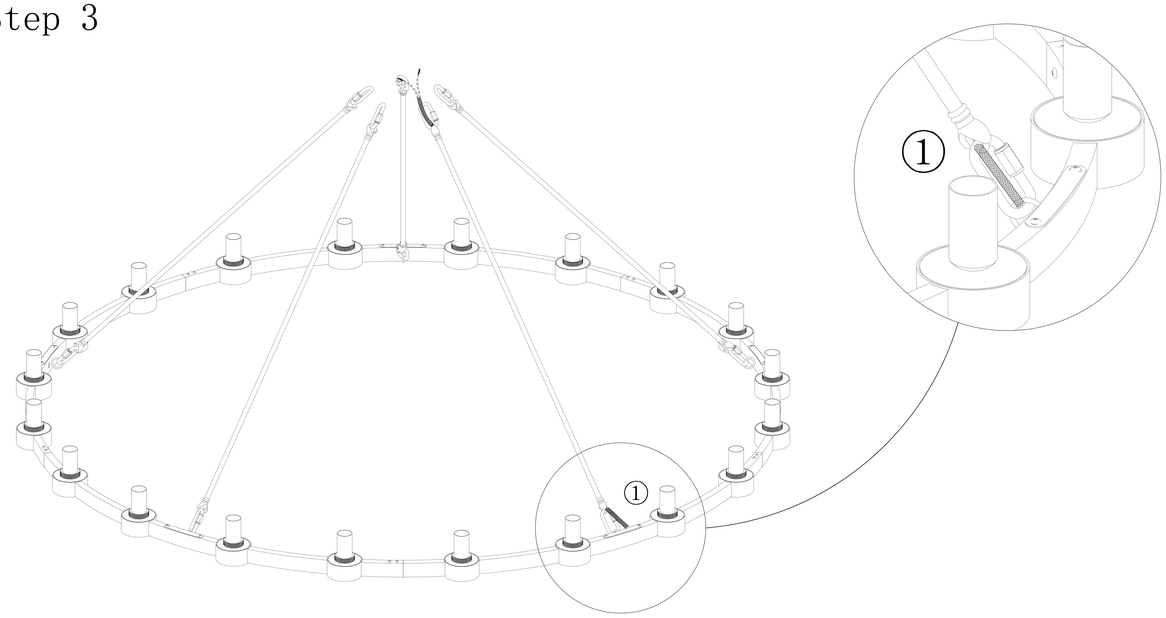


① Thread the wire through one of the pull rods and connect it to the ring with a snap ring。


## Step 4

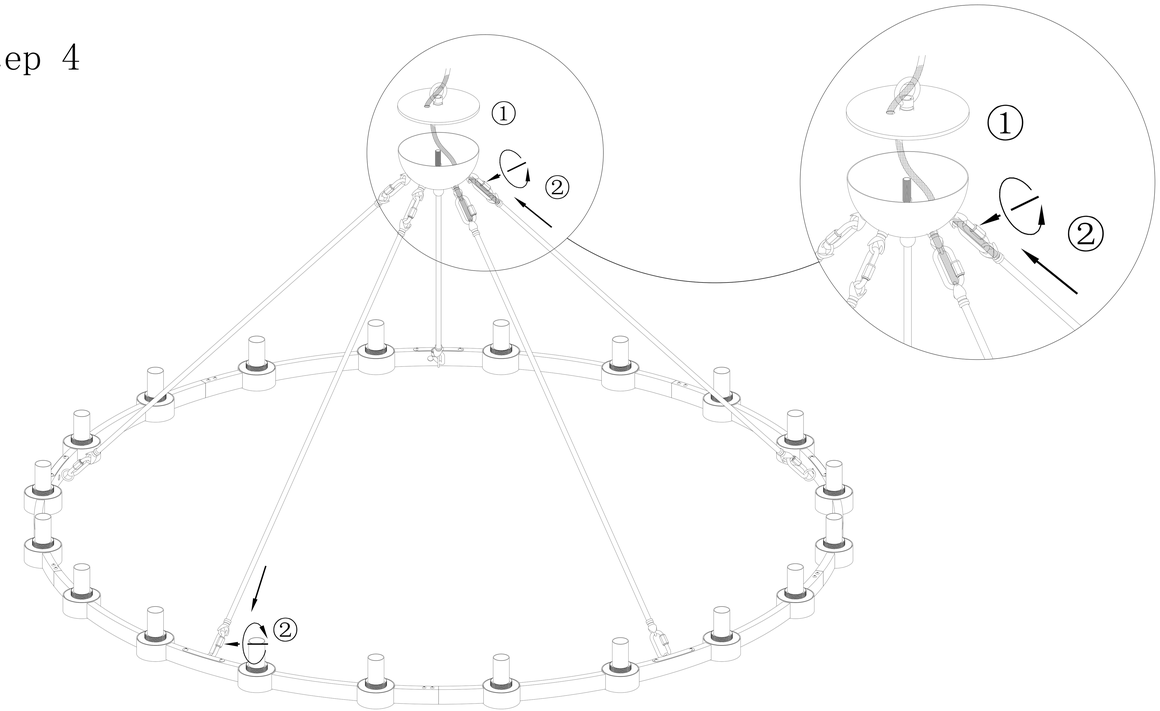


① Open the ancient lid and thread all the wires through the drum lid。

② Connect ancient, pull rods, and circular objects with mountain buckles。

## Step 5

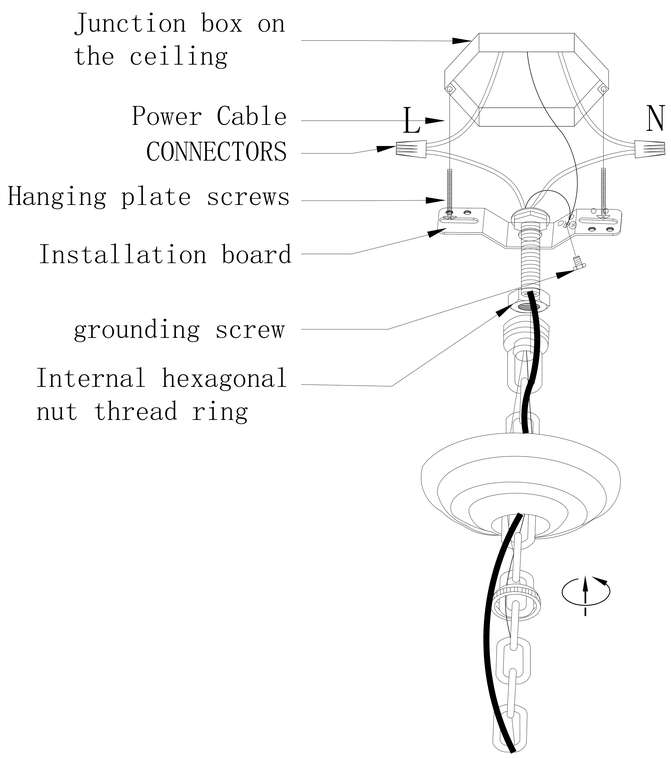


① Thread all the wires through the canopy and installation kit。

② Connect the power cable with two cable connectors。


③ Connect the grounding wire and tighten it with the grounding screw。

④ Install the fixing screws into the mounting plate, install the installation unit under the junction box, and tighten with two mounting screws。


⑤ Fix the canopy in place using a suspension ring. Tighten the screw ring and hex nut with a wrench to tighten the hex nut。

⑥ Tighten the fixing screws on the rain shelter holes。

⑦ Swivel the lid onto the canopy。

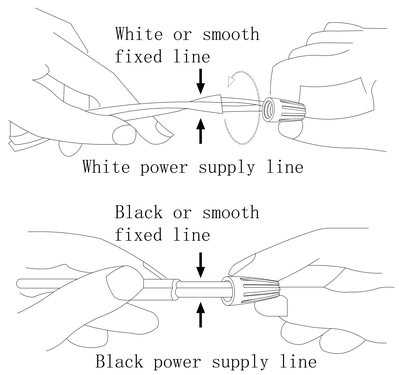



| Connect the black or red wire (with an L sticker on the wire) to: | Connect the white wire (with N stickers on the wire) to: |
|---|---|
| black | white |
| Parallel lines - pti&l (circular and smooth) | Parallel lines - spri&l (square and ridge shaped) |
| Transparent, brown, gold or black (without tracer) | Transparent, brown, gold or black (with tracer) |
| Copper core insulated wire (excluding GREEN) | Silver conductor insulated wire (excluding GREEN) |

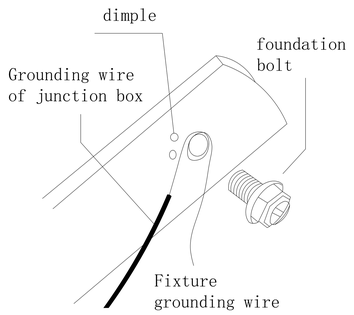




## Step 6

Kind reminder:Before installing the lampshade, please clean it thoroughly 。

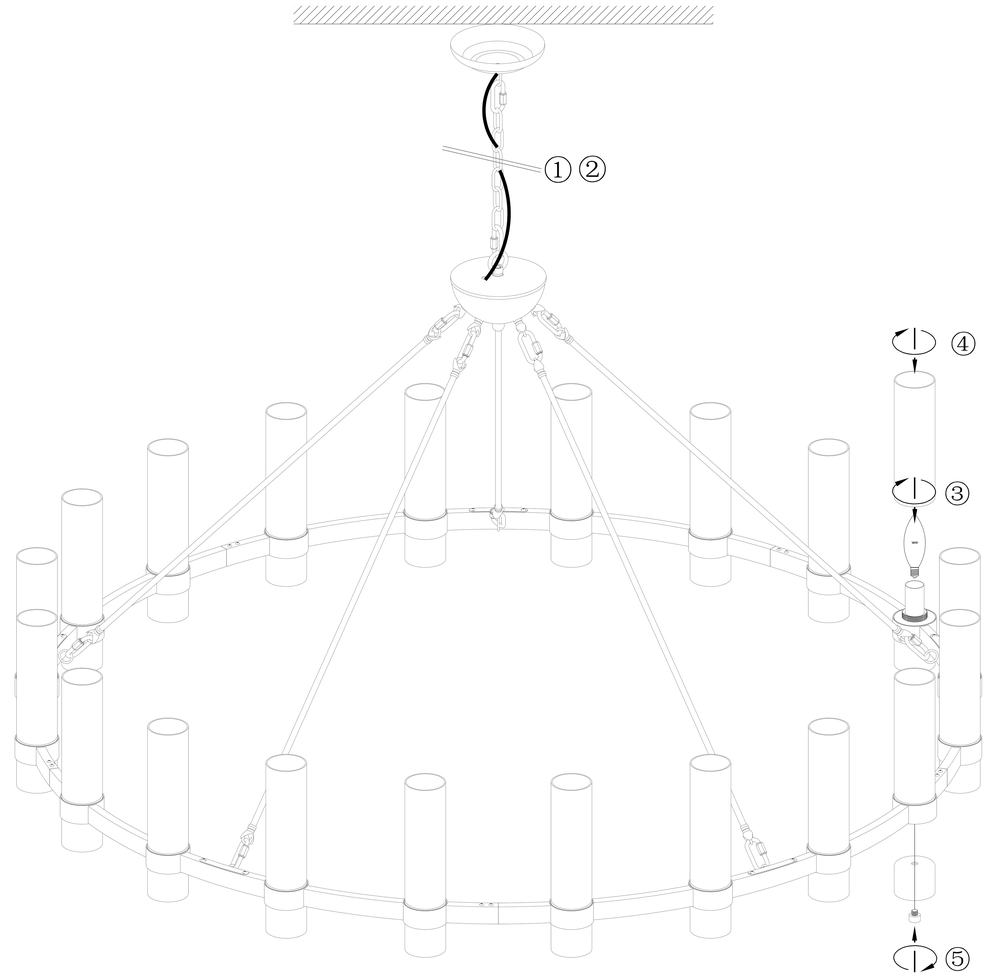


①② This depends on the height of your ceiling and the desired suspension length. You can measure the chain and adjust the locking buckle to achieve the desired chain length。

③ Tighten the light bulb (E12 maximum 40W, not included)。

④ Rotate the long glass lampshade onto the aluminum teeth on the lamp head。

⑤ Connect the flat mother through the middle hole of the short glass cover to the tooth hole on the lamp body and tighten it。