

ASSEMBLING & INSTALLATION INSTRUCTIONS
 The drawing shown may not exactly match the product enclosed. However, the installation instructions do apply to this product.

ASSEMBLING & INSTALLATION INSTRUCTIONS
 The drawing shown may not exactly match the product enclosed. However, the installation instructions do apply to this product.

- ◆ **WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**
◆ **ATTENTION! COUPER LE COURANT AU FUSIBLE OU UN DISJONCTEUR.**

ASSEMBLING THE FIXTURE (Fig.1)

1. Shut off the power at the circuit breaker box. Remove old fixture and all hardware from Junction Box.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. Guide supply wires through hole in center of mounting plate.
4. Attach the mounting plate to the junction box using two junction box screws as shown. The side of the mounting plate marked "GND" must face out. **The junction box is not included.**
5. Follow wiring instructions carefully.(see fig.2)
6. Attach the back plate of the lamp body onto the junction box, aligning the back plate mounting holes with screw hole of the mounting plate in side, then lock it securely with mounting screws.
7. Place the glass shade insert to the lamp holder, lock it securely with the check ring.
8. Install the light bulbs(not included) in accordance with the fixture's specifications. **NOTE: DO NOT EXCEED THE MAXIMUM WATTAGE RATING!**

CONNECTING THE WIRES (Fig.2)

1. Connect the electrical wires as follows. Connect the Black wire from the fixture to the black house (hot) Wire. Connect the white wire from the fixture to the white (neutral) house wire. Make sure all wire nuts are secured. You may wrap the connections with electrical tape. If your junction box has a ground wires (green or bare copper) connect fixture's ground wire to it. Otherwise attach the bare copper fixture wire to the green ground screw on the mounting plate.
2. Tuck the wire connections neatly in to the wall junction box.

Your installation is now complete. Return power to the junction box and test the fixture.

FIG.1

The diagram illustrates the assembly of a lamp fixture. The main assembly shows a central **Lamp Body** with a **Mounting Screw** at the top and a **Check Ring** at the bottom. Two **Glass Shade** components are shown, one above and one below the lamp body. To the left, an **Outlet Box** is shown with various wires connected to it: **Fixture Ground Wire**, **Supply Ground Wire**, **Supply wire**, and **Fixture wire**. A **Mounting plate** and **Box screw** are also indicated. Below the main assembly, two wiring configurations are shown, separated by a dashed line. The left configuration shows a single lamp fixture connected to a horizontal bar. The right configuration shows four lamp fixtures connected to a horizontal bar.

FIG.2

FIG.2	FIXTURE WIRES	HOUSE WIRES
Black or Smooth	Black(Hot)	Black(Hot)
White or Ribbed	White (Neutral)	White (Neutral)
Bare Copper (Ground)	Green or Bare Copper(Ground)	Green or Bare Copper(Ground)

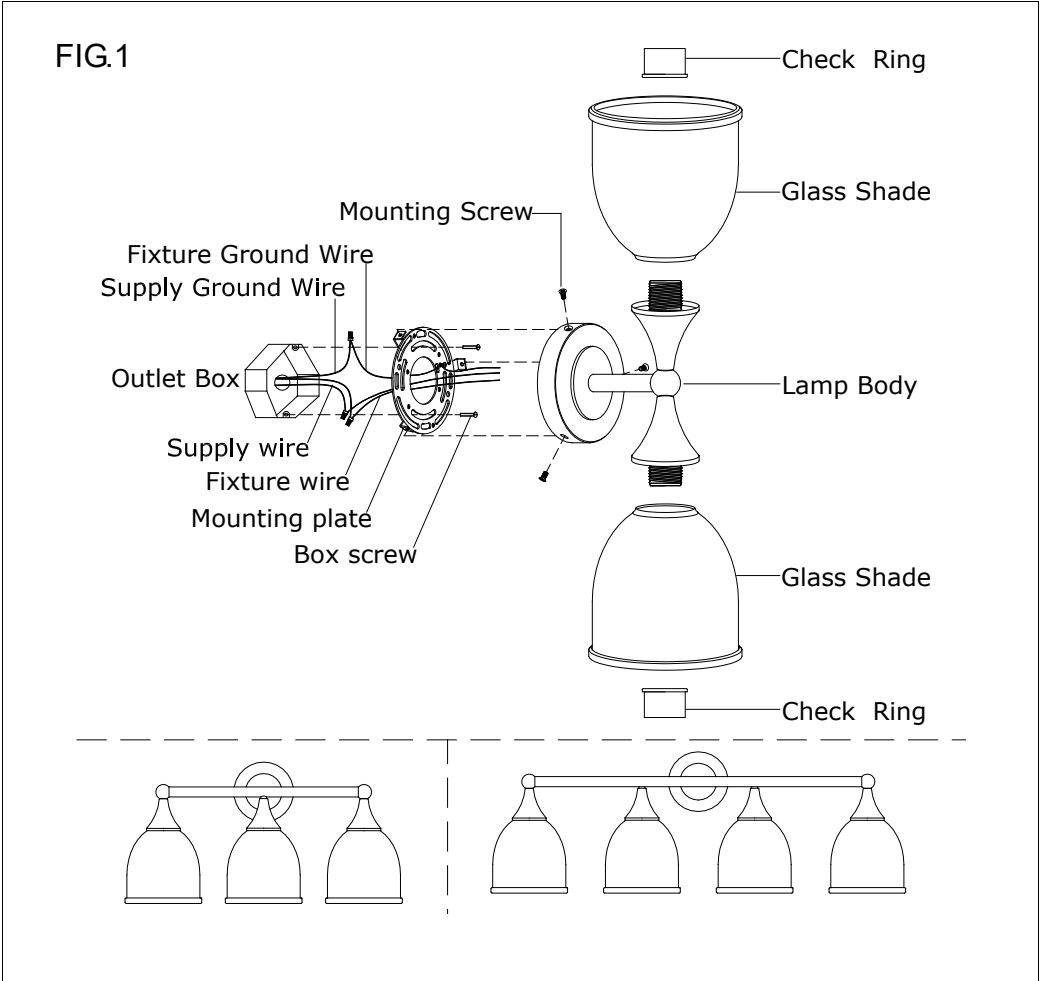


FIG.2

FIXTURE WIRES Black or Smooth  HOUSE WIRES Black (Hot)	FIXTURE WIRES White or Ribbed  HOUSE WIRES White (Neutral)	FIXTURE WIRES Bare Copper (Ground)  HOUSE WIRES Green or Bare Copper (Ground)
---	---	--

