


To Adjust Angle of Hand Shower
 Rotate holder in vertical direction to set desired hand shower angle.



To Save Water while Lathering or Shampooing
 To save water, turn dial lever to pause mode. For your safety (to prevent pressure buildup), pause mode has water dripping instead of complete shut-off. After use, do not leave dial set to pause mode.


WARNINGS:

- To avoid hot water dangers and conserve even more energy, make sure your water heater is set at 120°F (48.9°C) or below.
 - Test the shower water with your hand before bathing.
 - As with all combination showers, using both shower together always cause water pressure to drop in each shower head.
- Use shower head or hand shower individually to maximize water pressure for high-power performance. Use combined dual-shower application for gentle pampering, wide flow coverage and targeting of different body areas.
- Always ensure the hand-held shower head is properly placed in the bracket, so as to prevent the shower head from falling.
 - Do not pull on or tug the flexible hose. This may result in the shower head coming loose and falling.

Instruction Manual


To begin your shower experience we want to give you all of the proper tools to make installation easy and quick. This way you are that much closer to enjoying an invigorating shower with your new shower head.

- Gather the tools to install the shower head.

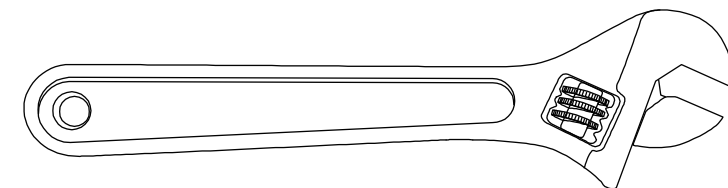



Adjustable Wrench (not included)

- Remove old shower head and remove all pipe tape as well.
- Insure that the washer from the old shower is not connected to the pipe. Use a thin utensil to check inside the pipe for washers, such as a pencil or screw driver. Do not use your fingers.

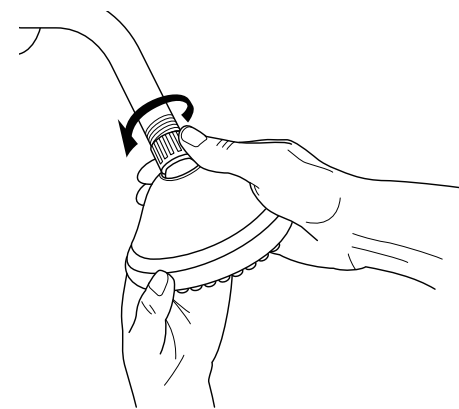


INSTALLATION

Dual Shower Heads

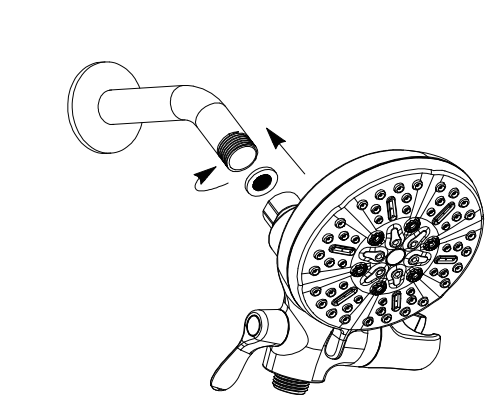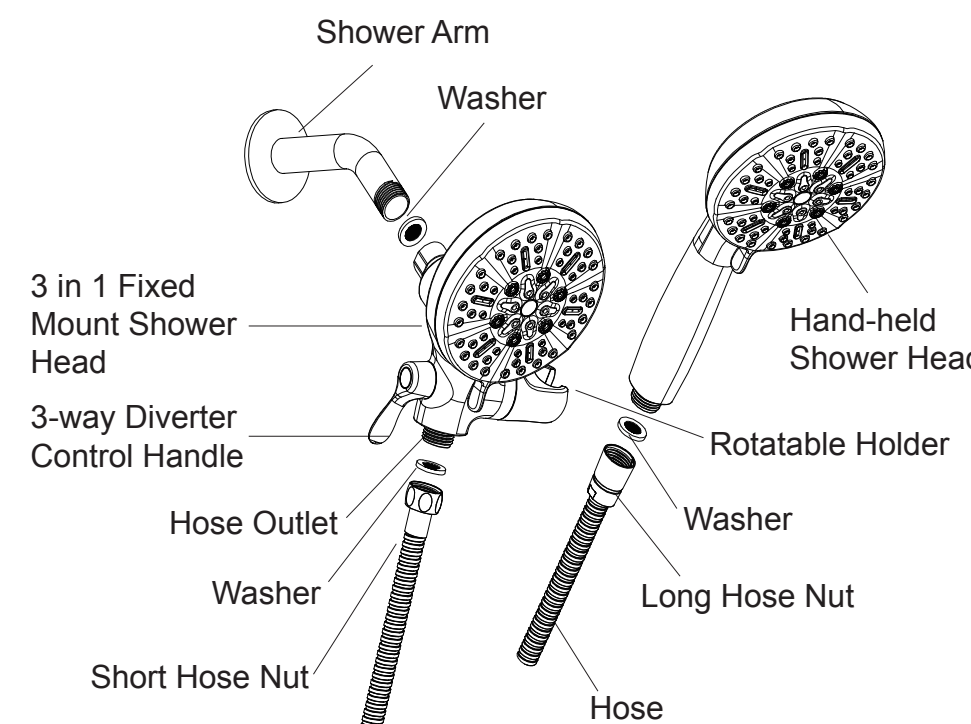

① Attach 3 in 1 fixed mount shower head by threading clockwise onto shower arm with rotatable holder to the right and 3-way diverter control handle to the left. Use a wrench to tighten shower head nut to a snug fit. Do not over tighten. Wrap shower head nut with a cloth if you are using pliers.

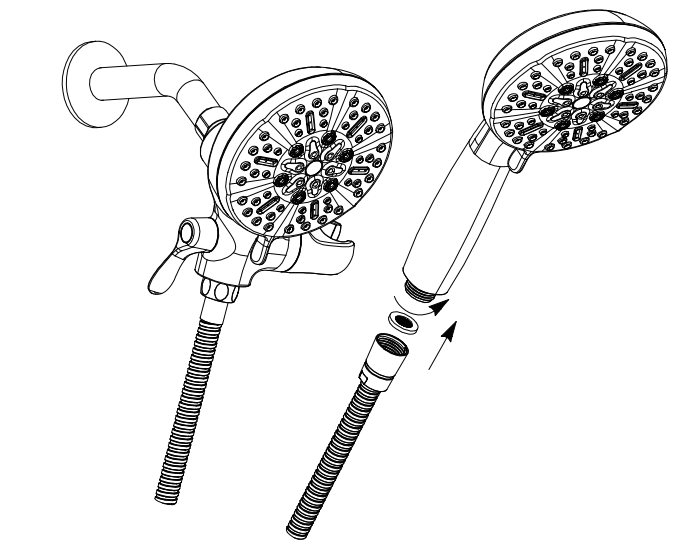


② Locate the hose end with short hose nut and hand tighten to shower head. **IMPORTANT!** If hose is not installed in this manner unit will not operate properly.




③ Place hand-held shower head in rotatable holder. Point all shower heads away from you and turn on the water full force. Check for leaks. Re-tighten all connectors if necessary.

Note: Several U.S. state and local municipal plumbing codes require the use of a backflow prevention device when installing a hand shower. This device is termed a vacuum breaker. If your hand shower includes a vacuum breaker it will be located in the plug of hand-held shower.

OPERATION:

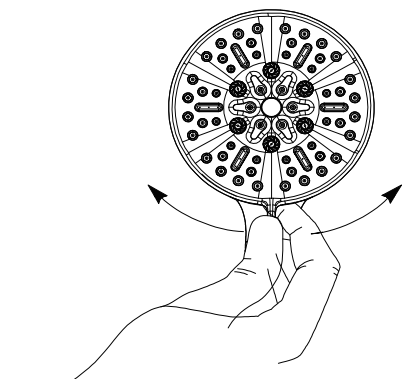

Spray Selector
 Spray Selector allows you to select from various spray patterns. Spray pattern is controlled by the small lever that rotates left and right.

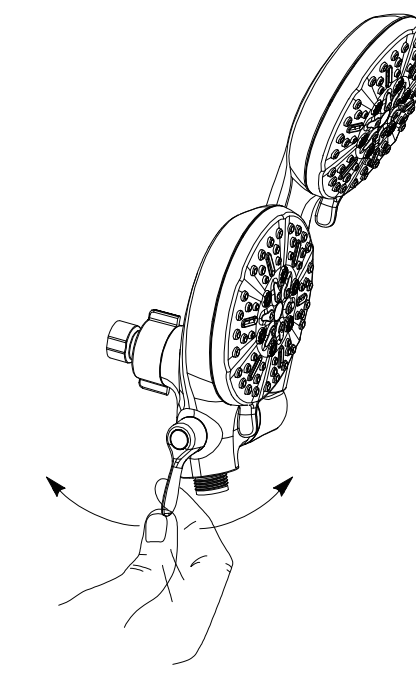

To Use 3-way Diverter
 To change between the hand-held or fixed mount spray or combination of both, turn the handle on the 3 in 1 fixed mount shower head clockwise or counter clockwise.