











Wood Cane Daybed

Sides Back, Rails and Slats

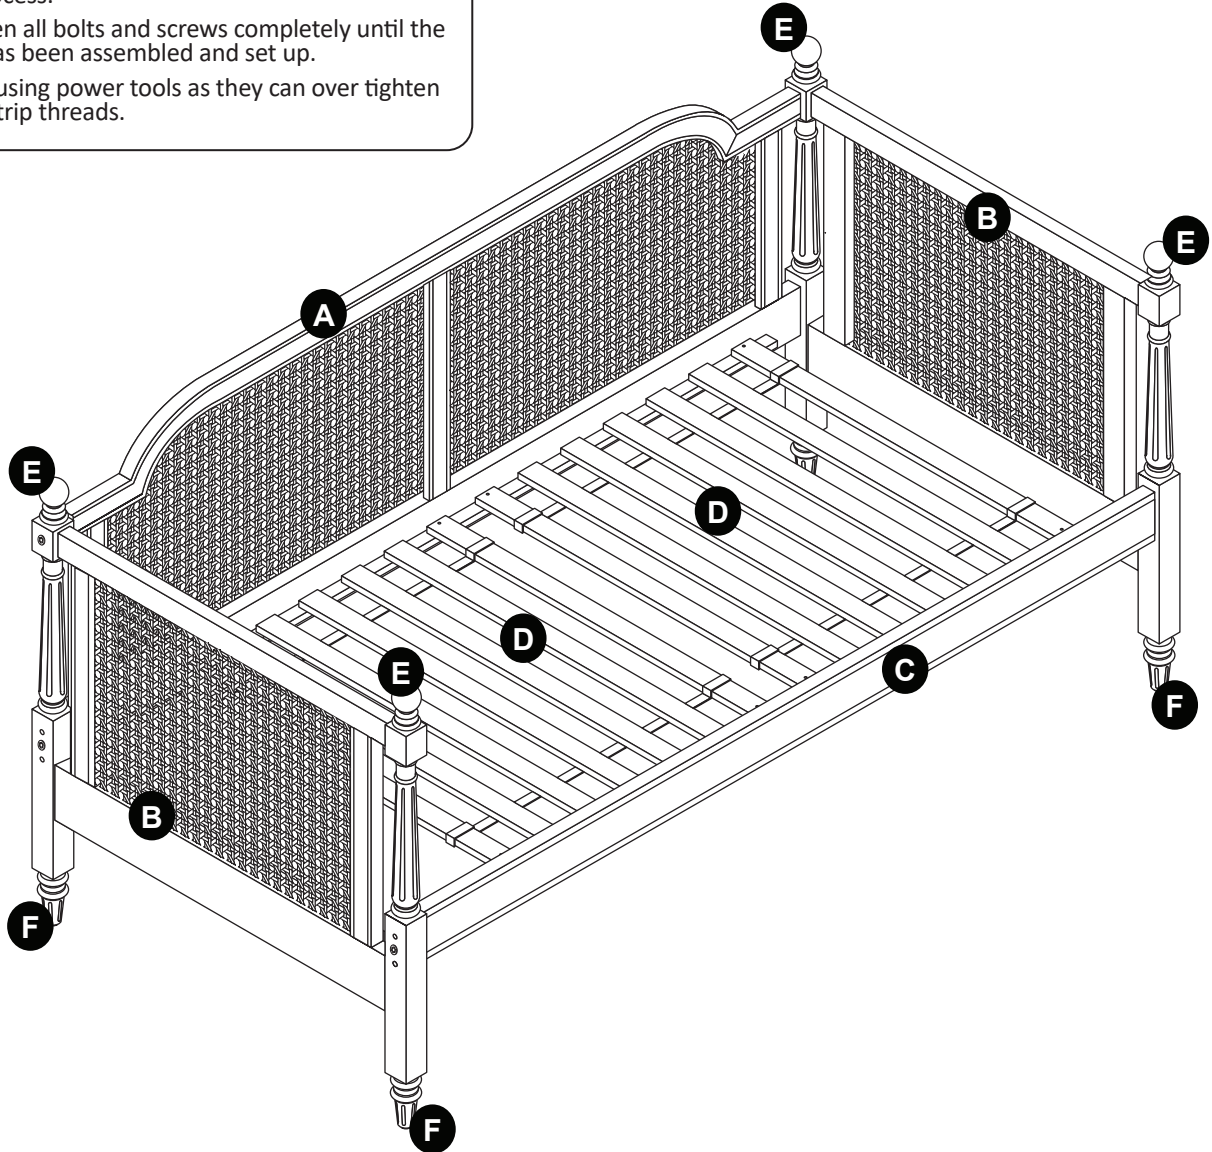
Examine all packaging material for small parts that may have come loose during shipment. Periodic checks are recommended to insure that all components are in proper position, tight and free from damage. Keep this assembly instruction for future reference. Adult assembly is required.

CODE	QTY	HARDWARE
1	6	1/4" x 3" Allen Bolts 
2	8	1/4" x 35L Screws 
3	8	Wood Dowels 
4	1	Allen Wrench 

CODE	QTY	COMPONENTS	CODE	QTY	COMPONENTS
A	1	Back Panel 	B	2	Side Panels 
C	1	Front Support Rail 	D	2	Slat Sets 
E	4	Finials 	F	4	Feet 

WARNING

- Do not let any sharp objects touch or rub the surface of the product.
- When assembling, do not let children play around the working area.
- Please confirm all parts are correct before starting the assembly process.
- Do not tighten all bolts and screws completely until the entire unit has been assembled and set up.
- Be careful if using power tools as they can over tighten screws and strip threads.



CARE & MAINTENANCE: The touch of a soft cloth is all the maintenance the finish will ever need. Please do not use harsh or abrasive cleaners for polishing, as they may cause damage to the finish. Periodic checks are recommended to make sure that all hardware is securely tightened.

Wood Cane Daybed

Sides
Back, Rails and Slats

STEP 1 - Figure 1

Begin assembly by attaching Side Panel (B) to Back Panel (A) using 2 Allen Bolts (1).

STEP 2 - Figure 1

Attach Front Support Rail to Side Panel (B) using 2 Wood Dowels (3) and 1 Allen Bolt (1).

STEP 3 - Figure 1

Repeat steps 1 and 2 to attach remaining Side Panel (B) to Back Panel (A) and Front Support Rail (C). Tighten all bolts with Allen Wrench (4) provided.

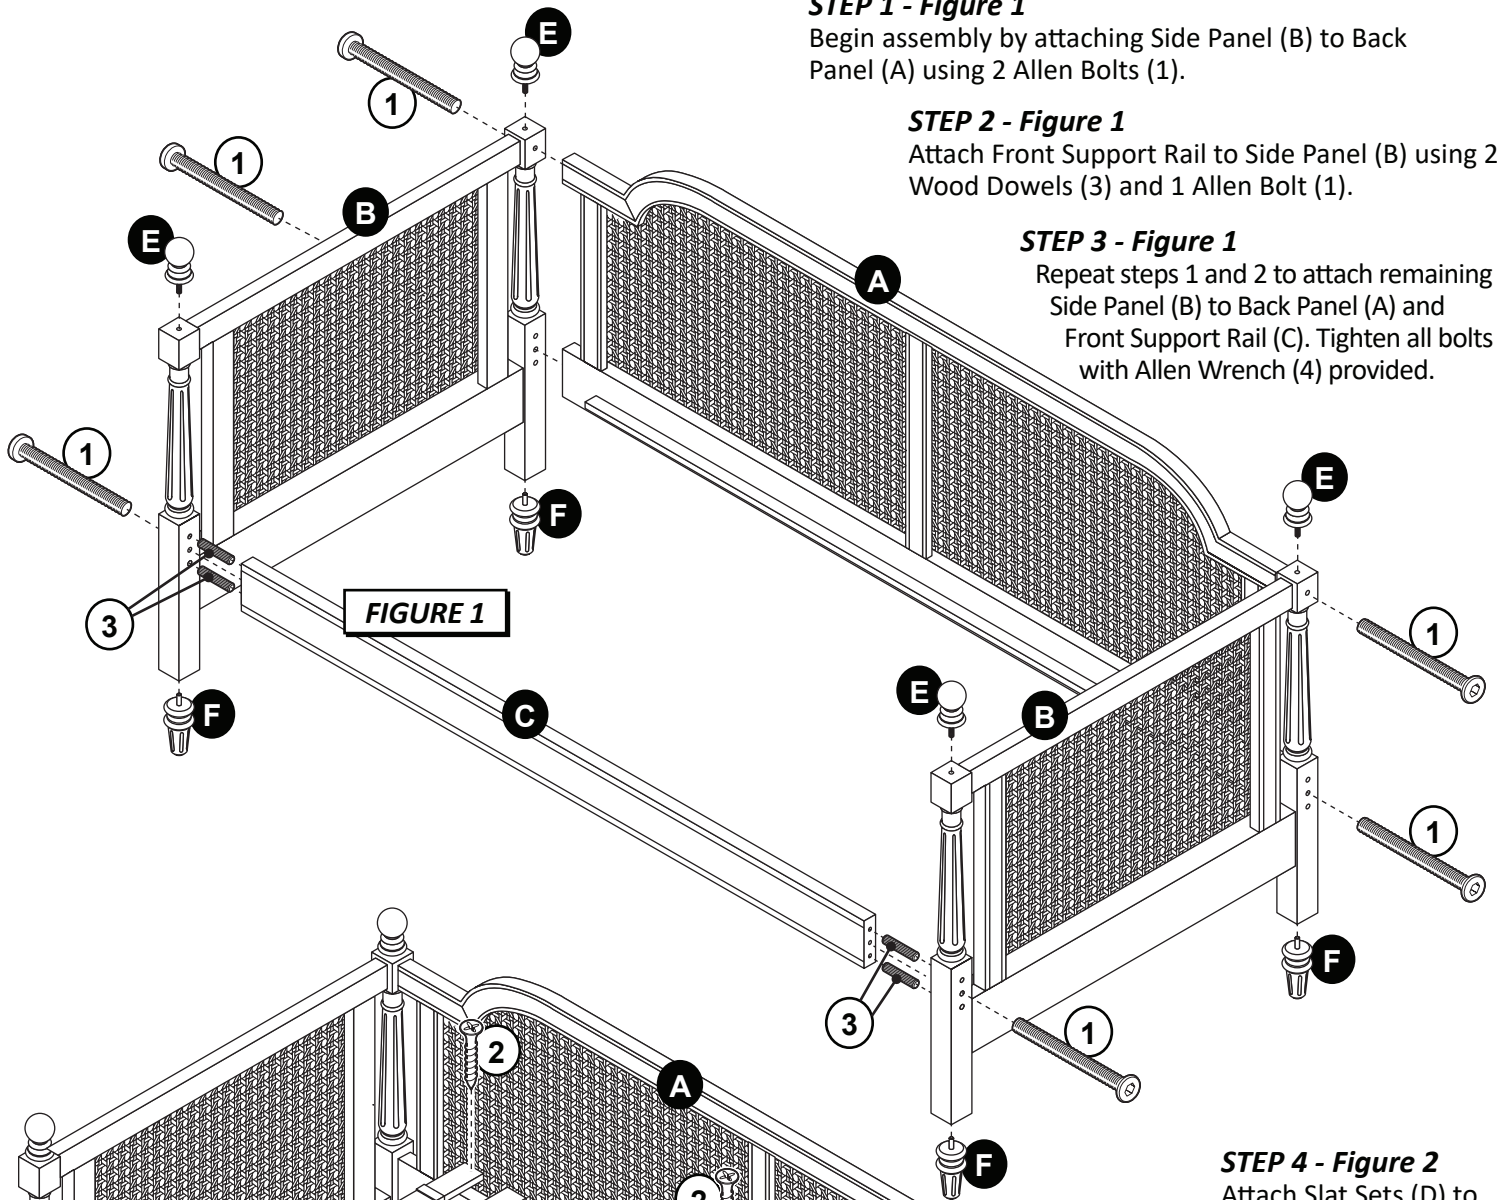


FIGURE 1

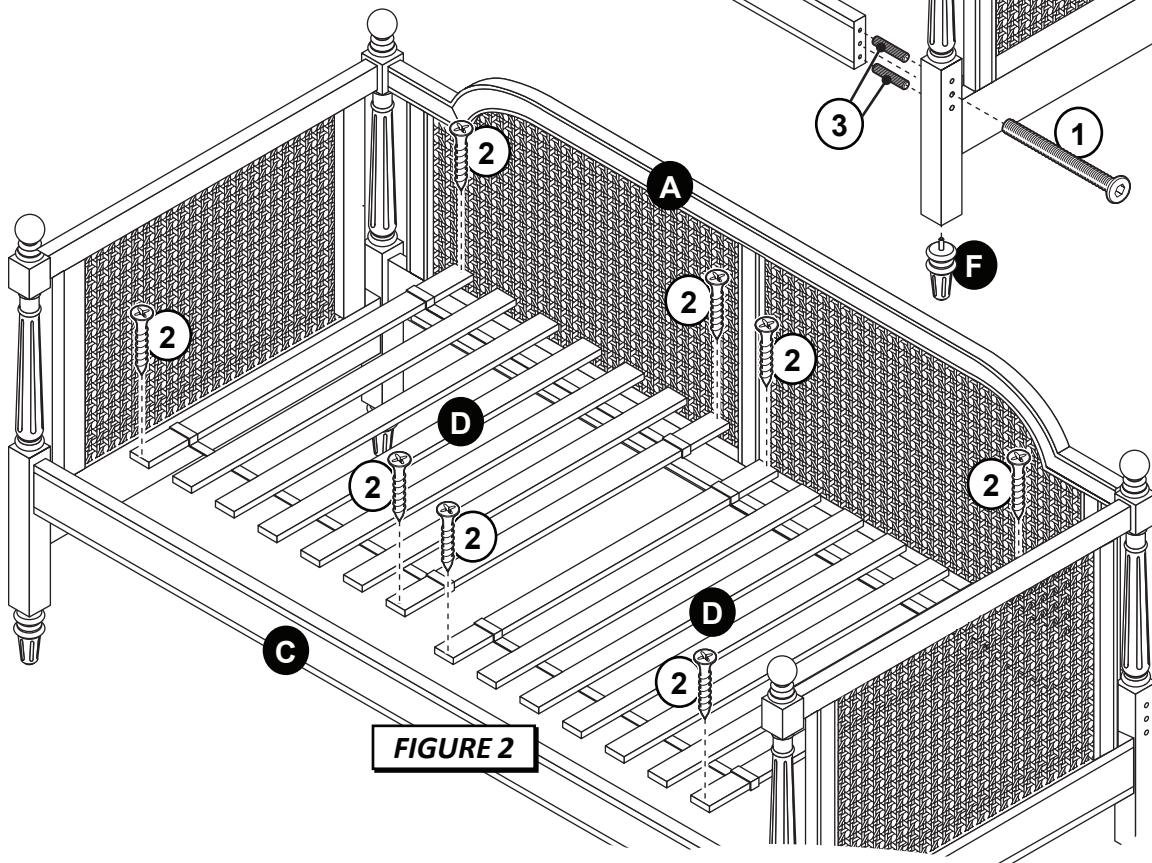


FIGURE 2

STEP 4 - Figure 2

Attach Slat Sets (D) to Back Panel (A) and Front Support Rail (C) using 4 Screws (2) per set. Tighten screws with Philips head screwdriver (not included). The assembly is now complete.