
厦门一点智能科技有限公司 Esmart（Xiamen）Technology Co .,Ltd.	产品包装图样	文件名称	W5203智冲坐便器英文说明书（F039300客户专用）		
		文件编号	ASVFAF0393019A		
□内外箱 □不干胶 □彩盒 □彩卡 □包装袋 □刀卡/隔板 □保丽龙 ■说明书 □合格证 □保修卡 □其它：		生效日期	2026-01-09	版次	1.0
		图样类别	□打样图 ■正式图	页次	1/1

厦门瑞尔特卫浴科技股份有限公司
受控文件

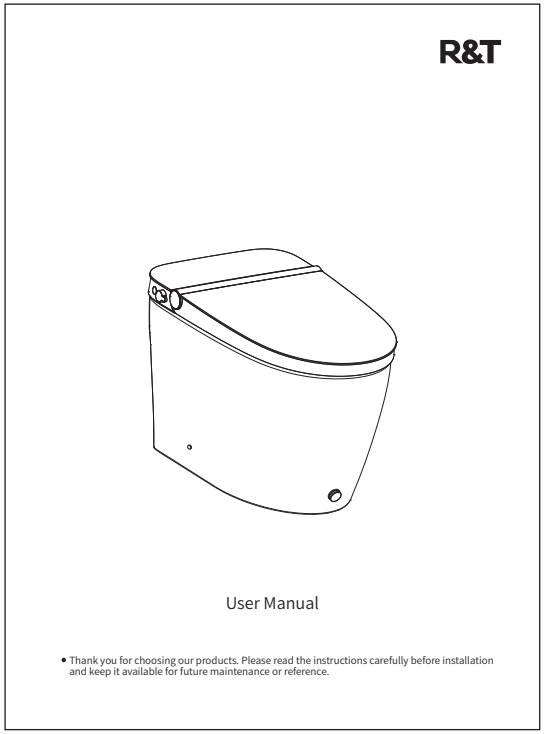


技术要求

1、规格：210*297mm/A3装订成册后A4大小；
2、材质：80g双胶纸；
3、颜色：黑色；
4、外观：外观整洁、平整，印刷内容清晰，油墨均匀，不能有模糊、漏印、重影、破损、脏污等不良；
5、要求：材料符合欧盟RoHS/REACH指令要求。

变更记录	版次	变更内容	日期	修改人

制图	陈琴	审核	曾朝虹	批准	谢学敏

R&T

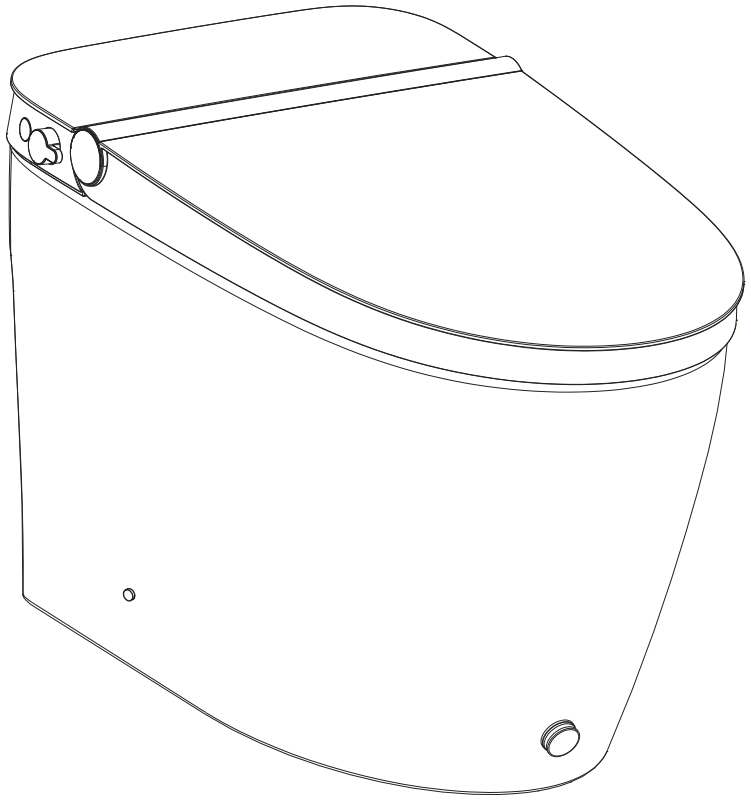

User Manual

- Thank you for choosing our products. Please read the instructions carefully before installation and keep it available for future maintenance or reference.

Content

Installation

Safety Instructions ---- 01

Parts identification ---- 03

List of materials ---- 04

Technical Drawing ---- 04

Precaution before installing ---- 05

Installation Instruction ---- 05

Previous Preparation ---- 07

Function Introduction ---- 08

Kick function instruction ---- 09

Maintenance

Cleaning Methods ---- 10

1. Main unit care and maintenace
2. Maintenance of filter net
3. When the product is left unused for long time

Emergency Troubleshooting ---- 11

1. No water supply
2. When the battery is low power
3. Replace the battery

Others

Technical Specification ---- 12

Product Warranty Card ---- 13

Safety Instructions

Please read the instructions carefully before installation and keep it available for future maintenance or reference.

Failure to observe this instruction can cause body injury and property damage.

Symbol lllustration

⚠ **Warning**	Indicates that failure to follow the instruction may cause serious injury or property damage.
⚠ **Caution**	Indicates that failure to follow the instruction may cause body injury or property damage.

Symbol lllustration


Symbol	Indication
	Prohibited activities
	Mandatory activities

⚠ **Warning**	
	Do not throw cigarettes and other burning stuff into toilet, otherwise it might cause fire.
	Never disassemble,repair or modify this product.Doing so may cause fire. Do not wash the main unit or battery case plug with water or detergent. Doing so may cause fire. Do not handle the battery case plug with wet hands. Doing so may cause a fault. Do not use battery device that are not in the original configuration, to avoid fire or failure. If the battery case cord is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified persons in order to avoid a hazard. This product is electric appliance, so it must be placed far away from water. Please don’ t drench urine and other liquid to it. Do not lay on side or upside the product during the battery circuit, to avoid fire or burning.
 Mandatory activities	Do not install or use the product in wet places as steam room etc. Only the original battery box of the product can be used, and the battery can only use 1.5V No.5 dry battery. The old aging water supply hose can not be used, otherwise it might cause leakage, fire or electrical shock. Installation of the bidet seat should include specified components and new water supply hose. When move the product from cold or wet environment into normal room temperature, wait for 2 hours until the condensation water is fully volatilized. Doing so can prevent the product from electrical short-circuit.


Caution	
	Do not use the product in the places close to bathtub or water tank. Do not place the product in water or other liquids. Do not stand on the ceramic toilet. Do not hit the ceramic. A heavy impact on ceramic leads to damage and water leakage. Never embed ceramic toilet base in cementitious material (such as cement mortar). It may lead to expansion crack. Do not stand on product unit, seat and cover. Do not use lacquer thinner, petrol, liquid medicine, detergent, insecticide, toilet cleanser and scrubbing brush to clean the product. Only use tap water. Exposure to direct sunlight is prohibited. This product is equipped with soft-closing seal cover. Heavy pressing or pushing may damage the soft-closing damper. Do not connect water supply to heater outlet. Do not lean against the seat cover when using the product, to avoid damage. Do not try flushing the newsprint, diapers, sanitary napkins and other items easy to chock the toilet. Stop using the product and shut off the power when product malfunctions, please contact service people for professional service.
 Mandatory activities	When installing, disassembling, repairing, and maintaining the product,you must unplug the power supply and close the water supply valve. Do not use in an environment below 0 °C. If it is not used for a long time, you must remove the battery box, take out the battery, and drain the water in the toilet and pipeline. When used by people (including children) who lack physical, sensory, intellectual abilities, or lack of experience and common sense, This product needs to be used under the supervision of a person, and patients with heart disease should use it with caution. Do not let children play with this product. To prevent damage caused by freezing, please implement warmth measures to increase the temperature of the toilet.

Parts identification


Left side

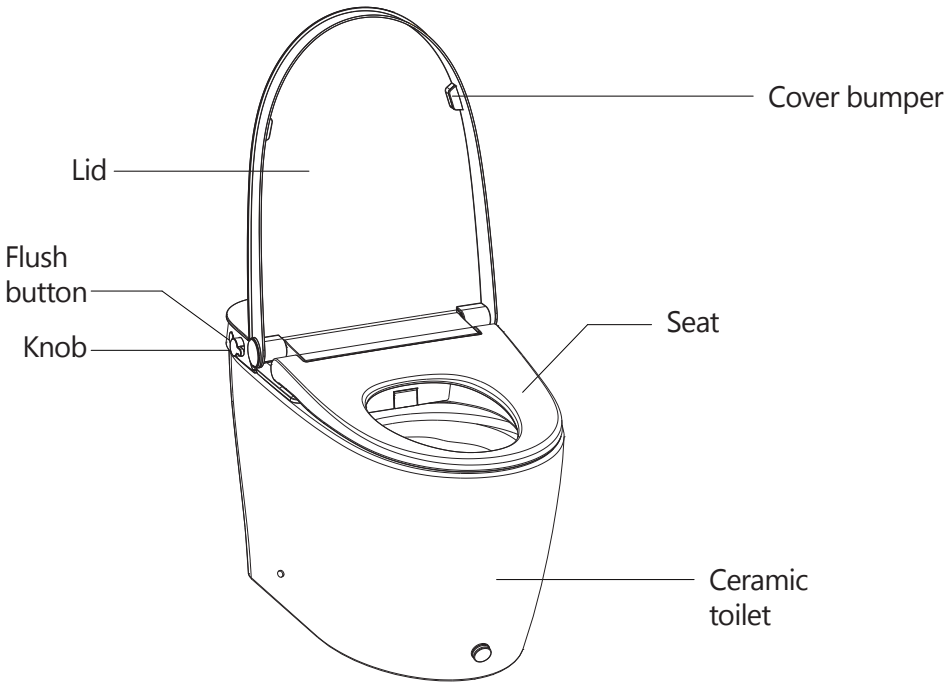


Right side

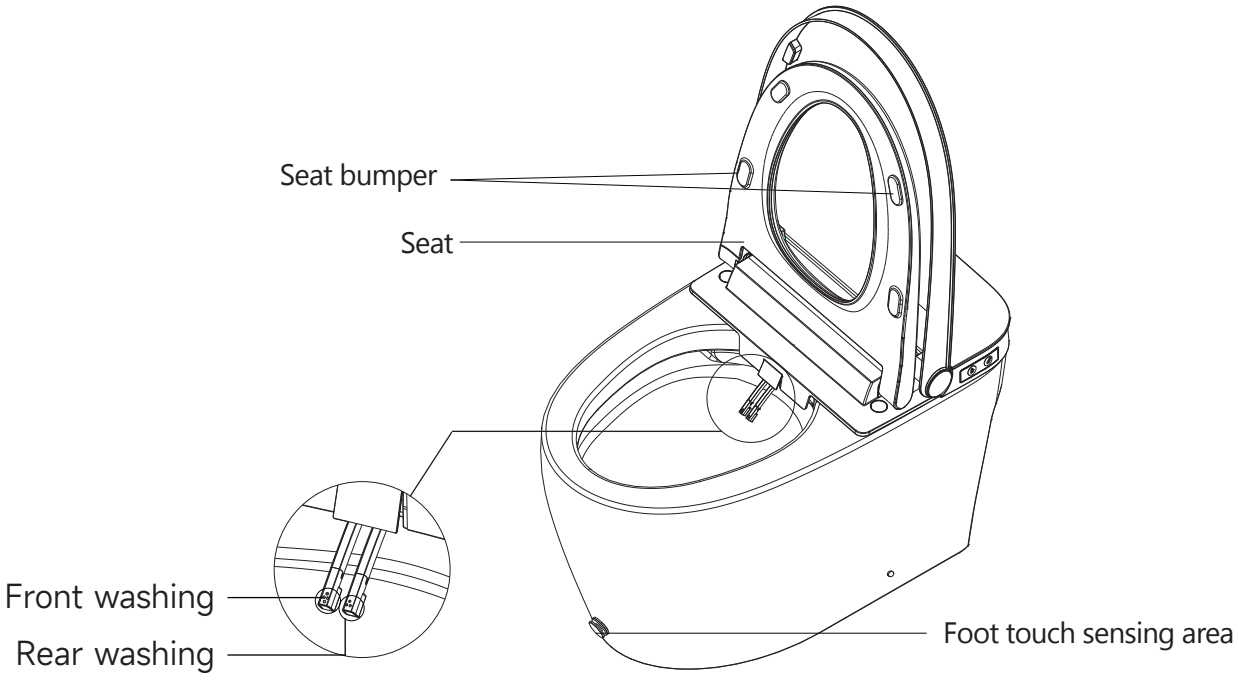

List of materials



Main Unit




Angle Valve



Installation Cardboard



Sealing Flange




Mounting Kit



Installation Manual

Technical Drawing

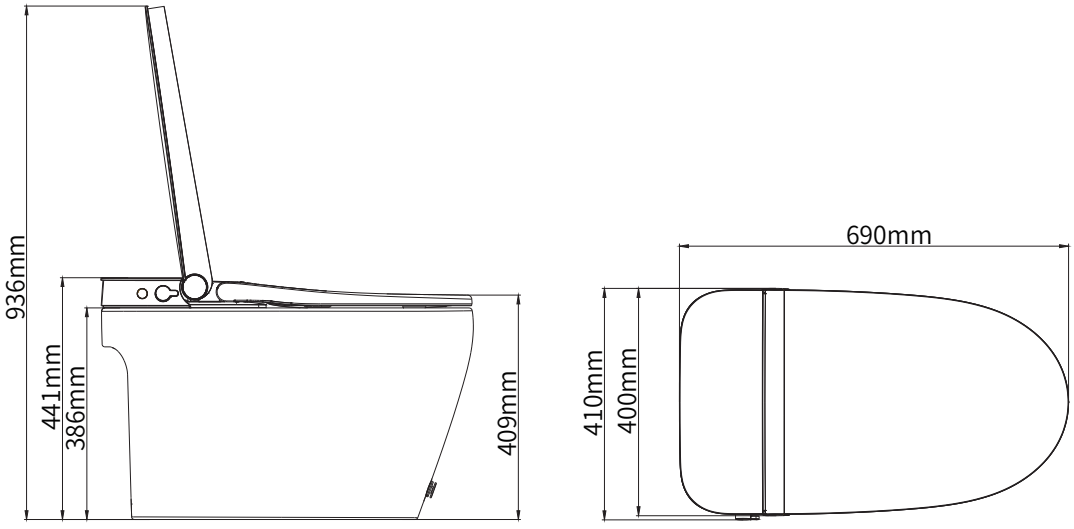


1. The drawing is for reference only, and we reserve the right to modify the product appearance.
2. Product appearance is subject to change in kind.

Precaution before installing

Minimum static working water pressure:
0.18MPa or more (18.0L/min or more),
failure to meet this pressure will not achieve the best flushing effect.

Remark: Apply the methods below if you don’ t have water pressure testing device.

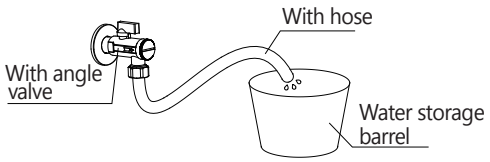


Open the angle valve and connect water inlet for 10s, once the water volume is above 3L, the minimum water pressure of the product is ensured.

Installation Instruction


1. Installation of mating angle valve

Draw drain outlet centerline on the floor, Install angle valve at proper position on wall according to dimension of toilet.

Note:
It is recommended to install at 220mm < L < 420mm from the left or right side of the angle valves’ center line.Please install the matching Angle valve in the appropriate position on the wall according to the actual size of the toilet.

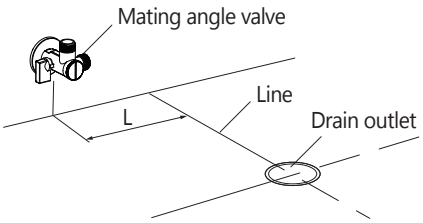

2. Cardboard installation

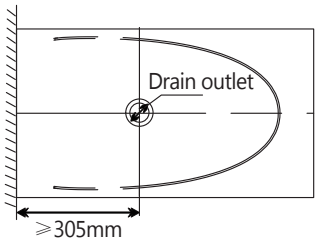


1. Align cardboard with the centerline of drain outlet;
2. Draw contour line according to cardboard.

Tips: Please clean the drain outlet.

3. Mounting bracket installation


Assemble the mounting bracket with bolts and then install them to the pre-installed flange plate on the ground and lock tight with nuts.

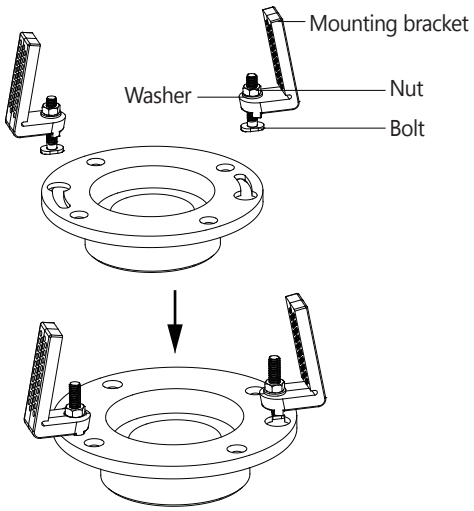


Installation Instruction

4. Hose

Connect the water inlet and angle valve of the toilet with the matching hose and tighten it.

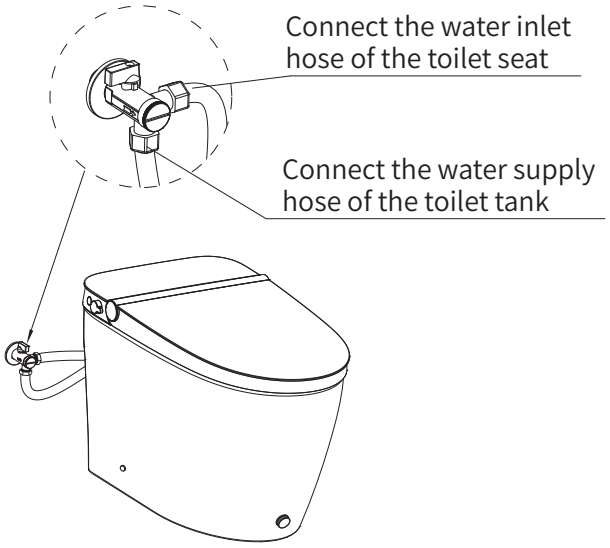


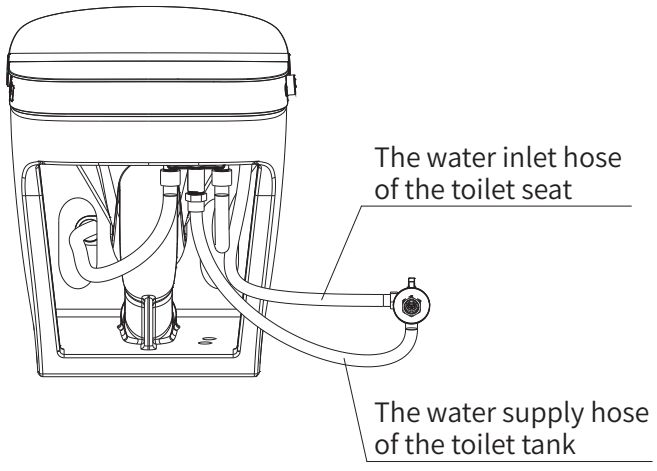

Note:
Please use this supplied water supply hose, to ensure optimal flushing performance.

5. Cardboard installation


1. Install sealing flange into drain outlet;
2. Install ceramic toilet on corresponding position according to contour line.

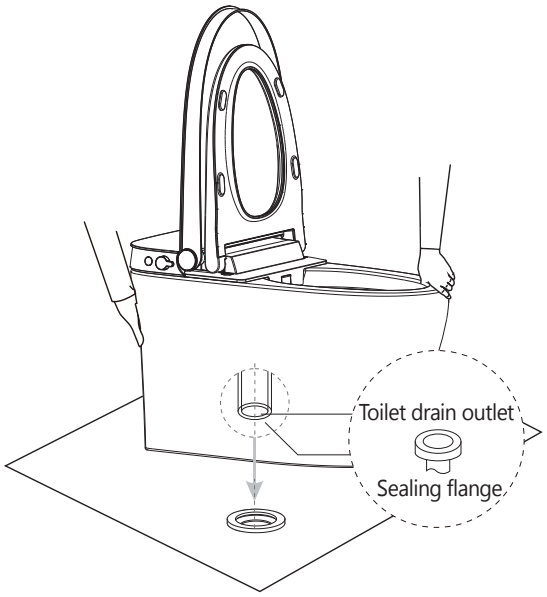

Tips: The toilet is heavy, and it needs to open the seat cover to carry it by two people.

6. Screw installation


1. Put the screw through the fixing sleeve and then install it through the holes (on both sides of the toilet bowl) to the mounting bracket on the ground. Lock tight.
2. Install the decorative cap on the fixing sleeve.

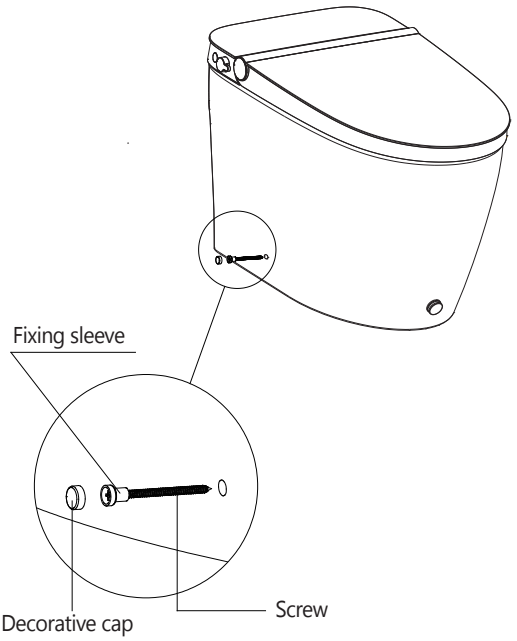

Previous Preparateion

1. Turn on the angle valve


Check thread connection, make sure no leakage is found,unscrew angle valve anticlockwise to maximumopening.
Tips: When opening for the first time, the angle valve handle has a larger torque.

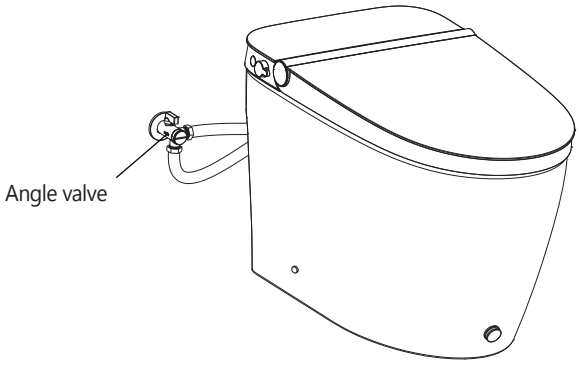

2. Power Connection

Take out the battery box, install the battery box after replace batteries, and press the lock button to lock up.

1.The product is without battery, need end user buy battery.
2.Please use 1.5V AA battery.
3.Do not mix different brands batteries / old and new batteries.
4.When using non-alkaline batteries, battery using life will be drastically reduced.
5.The battery box should be installed in place and abreast with cover plate.

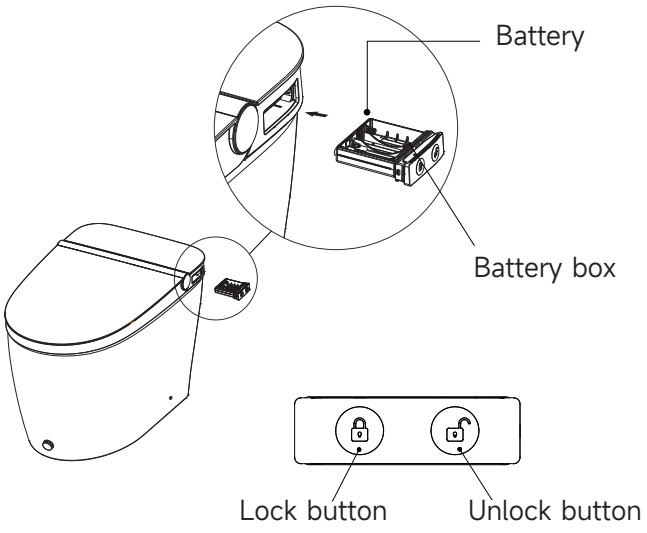

3. Self-inspection


After installing the battery, there will be a "beep" sound inside the seat.

Function Introduction


1. Manual flush function

Press the "Flush" button to full flush.

Note:
When the flushing button is pressed, if the buzzer inside the seat sounds an alarm, it indicates that the battery power is low. Please replace the battery.

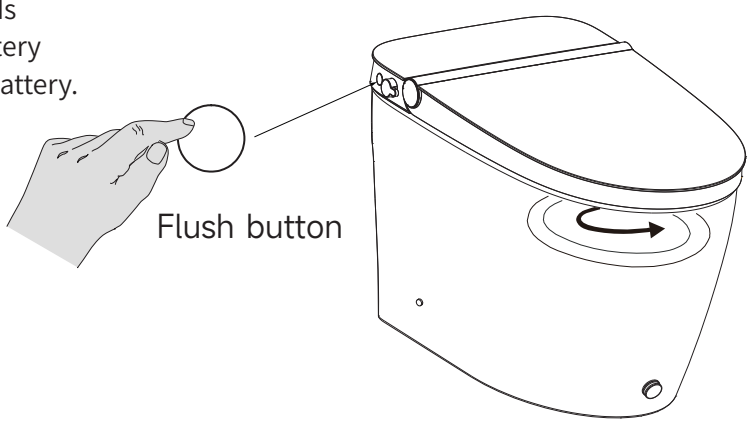

2. Description of the knob function

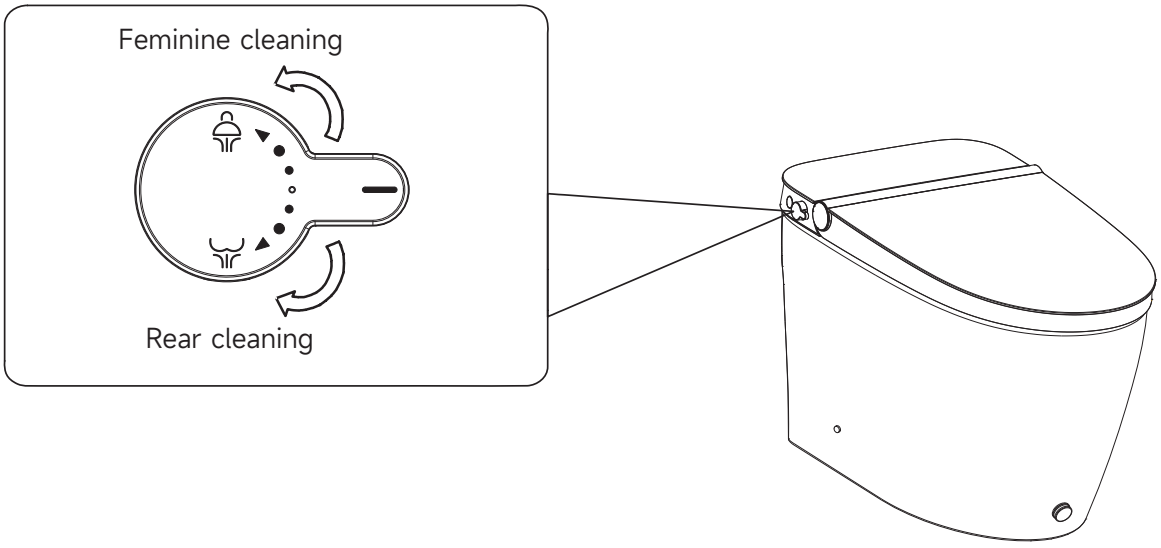

Feminine cleaning: Rotate the button to" " adjust the button angle to appropriate flushing.
Rear cleaning: Rotate the button to" " , adjust the button angle to appropriate flushing.
Stop: When the button is at the horizontal position, the seat cover stops.

3. Automatic flush function (Only for the product with Automatic flush function)

1. When the seat is detected to be more than 6 seconds and less than 1 minute, and leave the seat for more than 3 seconds, it will half flush.
2. When the seat is detected to be more than 1 minute, and leave the seat ring for more than 3 seconds, it will full flush.

Kick function instruction


After touching the kick button with your foot, perform a half flush.



Cleaning Methods

Main unit care and maintenance


Wipe the stain with a soft damp cloth.
1. Do not clean the cover plate with coarse cloth. Otherwise, the product may be scratched.
2. There are electronic components inside the product.
Please avoid water infiltration; otherwise, functional faults may occur.

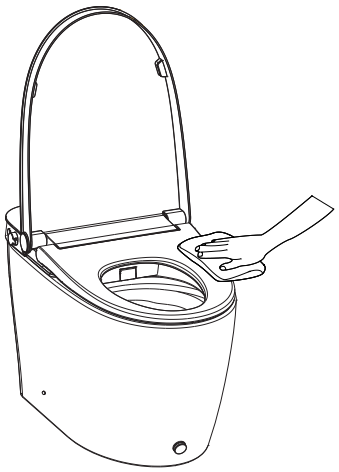


Filter maintenance

If poor spray performance occurs under normal conditions:

1. Turn off power and the angle valve
2. Unscrew angle valve nut
3. Remove filter net

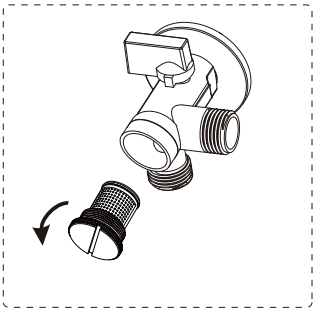

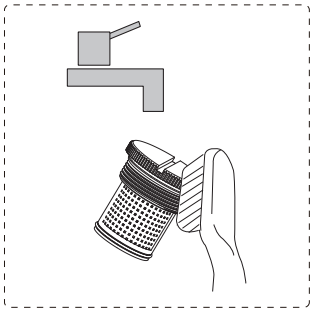


4. Clean out the filter net under running water using a toothbrush
5. Reinstall filter net and angle valve nut
6. Turn on the angle valve and connect the power.

Spray nozzle care and maintenance


1. When the nozzle is not in use, it can be manually pulled out for cleaning.

2. After pulling out the nozzle, it can be disassembled and cleaned separately.

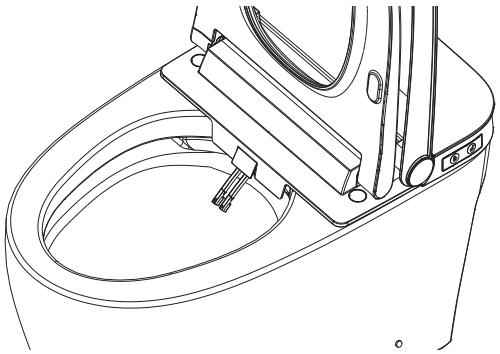

3. Use only a soft cloth or soft brush to clean.
Do not pull or push the wand, to avoid damage.






4. After reinstalling the nozzle, release it and it will automatically reset and retract.

Emergency Troubleshooting

No water supply


Put around 8L water into a barrel and flush the bowl of ceramic.
Note: Avoid water spilling from bowl.

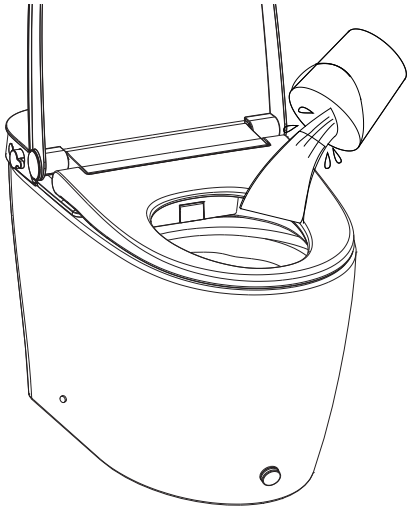

When the battery is low power


Press the flush button, the buzzer inside the seat will sound an alarm, indicating that the battery power is low.
Please replace the battery
Note:


1. Use 1.5V AA battery.
2. Do not mix different brands batteries/old andnew batteries.
3. When using non-alkaline batteries, battery using life will be drastically reduced.

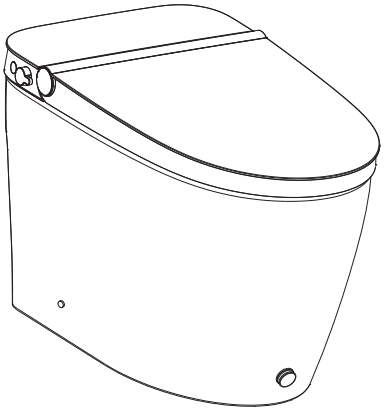

Replace the battery

Press the unlock button on the battery box, remove the battery box, replace the battery with new one. Install the battery box with new battery.

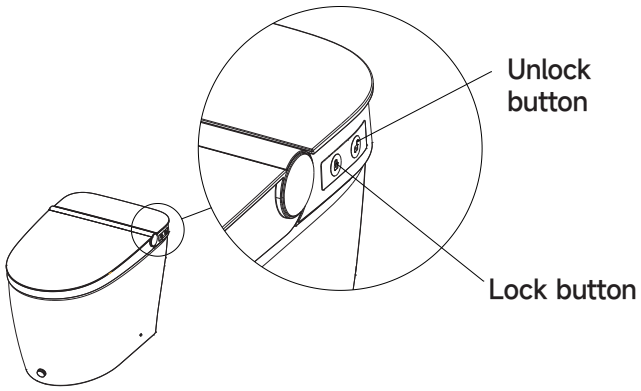

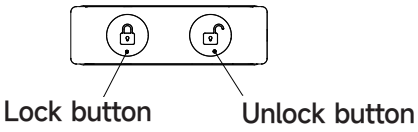

Technical Specification

Main Unit	Rated voltage	6V ⎓
	Rated power	2.1W(Solenoid valve power)
	Water proof	IPX4
Toilet	Flush volume	1.6/1.1Gpf(6.0/4.1Lpf)
	Flushing mode	Siphonic jet
	Rough in	305mm
	Drainage method	S-trap
	Outlet outside diameter	⩽100mm
	Water pressure range	0.18MPa (static pressure, flow rate of 18.0+L/min)--0.8MPa (static pressure)
Seat	Open and close device	Quiet soft-close
Caring device	Automatic flushing	Automatic flushing after use
	Low battery indication	When the flushing button is pressed, if the buzzer inside the seat sounds an alarm, it indicates that the battery power is low. Please replace the battery.

Product warranty card

Model No.		Customer Name	
Seller		Purchasing Date	
Invoice No.		Customer Contact	
Distributer Stamp		Distributer Phone	

Thank you for choosing our product. This product is warranted for three (3) years since the purchasing date for free repair of problems arising out of defects in workmanship while using in accordance with installation manual and usage cautions for intended purposes.


If the product does not work properly with warranty period, please contact your nearest service center. This certificate must be presented to obtain free service under this warranty.

Our company reserves the rights to replace the product by other similar models.
We can serve to fix or repair the product at a reasonable service charge, after expiration of warranty period.

Service charges shall be paid even during the warranty period, if breakage or damage is caused by any of the following events (including but without limitation).

1. The user's negligence or mistake in operation, unreasonable repair or alteration.
2. Product are damaged by negligence or mistake during installation.
3. The movement of installation location of the product.
4. Using the product outside of intended use in residential housing or commercial hotels.
5. The use of non specified power supply (voltage, rating pressure)
6. The dirt, sand and impurities that causing invalid operation.
7. Damages due to force majeure (including but not limitation to natural disaster) or other incidents.
8. The user fails to use in compliance with the warning or caution described in the installation manual.

Remark:
Please fill in date, seller correctly. If there are some mistakes, the warranty will get invalid.
This three year warranty for free of charge of repair service is only for the items listed in the warranty.
The purchasing date is subject to the purchasing invoice or receipt.
Please keep this warranty and invoice/receipt available for repair or maintenance.

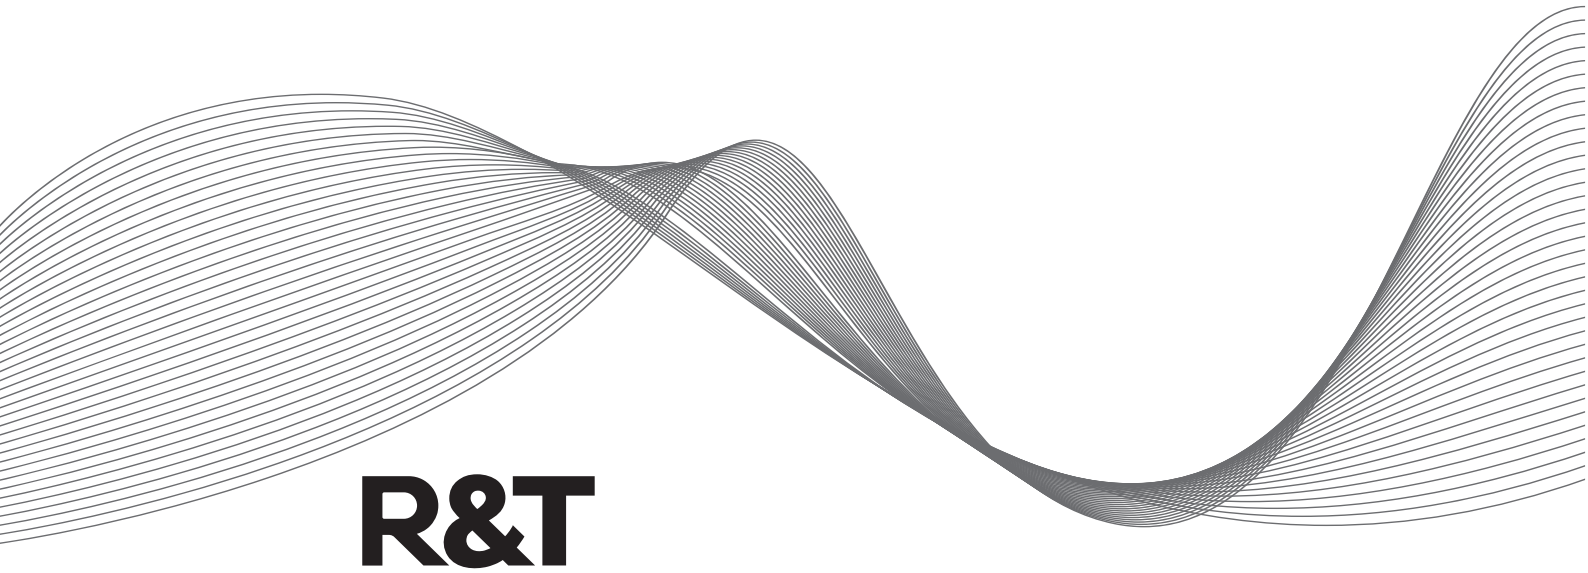

R&T

Xiamen R&T Plumbing Technology Co.,Ltd.

Add: No. 18, Houxiang Road, Haicang District, Xiamen, China
Tel: 86-0592-6539788
Fax: 86-0592-6539723
E-mail: info@rtplumbing.com
Http: //www.rtplumbing.com

The picture of product may not be entirely consistent with actual appearance and color because of product improvements, please in kind prevail.

ASVFAF0393019A-1.0