


## IMPORTANT SAFETY INSTRUCTIONS

- To avoid injury or damage, mount only on a surface that is sturdy.
- To avoid electric shock, make sure the electricity is turned off at the main circuit breaker panel. If you are replacing an existing fixture, turn off the following in order: fixture, wall switch, and main fuse or breaker box.  
**Note: Some types of fuses must be unscrewed to shut the power off.**
- If you are unclear as to how to proceed, please consult a licensed electrician.

**UNPACK THE FIXTURE:** Check the contents of the box. Box should contain all items on the parts diagram.

## INSTALLATION INSTRUCTIONS


1. Thread Canopy Screws (C) and hex nuts onto Mounting Plate (A). Secure Mounting Plate (A) to existing junction box using Mounting Screws (B) provided. Mounting Plate (A) should be positioned with Canopy Screws (C) pointing away from the junction box.
2. Place Canopy (F) against ceiling by inserting Canopy Screws (C) through appropriate holes located on Canopy (F) . Adjust Canopy Screws (C) and hex nuts until 1/4" of the threaded portion is visible. Remove Canopy (F) and set it aside.
3. Remove the decorative ring from the top of Center Anchor (H). Slide up Center Anchor (H) exposing the nipple. Adjust the hex nut on the nipple 1/2" from bottom. Screw the bottom of the nipple into the top of Socket Assembly (I) until you reach the bottom hex nut. Replace Center Anchor (H) over the nipple and lock in place with the decorative ring.

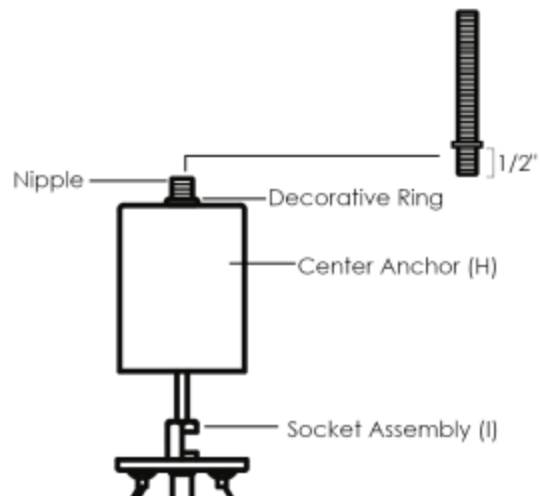



8. Attach Cables (J) to Screw Studs (L). To allow Diffuser (R) to sit properly onto the metal ring on Shade (M), tighten/straighten Cables (J) by pushing Cables (J) into Cable Grips (T) on bottom of Socket Assembly (I).


**NOTE: To relieve tension/loosen cables, push Cable Grips (T) upwards into Socket Assembly (I) and then pull cables away from the grips.**

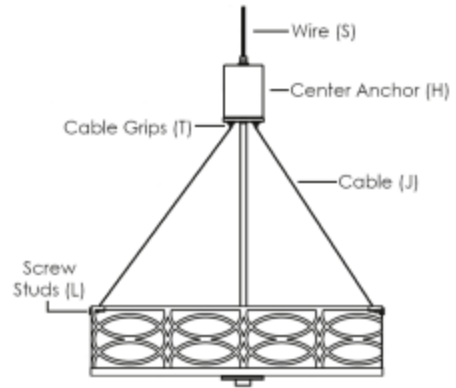

9. Determine desired hanging length using Downrods (G).

10. Thread Wire (S) through Downrods (G). Screw Downrods (G) into nipple on Center Anchor (H). Thread Wire (S) through the nipple on Canopy (F). Attach Canopy (F) to Downrods (G) by turning in clockwise direction. Remove any excess wire, leaving approximately 10 inches of wire at the end.

11. Using the wire graph below, connect the appropriate wires from the fixture to the corresponding wires in the electrical junction box (not included) and secure Wire Connectors (D).

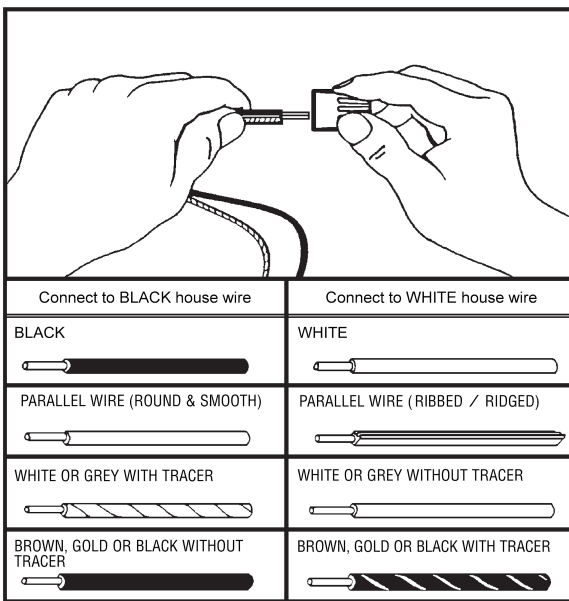

**A.** Connect the ground wire (bare copper or green) from your fixture to the:

- 1) ground wire in the junction box, or
- 2) ground screw in the junction box

**B.** Connect the BLACK house wire to fixture hot wire that corresponds to diagram (black, round & smooth, white/grey with tracer, brown/gold without tracer).

**C.** Connect the WHITE house wire to fixture neutral wire that corresponds to diagram (white, ribbed/ridged, white/grey without tracer, brown/gold with tracer).

12. Place all Wires (S) and Wire Connectors (D) back into the junction box.

13. Secure Canopy (F) to Mounting Plate (A) with Decorative Caps (E).

14. Install bulbs (not included) into Sockets (K).

Enjoy your new fixture!

**HELPFUL TOOLS:** Safety Goggles, Screwdriver, Wire Cutter/Stripper, Ladder, Measuring Tape

