

01

1. Place all parts on a clean soft surface.

02

2. Attach the front and back Legs (C,D) to the Studs on the Chair Seat (B) using Washers and Nuts (L,M,N). Tighten the Nuts using the wrench & tighten. Add the protect hats (P).

03

3. Attach the Backrest (A) to the Chair Seat (B) using Washers and Nuts (L,M,N). Tighten the Nuts using the wrench. Add the protect hats (P).

04


4. Attach the Right and Left Arm(E,F) ,using the studs (G) and washer ,nuts (H,I,J) ,DO NOT over tighten .and then using Studs (K) and Washers and Nuts (H,I,J).Adjust to a correct place ,then tighten G&K.Add the protect hats (O).


05

5. Adjust the pre-installed Rubber Pad (I) until the chair is level with the ground, Upon completion of full assembly and bolted up-all screws can be tightened down.

List of Parts for Assembly of 1x Table

No	Parts	Qty
A	Table Top	1
B	Table Leg	3
C	Leg Support	1
D	Stud M8*35	4
E	Flat Washers M8	4
F	Spring Washer M8	4
G	Nut M8	4
H	Stud M6*30	7
I	Flat Washers M6	7
J	Spring Washer M6	7
K	Nut M6	7
L	M6 protect hats	7
M	M8 protect hats	4

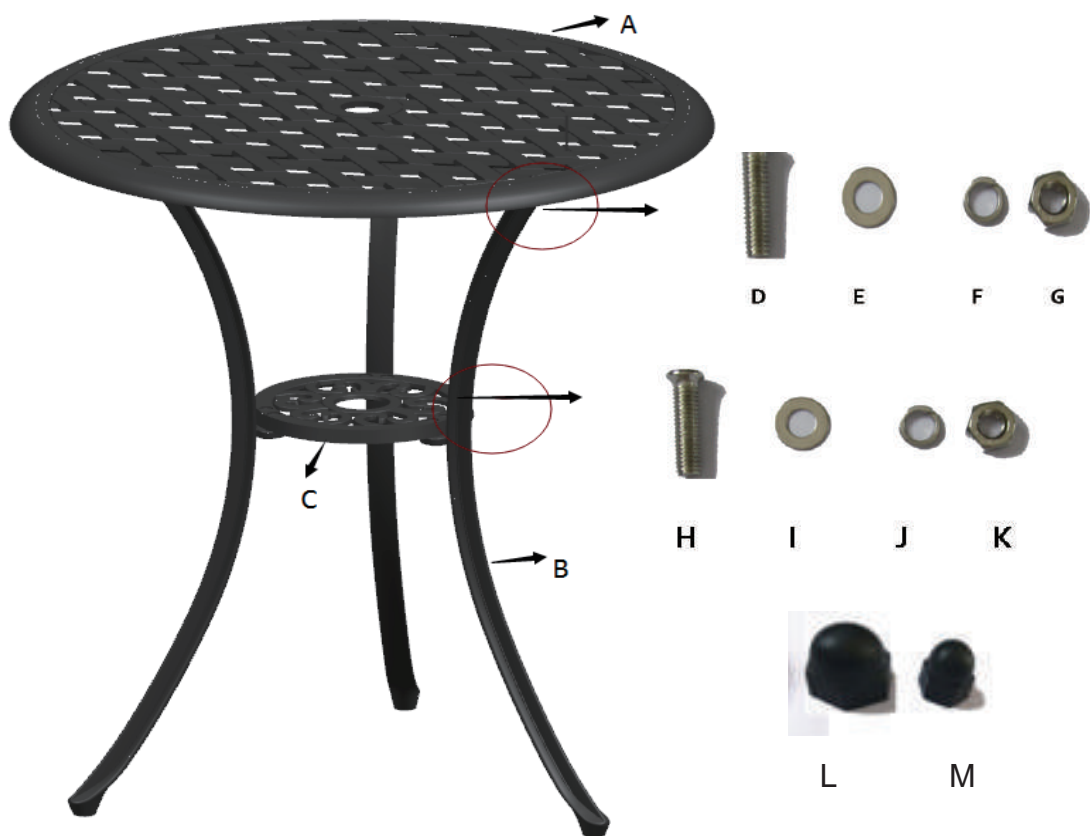

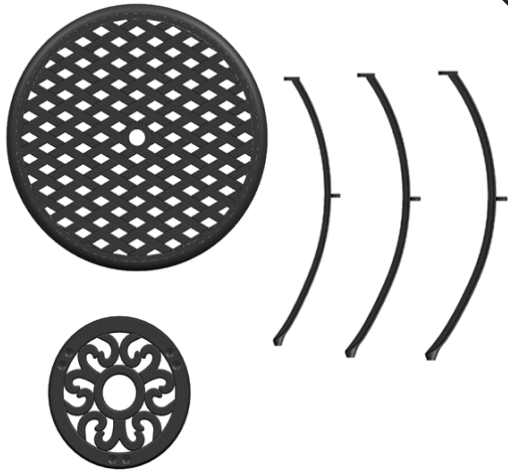01

1. Place all parts on a clean soft surface.

02

2. Place the Table Top (A) upside down. Attach the Table Legs on the Table Top (B) using the Stud (D), Washers and Nuts (E, F, G). Tighten the Nuts using the a Wrench, DO NOT over tighten

03

3. Attach the Leg Support (C) to the Table Legs (B) using Studs (H), Washers and Nuts (I, J, K).

04

4. Tighten all the Nuts using the Wrench , and add all the protect hats (L, M)

05

5. Adjust the pre-installed Rubber Pad , at the end of each Table Legs until the Table is level with the ground.