


GLASS SHADE INSTALLATION GUIDE

(Med. Base Pendant Set 120V)

Use With
these Models:

IMPORTANT: For installation of pendants and wiring, please refer to the **Fixture Installation Guide** included with fixture canopy

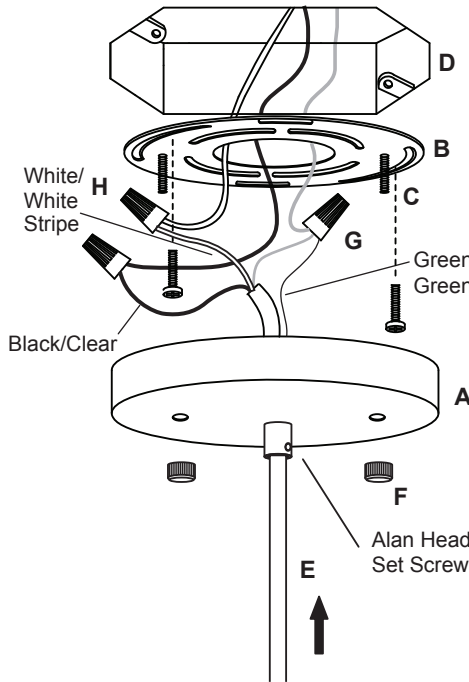


1. Carefully unpack parts. Remove the Mounting Plate (B) from the Canopy (A), by unthreading the Cap Nuts (F) from the Threaded Posts (C).
2. Install the Mounting Plate (B) to the Outlet Box (D), as shown. Feed the Fixture Cord (E) through the Canopy (A) and connect House Supply Wires to Fixture Cord Conductors as follows: House Ground Wire to Green Stripe Conductor Cord and Bare Copper Lead with provided Wirenut (G). Connect Black/Clear to Black and White/White Stripe to White with provided Wirenuts (H). Push the wires and wirenuts into the Outlet Box (D).
3. Align the openings on the canopy with the Threaded Posts on the Mounting Plate. Push the Canopy (A) up over the Threaded Posts until tight to the ceiling, then secure with the two Cap Nuts (F).
4. Loosen the Alan Head Set Screw on the Canopy to adjust the height of the Fixture Cord, then re-tighten the Alan Head Set Screw to secure in place.

NOTE: Do not overtighten set screw as this may cause a short.

GLASS INSTALLATION:

1. Install Glass per diagram to the right: Unthread the Socket Cap from Socket. Align glass openings with Socket and install to Socket by re-threading the Socket cap to Socket.
2. Install Lamp.
3. Restore power.


NOTE:
Glass Shade is for instructional purposes. Actual Glass Shade may vary in size and shape.

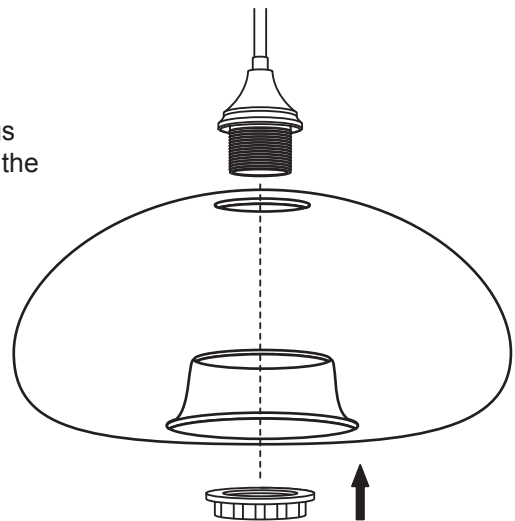

POLARITY INSTRUCTIONS

Using a Continuity Tester or Multimeter, confirm the following connections:

- Clear Conductor with White Stripe (Neutral/White) is connected to the Socket Screwshell. This wire is to be connected to house supply white conductor.
- Clear Conductor (Hot/Black) is connected to the Socket Center Contact. This wire is to be connected to house supply black wire.

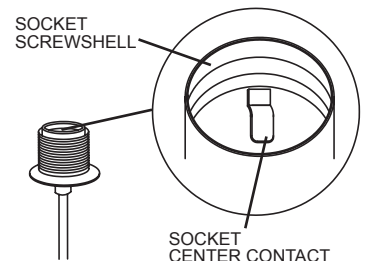

All electrical connections and the installation of this fixture must be in agreement with local codes, ordinances or the NEC (National Electric Code) or CEC (Canadian Electrical Code). Do not connect this fixture to an electrical system that does not provide a means for equipment grounding.