

Cool and clean, Style II™ offers multiple sizes and a linear mosaic for a contemporary installation perfect for any application.

STYLE II™

Glazed Porcelain




FLOOR / WALL

RESIDENTIAL

COMMERCIAL


INDOOR



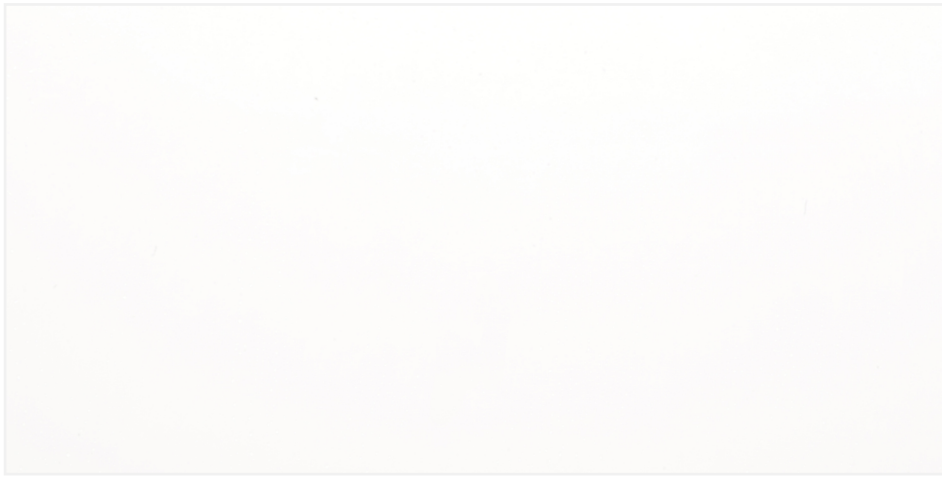



OUTDOOR



Pure White

Mosaics



| |  |  |  |  |  |  | |
|-----------------------------------|---|---|---|---|---|---|---------------------------|
| Sizes | 32" x 32" 31.50" x 31.50" | 24" x 24" 23.62" x 23.62" | 12" x 24" 11.81" x 23.62" | 12" x 12" Mesh | 12" x 12" Mesh | 3" x 12" Floor SBN | |
| Thickness | 9.5mm | 9.5mm | 9.5mm | 9.4mm | 9.4mm | 9.5mm | |
| Faces | 1 | 1 | 1 | N/A | N/A | 1 | |
| Finish | Polished | Matte & Polished | Matte & Polished | Matte | Polished | Matte & Polished | |
| Edge | Rectified | Rectified | Rectified | Cut | Cut | Cut/Rounded | |
| Grout Joint Recommendation | 3/16" | 3/16" | 3/16" | 3/16" | 3/16" | 3/16" | |
| Testing | Abrasion Resistance C1027 | Breaking Strength C648 | Chemical Resistance C650 | Water Absorption C373 | DCOF ANSI A1371 | Scratch Hardness MOHS | Shade Variation Rating |
| Results* | IV (Matte) III (Polished) | >400 lbf | Resistant | <0.50% | >0.55 (Matte) <0.42 (Polished) | 7 (Matte) 5 (Polished) | V1 |

Product and Installation Details | ANSI A108.02
Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

*For more information visit www.emser.com. Always consult a professional for proper usage and installation.