
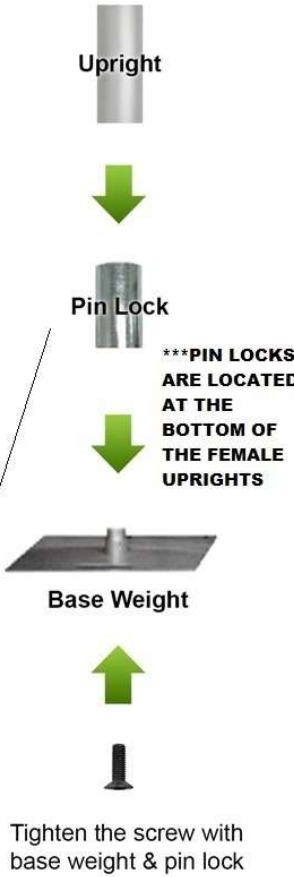





ADJUSTABLE PIPE & DRAPE INSTRUCTION

STEP 1	STEP 2	STEP 3	STEP 4
 <p>Male Upright</p> <p>Adjustable Upright</p> <p>Female Upright</p>	 <p>Upright</p> <p>Pin Lock</p> <p>***PIN LOCKS ARE LOCATED AT THE BOTTOM OF THE FEMALE UPRIGHTS</p> <p>Base Weight</p> <p>Tighten the screw with base weight & pin lock</p>	<p>The male crossbar (hooks on both sides) will provide 4' - 7' coverage. For up to 10' coverage, simply slide out the inner tube and connect with the female crossbar</p>  <p>Male Crossbar</p> <p>Female Crossbar</p>	 <p>Connect the crossbar into the upright</p> <p>***Drapes are optional</p> <p>Completed</p>  <p>***Images shows 8x20BLK setup</p>