


INSTALLATION MANUAL CHANDELIER




TOOLS REQUIRED

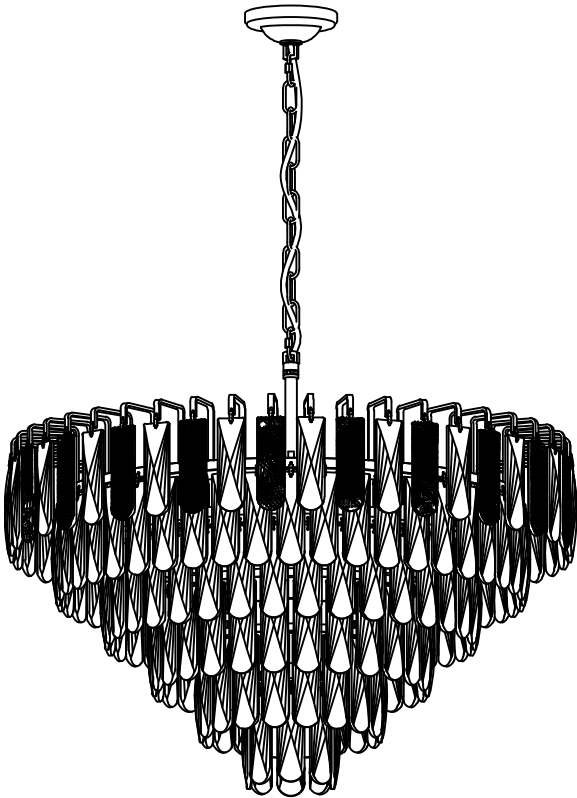


Ladder



Pliers



Wire Strippers



Screwdrivers

INSTALLATION KIT

A Mounting Bracket
B Canopy
C Loop Ring
D Chain
E Hanging Rod
F Top Lamp Frame
G Square rod
H Bottom Lamp Frame

M5 Screw
M3 Screw


A	1X	B	1X	C	1X	D	1X	E	1X
Mounting Bracket		Canopy		Loop Ring		Chain		Hanging Rod	
F	1X	G	4+4+4X	H	1+1+1X		12X		12X
Top Lamp Frame		Square rod		Bottom Lamp Frame		M5 Screw		M3 Screw	
AA	3X	BB	2X	CC	4X	DD	4X	EE	24X
Wire Nut		Outlet Box Screw		Expansion screw		Wood Screw		Smoky grey crystal sheet	
FF	162X	GG	2X						
Clear light crystal sheet		Gloves							

- NOTE:
- 1.A/C has already been pre-installed with Canopy(B).
 - 2.M3 screws /M5 screws are pre-installed on the square rod (G).
 - 3.Some extra hardware may be included,The quantity listed above is the number required for installation.
 - 4.Connect the Top Lamp Frame(F) and Bottom Lamp Frame (H) with square rod rods(G), and fix them with M5 screws and M3 screws.
 - 5.Pass the wires through the Hanging Rod(E) , Chain (D),Loop Ring(C) and Canopy(B) in order.


MOUNTING AND WIRE

1. Take out Mounting Bracket

Loosen the Loop Ring (MM) from the canopy(A),and take out the mounting bracket(AA).




2-1. Installation Method One:Installation bracket method for solid wood ceiling structure.

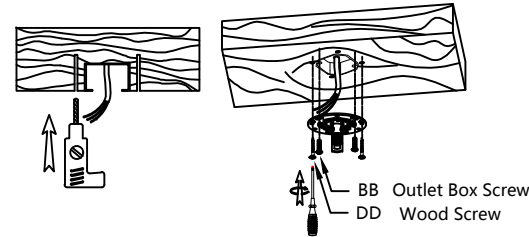


Mark and drill screw holes on the installation position of the solid wood ceiling with the installation bracket (using a 1/8" drill bit). Mount the mounting bracket with wood screws(DD)and Outlet Box Screw(BB).

2-2. Installation Method Two:Installation method of cement ceiling structure installation brackets.

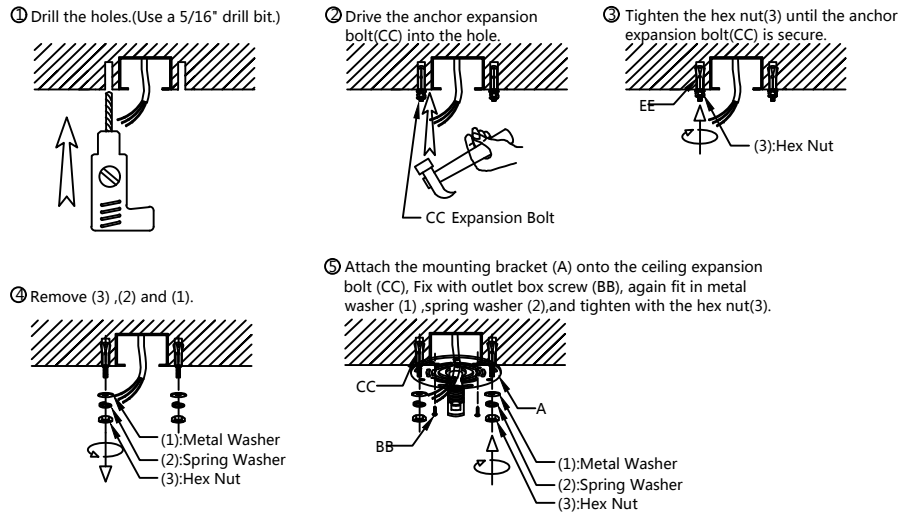

4. Connect the wires

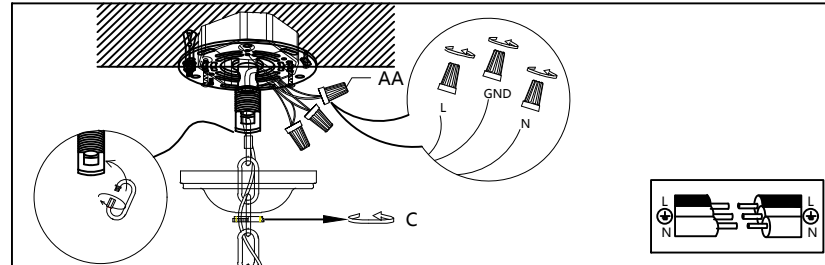

STEP 1: Open the quick connection on the chain (D), then fasten the quick connection on the chain (D) to the installation bracket (A), then lock the quick loop, and then string the power cord through the installation bracket (A) and pull it out from the outlet hole beside the installation bracket.


STEP 2: Wrap the ground wire from the outlet box around the Ground Screw on the Mounting Bracket (A),and then connect the ground wire from the fixture to the ground wire from the outlet box.

STEP 3: Connect the wires from the fixture to the house supply wires,neutral (white) to neutral wire,and hot (black) to hot wire.

STEP 4: Spread apart the wires so that the hot wires are on one side of the outlet box and the neutral wires are on the other.

STEP 5: Lock the Loop Ring (C) onto the Mounting Bracket (A), then attach the Canopy (B) to the ceiling.

INSTALL CRYSTAL AND BULBS

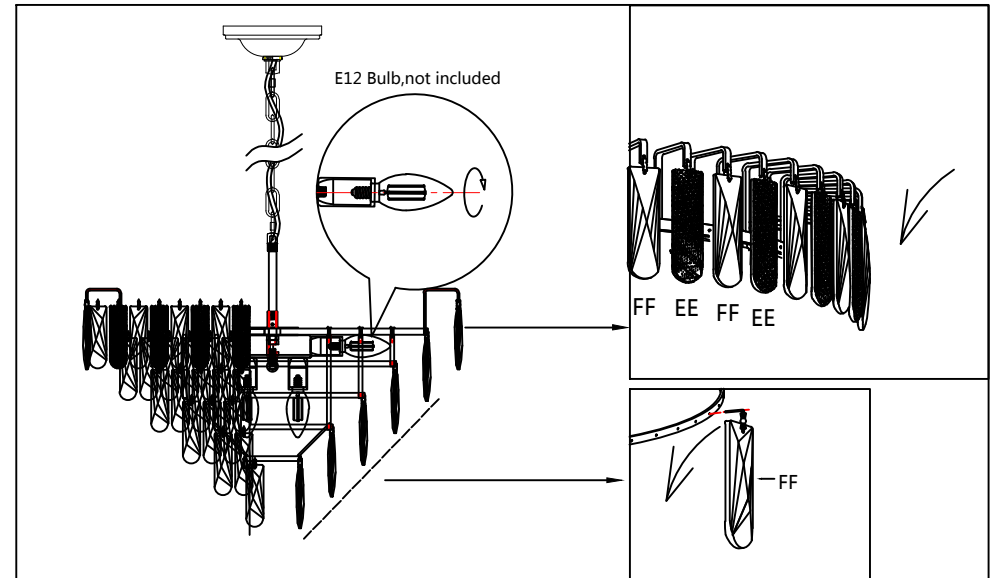

Step 1: Install the E12 bulbs.(not included)

NOTE: This Lamp uses E12 bulb base and can only be used in conjunction with LED bulbs up to 40W.

Fully dimmable when used with dimmable bulbs and compatible dimming switches (not included).

Step 2: Install the crystal glass plate: Insert the pins on the crystal glass plate (EE) and (FF) through the small holes on the lamp holder (F) and (H), and then bend and fix the pins.