

# SIGNATURE SERIES SOTTILE 18" DEPTH BEVERAGE CENTER

**HH24BS-3** INDOOR MODEL

**HH24BO-3** OUTDOOR MODEL



Glass Door Model



Solid Door Model

## GENERAL SIGNATURE SERIES SOTTILE FEATURES



- 32" height including leveling legs
- **Industry Exclusive** 18" depth for design flexibility
- Plug recessed for true 18" depth
- **Industry Exclusive** front-vented RAPIDcool forced-air refrigeration system provides best-in-class cooling performance
- Commercial-grade stainless steel interior and exterior
- All models available with stainless steel or panel ready door. Panel ready doors come ready to accept customer-supplied overlay and handle
- **Industry Exclusive** full extension refrigerator and wine shelves provide easy access for stocking and retrieving product. Shelves glide smoothly in and out of cabinet on stainless steel ball bearing glides
- Zero-clearance hinging allows for abutment with surrounding cabinetry
- Adjustable Crisp White and Cool Blue LED lighting
- Low E, double pane UV-resistant glass provides exceptional insulation and protection from light
- State-of-the-art digital control module
- Comprehensive Full Three Year Warranty plus additional three years on sealed system

## HH24BS/BO FEATURES

- Available with stainless steel solid door, panel ready solid door, stainless steel glass door or panel ready glass door
- Includes two (2) full-extension wine shelves and one (1) full-extension refrigerator shelf
- Wine shelves feature stainless steel fronts
- Shelves are soft-coat vinyl dipped to gently cradle bottles and protect them from vibration transfer
- Product capacity is 10 wine bottles (750 ml.) and 41 cans (12 oz.)
- Beverage Center temperature 33°- 48°F

## ACCESSORIES

(L)	Factory Installed Lock
67992-L/R	Stacking Kit for HH24 models
67115-24	Wood Faces for Wine Shelves (7/pk)
67360	6" Toe Kick and Riser

Perlick accessories are available for purchase through an authorized Perlick dealer. For a full list of accessories and to find a dealer near you, visit [perlick.com/residential](http://perlick.com/residential)

## PRODUCT SPECIFICATIONS

Product Width	23-7/8" (606 mm.)
Product Height	32" (813 mm.)
Product Depth	18" (457 mm.)
Opening Width	24" (610 mm.)
Opening Height	32-1/4" (819 mm.)
Opening Depth	18" (457 mm.)
Refrigerated Volume	3.1 cu. ft.
Door Swing Clearance	25" (635 mm.) minimum
Electrical	115V, 60Hz., 1 Phase, 2.3 amps
Compressor	525 BTU, standard
Plumbing	None Required
Annual Energy Usage	283 kWh/yr
Shipping Weight	185 lbs (83.91 kg.)

## INDOOR MODELS


HH24BS-3-1L*	Stainless steel solid door, hinge left
HH24BS-3-2L*†	Panel ready solid door, hinge left
HH24BS-3-3L*	Stainless steel glass door, hinge left
HH24BS-3-4L*†	Panel ready glass door, hinge left

## OUTDOOR MODELS

HH24BO-3-1L*	Stainless steel solid door, hinge left
HH24BO-3-2L*†	Panel ready solid door, hinge left
HH24BO-3-3L*	Stainless steel glass door, hinge left
HH24BO-3-4L*†	Panel ready glass door, hinge left

\* Also available hinge right (R)

† This unit comes ready to accept customer-provided overlay panel and handle

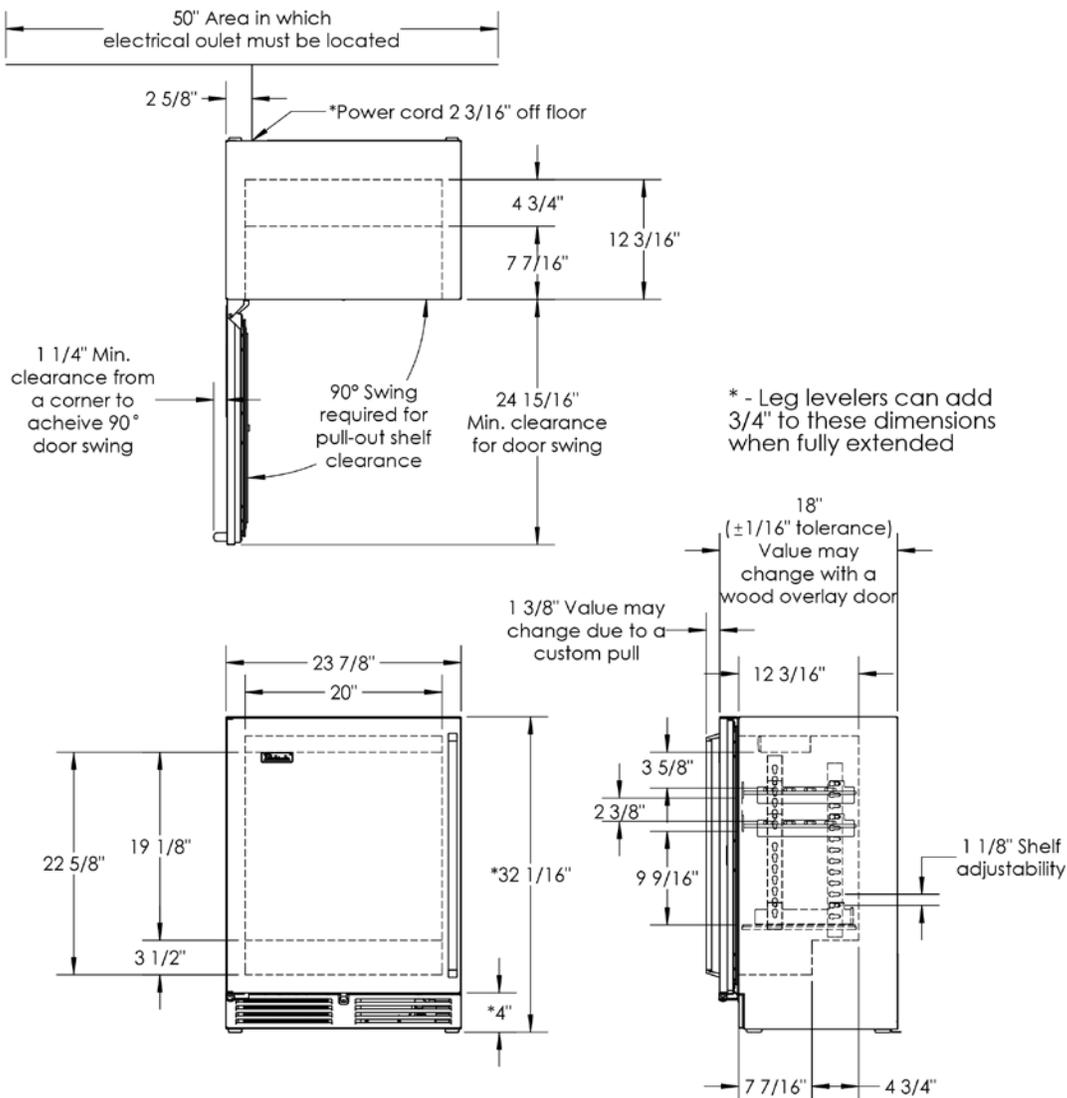

California Prop 65 Notice:

**WARNING:** The materials used in this product may contain chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

FORM NO. Z2521  
REV. A-09/07/2018