ASSEMBLY INSTRUCTIONS
Chair Bistro Set
with Cushion



Please keep
this manual for future reference

NOTES TO CUSTOMERS:

- Please check that your parcel contains all the parts listed below.
- Please keep all the packaging for the product until you are satisfied with your purchase as we cannot accept any returned item not in the original packaging.
- For the protection of your furniture we recommend that the product is placed on a protected surface during assembly to prevent any damage.
- Please ensure that you read the instructions before assembling the product.
- Please do not force or over tighten the nuts. If a nut becomes stuck, unscrew it and start again.
- Ensure you have plenty of space to assemble the item in, it is also recommended that you assemble the item close to where it will be kept.
- Please ensure that you have sufficient space and people to assemble the item.

Parts List


Parts & Hardware List:

PART	FIGURE	DESCRIPTION	QTY
A		Right Armrest	2
B		Left Armrest	2
C		Seat	2
D		Connection Bar	2
E		Bolt M6 x 18mm	16+1
F		Bolt M6 x 30mm	4+1
G		Adjusting Bolt	4+1
H		Washer	20+1
I		Allen Key	1
J		Cushion	2
K		Seat Cushion	2

Assembly Instructions - Spring Chair


Step 1

Attach left armrest to seat as shown, do not tighten bolts.

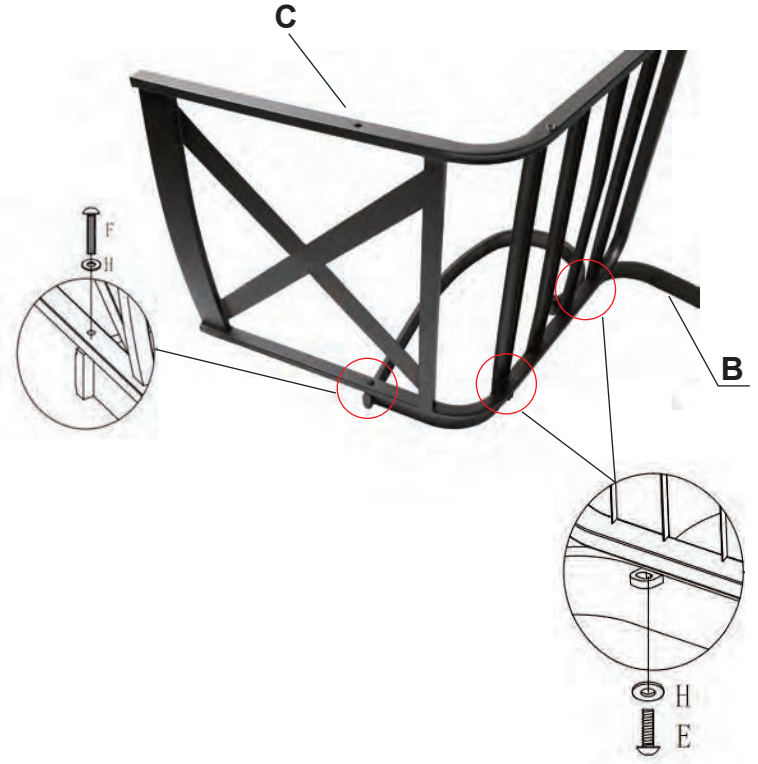

Step 2


Repeat for the right armrest, do not tighten bolts.

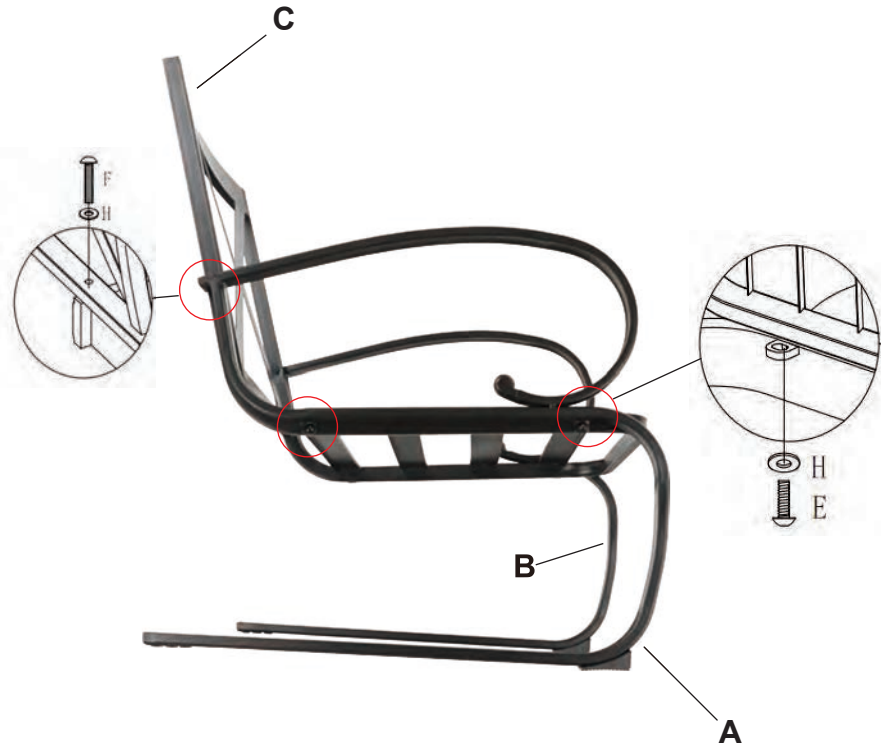

Assembly Instructions - Spring Chair

Step 3

Connect the back of two legs as shown, then tighten all bolts on the chair.

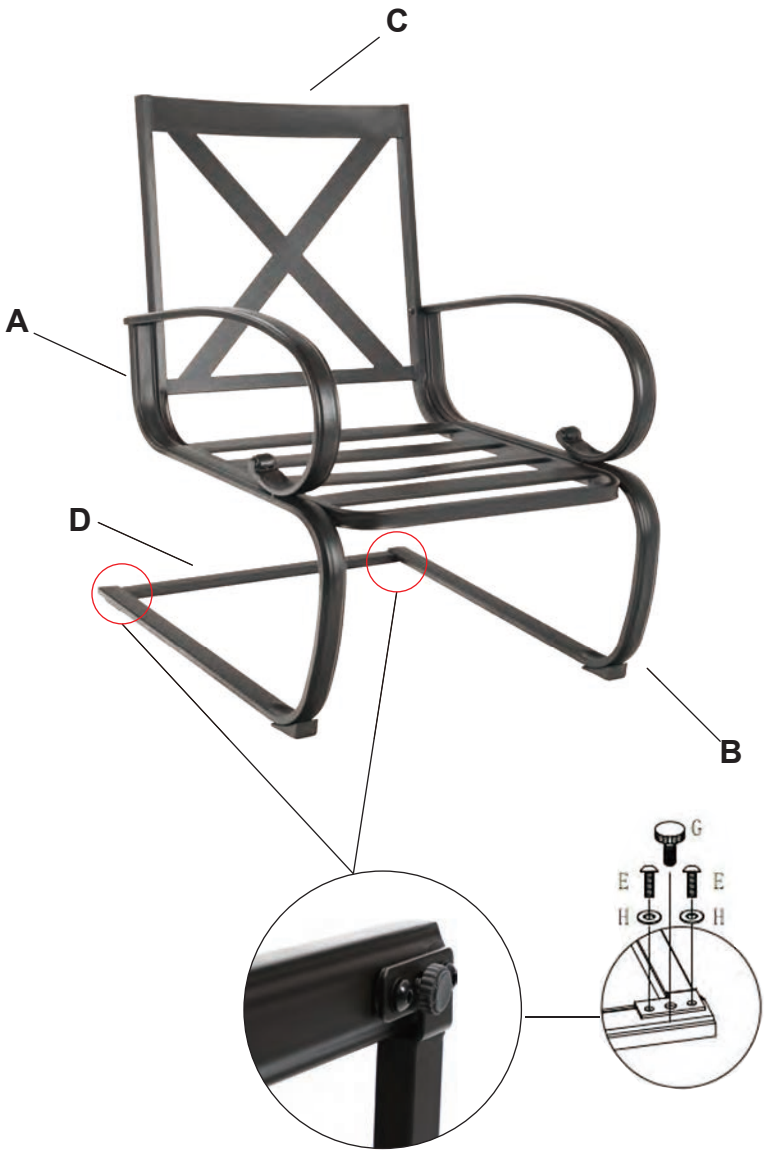

Step 4

Place cushions and adjust the the adjusting bolt to even your spring chair.



Caution:
Use this product only on flat surface. Adjust bolts at the bottom of connection bar for slightly uneven surface. Failure to do so may result in damage to the product or physical injury.

Parts List


Parts & Hardware List:

PART	FIGURE	DESCRIPTION	QTY
A		Top	1
B		Leg	4
C		Leg Connector	1
D		Bolt M6 x 25mm	12+1
E		Flat Washer	12+1
F		Allen Wrench	1

Assembly Instructions - Table

Step 1

Place table top upside down on a flat surface, connect four legs to table, do not tighten bolts.

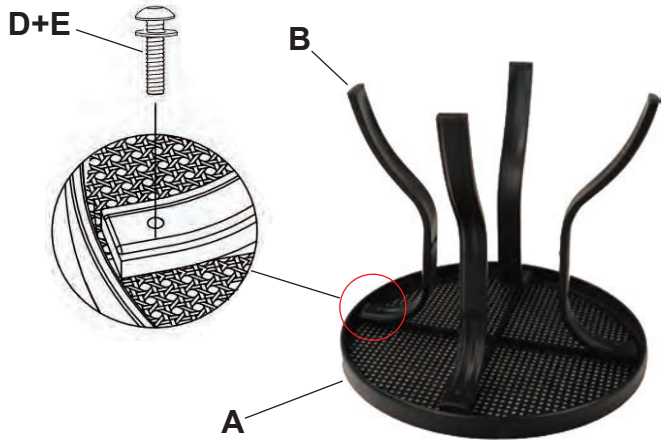

Step 2

Place leg connector with bolts, then tighten all bolts.

